


FEATURES

- Complimentray to PXT8050

APPLICATIONS

- This device is designed as a general purpose amplifier and switching.

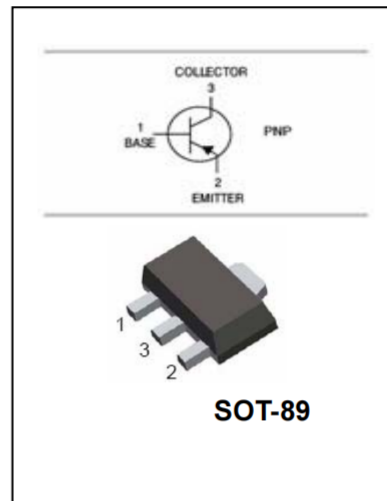

MAXIMUM RATING @ Ta=25°C unless otherwise specified


Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-40	V
V_{CEO}	Collector-Emitter Voltage	-25	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-1.5	A
P_C	Collector Power dissipation	0.5	W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55 to +150	°C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified


Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E = 0$	-40		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -0.1mA, I_B = 0$	-25		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100\mu A, I_C = 0$	-5		V
Collector cut-off current	I_{CBO}	$V_{CB} = -40V, I_E = 0$		-0.1	μA
Emitter cut-off current	I_{CEO}	$V_{CE} = -20V, I_E = 0$		-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$		-0.1	μA
DC current gain	h_{FE}	$V_{CE} = -1V, I_C = -100mA$ $V_{CE} = -1V, I_C = -800mA$	85 40	400	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -800mA, I_B = -80mA$		-0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -800mA, I_B = -80mA$		-1.2	V
Base-emitter volatage	V_{BE}	$V_{CE} = -1V, I_C = -10mA$		-1	V
Base-emitter positive favor voltage	V_{BEF}	$I_B = -1A$		-1.55	V
Transition frequency	f_T	$V_{CE} = -10V, I_C = -50mA,$	100		MHz
Output Capacitance	C_{ob}	$V_{CB} = -10V, f = 1MHz, I_E = 0$		15	pF

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified WWW.TECHPUBLIC.COM


STATIC CHARACTERISTIC

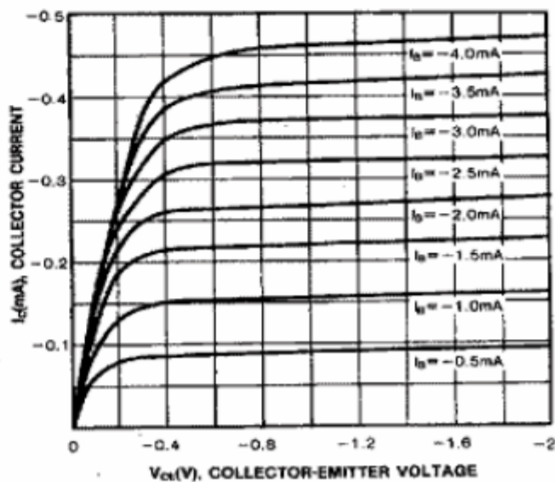


DC CURRENT GAIN

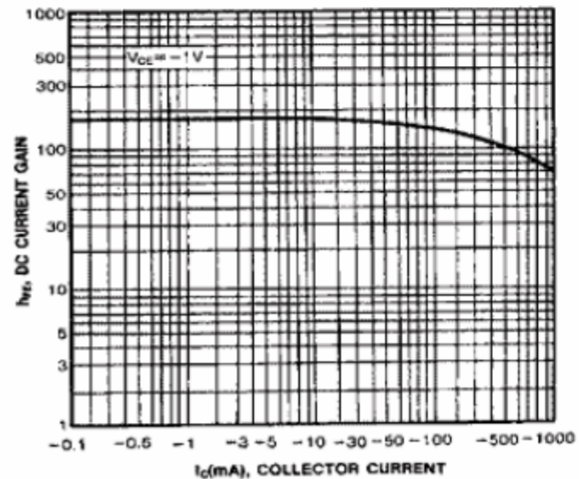


BASE-EMITTER ON VOLTAGE

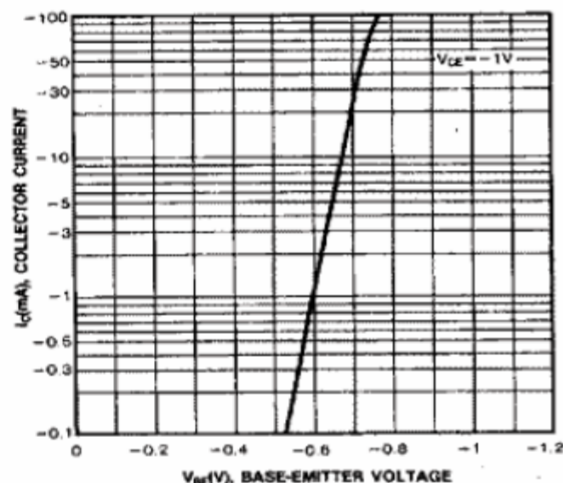


**BASE-EMITTER SATURATION VOLTAGE
COLLECTOR-EMITTER SATURATION VOLTAGE**

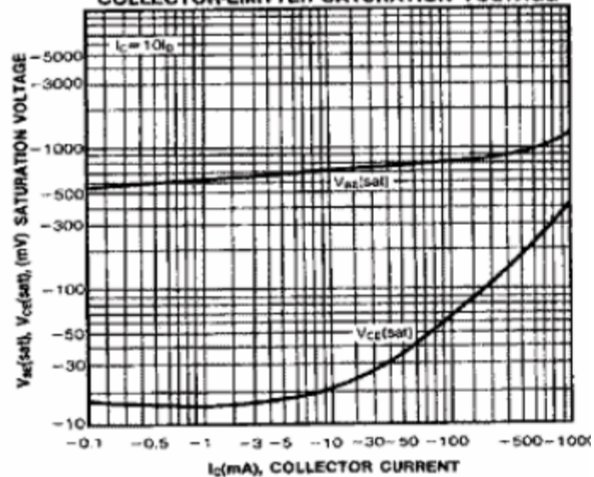

CURRENT GAIN-BANDWIDTH PRODUCT

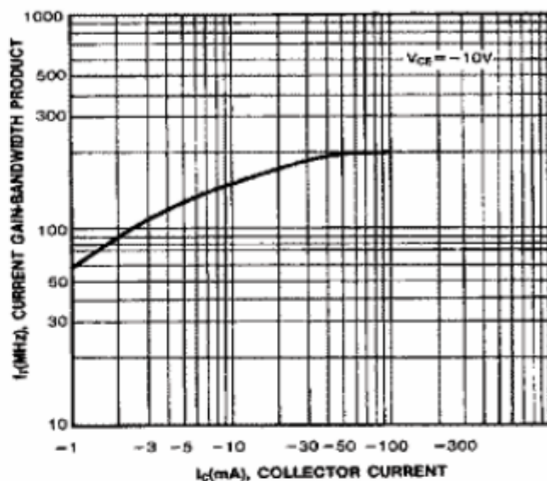


COLLECTOR OUTPUT CAPACITANCE

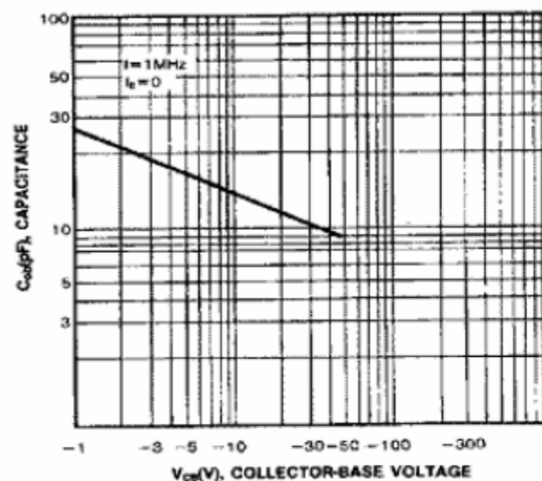

PACKAGE OUTLINE

Plastic surface mounted package

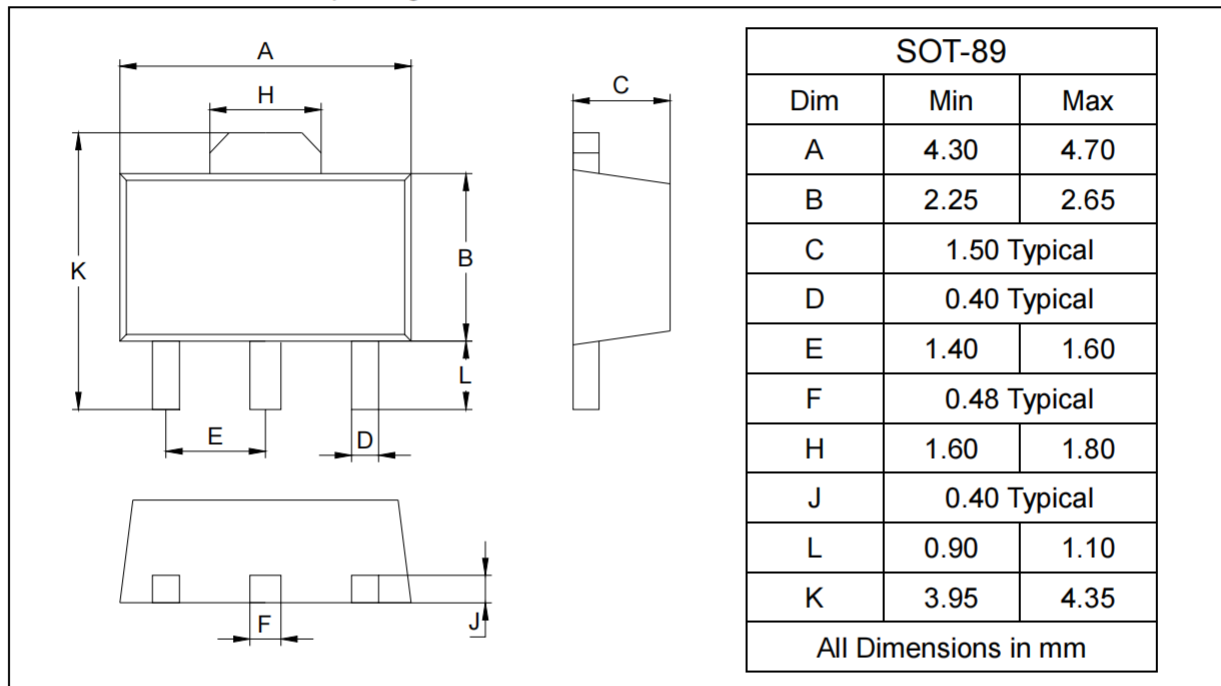

SOLDERING FOOTPRINT

