


P/N
MMT471A315-0003
EAN 4250184169505
2024/06/14
Version: K


Illustrations



Dimensional drawing

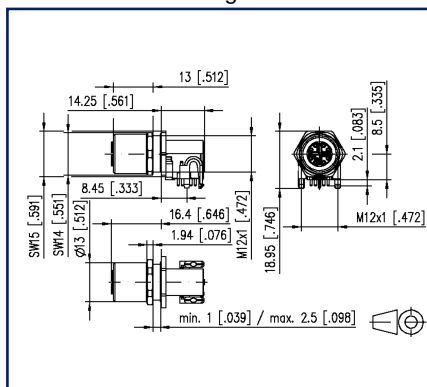

Drill pattern

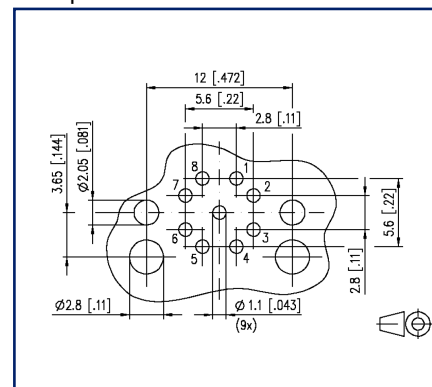

See enlarged drawings at the end of document

Product specification

- PC board jack M12
- 8-pole, X-coded according to IEC 61076-2-109
- 90° angled
- 10 GBit suitable according to IEEE 802.3an
- THR solderable
- Side entry
- Contact carriers green
- IP67 when plugged in
- suitable for a wall thickness up to 2.5 mm
- in individual parts
- suitable for applications in the railway industry according to data sheet

Data sheet

Page 2/7

PC board jack M12, X-coded, 8-pole, IP67, 90° angled, max. 2.5 mm wall thickness, in individual parts

P/N
MMT471A315-0003
EAN 4250184169505
2024/06/14
Version: K

Technical Data

General Data

Dimensions

Dimension (L x W x H)	30.65 mm x 16.82 mm x 18.95 mm
Dimension (L x W x H)	1.207 in. x 0.662 in. x 0.746 in.
Jack	M12
Coding	X-coded
For wall thickness (mm)	2.5 mm
For wall thickness (inch)	0.098 in.

Electrical characteristics

Rated voltage	50 V AC / 60 V DC
Nominal current at 50 °C	max. 0.5 A
Insulation resistance	min. 100 MOhm
Overvoltage category	II
Degree of pollution	2

Mechanical data

Material

Material - Housing	CuZnPb
Material - Contact	CuZnPb
Contact surface	Ni + Au
Material - Insulating body	PA UL94 V0
Life - Number of mating cycles	>= 100
Tightening torque - Plug	0,6 - 1 Nm
Tightening torque - Jack mounting	3 Nm +/- 0,5 Nm (see illustration at the end of the data sheet)
Protection category	IP67 when plugged in

Climatic properties

Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F



U | Contact

Data sheet

Page 3/7

**PC board jack M12, X-coded, 8-pole, IP67,
90° angled, max. 2.5 mm wall thickness, in individual parts**

P/N
MMT471A315-0003
EAN 4250184169505
2024/06/14
Version: K

Technical Data

Approvals	
Approval mark UL/CSA	E178484
Packaging	
Type of packaging	5 pc(s) / blister packaging
Standards/Regulations	
Railway applications	
Electronic equipment used on rolling stock	following to DIN EN 50155
Fire protection on railway vehicles	following to DIN EN 45545-2
Classifications	
ETIM 7.0	EC002637
ETIM 8.0	EC002637
ETIM 9.0	EC002637

U | Contact

Data sheet

Page 4/7

**PC board jack M12, X-coded, 8-pole, IP67,
90° angled, max. 2.5 mm wall thickness, in individual parts**

P/N

MMT471A315-0003

EAN 4250184169505

2024/06/14

Version: K

Accessories

P/N	Designation
700701	M12 screw plug for jacks IP54

Data sheet

Page 5/7

**PC board jack M12, X-coded, 8-pole, IP67,
90° angled, max. 2.5 mm wall thickness, in individual parts**

P/N

MMT471A315-0003


EAN 4250184169505

2024/06/14


Version: K

Illustrations

Dimensional drawing

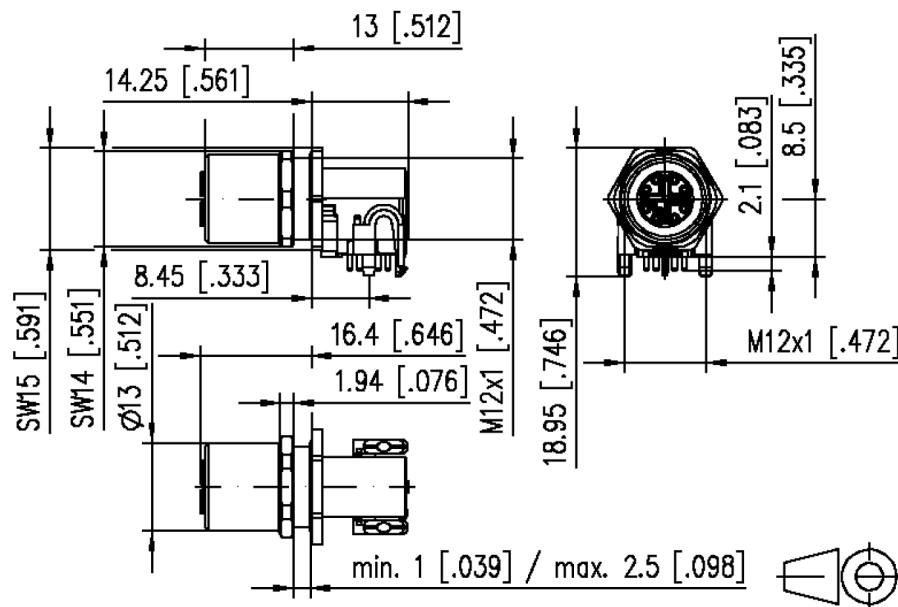

Drill pattern

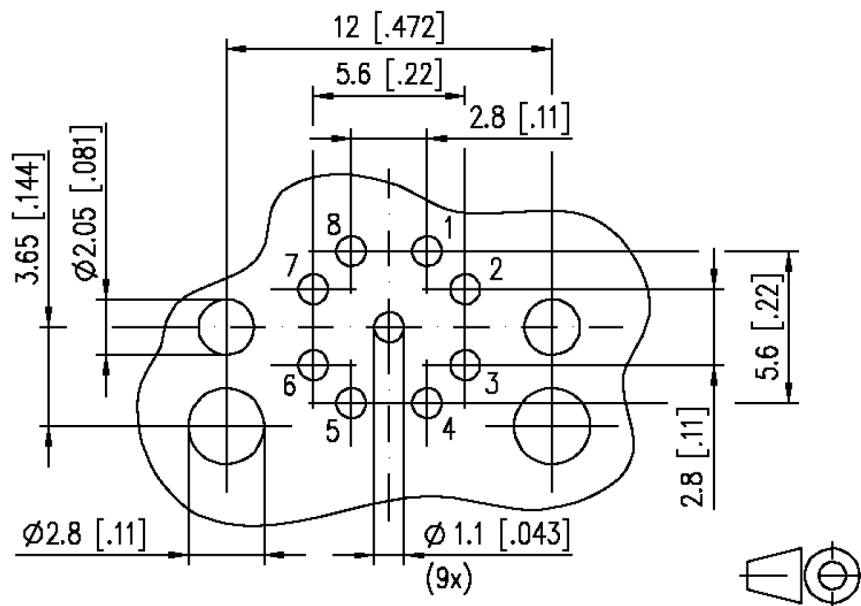

U | Contact

Data sheet


Page 6/7

**PC board jack M12, X-coded, 8-pole, IP67,
90° angled, max. 2.5 mm wall thickness, in individual parts**

P/N
MMT471A315-0003
EAN 4250184169505
2024/06/14
Version: K

Illustrations

Cut-out

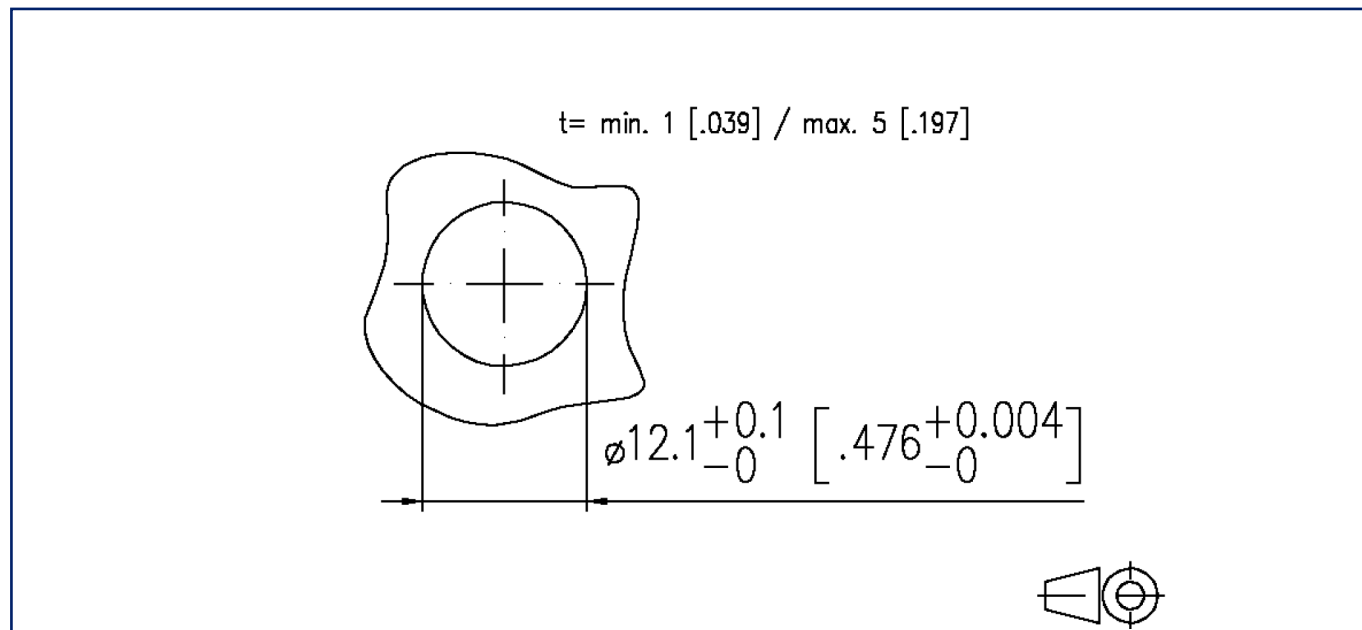

U | Contact

Data sheet


Page 7/7

**PC board jack M12, X-coded, 8-pole, IP67,
90° angled, max. 2.5 mm wall thickness, in individual parts**

P/N
MMT471A315-0003
EAN 4250184169505
2024/06/14
Version: K

Illustrations

Mounting instruction

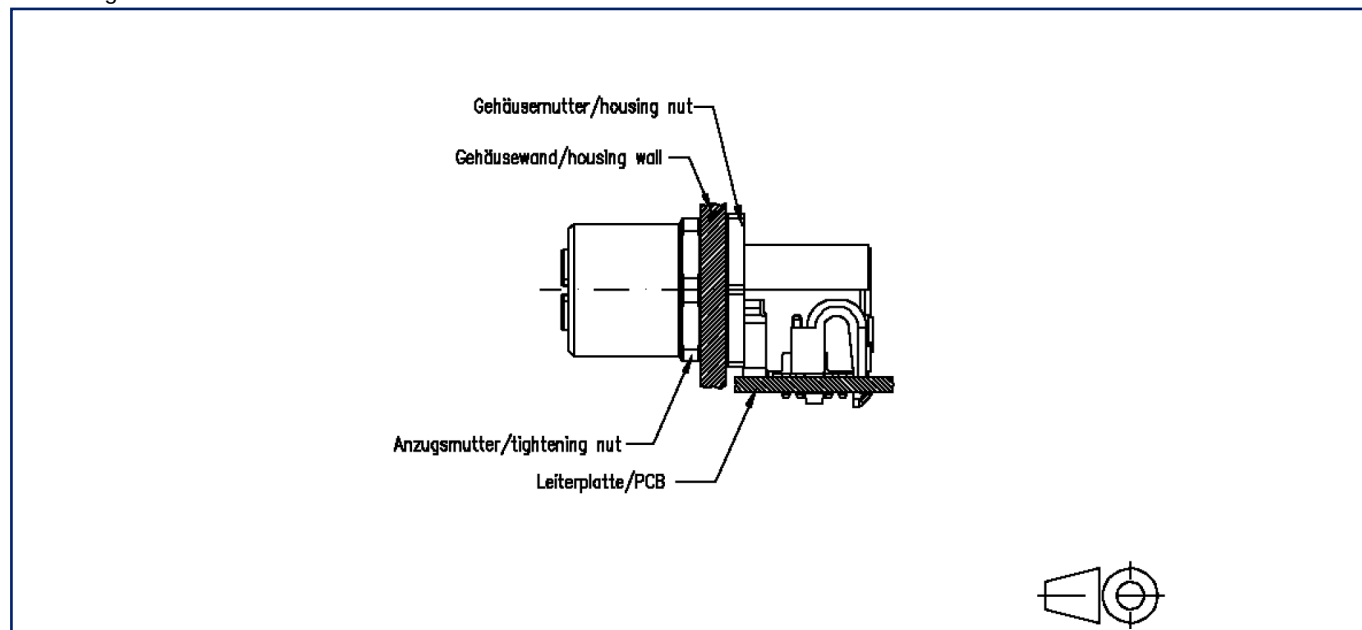

Tightening torque - Jack mounting

3 Nm +/- 0,5 Nm (Measured between tightening nut and housing nut)

