

# 150W 立体声/300W 单声道 PurePath™ HD 模拟输入功率级

查询样品: [TAS5613A](#)

## 特性

- 有源激活的集成反馈提供: (**PurePath™ HD**)
  - 来自高清源的高频内容, 信号带宽高达 **80 kHz**
  - 超低功率 **4Ω** 负载时提供 **1 W**连续功率, 总谐波失真 (**THD**) 小于 **0.03%**
  - 自然音响所有频率扁平总谐波失真 (**THD**)
  - **80dB PSRR (BTL, 无输入信号)**
  - **>100dB (A 加权声级) SNR**
  - 启动和停止时无可闻杂音
- 与 **TAS5630**, **TAS5615** 和 **TAS5611**引脚兼容
- 在同一 **PCB**上的多重可选配置:
  - 单声道并行桥式负载 (**PBTL**)
  - 立体声桥式负载 (**BTL**)
  - **2.1** 单端 (**SE**) 立体声对和桥式负载低音炮
- 总谐波失真 (**THD**) + 噪音 (**N**) 小于 **10%**时的全部输出功率
  - 在单声道 **PBTL** 配置时为 **300 W**
  - 在立体声 **BTL** 配置中每通道的功率为 **150 W**
- 在立体声 **BTL** 配置中, 全部输出功率的总谐波失真 (**THD**) + 噪音 (**N**) 为 **1%**
  - 为 **3 Ω** 负载提供 **160 W**立体声功率
  - 为 **4 Ω** 负载提供 **125 W**立体声功率
  - 为 **6 Ω** 负载提供 **85 W**立体声功率
  - 为 **8 Ω** 负载提供 **65 W**立体声功率
- 具有 **60-mΩ** 输出 **MOSFET**的大于 **90%** 的有效功率级
- 自我保护设计 (包括欠压、温度过高、削波和短路保护) 并产生错误报告
- 符合 **EMI** (当与建议的系统设计配合使用)

- 耐热增强型封装选项:

- **PHD (64-引脚 QFP)**
- **DKD (44-引脚 PSOP3)**

## 应用范围

- 家庭影院系统
- **AV** 接收器
- **DVD/** 蓝光光盘™ 接收器
- 迷你型/微型组合音响系统
- 有源扬声器和超低音扬声器


## 说明

TAS5613A是一款高性能模拟输入D类放大器, 此放大器具有集成闭环反馈技术(即 **PurePath™ HD**)。它的驱动能力高达150W。(1) 36 V 单电源供电时, 4 Ω负载扬声器提供立体声输出。

**PurePath™ HD** 技术实现了传统AB-放大器性能 (<0.03% THD) 水平同时提供了与传统D类放大器一样的电源效率。

与传统的D类放大器不同, 只有输出电平进入削波时, 失真曲线才增加。

**PurePath™ HD** 技术实现了更低的空闲损失, 从而使该设备效率更高。

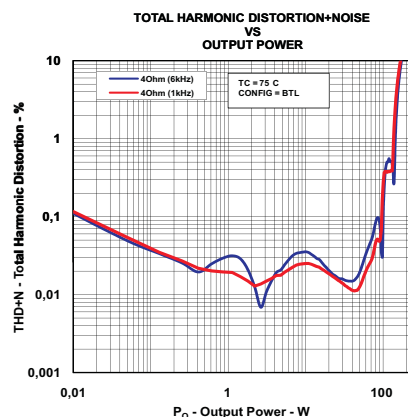

- (1) 输出功率水平依赖于目标应用的散热配置。在封装外露散热片和散热器之间应该使用高性能热界面材料以获得高输出功率水平。



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

蓝光光盘™ is a trademark of Blu-ray Disc Association.

All other trademarks are the property of their respective owners.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.


## DEVICE INFORMATION

## Pin Assignment

The TAS5613A is available in two thermally enhanced packages:

- 64-Pin QFP (PHD) Power Package
- 44-Pin PSOP3 Package (DKD)

The package type contains a heat slug that is located on the top side of the device for convenient thermal coupling to the heat sink.

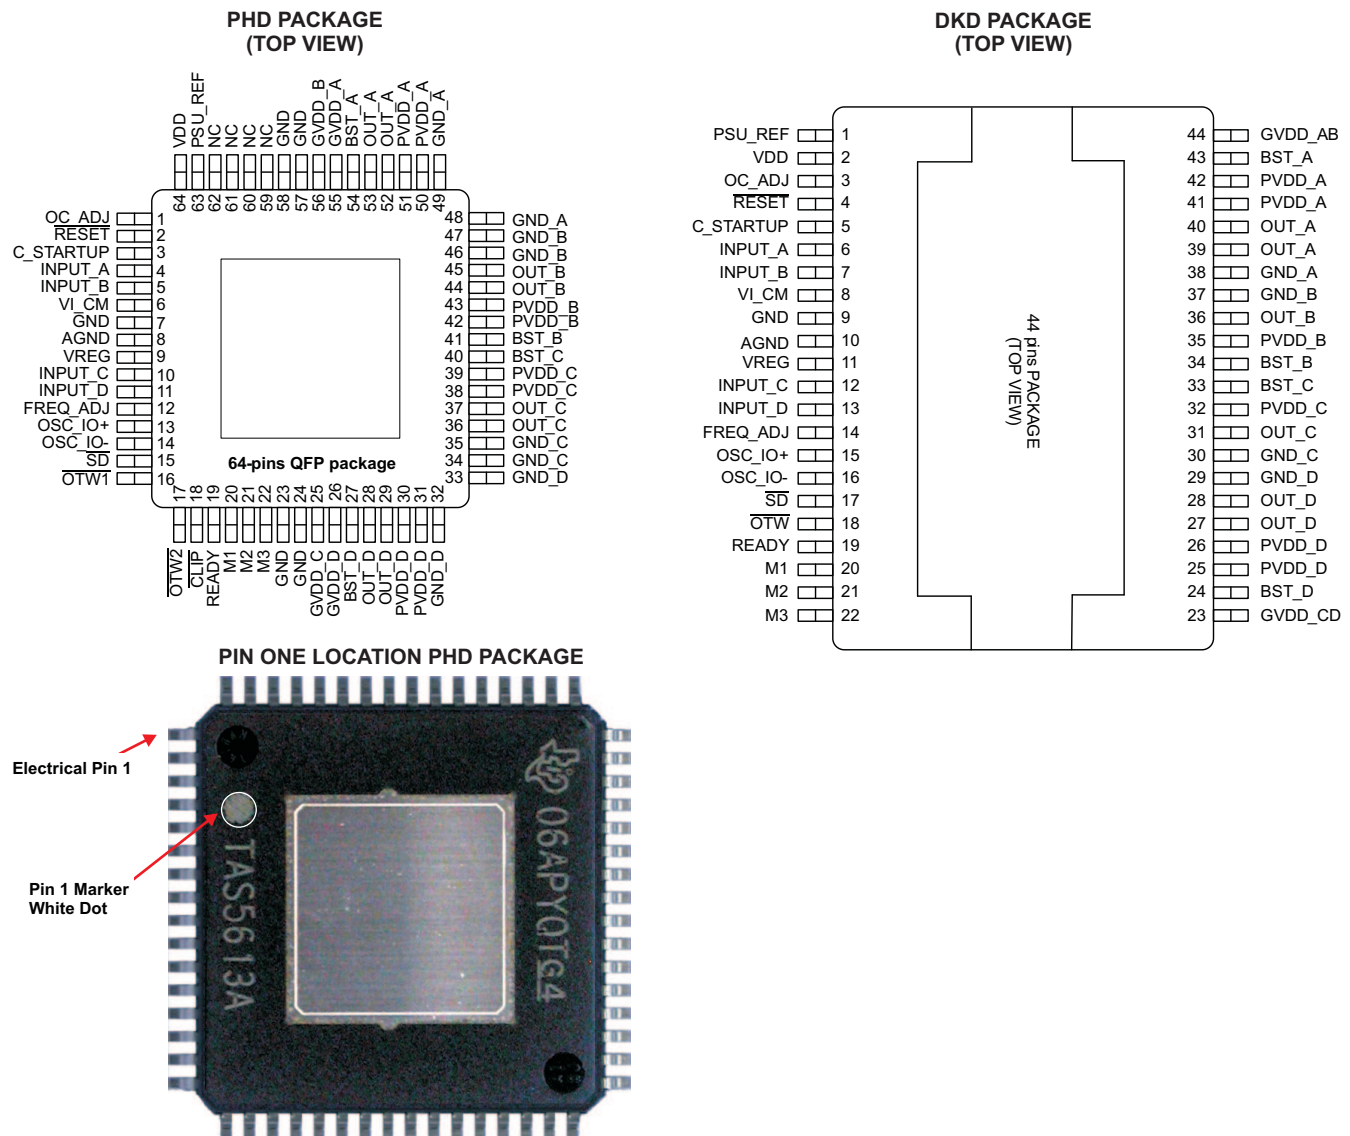

## MODE SELECTION PINS

| MODE PINS |    |    | ANALOG<br>INPUT                               | OUTPUT<br>CONFIGURATION | DESCRIPTION                 |                        |         |
|-----------|----|----|-----------------------------------------------|-------------------------|-----------------------------|------------------------|---------|
| M3        | M2 | M1 |                                               |                         |                             |                        |         |
| 0         | 0  | 0  | Differential                                  | 2 × BTL                 | AD mode                     |                        |         |
| 0         | 0  | 1  | —                                             | —                       | Reserved                    |                        |         |
| 0         | 1  | 0  | Differential                                  | 2 × BTL                 | BD mode                     |                        |         |
| 0         | 1  | 1  | Differential<br>(BTL)<br>Single Ended<br>(SE) | 1 × BTL + 2 × SE        | BTL = BD mode, SE = AD mode |                        |         |
| 1         | 0  | 0  | Single Ended                                  | 4 × SE                  | AD mode                     |                        |         |
| 1         | 0  | 1  | Differential                                  | 1 × PBTL                | INPUT_C <sup>(1)</sup>      | INPUT_D <sup>(1)</sup> |         |
|           |    |    |                                               |                         | 0                           | 0                      | AD mode |
|           |    |    |                                               |                         | 1                           | 0                      | BD mode |
| 1         | 1  | 0  | Reserved                                      |                         |                             |                        |         |
| 1         | 1  | 1  |                                               |                         |                             |                        |         |

(1) INPUT\_C and D are used to select between a subset of AD and BD mode operations in PBTL mode (1=VREG and 0=GND).

## PACKAGE HEAT DISSIPATION RATINGS<sup>(1)</sup>

| PARAMETER                                          | TAS5613APHD        | TAS5613ADKD        |
|----------------------------------------------------|--------------------|--------------------|
| R <sub>θJC</sub> (°C/W) – 2 BTL or 4 SE channels   | 3.2                | 2.1                |
| R <sub>θJC</sub> (°C/W) – 1 BTL or 2 SE channel(s) | 5.4                | 3.5                |
| R <sub>θJC</sub> (°C/W) – 1 SE channel             | 7.9                | 5.1                |
| Pad Area <sup>(2)</sup>                            | 64 mm <sup>2</sup> | 80 mm <sup>2</sup> |

(1) J<sub>C</sub> is junction-to-case, CH is case-to-heat sink

(2) R<sub>θH</sub> is an important consideration. Assume a 2-mil thickness of typical thermal grease between the pad area and the heat sink and both channels active. The R<sub>θCH</sub> with this condition is 1.22°C/W for the PHD package and 1.02°C/W for the DKD package.

**Table 1. ORDERING INFORMATION<sup>(1)</sup>**

| T <sub>A</sub> | PACKAGE     | DESCRIPTION  |
|----------------|-------------|--------------|
| 0°C–70°C       | TAS5613APHD | 64 pin HTQFP |
|                | TAS5613ADKD | 44 pin PSOP3 |

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted <sup>(1)</sup>

| TAS5613A                                                                         |                                                | UNIT |
|----------------------------------------------------------------------------------|------------------------------------------------|------|
| VDD to GND                                                                       | –0.3 to 13.2                                   | V    |
| GVDD to GND                                                                      | –0.3 to 13.2                                   | V    |
| PVDD_X to GND_X <sup>(2)</sup>                                                   | –0.3 to 53                                     | V    |
| OUT_X to GND_X <sup>(2)</sup>                                                    | –0.3 to 53                                     | V    |
| BST_X to GND_X <sup>(2)</sup>                                                    | –0.3 to 66.2                                   | V    |
| BST_X to GVDD_X <sup>(2)</sup>                                                   | –0.3 to 53                                     | V    |
| VREG to GND                                                                      | –0.3 to 4.2                                    | V    |
| GND_X to GND                                                                     | –0.3 to 0.3                                    | V    |
| GND to AGND                                                                      | –0.3 to 0.3                                    | V    |
| OC_ADJ, M1, M2, M3, OSC_IO+, OSC_IO–, FREQ_ADJ, VI_CM, C_STARTUP, PSU_REF to GND | –0.3 to 4.2                                    | V    |
| INPUT_X                                                                          | –0.3 to 7                                      | V    |
| RESET, SD, OTW, OTW1, OTW2, CLIP, READY to GND                                   | –0.3 to 7                                      | V    |
| Continuous sink current (SD, OTW, OTW1, OTW2, CLIP, READY)                       | 9                                              | mA   |
| Operating junction temperature range, T <sub>J</sub>                             | 0 to 150                                       | °C   |
| Storage temperature, T <sub>stg</sub>                                            | –40 to 150                                     | °C   |
| Electrostatic discharge                                                          | Human-Body Model <sup>(3)</sup> (all pins)     | ±2   |
|                                                                                  | Charged-Device Model <sup>(3)</sup> (all pins) | ±500 |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) These voltages represents the DC voltage + peak AC waveform measured at the terminal of the device in all conditions.
- (3) Failure to follow good anti-static ESD handling during manufacture and rework will contribute to device malfunction. Make sure the operators handling the device are adequately grounded through the use of ground straps or alternative ESD protection.

## RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

|                         |                                                                                |                                                                                         | MIN  | TYP | MAX  | UNIT |
|-------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------|-----|------|------|
| PVDD_x                  | Half-bridge supply                                                             | DC supply voltage                                                                       | 18   | 36  | 38   | V    |
| GVDD_x                  | Supply for logic regulators and gate-drive circuitry                           | DC supply voltage                                                                       | 10.8 | 12  | 13.2 | V    |
| VDD                     | Digital regulator supply voltage                                               | DC supply voltage                                                                       | 10.8 | 12  | 13.2 | V    |
| R <sub>L</sub> (BTL)    | Load impedance                                                                 | Output filter according to <a href="#">Figure 12</a> and <a href="#">Figure 13</a>      | 3.5  | 4   |      | Ω    |
| R <sub>L</sub> (SE)     |                                                                                |                                                                                         | 2.8  | 3   |      |      |
| R <sub>L</sub> (PBTL)   |                                                                                |                                                                                         | 1.6  | 2   |      |      |
| R <sub>L</sub> (BTL)    | Load impedance                                                                 | Output filter according to <a href="#">Figure 12</a> + Schottky, R <sub>OC</sub> = 22kΩ | 2.8  | 3   |      | Ω    |
| L <sub>OUT</sub> (BTL)  | Output filter inductance                                                       | Minimum output inductance at I <sub>OC</sub>                                            | 7    | 10  |      | μH   |
| L <sub>OUT</sub> (SE)   |                                                                                |                                                                                         | 7    | 15  |      |      |
| L <sub>OUT</sub> (PBTL) |                                                                                |                                                                                         | 7    | 10  |      |      |
| F <sub>PWM</sub>        | PWM frame rate selectable for AM interference avoidance; 1% Resistor tolerance | Nominal                                                                                 | 385  | 400 | 415  | kHz  |
|                         |                                                                                | AM1                                                                                     | 315  | 333 | 350  |      |
|                         |                                                                                | AM2                                                                                     | 260  | 300 | 335  |      |
| R <sub>FREQ_ADJ</sub>   | PWM frame rate programming resistor                                            | Nominal; Master mode                                                                    | 9.9  | 10  | 10.1 | kΩ   |
|                         |                                                                                | AM1; Master mode                                                                        | 19.8 | 20  | 20.2 |      |
|                         |                                                                                | AM2; Master mode                                                                        | 29.7 | 30  | 30.3 |      |
| C <sub>PVDD</sub>       | PVDD close decoupling capacitors                                               |                                                                                         | 2.0  |     |      | μF   |
| R <sub>OC</sub>         | Over-current programming resistor                                              | Resistor tolerance = 5%                                                                 | 22   | 30  |      | kΩ   |
| R <sub>OC_LATCHED</sub> | Over-current programming resistor                                              | Resistor tolerance = 5%                                                                 | 47   | 64  |      | kΩ   |
| V <sub>FREQ_ADJ</sub>   | Voltage on FREQ_ADJ pin for slave mode operation                               | Slave mode                                                                              | 3.3  |     |      | V    |
| T <sub>J</sub>          | Junction temperature                                                           |                                                                                         | 0    |     | 125  | °C   |

## PIN FUNCTIONS


| NAME      | PIN               |         | FUNCTION <sup>(1)</sup> | DESCRIPTION                                                               |
|-----------|-------------------|---------|-------------------------|---------------------------------------------------------------------------|
|           | PHD NO.           | DKD NO. |                         |                                                                           |
| AGND      | 8                 | 10      | P                       | Analog ground                                                             |
| BST_A     | 54                | 43      | P                       | HS bootstrap supply (BST), external 0.033 μF capacitor to OUT_A required. |
| BST_B     | 41                | 34      | P                       | HS bootstrap supply (BST), external 0.033 μF capacitor to OUT_B required. |
| BST_C     | 40                | 33      | P                       | HS bootstrap supply (BST), external 0.033 μF capacitor to OUT_C required. |
| BST_D     | 27                | 24      | P                       | HS bootstrap supply (BST), external 0.033 μF capacitor to OUT_D required. |
| CLIP      | 18                | –       | O                       | Clipping warning; open drain; active low                                  |
| C_STARTUP | 3                 | 5       | O                       | Startup ramp requires a charging capacitor of 4.7nF to GND                |
| FREQ_ADJ  | 12                | 14      | I                       | PWM frame rate programming pin requires resistor to GND                   |
| GND       | 7, 23, 24, 57, 58 | 9       | P                       | Ground                                                                    |
| GND_A     | 48, 49            | 38      | P                       | Power ground for half-bridge A                                            |
| GND_B     | 46, 47            | 37      | P                       | Power ground for half-bridge B                                            |
| GND_C     | 34, 35            | 30      | P                       | Power ground for half-bridge C                                            |
| GND_D     | 32, 33            | 29      | P                       | Power ground for half-bridge D                                            |
| GVDD_A    | 55                | –       | P                       | Gate drive voltage supply requires 0.1 μF capacitor to GND_A              |
| GVDD_B    | 56                | –       | P                       | Gate drive voltage supply requires 0.1 μF capacitor to GND_B              |
| GVDD_C    | 25                | –       | P                       | Gate drive voltage supply requires 0.1 μF capacitor to GND_C              |
| GVDD_D    | 26                | –       | P                       | Gate drive voltage supply requires 0.1 μF capacitor to GND_D              |
| GVDD_AB   | –                 | 44      | P                       | Gate drive voltage supply requires 0.22 μF capacitor to GND_A/GND_B       |
| GVDD_CD   | –                 | 23      | P                       | Gate drive voltage supply requires 0.22 μF capacitor to GND_C/GND_D       |

(1) I = Input, O = Output, P = Power


**PIN FUNCTIONS (continued)**

| PIN     |         |         | FUNCTION <sup>(1)</sup> | DESCRIPTION                                                                                                           |
|---------|---------|---------|-------------------------|-----------------------------------------------------------------------------------------------------------------------|
| NAME    | PHD NO. | DKD NO. |                         |                                                                                                                       |
| INPUT_A | 4       | 6       | I                       | Input signal for half bridge A                                                                                        |
| INPUT_B | 5       | 7       | I                       | Input signal for half bridge B                                                                                        |
| INPUT_C | 10      | 12      | I                       | Input signal for half bridge C                                                                                        |
| INPUT_D | 11      | 13      | I                       | Input signal for half bridge D                                                                                        |
| M1      | 20      | 20      | I                       | Mode selection                                                                                                        |
| M2      | 21      | 21      | I                       | Mode selection                                                                                                        |
| M3      | 22      | 22      | I                       | Mode selection                                                                                                        |
| NC      | 59-62   | –       | –                       | No connect, pins may be grounded.                                                                                     |
| OC_ADJ  | 1       | 3       | O                       | Analog over current programming pin requires 30kΩ resistor to ground:                                                 |
| OSC_IO+ | 13      | 15      | I/O                     | Oscillator master/slave output/input.                                                                                 |
| OSC_IO– | 14      | 16      | I/O                     | Oscillator master/slave output/input.                                                                                 |
| /OTW    | -       | 18      | O                       | Overtemperature warning signal, open drain, active low.                                                               |
| OTW1    | 16      | –       | O                       | Overtemperature warning signal, open drain, active low.                                                               |
| OTW2    | 17      | –       | O                       | Overtemperature warning signal, open drain, active low.                                                               |
| OUT_A   | 52, 53  | 39, 40  | O                       | Output, half bridge A                                                                                                 |
| OUT_B   | 44, 45  | 36      | O                       | Output, half bridge B                                                                                                 |
| OUT_C   | 36, 37  | 31      | O                       | Output, half bridge C                                                                                                 |
| OUT_D   | 28, 29  | 27, 28  | O                       | Output, half bridge D                                                                                                 |
| PSU_REF | 63      | 1       | P                       | PSU Reference requires close decoupling of 330pF to GND                                                               |
| PVDD_A  | 50, 51  | 41, 42  | P                       | Power supply input for half bridges A requires close decoupling of 2μF capacitor to GND_A.                            |
| PVDD_B  | 42, 43  | 35      | P                       | Power supply input for half bridges B requires close decoupling of 2μF capacitor to GND_B.                            |
| PVDD_C  | 38, 39  | 32      | P                       | Power supply input for half bridges C requires close decoupling of 2μF capacitor to GND_C.                            |
| PVDD_D  | 30, 31  | 25, 26  | P                       | Power supply input for half bridges D requires close decoupling of 2μF capacitor to GND_D.                            |
| READY   | 19      | 19      | O                       | Normal operation; open drain; active high                                                                             |
| RESET   | 2       | 4       | I                       | Device reset Input; active low, requires 47kΩ pull up resistor to VREG                                                |
| SD      | 15      | 17      | O                       | Shutdown signal, open drain, active low                                                                               |
| VDD     | 64      | 2       | P                       | Power supply for internal voltage regulator requires a 10-μF capacitor with a 0.1-μF capacitor to GND for decoupling. |
| VI_CM   | 6       | 8       | O                       | Analog comparator reference node requires close decoupling of 1nF to GND                                              |
| VREG    | 9       | 11      | P                       | Internal regulator supply filter pin requires 0.1-μF capacitor to GND                                                 |

## TYPICAL SYSTEM BLOCK DIAGRAM

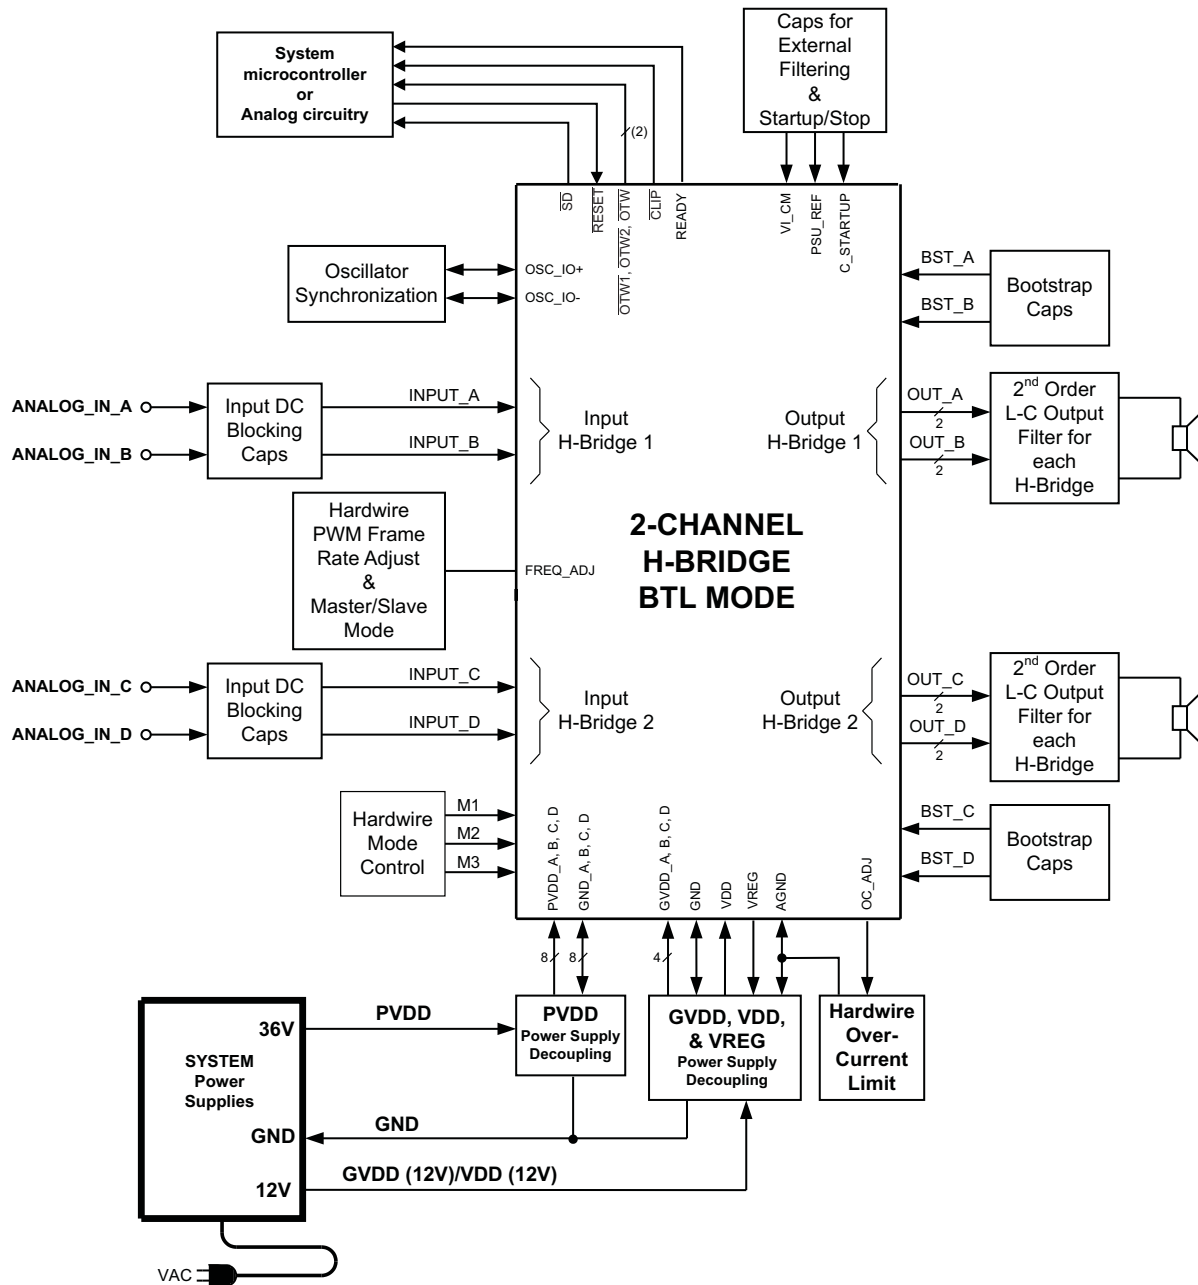

## FUNCTIONAL BLOCK DIAGRAM

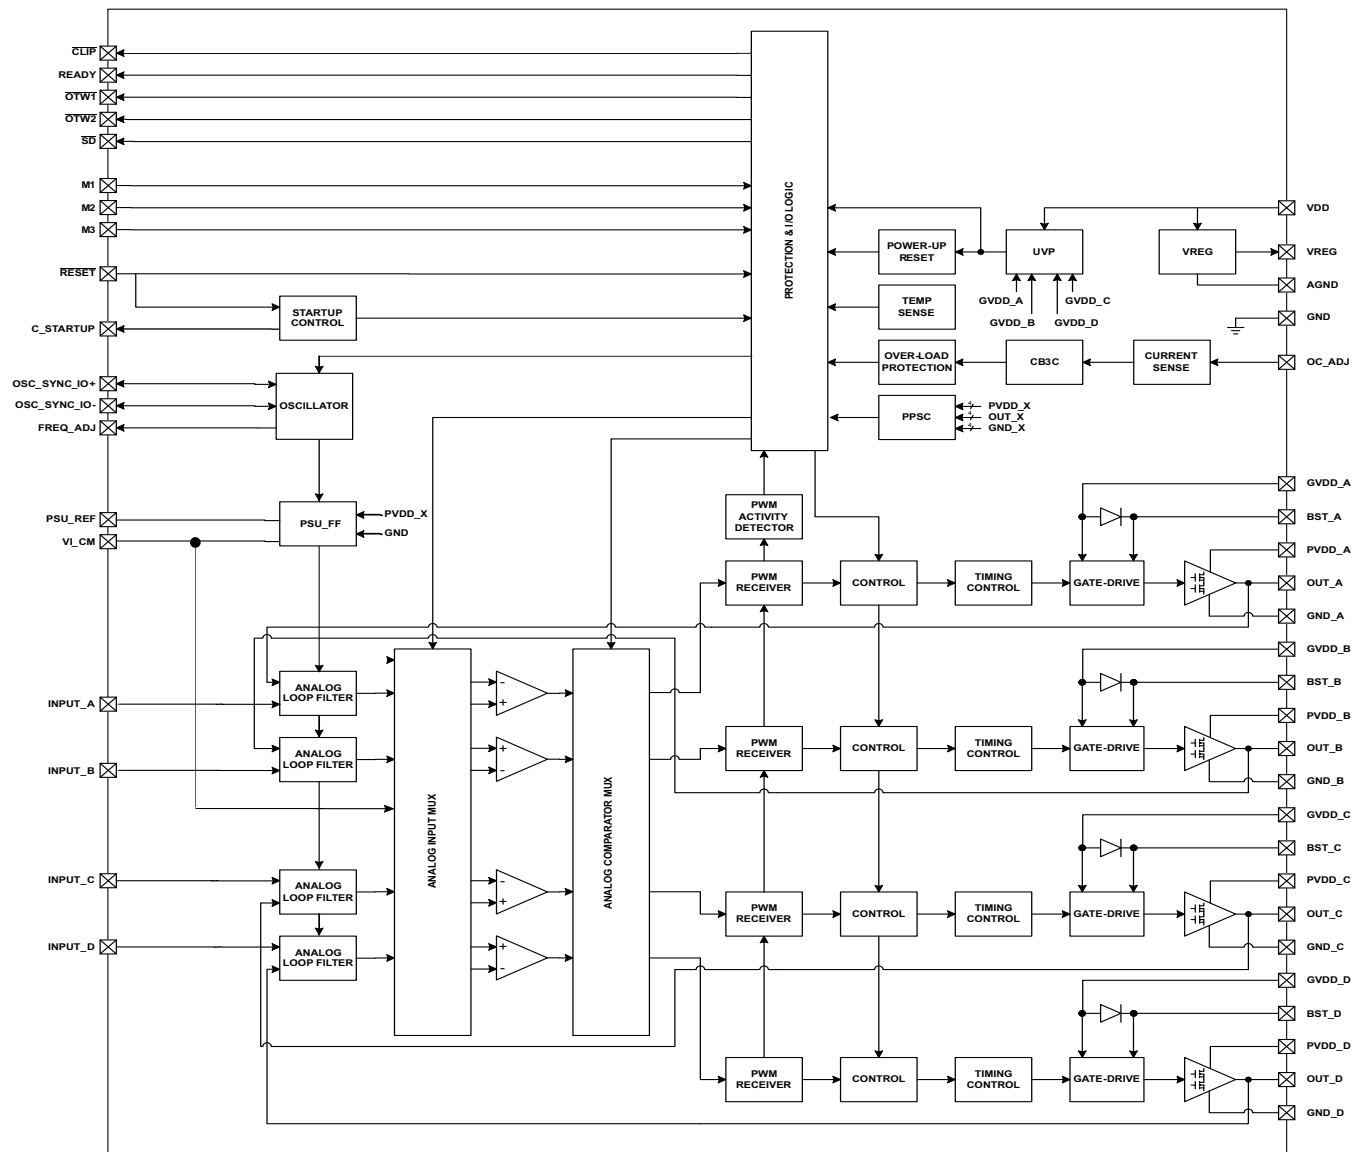

## AUDIO CHARACTERISTICS (BTL)

PCB and system configuration are in accordance with recommended guidelines. Audio frequency = 1kHz, PVDD\_X = 36V, GVDD\_X = 12V,  $R_L = 4\Omega$ ,  $f_s = 400\text{kHz}$ ,  $R_{OC} = 30\text{k}\Omega$ ,  $T_C = 75^\circ\text{C}$ , Output Filter:  $L_{DEM} = 7\mu\text{H}$ ,  $C_{DEM} = 680\text{nF}$ , mode = 010, unless otherwise noted.

| PARAMETER         |                                                             | TEST CONDITIONS                                                                                      | MIN | TYP   | MAX | UNIT          |
|-------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----|-------|-----|---------------|
| P <sub>O</sub>    | Power output per channel                                    | $R_L = 3\Omega$ , 10% THD+N ( $R_{OC} = 22\text{k}\Omega$ , add Schottky diodes from OUT_X to GND_X) |     | 200   |     | W             |
|                   |                                                             | $R_L = 4\Omega$ , 10% THD+N                                                                          |     | 150   |     |               |
|                   |                                                             | $R_L = 3\Omega$ , 1% THD+N ( $R_{OC} = 22\text{k}\Omega$ , add Schottky diodes from OUT_X to GND_X)  |     | 160   |     |               |
|                   |                                                             | $R_L = 4\Omega$ , 1% THD+N                                                                           |     | 125   |     |               |
| THD+N             | Total harmonic distortion + noise                           | 1 W                                                                                                  |     | 0.03% |     |               |
| V <sub>n</sub>    | Output integrated noise                                     | A-weighted, AES17 filter, Input Capacitor Grounded                                                   |     | 185   |     | $\mu\text{V}$ |
| V <sub>OS</sub>   | Output offset voltage                                       | Inputs AC coupled to GND                                                                             |     | 8     | 25  | mV            |
| SNR               | Signal-to-noise ratio <sup>(1)</sup>                        |                                                                                                      |     | 100   |     | dB            |
| DNR               | Dynamic range                                               |                                                                                                      |     | 100   |     | dB            |
| P <sub>idle</sub> | Power dissipation due to Idle losses (I <sub>PVDD_X</sub> ) | P <sub>O</sub> = 0, 4 channels switching <sup>(2)</sup>                                              |     | 1.8   |     | W             |

(1) SNR is calculated relative to 1% THD+N output level.

(2) Actual system idle losses also are affected by core losses of output inductors.

## AUDIO CHARACTERISTICS (PBTL)

PCB and system configuration are in accordance with recommended guidelines. Audio frequency = 1kHz, PVDD\_X = 36V, GVDD\_X = 12V,  $R_L = 2\Omega$ ,  $f_s = 400\text{kHz}$ ,  $R_{OC} = 30\text{k}\Omega$ ,  $T_C = 75^\circ\text{C}$ , Output Filter:  $L_{DEM} = 7\mu\text{H}$ ,  $C_{DEM} = 680\text{nF}$ , MODE = 101-BD, unless otherwise noted.

| PARAMETER         |                                                | TEST CONDITIONS                                         | MIN | TYP   | MAX | UNIT          |
|-------------------|------------------------------------------------|---------------------------------------------------------|-----|-------|-----|---------------|
| P <sub>O</sub>    | Power output per channel                       | $R_L = 2\Omega$ , 10% THD+N                             |     | 300   |     | W             |
|                   |                                                | $R_L = 3\Omega$ , 10% THD+N                             |     | 200   |     |               |
|                   |                                                | $R_L = 4\Omega$ , 10% THD+N                             |     | 160   |     |               |
|                   |                                                | $R_L = 2\Omega$ , 1% THD+N                              |     | 250   |     |               |
|                   |                                                | $R_L = 3\Omega$ , 1% THD+N                              |     | 160   |     |               |
|                   |                                                | $R_L = 4\Omega$ , 1% THD+N                              |     | 130   |     |               |
| THD+N             | Total harmonic distortion + noise              | 1 W                                                     |     | 0.05% |     |               |
| V <sub>n</sub>    | Output integrated noise                        | A-weighted                                              |     | 182   |     | $\mu\text{V}$ |
| SNR               | Signal to noise ratio <sup>(1)</sup>           | A-weighted                                              |     | 100   |     | dB            |
| DNR               | Dynamic range                                  | A-weighted                                              |     | 100   |     | dB            |
| P <sub>idle</sub> | Power dissipation due to idle losses (IPVDD_X) | P <sub>O</sub> = 0, 4 channels switching <sup>(2)</sup> |     | 1.8   |     | W             |

(1) SNR is calculated relative to 1% THD+N output level.

(2) Actual system idle losses are affected by core losses of output inductors.

## ELECTRICAL CHARACTERISTICS

PVDD\_X = 36V, GVDD\_X = 12V, VDD = 12V, T<sub>C</sub> (Case temperature) = 75°C, f<sub>s</sub> = 400kHz, unless otherwise specified.

| PARAMETER                                          |                                                                                                                 | TEST CONDITIONS                                                                                               | MIN  | TYP  | MAX  | UNIT |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------|------|------|------|
| INTERNAL VOLTAGE REGULATOR AND CURRENT CONSUMPTION |                                                                                                                 |                                                                                                               |      |      |      |      |
| VREG                                               | Voltage regulator, only used as reference node                                                                  | VDD = 12V                                                                                                     | 3    | 3.3  | 3.6  | V    |
|                                                    | Analog comparator reference node, VI_CM                                                                         |                                                                                                               | 1.5  | 1.75 | 1.9  | V    |
| I_VDD                                              | VDD supply current                                                                                              | Operating, 50% duty cycle                                                                                     | 20   |      |      | mA   |
|                                                    |                                                                                                                 | Idle, reset mode                                                                                              | 20   |      |      |      |
| I_GVDD_x                                           | Gate-supply current per half-bridge                                                                             | 50% duty cycle                                                                                                | 10   |      |      | mA   |
|                                                    |                                                                                                                 | Reset mode                                                                                                    | 1.5  |      |      |      |
| I_PVDD_x                                           | Half-bridge idle current                                                                                        | 50% duty cycle with recommended output filter                                                                 | 12.5 |      |      | mA   |
|                                                    |                                                                                                                 | Reset mode, No switching                                                                                      | 620  |      |      |      |
| ANALOG INPUTS                                      |                                                                                                                 |                                                                                                               |      |      |      |      |
| R_IN                                               | Input resistance                                                                                                | READY = HIGH                                                                                                  | 33   |      |      | kΩ   |
| V_IN                                               | Maximum input voltage swing                                                                                     |                                                                                                               | 7    |      |      | V    |
| I_IN                                               | Maximum input current                                                                                           |                                                                                                               | 1    |      |      | mA   |
| G                                                  | Inverting voltage Gain, (V_OUT/V_IN)                                                                            |                                                                                                               | 21   |      |      | dB   |
| OSCILLATOR                                         |                                                                                                                 |                                                                                                               |      |      |      |      |
| f_OSC_IO+                                          | Nominal, Master Mode                                                                                            | F_PWM × 10                                                                                                    | 3.85 | 4    | 4.15 | MHz  |
|                                                    | AM1, Master Mode                                                                                                |                                                                                                               | 3.15 | 3.33 | 3.5  |      |
|                                                    | AM2, Master Mode                                                                                                |                                                                                                               | 2.6  | 3    | 3.35 |      |
| V_IH                                               | High level input voltage                                                                                        |                                                                                                               | 1.86 |      |      | V    |
| V_IL                                               | Low level input voltage                                                                                         |                                                                                                               | 1.45 |      |      | V    |
| OUTPUT-STAGE MOSFETs                               |                                                                                                                 |                                                                                                               |      |      |      |      |
| R_DS(on)                                           | Drain-to-source resistance, low side (LS)                                                                       | T_J = 25°C, Includes metallization resistance, GVDD = 12V                                                     | 60   |      |      | mΩ   |
|                                                    | Drain-to-source resistance, high side (HS)                                                                      |                                                                                                               | 60   |      |      | mΩ   |
| I/O PROTECTION                                     |                                                                                                                 |                                                                                                               |      |      |      |      |
| V_uvp,G                                            | Undervoltage protection limit, GVDD_x and VDD                                                                   |                                                                                                               | 9.5  |      |      | V    |
| V_uvp,hyst <sup>(1)</sup>                          |                                                                                                                 |                                                                                                               | 0.6  |      |      | V    |
| OTW                                                | Overtemperature warning 1, $\overline{OTW1}^{(1)}$                                                              |                                                                                                               | 95   | 100  | 105  | °C   |
|                                                    | Overtemperature warning 2, $\overline{OTW}$ , $\overline{OTW2}^{(1)}$                                           |                                                                                                               | 115  | 125  | 135  | °C   |
| OTW_HYST <sup>(1)</sup>                            | Temperature drop needed below OTW temperature for $\overline{OTW}$ to be inactive after $\overline{OTW}$ event. |                                                                                                               | 25   |      |      | °C   |
| OTE <sup>(1)</sup>                                 | Overtemperature error                                                                                           |                                                                                                               | 145  | 155  | 165  | °C   |
| OTE-OTW <sub>differential</sub> <sup>(1)</sup>     | OTE-OTW differential                                                                                            |                                                                                                               | 30   |      |      | °C   |
| OTE_HYST <sup>(1)</sup>                            | A reset needs to occur for $\overline{SD}$ to be released following an OTE event                                |                                                                                                               | 25   |      |      | °C   |
| OLPC                                               | Overload protection counter                                                                                     | f_PWM = 400kHz                                                                                                | 2.6  |      |      | ms   |
| I_OC                                               | Overcurrent limit protection                                                                                    | Resistor – programmable, nominal peak current in 1Ω load, R_OCP = 30kΩ                                        | 14   |      |      | A    |
|                                                    |                                                                                                                 | Resistor – programmable, nominal peak current in 1Ω load, R_OCP = 22kΩ (with Schottky diodes on output nodes) | 18   |      |      |      |
| I_OC_LATCHED                                       | Overcurrent limit protection                                                                                    | Resistor – programmable, peak current in 1Ω load, R_OCP = 64kΩ                                                | 14   |      |      | A    |
|                                                    |                                                                                                                 | Resistor – programmable, nominal peak current in 1Ω load, R_OCP = 47kΩ (with Schottky diodes on output nodes) | 18   |      |      |      |
| I_OCT                                              | Overcurrent response time                                                                                       | Time from switching transition to flip-state induced by overcurrent.                                          | 150  |      |      | ns   |
| I_PD                                               | Output pulldown current of each half                                                                            | Connected when $\overline{RESET}$ is active to provide bootstrap charge. Not used in SE mode.                 | 3    |      |      | mA   |

(1) Specified by design.

**ELECTRICAL CHARACTERISTICS (continued)**

PVDD\_X = 36V, GVDD\_X = 12V, VDD = 12V, T<sub>C</sub> (Case temperature) = 75°C, f<sub>S</sub> = 400kHz, unless otherwise specified.

| PARAMETER                            |                                                                                                                                                   | TEST CONDITIONS                | MIN | TYP | MAX | UNIT    |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----|-----|-----|---------|
| <b>STATIC DIGITAL SPECIFICATIONS</b> |                                                                                                                                                   |                                |     |     |     |         |
| V <sub>IH</sub>                      | High level input voltage                                                                                                                          | INPUT_X, M1, M2, M3, RESET     | 1.9 |     |     | V       |
| V <sub>IL</sub>                      | Low level input voltage                                                                                                                           |                                |     |     | 0.8 | V       |
| Leakage                              | Input leakage current                                                                                                                             |                                |     |     | 100 | μA      |
| <b>OTW/SHUTDOWN (SD)</b>             |                                                                                                                                                   |                                |     |     |     |         |
| R <sub>INT_PU</sub>                  | Internal pullup resistance, $\overline{\text{OTW1}}$ to VREG, $\overline{\text{OTW2}}$ to VREG, $\overline{\text{SD}}$ to VREG                    |                                | 20  | 26  | 32  | kΩ      |
| V <sub>OH</sub>                      | High level output voltage                                                                                                                         | Internal pullup resistor       | 3   | 3.3 | 3.6 | V       |
|                                      |                                                                                                                                                   | External pullup of 4.7kΩ to 5V | 4.5 |     | 5   |         |
| V <sub>OL</sub>                      | Low level output voltage                                                                                                                          | I <sub>O</sub> = 4 mA          |     | 200 | 500 | mV      |
| FANOUT                               | Device fanout $\overline{\text{OTW1}}$ , $\overline{\text{OTW2}}$ , $\overline{\text{SD}}$ , $\overline{\text{CLIP}}$ , $\overline{\text{READY}}$ | No external pullup             |     | 30  |     | devices |

## TYPICAL CHARACTERISTICS, BTL CONFIGURATION

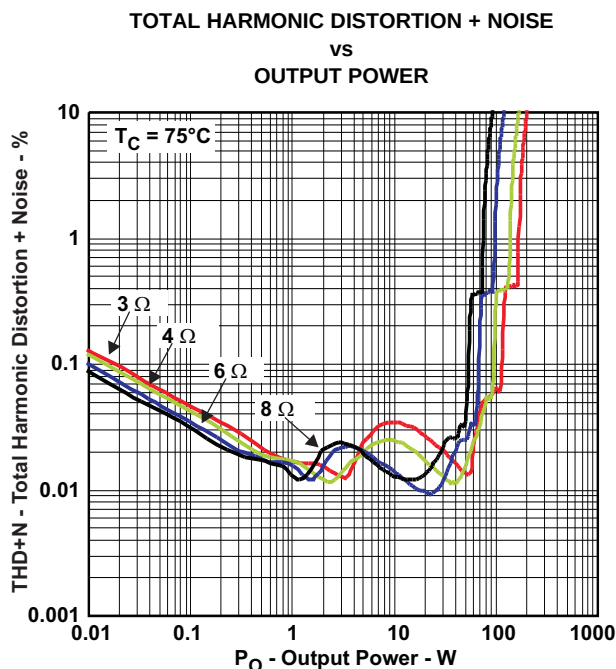


Figure 1.

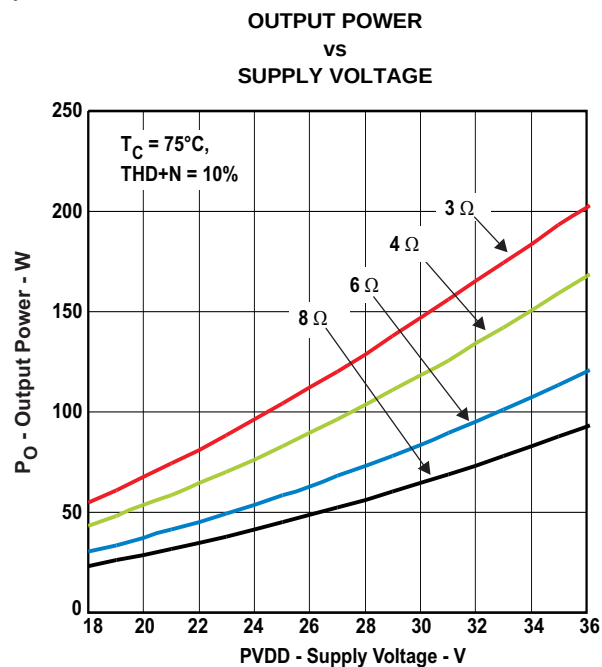


Figure 2.

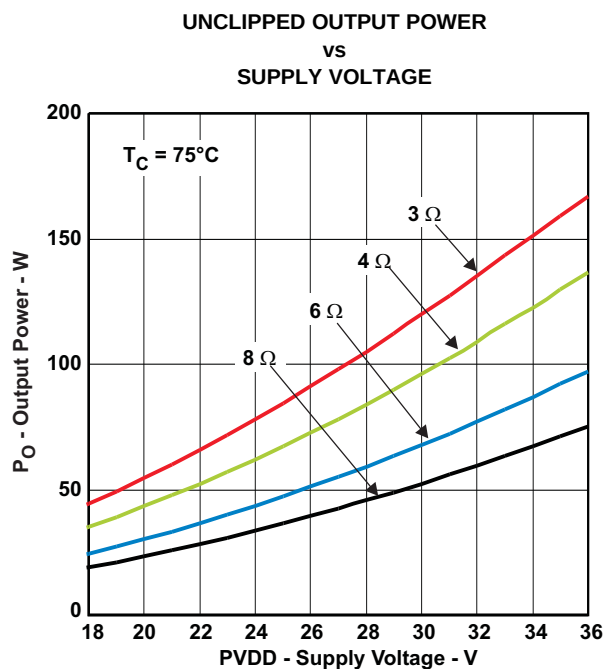


Figure 3.

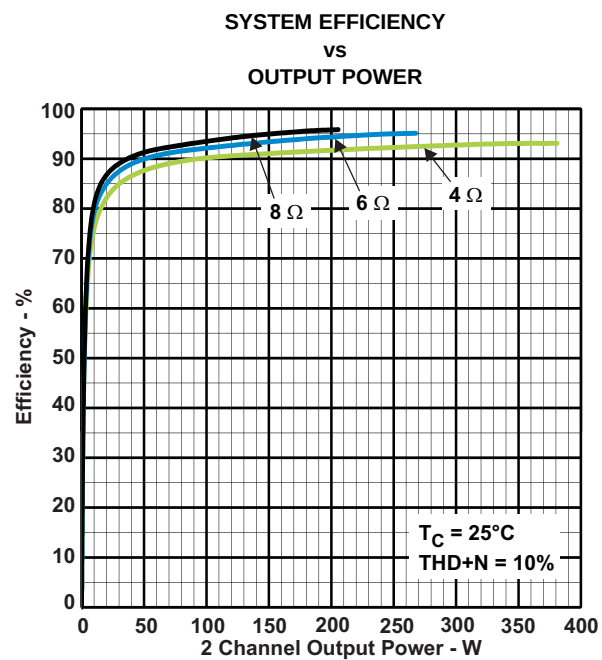


Figure 4.

# **TYPICAL CHARACTERISTICS, BTL CONFIGURATION (continued)**

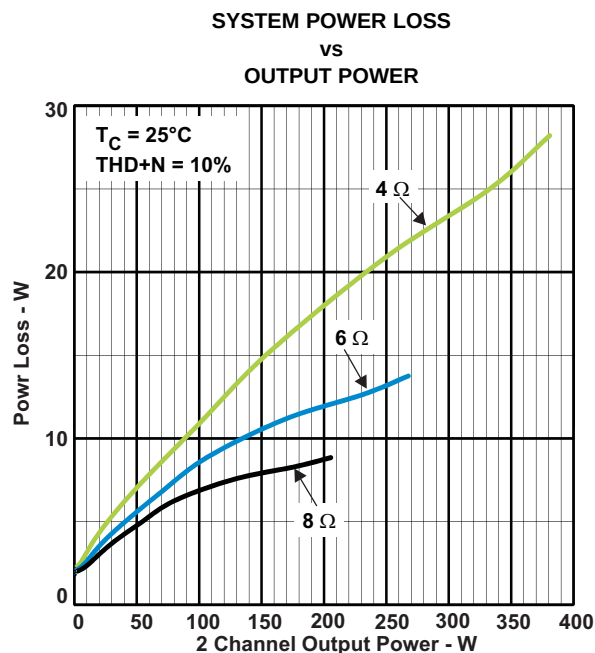


Figure 5.

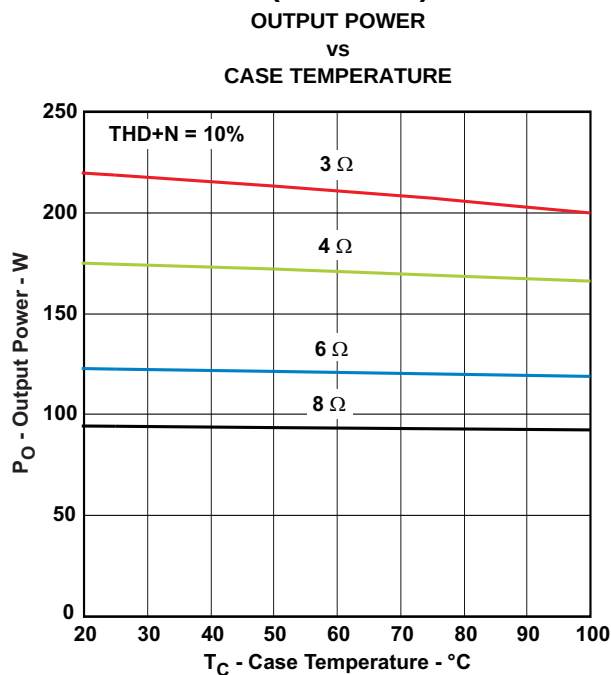


Figure 6.

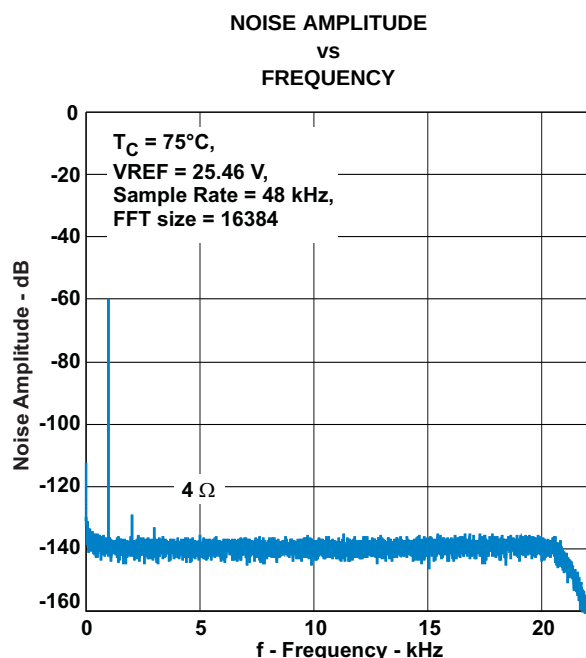


Figure 7.




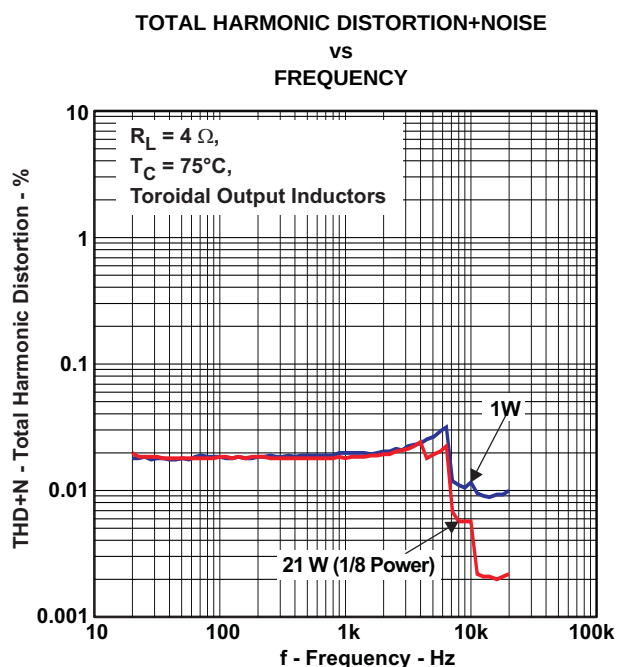


Figure 8.

## TYPICAL CHARACTERISTICS, PBTL CONFIGURATION

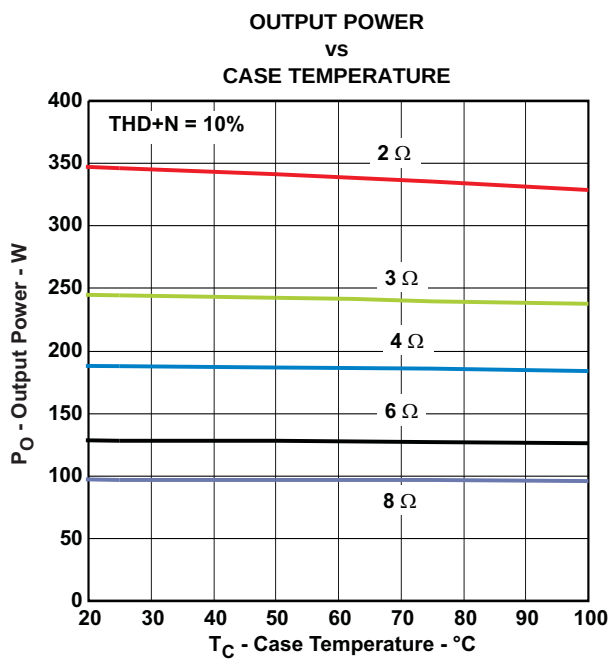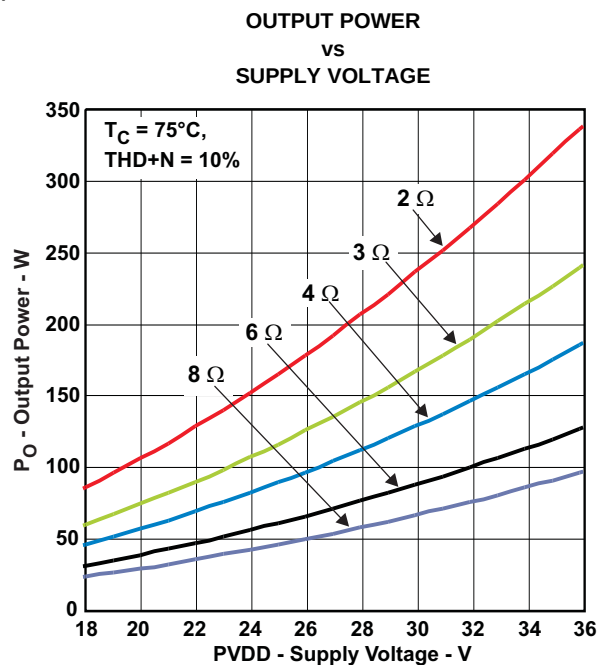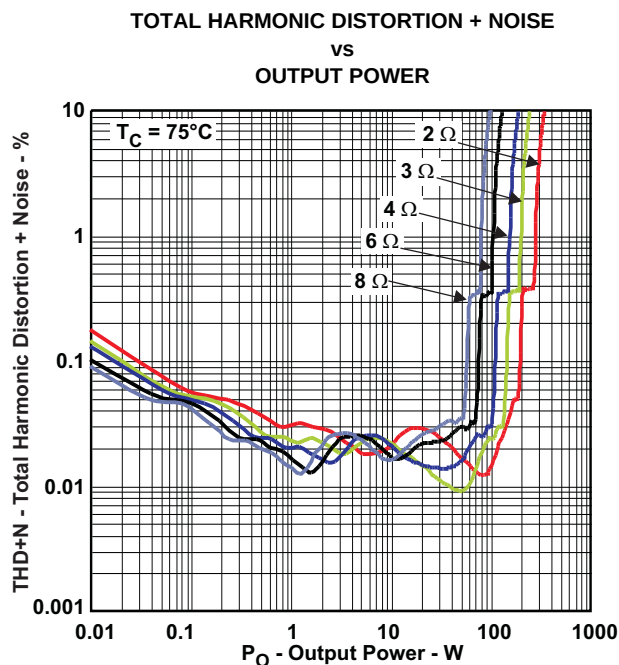

## **APPLICATION INFORMATION**

### **PCB MATERIAL RECOMMENDATION**

FR-4 Glass Epoxy material with 2 oz. (70 $\mu$ m) is recommended for use with the TAS5613A. The use of this material can provide for higher power output, improved thermal performance, and better EMI margin (due to lower PCB trace inductance).

### **PVDD CAPACITOR RECOMMENDATION**

The large capacitors used in conjunction with each full-bridge, are referred to as the PVDD Capacitors. These capacitors should be selected for proper voltage margin and adequate capacitance to support the power requirements. In practice, with a well designed system power supply, 1000  $\mu$ F, 50V will support more applications. The PVDD capacitors should be low ESR type because they are used in a circuit associated with high-speed switching.

### **DECOUPLING CAPACITOR RECOMMENDATIONS**

In order to design an amplifier that has robust performance, passes regulatory requirements, and exhibits good audio performance, good quality decoupling capacitors should be used. In practice, X7R should be used in this application.

The voltage of the decoupling capacitors should be selected in accordance with good design practices. Temperature, ripple current, and voltage overshoot must be considered. This fact is particularly true in the selection of the 2 $\mu$ F that is placed on the power supply to each half-bridge. It must withstand the voltage overshoot of the PWM switching, the heat generated by the amplifier during high power output, and the ripple current created by high power output. A minimum voltage rating of 50V is required for use with a 36V power supply.

### **SYSTEM DESIGN RECOMMENDATIONS**

The following schematics and PCB layouts illustrate best practices in the use of the TAS5613A.

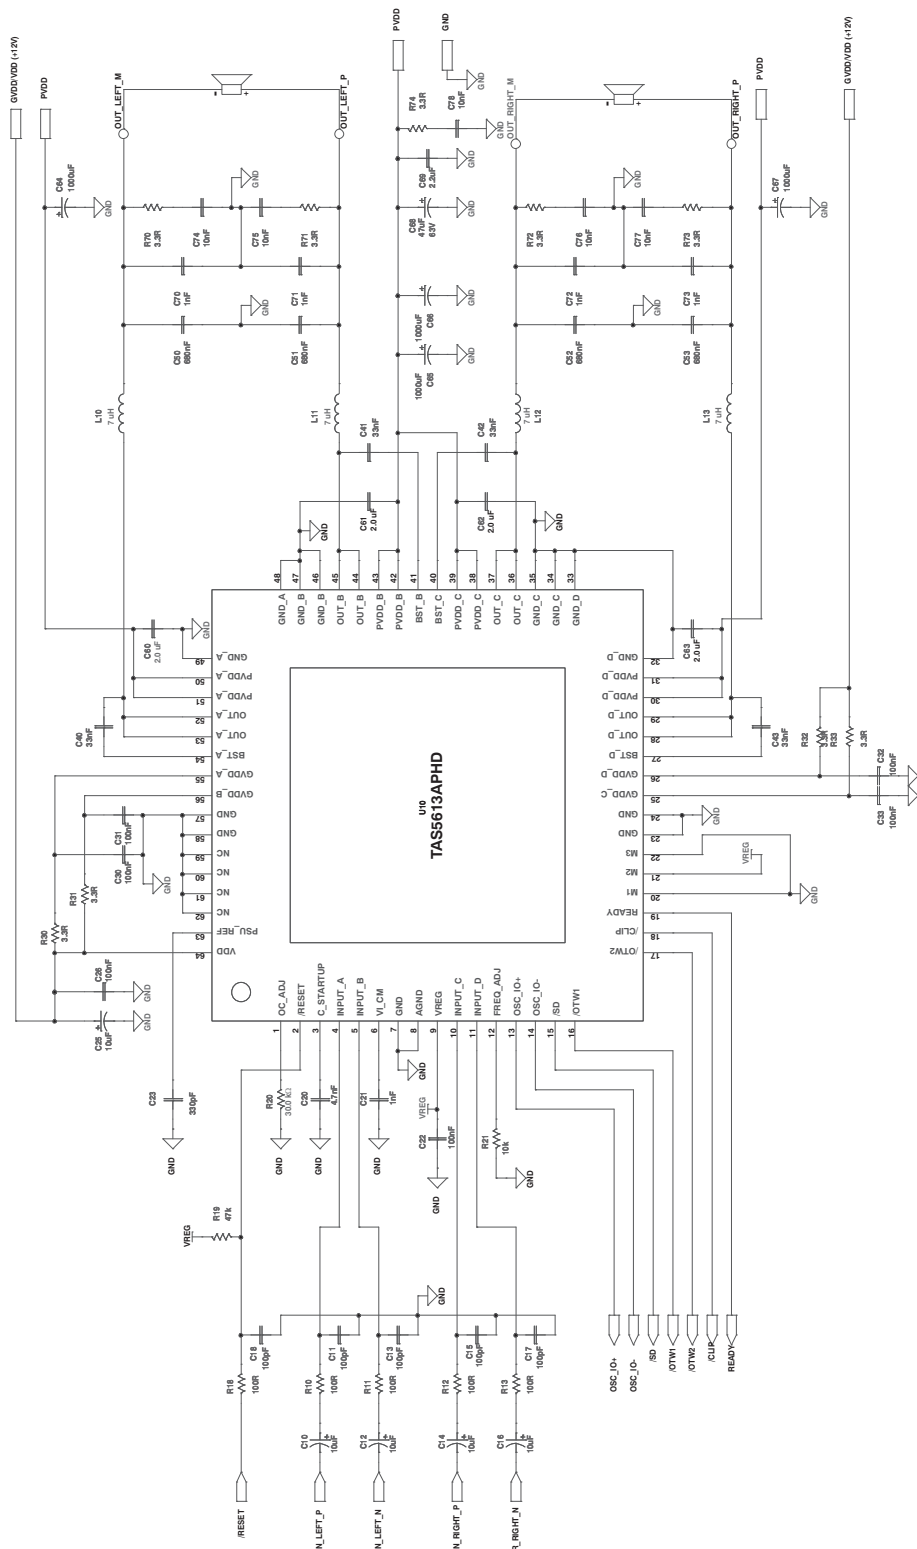


Figure 12. Typical Differential Input BTL Application With BD Modulation Filters

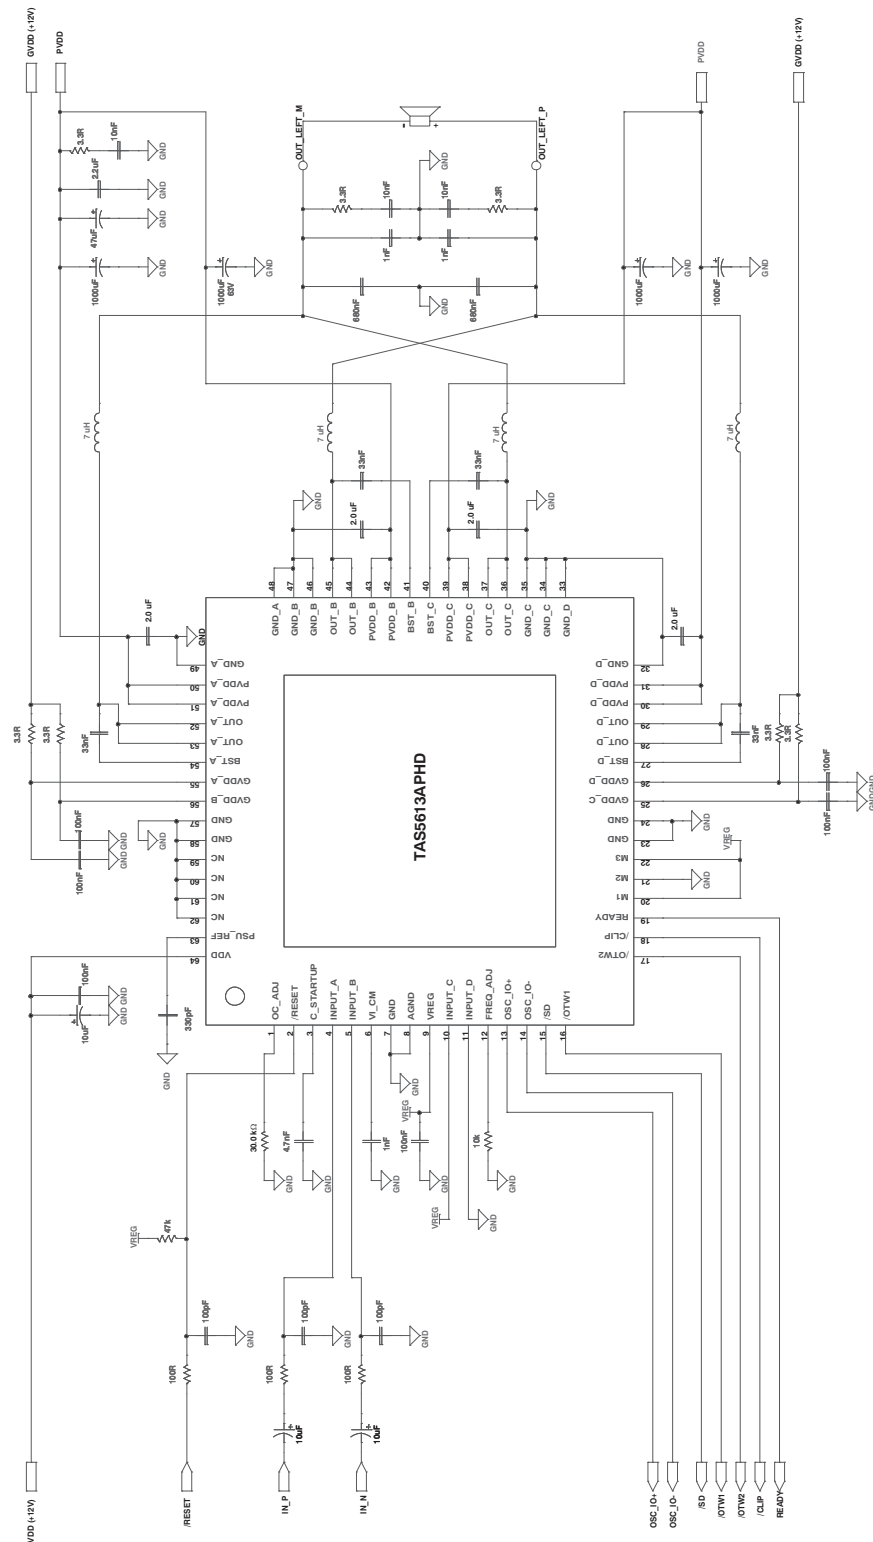


Figure 13. Typical Differential (2N) PBTL Application With BD Modulation Filters

## THEORY OF OPERATION

### POWER SUPPLIES

To facilitate system design, the TAS5613A needs only a 12V supply in addition to the (typical) 36V power-stage supply. An internal voltage regulator provides suitable voltage levels for the digital and low-voltage analog circuitry. Additionally, all circuitry requiring a floating voltage supply, e.g., the high-side gate drive, is accommodated by built-in bootstrap circuitry requiring only an external capacitor for each half-bridge.

In order to provide outstanding electrical and acoustical characteristics, the PWM signal path including gate drive and output stage is designed as identical, independent half-bridges. For this reason, each half-bridge has separate bootstrap pins (BST\_X), and power-stage supply pins (PVDD\_X). Gate drive supply (GVDD\_X) is separate for each half bridge for the PHD package and separate per full bridge for the DKD package. Furthermore, an additional pin (VDD) is provided as supply for all common circuits. Although supplied from the same 12V source, separating to GVDD\_A, GVDD\_B, GVDD\_C, GVDD\_D, and VDD on the printed-circuit board (PCB) by RC filters (see application diagram for details) is recommended. These RC filters provide the recommended high-frequency isolation. Special attention should be paid to placing all decoupling capacitors as close to their associated pins as possible. In general, inductance between the power supply pins and decoupling capacitors must be avoided. (See reference board documentation for additional information.)

For a properly functioning bootstrap circuit, a small ceramic capacitor must be connected from each bootstrap pin (BST\_X) to the power-stage output pin (OUT\_X). When the power-stage output is low, the bootstrap capacitor is charged through an internal diode connected between the gate-drive power-supply pin (GVDD\_X) and the bootstrap pins. When the power-stage output is high, the bootstrap capacitor potential is shifted above the output potential and thus provides a suitable voltage supply for the high-side gate driver. In an application with PWM switching frequencies in the range from 300kHz to 400kHz, it is recommended to use 33nF ceramic capacitors, size 0603 or 0805, for the bootstrap supply. These 33nF capacitors ensure sufficient energy storage, even during minimal PWM duty cycles, to keep the high-side power stage FET (LDMOS) fully turned on during the remaining part of the PWM cycle.

Special attention should be paid to the power-stage power supply; this includes component selection, PCB placement, and routing. As indicated, each half-bridge has independent power-stage supply pins (PVDD\_X). For optimal electrical performance, EMI compliance, and system reliability, it is important that each PVDD\_X pin is decoupled with a 2-μF ceramic capacitor placed as close as possible to each supply pin. It is recommended to follow the PCB layout of the TAS5613A reference design. For additional information on recommended power supply and required components, see the application diagrams in this data sheet.

The 12V supply should be from a low-noise, low-output-impedance voltage regulator. Likewise, the 36V power-stage supply is assumed to have low output impedance and low noise. The power-supply sequence is not critical as facilitated by the internal power-on-reset circuit. Moreover, the TAS5613A is fully protected against erroneous power-stage turn on due to parasitic gate charging. Thus, voltage-supply ramp rates (dV/dt) are non-critical within the specified range (see the [Recommended Operating Conditions](#) table of this data sheet).

### SYSTEM POWER-UP/POWER-DOWN SEQUENCE

#### Powering Up

The TAS5613A does not require a power-up sequence. The outputs of the H-bridges remain in a high-impedance state until the gate-drive supply voltage (GVDD\_X) and VDD voltage are above the undervoltage protection (UVP) voltage threshold (see the [Electrical Characteristics](#) table of this data sheet). Although not specifically required, it is recommended to hold RESET in a low state while powering up the device. This allows an internal circuit to charge the external bootstrap capacitors by enabling a weak pulldown of the half-bridge output.

#### Powering Down

The TAS5613A does not require a power-down sequence. The device remains fully operational as long as the gate-drive supply (GVDD\_X) voltage and VDD voltage are above the undervoltage protection (UVP) voltage threshold (see the [Electrical Characteristics](#) table of this data sheet). Although not specifically required, it is a good practice to hold RESET low during power down, thus preventing audible artifacts including pops or clicks.

## ERROR REPORTING

The  $\overline{SD}$ ,  $\overline{OTW}$ ,  $\overline{OTW1}$  and  $\overline{OTW2}$  pins are active-low, open-drain outputs. The function is for protection-mode signaling to a PWM controller or other system-control device.

Any fault resulting in device shutdown is signaled by the  $\overline{SD}$  pin going low. Also,  $\overline{OTW}$  and  $\overline{OTW2}$  go low when the device junction temperature exceeds 125°C, and  $\overline{OTW1}$  goes low when the junction temperature exceeds 100°C (see [Table 2](#)).

**Table 2. Error Reporting**

| $\overline{SD}$ | $\overline{OTW1}$ | $\overline{OTW2}, \overline{OTW}$ | DESCRIPTION                                                                                                                    |
|-----------------|-------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| 0               | 0                 | 0                                 | Overtemperature (OTE) or overload (OLP) or undervoltage (UVP) Junction temperature higher than 125°C (overtemperature warning) |
| 0               | 0                 | 1                                 | Overload (OLP) or undervoltage (UVP). Junction temperature higher than 100°C (overtemperature warning)                         |
| 0               | 1                 | 1                                 | Overload (OLP) or undervoltage (UVP). Junction temperature lower than 100°C                                                    |
| 1               | 0                 | 0                                 | Junction temperature higher than 125°C (overtemperature warning)                                                               |
| 1               | 0                 | 1                                 | Junction temperature higher than 100°C (overtemperature warning)                                                               |
| 1               | 1                 | 1                                 | Junction temperature lower than 100°C and no OLP or UVP faults (normal operation)                                              |

Note that asserting either  $\overline{RESET}$  low forces the  $\overline{SD}$  signal high, independent of faults being present. TI recommends monitoring the  $\overline{OTW}$  signal using the system microcontroller and responding to an overtemperature warning signal by, e.g., turning down the volume to prevent further heating of the device resulting in device shutdown (OTE).

To reduce external component count, an internal pullup resistor to 3.3V is provided on both  $\overline{SD}$  and  $\overline{OTW}$  outputs. Level compliance for 5V logic can be obtained by adding external pullup resistors to 5 V (see the Electrical Characteristics section of this data sheet for further specifications).

## DEVICE PROTECTION SYSTEM

The TAS5613A contains advanced protection circuitry carefully designed to facilitate system integration and ease of use, as well as to safeguard the device from permanent failure due to a wide range of fault conditions such as short circuits, overload, overtemperature, and undervoltage. The TAS5613A responds to a fault by immediately setting the power stage in a high-impedance (Hi-Z) state and asserting the  $\overline{SD}$  pin low. In situations other than overload and overtemperature error (OTE), the device automatically recovers when the fault condition has been removed, i.e., the supply voltage has increased.

The device will function on errors, as shown in [Table 3](#).

**Table 3. Device Protection**

| BTL            | MODE      | PBTL           | MODE      | SE             | MODE      |
|----------------|-----------|----------------|-----------|----------------|-----------|
| LOCAL ERROR IN | TURNS OFF | LOCAL ERROR IN | TURNS OFF | LOCAL ERROR IN | TURNS OFF |
| A              | A+B       | A              | A+B+C+D   | A              | A+B       |
| B              |           | B              |           | B              |           |
| C              | C+D       | C              |           | C              | C+D       |
| D              |           | D              |           | D              |           |

Bootstrap UVP does not shutdown according to the table, it shuts down the respective halfbridge (non-latching, does not assert  $\overline{SD}$ ).

## PIN-TO-PIN SHORT CIRCUIT PROTECTION (PPSC)

The PPSC detection system protects the device from permanent damage in the case that a power output pin (OUT\_X) is shorted to GND\_X or PVDD\_X. For comparison, the OC protection system detects an overcurrent after the demodulation filter where PPSC detects shorts directly at the pin before the filter. PPSC detection is performed at startup i.e. when VDD is supplied, consequently a short to either GND\_X or PVDD\_X after system startup will not activate the PPSC detection system. When PPSC detection is activated by a short on the output, all half bridges are kept in a Hi-Z state until the short is removed, the device then continues the startup sequence

and starts switching. The detection is controlled globally by a two step sequence. The first step ensures that there are no shorts from OUT\_X to GND\_X, the second step tests that there are no shorts from OUT\_X to PVDD\_X. The total duration of this process is roughly proportional to the capacitance of the output LC filter. The typical duration is < 15ms/μF. While the PPSC detection is in progress,  $\overline{SD}$  is kept low, and the device will not react to changes applied to the RESET pins. If no shorts are present the PPSC detection passes, and  $\overline{SD}$  is released. A device reset will not start a new PPSC detection. PPSC detection is enabled in BTL and PBTL output configurations, the detection is not performed in SE mode. To make sure not to trip the PPSC detection system it is recommended not to insert resistive load to GND\_X or PVDD\_X.

## OVERTEMPERATURE PROTECTION

### PHD Package

The TAS5613A PHD package option has a three-level temperature-protection system that asserts an active-low warning signal ( $\overline{OTW1}$ ) when the device junction temperature exceeds 100°C (typical), ( $\overline{OTW2}$ ) when the device junction temperature exceeds 125°C (typical) and, if the device junction temperature exceeds 155°C (typical), the device is put into thermal shutdown, resulting in all half-bridge outputs being set in the high-impedance (Hi-Z) state and  $\overline{SD}$  being asserted low. OTE is latched in this case. To clear the OTE latch, RESET must be asserted. Thereafter, the device resumes normal operation.

### DKD Package

The TAS5613A DKD package option has a two-level temperature-protection system that asserts an active-low warning signal ( $\overline{OTW}$ ) when the device junction temperature exceeds 125°C (typical) and, if the device junction temperature exceeds 155°C (typical), the device is put into thermal shutdown, resulting in all half-bridge outputs being set in the high-impedance (Hi-Z) state and  $\overline{SD}$  being asserted low. OTE is latched in this case. To clear the OTE latch, RESET must be asserted. Thereafter, the device resumes normal operation.

## UNDERVOLTAGE PROTECTION (UVP) AND POWER-ON RESET (POR)

The UVP and POR circuits of the TAS5613A fully protect the device in any power-up/down and brownout situation. While powering up, the POR circuit resets the overload circuit (OLP) and ensures that all circuits are fully operational when the GVDD\_X and VDD supply voltages reach stated in the [Electrical Characteristics](#) table. Although GVDD\_X and VDD are independently monitored, a supply voltage drop below the UVP threshold on any VDD or GVDD\_X pin results in all half-bridge outputs immediately being set in the high-impedance (Hi-Z) state and  $\overline{SD}$  being asserted low. The device automatically resumes operation when all supply voltages have increased above the UVP threshold.

## DEVICE RESET

When RESET is asserted low, all power-stage FETs in the four half-bridges are forced into a high-impedance (Hi-Z) state.

In BTL modes, to accommodate bootstrap charging prior to switching start, asserting the reset input low enables weak pulldown of the half-bridge outputs. In the SE mode, the output is forced into a high impedance state when asserting the reset input low.

Asserting reset input low removes any fault information to be signalled on the  $\overline{SD}$  output, i.e.,  $\overline{SD}$  is forced high. A rising-edge transition on reset input allows the device to resume operation after an overload fault. To ensure thermal reliability, the rising edge of reset must occur no sooner than 4 ms after the falling edge of  $\overline{SD}$ .

## SYSTEM DESIGN CONSIDERATION

A rising-edge transition on reset input allows the device to execute the startup sequence and starts switching.

Apply only audio when the state of READY is high that will start and stop the amplifier without having audible artifacts that is heard in the output transducers.

The CLIP signal is indicating that the output is approaching clipping. The signal can be used to either an audio volume decrease or intelligent power supply controlling a low and a high rail.

The device is inverting the audio signal from input to output.

The VREG pin is not recommended to be used as a voltage source for external circuitry.

## OSCILLATOR

The oscillator frequency can be trimmed by external control of the `FREQ_ADJ` pin.


To reduce interference problems while using radio receiver tuned within the AM band, the switching frequency can be changed from nominal to lower values. These values should be chosen such that the nominal and the lower value switching frequencies together results in the fewest cases of interference throughout the AM band. can be selected by the value of the `FREQ_ADJ` resistor connected to `AGND` in master mode.

For slave mode operation, turn of the oscillator by pulling the `FREQ_ADJ` pin to `VREG`. This configures the `OSC_I/O` pins as inputs and needs to be slaved from an external differential clock.

## PRINTED CIRCUIT BOARD RECOMMENDATION

Use an unbroken ground plane to have good low impedance and inductance return path to the power supply for power and audio signals. PCB layout, audio performance and EMI are linked closely together. The circuit contains high fast switching currents; therefore, care must be taken to prevent damaging voltage spikes. Routing the audio input should be kept short and together with the accompanied audio source ground. A local ground area underneath the device is important to keep solid to minimize ground bounce.

Netlist for this printed circuit board is generated from the schematic in [Figure 12](#).

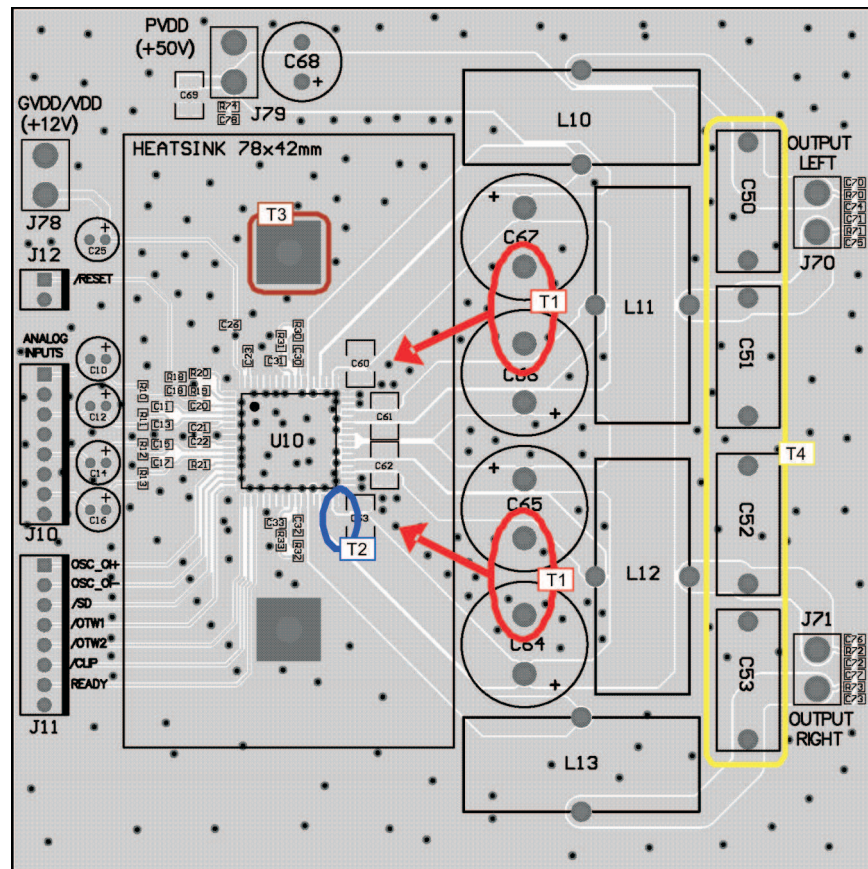


**Note T1:** PVDD decoupling bulk capacitors C60-C64 should be as close as possible to the PVDD and `GND_X` pins, the heat sink sets the distance. Wide traces should be routed on the top layer with direct connection to the pins and without going through vias. No vias or traces should be blocking the current path.

**Note T2:** Close decoupling of PVDD with low impedance X7R ceramic capacitors is placed under the heat sink and close to the pins.

**Note T3:** Heat sink needs to have a good connection to PCB ground.

**Note T4:** Output filter capacitors must be linear in the applied voltage range preferable metal film types.

**Figure 14. Printed Circuit Board - Top Layer**

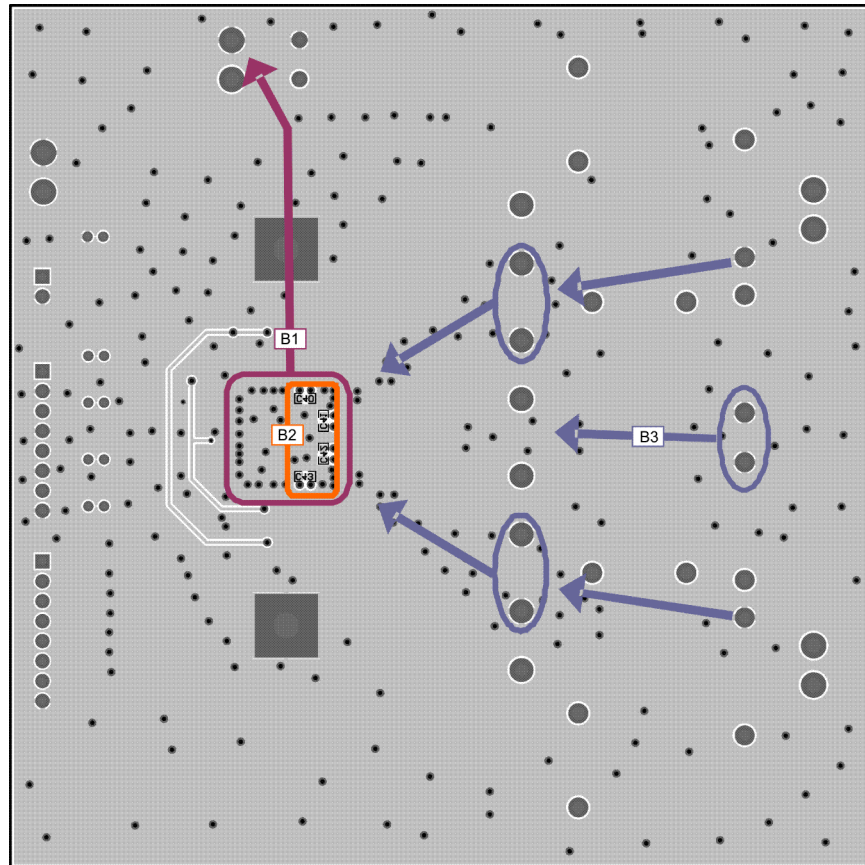

**Note B1:** It is important to have a direct low impedance return path for high current back to the power supply. Keep impedance low from top to bottom side of PCB through a lot of ground vias.

**Note B2:** Bootstrap low impedance X7R ceramic capacitors placed on bottom side providing a short low inductance current loop.

**Note B3:** Return currents from bulk capacitors and output filter capacitors.

**Figure 15. Printed Circuit Board - Bottom Layer**

## REVISION HISTORY

| Changes from Original (June 2010) to Revision A                                                                | Page |
|----------------------------------------------------------------------------------------------------------------|------|
| • Deleted DKD 44-引脚封装具有的特性 .....                                                                               | 1    |
| • Deleted the DKD Package drawing from the Pin Assignment section .....                                        | 2    |
| • Deleted the TAS5613ADKD from the PACKAGE HEAT DISSIPATON RATINGS table .....                                 | 3    |
| • Deleted the TAS5613ADKD from the ORDERING INFORMATION table .....                                            | 3    |
| • Changed the $F_{PWM}$ and $R_{FREQ\_ADJ}$ values in the RECOMMENDED OPERATING CONDITIONS table .....         | 5    |
| • Changed the TJ max value From: 150 To: 125 in the ROC table .....                                            | 5    |
| • Deleted the DKD package from the PIN FUNCTIONS table .....                                                   | 5    |
| • Changed the values of the ANALOG INPUTS and OSCILLATOR section of the ELECTRICAL CHARACTERISTICS table ..... | 10   |
| • Deleted the DKD Package section from the OVERTEMPERATURE PROTECTION section .....                            | 20   |
| Changes from Revision A (March 2011) to Revision B                                                             | Page |
| • Added DKD 44-引脚封装的特性 .....                                                                                   | 1    |
| • Added the DKD Package drawing to the Pin Assignment section .....                                            | 2    |
| • Added the TAS5613ADKD to the PACKAGE HEAT DISSIPATON RATINGS table .....                                     | 3    |
| • Added the TAS5613ADKD to the ORDERING INFORMATION table .....                                                | 3    |
| • Added the DKD package to the PIN FUNCTIONS table .....                                                       | 5    |
| • Changed Inverting voltage Gain, ( $V_{OUT}/V_{IN}$ ) From: 20 dB To: 21 dB .....                             | 10   |
| • Added text to the Power Supplies section .....                                                               | 18   |
| • Added text following <a href="#">Table 3</a> " (non-latching, does not assert $\overline{SD}$ )" .....       | 19   |
| • Added the DKD Package section .....                                                                          | 20   |

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| TAS5613ADKD      | ACTIVE        | HSSOP        | DKD                | 44   | 29             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-4-260C-72 HR   | 0 to 70      | TAS5613A                | <a href="#">Samples</a> |
| TAS5613ADKDR     | ACTIVE        | HSSOP        | DKD                | 44   | 500            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-4-260C-72 HR   | 0 to 70      | TAS5613A                | <a href="#">Samples</a> |
| TAS5613APHD      | ACTIVE        | HTQFP        | PHD                | 64   | 90             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | 0 to 70      | TAS5613A                | <a href="#">Samples</a> |
| TAS5613APHDR     | ACTIVE        | HTQFP        | PHD                | 64   | 1000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | 0 to 70      | TAS5613A                | <a href="#">Samples</a> |
| TAS5613PHD       | NRND          | HTQFP        | PHD                | 64   | 90             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | 0 to 70      | TAS5613                 |                         |
| TAS5613PHDR      | NRND          | HTQFP        | PHD                | 64   | 1000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | 0 to 70      | TAS5613                 |                         |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TAS5613ADKDR | HSSOP        | DKD             | 44   | 500  | 330.0              | 24.4               | 14.7    | 16.4    | 4.0     | 20.0    | 24.0   | Q1            |
| TAS5613APHDR | HTQFP        | PHD             | 64   | 1000 | 330.0              | 24.4               | 17.0    | 17.0    | 1.5     | 20.0    | 24.0   | Q2            |
| TAS5613PHDR  | HTQFP        | PHD             | 64   | 1000 | 330.0              | 24.4               | 17.0    | 17.0    | 1.5     | 20.0    | 24.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TAS5613ADKDR | HSSOP        | DKD             | 44   | 500  | 367.0       | 367.0      | 45.0        |
| TAS5613APHDR | HTQFP        | PHD             | 64   | 1000 | 367.0       | 367.0      | 45.0        |
| TAS5613PHDR  | HTQFP        | PHD             | 64   | 1000 | 367.0       | 367.0      | 45.0        |

## MECHANICAL DATA

### PHD (S-PQFP-G64) PowerPAD™ PLASTIC QUAD FLATPACK (DIE DOWN)

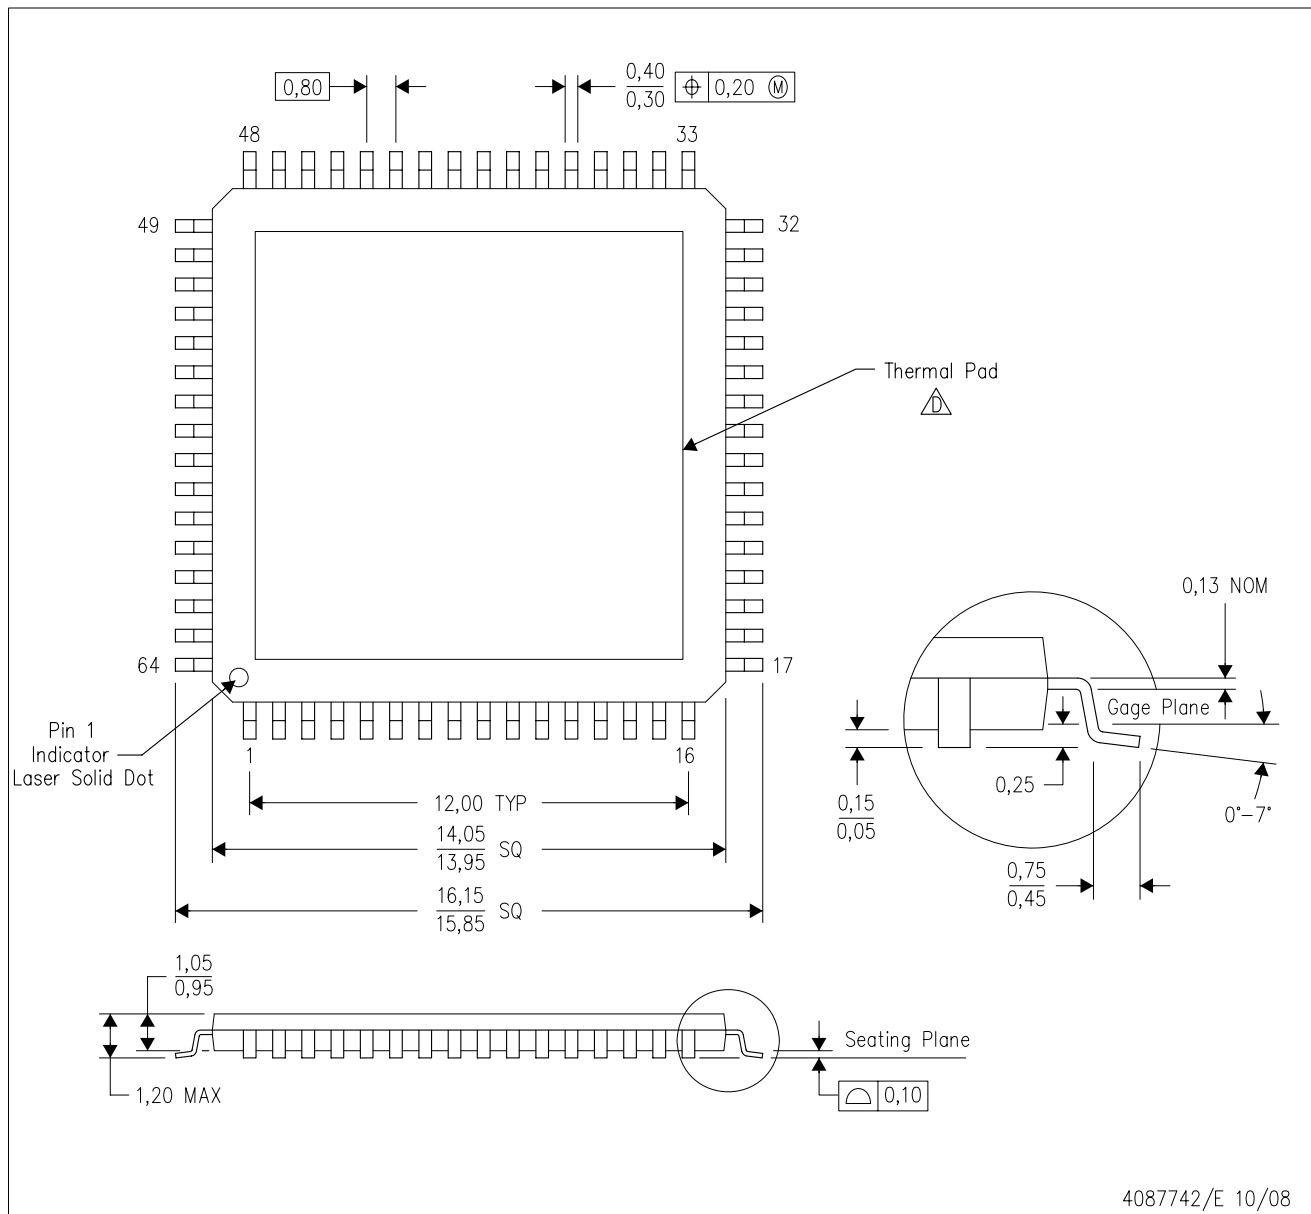

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion.
  - This package is designed to be attached directly to an external heatsink. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>. See the product data sheet for details regarding the exposed thermal pad dimensions.
  - Falls within JEDEC MS-026

PowerPAD is a trademark of Texas Instruments.

## THERMAL PAD MECHANICAL DATA


### PHD (S-PQFP-G64) PowerPAD™ PLASTIC QUAD FLATPACK (DIE DOWN)

#### THERMAL INFORMATION

This PowerPAD™ package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the PowerPAD package and how to take advantage of its heat dissipating abilities, refer to Technical Brief, PowerPAD Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 and Application Brief, PowerPAD Made Easy, Texas Instruments Literature No. SLMA004. Both documents are available at [www.ti.com](http://www.ti.com).


The exposed thermal pad dimensions for this package are shown in the following illustration.

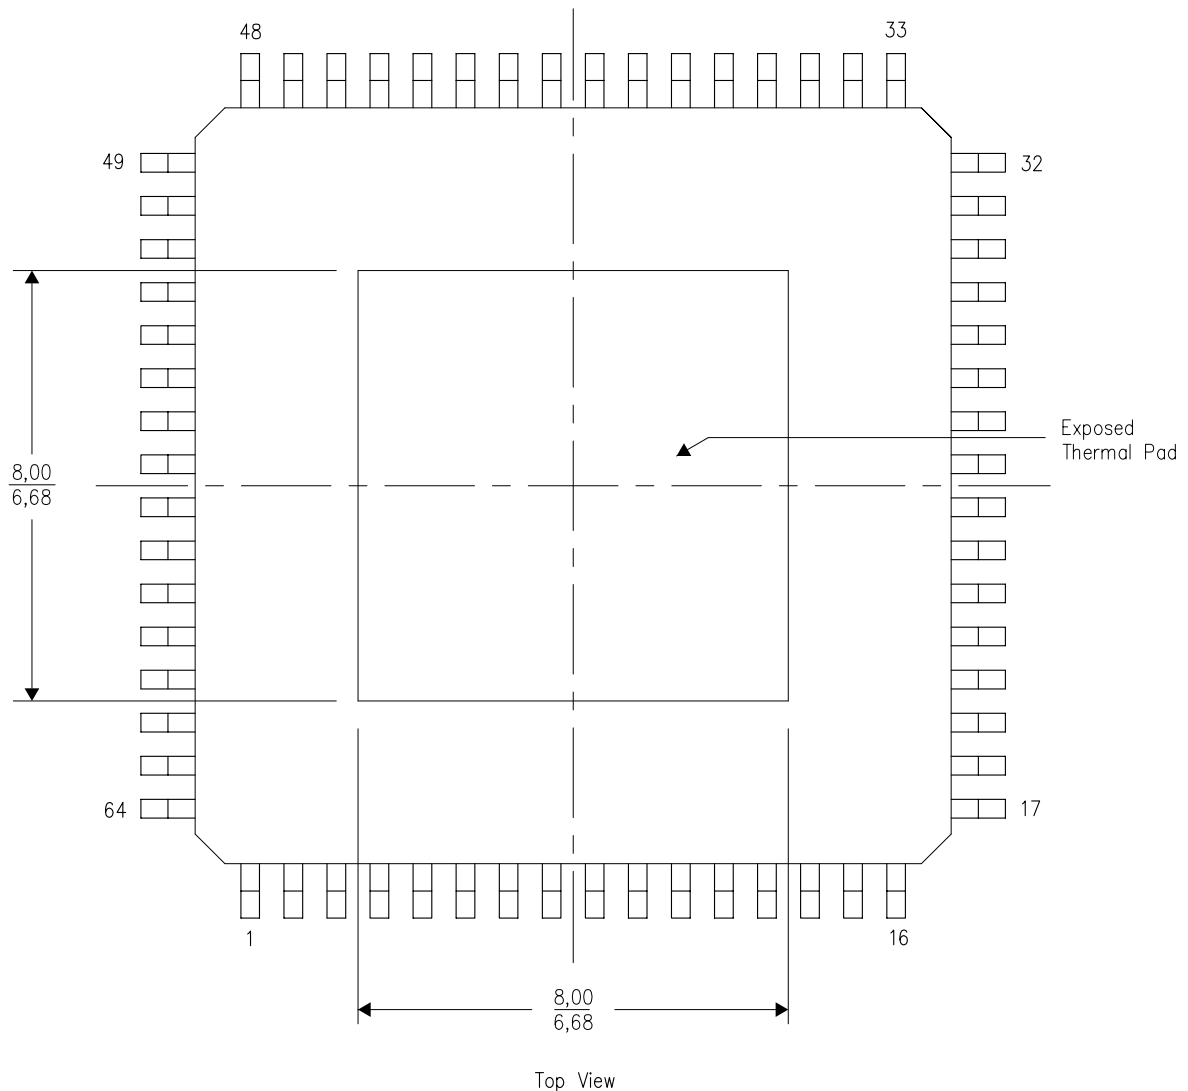

4206328-3/H 04/11


NOTE: A. All linear dimensions are in millimeters

PowerPAD is a trademark of Texas Instruments

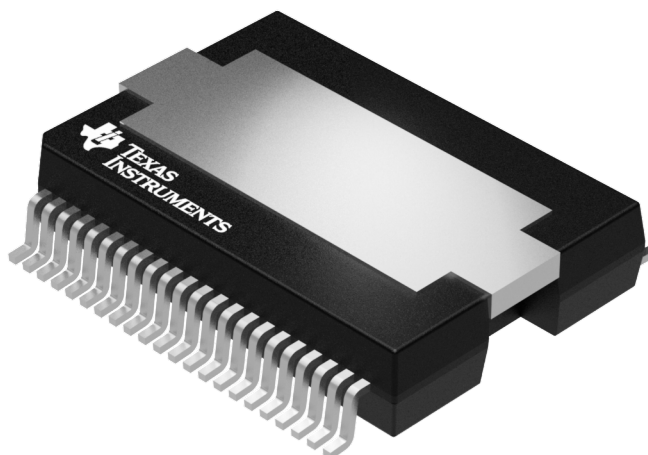

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.


DKD0044A



# PACKAGE OUTLINE

## PowerPAD™ SSOP - 3.6 mm max height

PLASTIC SMALL OUTLINE

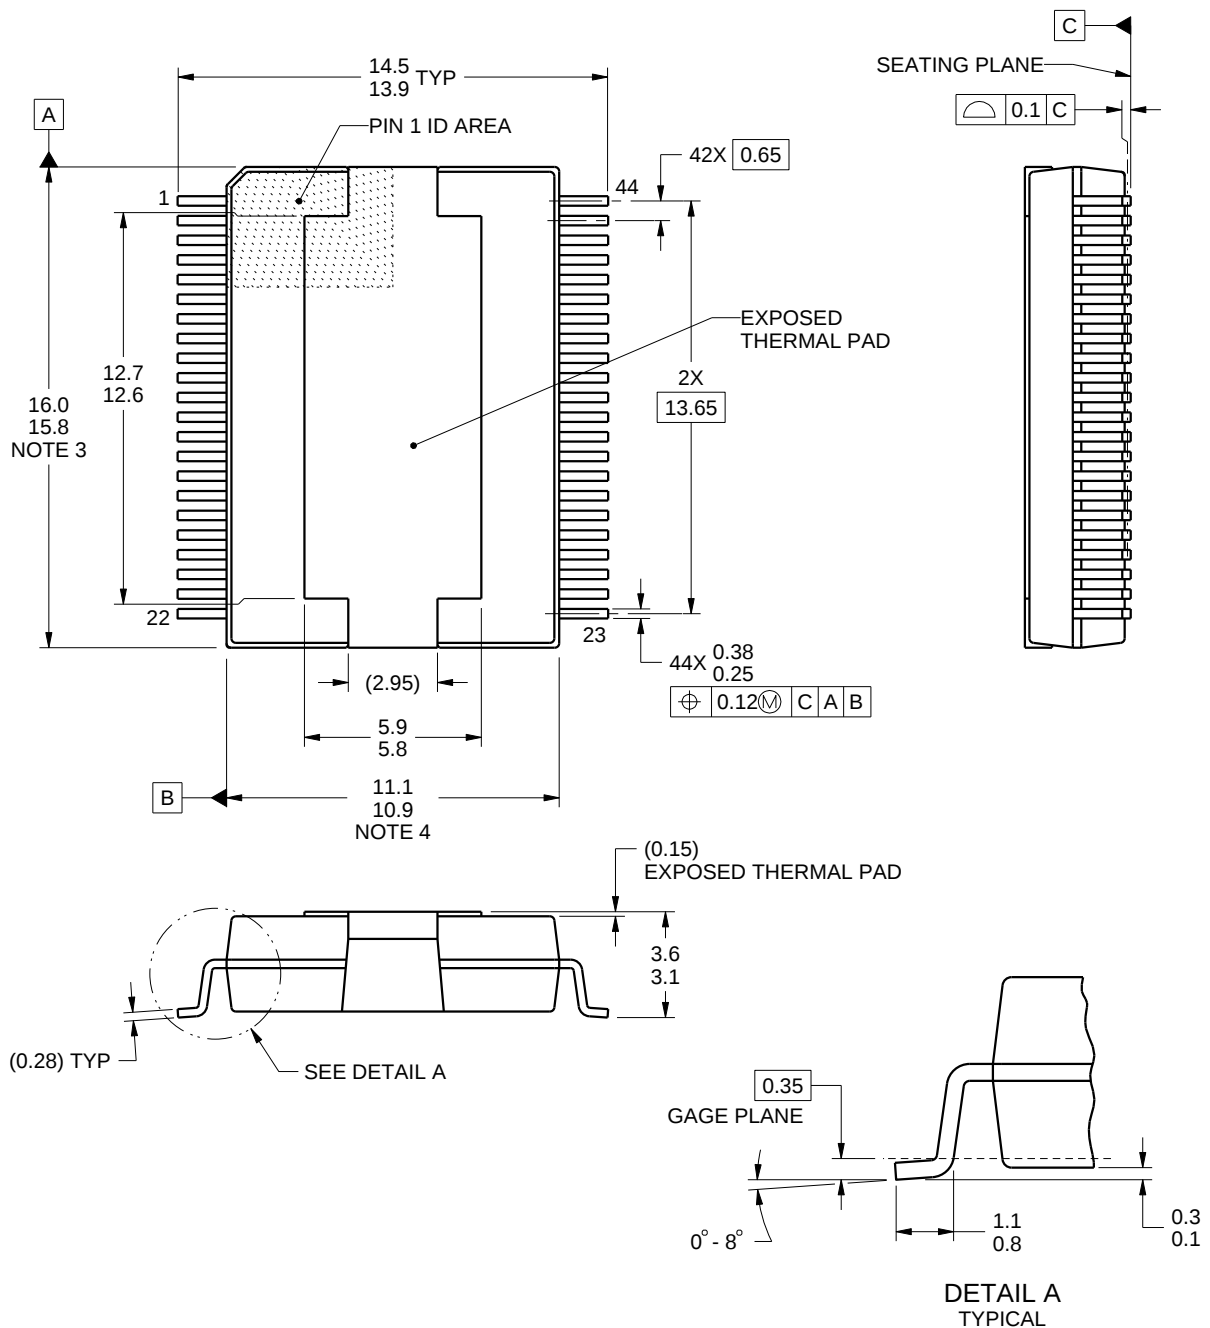

4218846/A 07/2016

### NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. The exposed thermal pad is designed to be attached to an external heatsink.

# EXAMPLE BOARD LAYOUT


DKD0044A

PowerPAD™ SSOP - 3.6 mm max height

PLASTIC SMALL OUTLINE

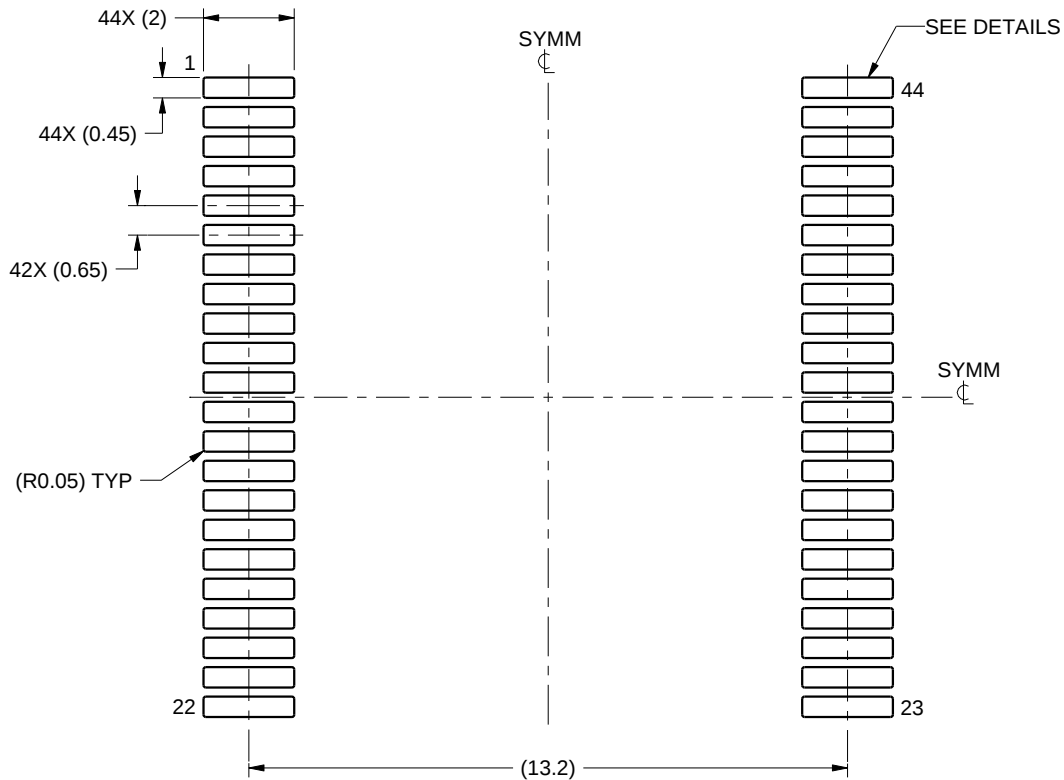

LAND PATTERN EXAMPLE  
SCALE:6X

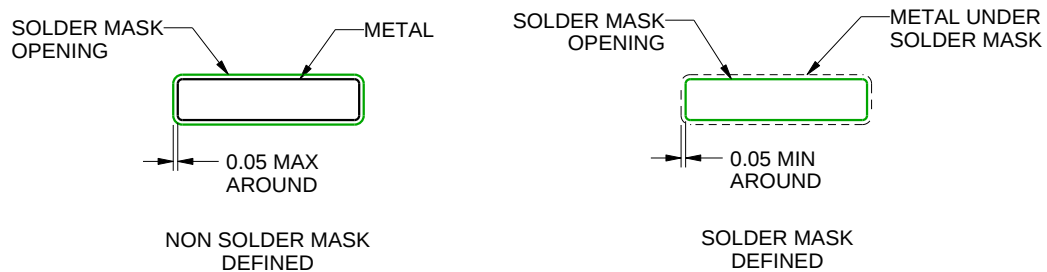

SOLDER MASK DETAILS  
NOT TO SCALE

4218846/A 07/2016

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.


6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DKD0044A

PowerPAD™ SSOP - 3.6 mm max height

PLASTIC SMALL OUTLINE

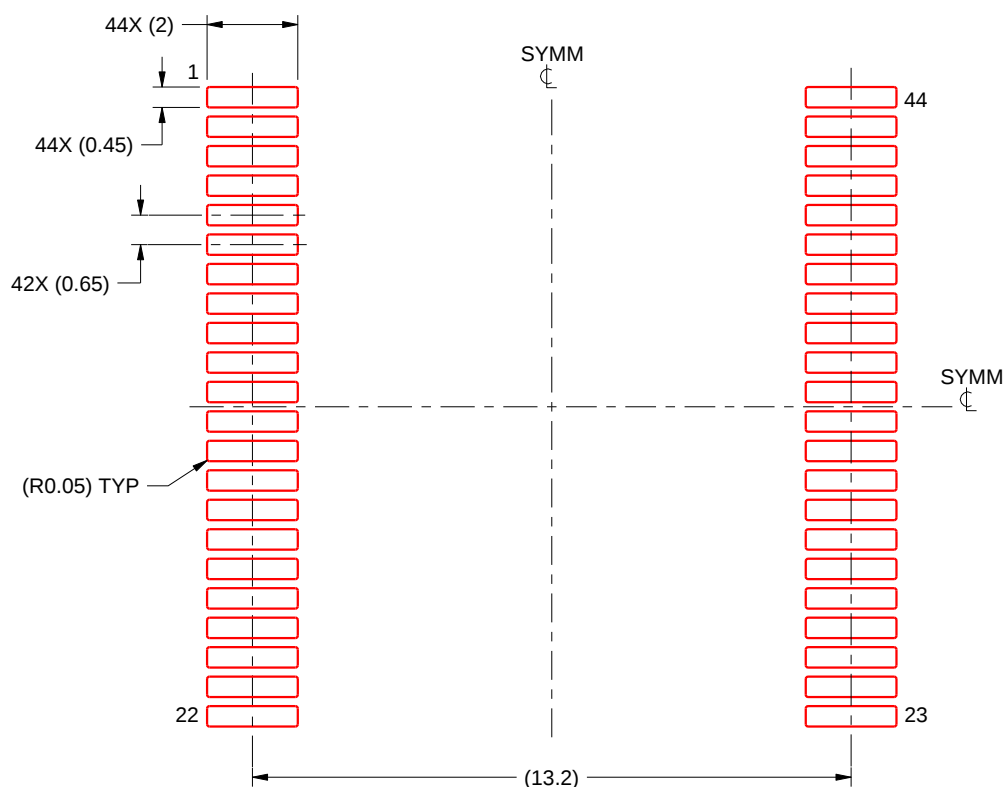

SOLDER PASTE EXAMPLE  
BASED ON 0.125 MM THICK STENCIL  
SCALE:6X

4218846/A 07/2016

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## 有关 TI 设计信息和资源的重要通知

德州仪器 (TI) 公司提供的技术、应用或其他设计建议、服务或信息，包括但不限于与评估模块有关的参考设计和材料（总称“TI 资源”），旨在帮助设计人员开发整合了 TI 产品的应用；如果您（个人，或如果是代表贵公司，则为贵公司）以任何方式下载、访问或使用了任何特定的 TI 资源，即表示贵方同意仅为该等目标，按照本通知的条款进行使用。

TI 所提供的 TI 资源，并未扩大或以其他方式修改 TI 对 TI 产品的公开适用的质保及质保免责声明；也未导致 TI 承担任何额外的义务或责任。TI 有权对其 TI 资源进行纠正、增强、改进和其他修改。

您理解并同意，在设计应用时应自行实施独立的分析、评价和判断，且应全权负责并确保应用的安全性，以及您的应用（包括应用中使用的 TI 产品）应符合所有适用的法律法规及其他相关要求。您就您的应用声明，您具备制订和实施下列保障措施所需的一切必要专业知识，能够 (1) 预见故障的危险后果，(2) 监视故障及其后果，以及 (3) 降低可能导致危险的故障几率并采取适当措施。您同意，在使用或分发包含 TI 产品的任何应用前，您将彻底测试该等应用和该等应用所用 TI 产品的功能。除特定 TI 资源的公开文档中明确列出的测试外，TI 未进行任何其他测试。

您只有在为开发包含该等 TI 资源所列 TI 产品的应用时，才被授权使用、复制和修改任何相关单项 TI 资源。但并未依据禁止反言原则或其他法律授予您任何 TI 知识产权的任何其他明示或默示的许可，也未授予您 TI 或第三方的任何技术或知识产权的许可，该等产权包括但不限于任何专利权、版权、屏蔽作品权或与使用 TI 产品或服务的任何整合、机器制作、流程相关的其他知识产权。涉及或参考了第三方产品或服务的信息不构成使用此类产品或服务的许可或与其相关的保证或认可。使用 TI 资源可能需要您向第三方获得对该等第三方专利或其他知识产权的许可。

TI 资源系“按原样”提供。TI 兹免除对 TI 资源及其使用作出所有其他明确或默示的保证或陈述，包括但不限于对准确性或完整性、产权保证、无屡发故障保证，以及适销性、适合特定用途和不侵犯任何第三方知识产权的任何默认保证。

TI 不负责任何申索，包括但不限于因组合产品所致或与之有关的申索，也不为您辩护或赔偿，即使该等产品组合已列于 TI 资源或其他地方。对因 TI 资源或其使用引起或与之有关的任何实际的、直接的、特殊的、附带的、间接的、惩罚性的、偶发的、从属或惩戒性损害赔偿，不管 TI 是否获悉可能会产生上述损害赔偿，TI 概不负责。

您同意向 TI 及其代表全额赔偿因您不遵守本通知条款和条件而引起的任何损害、费用、损失和/或责任。

本通知适用于 TI 资源。另有其他条款适用于某些类型的材料、TI 产品和服务的使用和采购。这些条款包括但不限于适用于 TI 的半导体产品 (<http://www.ti.com/sc/docs/stdterms.htm>)、[评估模块](#)和样品 (<http://www.ti.com/sc/docs/sampters.htm>) 的标准条款。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2017 德州仪器半导体技术（上海）有限公司