

# Timer Relay click



PID: MIKROE-5562

**Timer Relay Click** is a compact add-on board that allows you to control the load with a timer. This board features the NE555, a precision timer from [Diodes Incorporated](#). It is a precision timing circuit capable of producing accurate time delays in a monostable mode of operation. The Timer Relay Click features the SRD-5VDC-SL-C, a relay from Ningbo, to control the connected load over the screw terminal. This Click board™ makes the perfect solution for developing and controlling high-power applications that require delayed timing.

## How does it work?

Timer Relay Click is based on the NE555, a precision timer from Diodes Incorporated. It works so that when the trigger is in a LOW logic state, it will start a delay regarding the threshold and then activate the relay. The [TPL0501](#), a 256-tap single-channel digital potentiometer from Texas Instruments, determines the threshold. By setting a desired value on this digital potentiometer, you are setting a threshold on the NE555 for the delay. When you hit the onboard trigger button, you activate the relay regarding the delay you set by the digital potentiometer.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

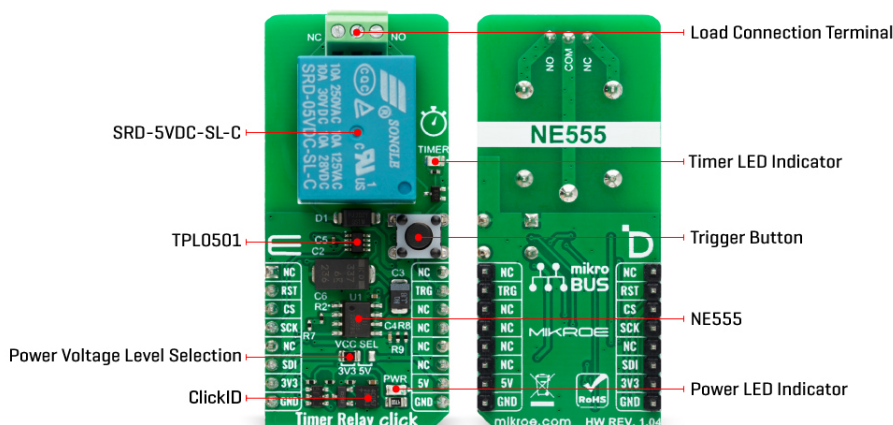

Timer Relay Click uses a 3-wire SPI serial interface of the TPL0501 to allow the host MCU to set the threshold. Besides the trigger button, you can trigger the NE555 over the TRG pin of the mikroBUS™ socket. When the timer hits the threshold and after delay activates the relay, it will also turn the TIMER LED On. The relay itself can withstand up to 10A and 220VAC/28VDC.

This Click board™ can operate with either 3.3V or 5V logic voltage levels selected via the VCC SEL jumper. This way, both 3.3V and 5V capable MCUs can use the communication lines properly. Also, this Click board™ comes equipped with a library containing easy-to-use functions and an example code that can be used as a reference for further development.

## Specifications

Type	Relay
Applications	Can be used for developing and controlling high-power applications that require delayed timing
On-board modules	NE555 - precision timer from Diodes Incorporated
Key Features	Time-delayed operation, trigger control by the host MCU or over the button, digital potentiometer for setting the threshold, screw terminals for connecting the load, long mechanical life of the relay, and more
Interface	SPI
Feature	ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V or 5V

## Pinout diagram

This table shows how the pinout on Timer Relay Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
Reset / ID SEL	<b>RST</b>	2	RST	INT	15	<b>TRG</b>	Timer Trigger
SPI Select / ID COMM	<b>CS</b>	3	CS	RX	14	NC	
SPI Clock	<b>SCK</b>	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	NC	
SPI Data IN	<b>SDI</b>	6	MOSI	SDA	11	NC	
Power Supply	<b>3.3V</b>	7	3.3V	5V	10	<b>5V</b>	Power Supply
Ground	<b>GND</b>	8	GND	GND	9	<b>GND</b>	Ground

## Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
LD2	TIMER	-	Timer LED Indicator
JP1	VCC SEL	Left	Power/Logic Voltage Level Selection 3V3/5V: Left position 3V3, Right position 5V
T1	-	-	Trigger Button

## Timer Relay Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	3.3	-	5	V
Operational Current Voltage	-	-	10	A
Operational AC Voltage	-	-	220	V
Operational DC Voltage	-	-	28	V

## Software Support

We provide a library for the Timer Relay Click as well as a demo application (example), developed using MIKROE [compilers](#). The demo can run on all the main MIKROE [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

## Library Description

This library contains API for Timer Relay Click driver.

### Key functions

- timerrelay\_set\_wiper\_pos Timer Relay set wiper position function.
- timerrelay\_activate\_reset Timer Relay reset timer function.
- timerrelay\_activate\_trigger Timer Relay activate trigger function.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

## Example Description

This example demonstrates the use of the Timer Relay Click board™ by setting the relay timer to 2 seconds ON time, then holding it OFF for 2 more seconds.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.TimerRelay

## Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE [compilers](#).

## mikroSDK

This Click board™ is supported with [mikroSDK](#) - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

## Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click Boards™](#)

[ClickID](#)

## Downloads

[Timer Relay click schematic](#)

[Timer Relay click 2D and 3D files](#)

[NE555 datasheet](#)

[SRD-5VDC-SL-C datasheet](#)

[TPL0501 datasheet](#)

[Timer Relay click example on Libstock](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).