



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK



MICROWAVE CORPORATION v00.0112



HMC897

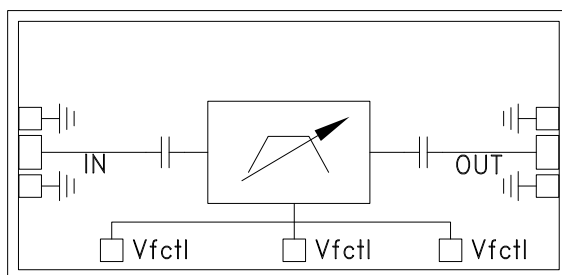
FILTER - TUNABLE, BAND PASS 9 - 19 GHz

Typical Applications

The HMC897 is ideal for:

- Test & Measurement Equipment
- Military RADAR & EW/ECM
- SATCOM & Space
- Industrial & Medical Equipment

Functional Diagram



Features

- Fast Tuning Response
- Excellent Wideband Rejection
- Single Chip Replacement For Mechanically Tuned Designs
- Small Size: 2.48 x 1.16 x 0.10 mm

General Description

The HMC897 is a MMIC band pass filter which features a user selectable passband frequency. The 3 dB filter bandwidth is approximately 18%. The 20 dB filter bandwidth is approximately 35%. The center frequency can be varied between 9 and 19 GHz by applying an analog tune voltage between 0 and 14V. This tunable filter can be used as a much smaller alternative to physically large switched filter banks and cavity tuned filters. The HMC897 has excellent microphonics due to the monolithic design, and provides a dynamically adjustable solution in advanced communications applications.

Electrical Specifications, $T_A = +25^\circ\text{C}$

Parameter	Min.	Typ.	Max.	Units
F_{center} Tuning Range	9		19	GHz
3 dB Bandwidth		18		%
Low Side Rejection Frequency (Rejection >20 dB)		$0.81 \cdot F_{\text{center}}$		GHz
High Side Rejection Frequency (Rejection >20 dB)		$1.17 \cdot F_{\text{center}}$		GHz
Low Side Sub-Harmonic Rejection (Rejection >40 dB)		$0.58 \cdot F_{\text{center}}$		GHz
High Side Sub-Harmonic Rejection (Rejection >40 dB)		$1.23 \cdot F_{\text{center}}$		GHz
Re-entry Frequency (Rejection <30 dB)		>40		GHz
Insertion Loss		5.5		dB
Return Loss (2 dB Bandwidth)		9.5		dB
Input IP3 (Pin = 0 to +20 dBm)		30		dBm
Input Power @ 5° Shift In Insertion Phase ($V_{\text{ctl}} = 0\text{V}$)		10		dBm
Input Power @ 5° Shift In Insertion Phase ($V_{\text{ctl}} \geq 1\text{V}$)		15		dBm
Frequency Control Voltage (V_{ctl})	0		14	V
Source/Sink Current (I_{ctl})			± 1	mA
Residual Phase Noise [1] (100 kHz Offset)		-160		dBc/Hz
F_{center} Drift Rate		-1.6		MHz/°C
Tuning Speed, Phase Settling to within 10° [2]		< 200		ns

[1] Optimum residual phase noise performance requires the use of a low noise driver circuit.

[2] Tuning speed includes 40 ns tuning voltage ramp from driver.

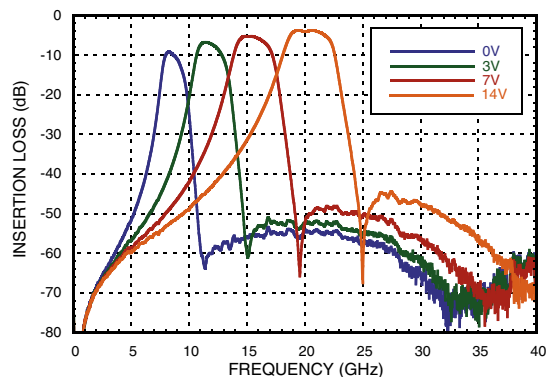
For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com


Application Support: Phone: 978-250-3343 or apps@hittite.com

FILTER - TUNABLE, BAND PASS 9 - 19 GHz


Broadband Insertion Loss vs. Vfctl




Broadband Return Loss vs. Vfctl

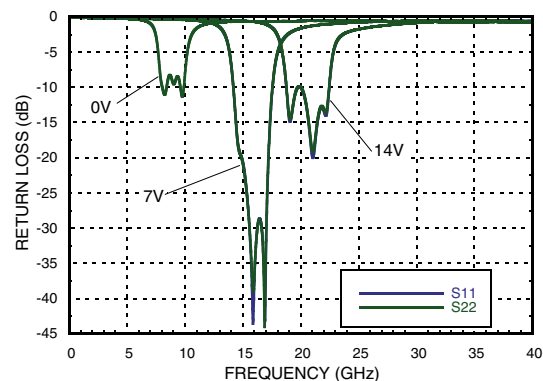


Insertion Loss vs. Vfctl

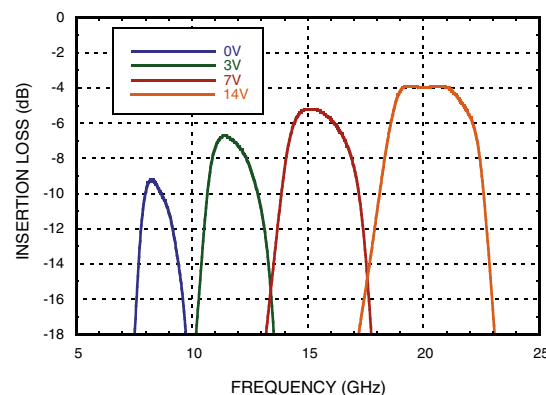


Return Loss vs. Vfctl

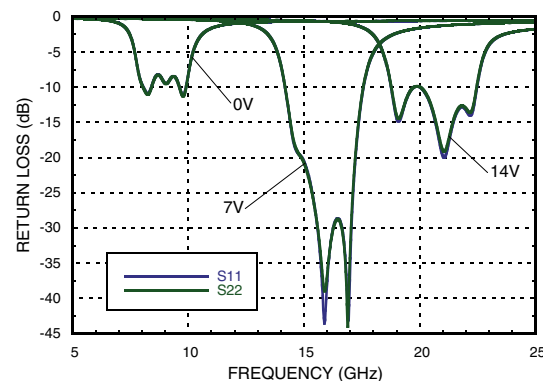






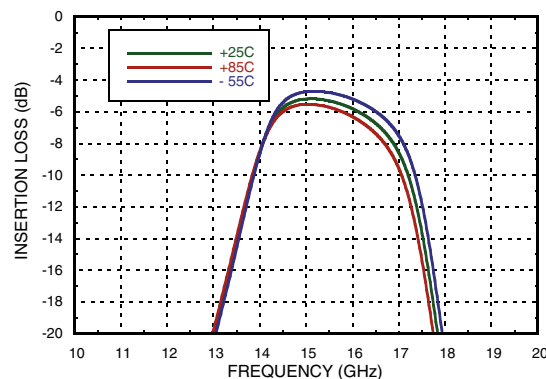
Insertion Loss vs. Temperature, Vfctl = 7V



Return Loss vs. Temperature, Vfctl = 7V






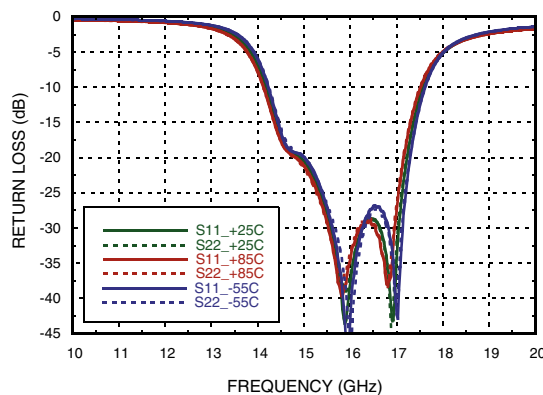


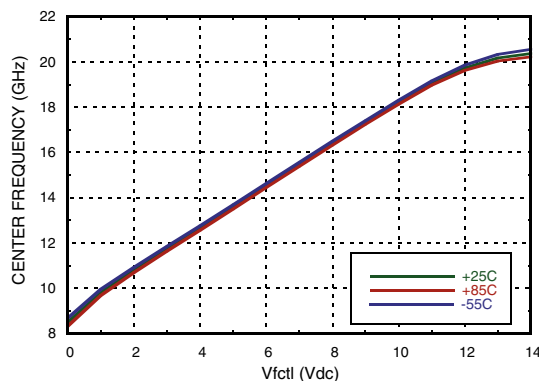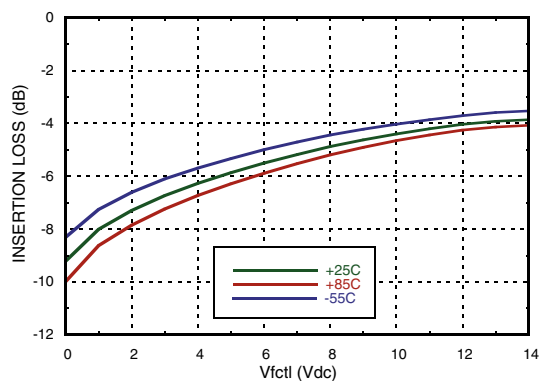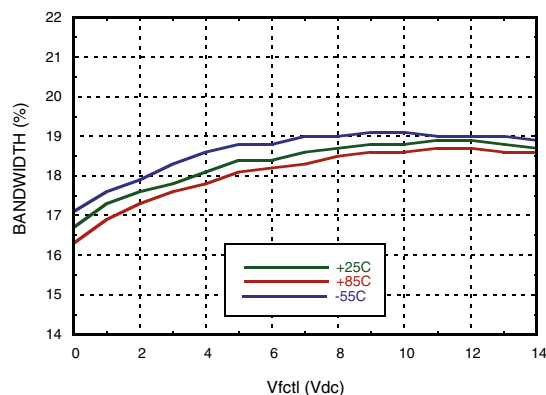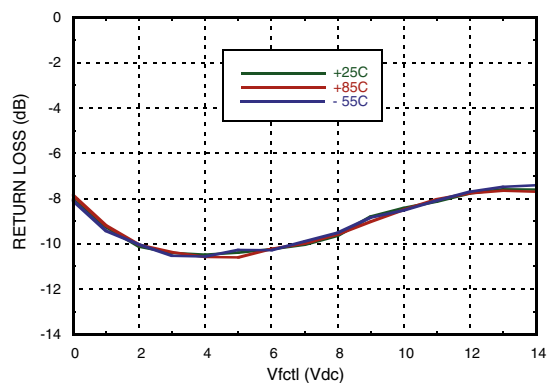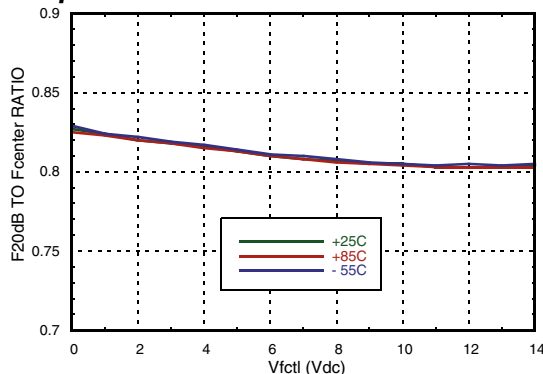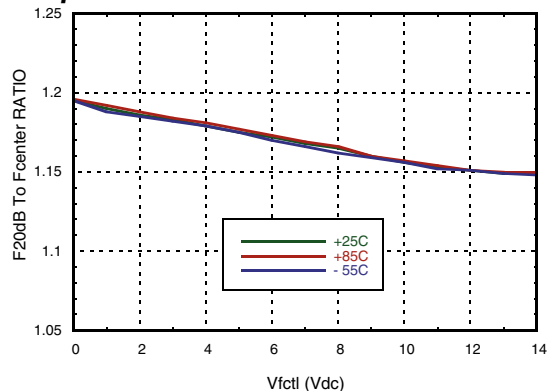FILTER - TUNABLE, BAND PASS **9 - 19 GHz**

Center Frequency vs. Temperature

Insertion Loss vs. Temperature

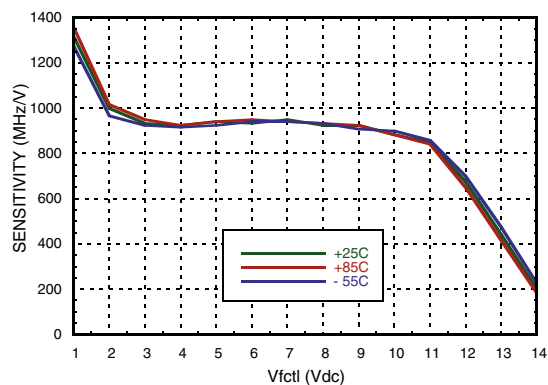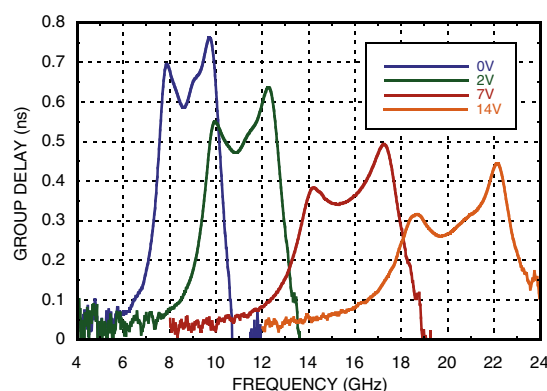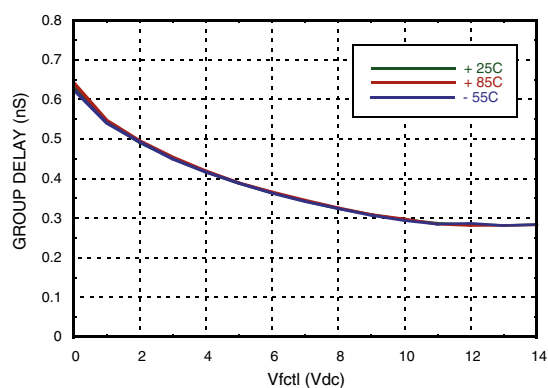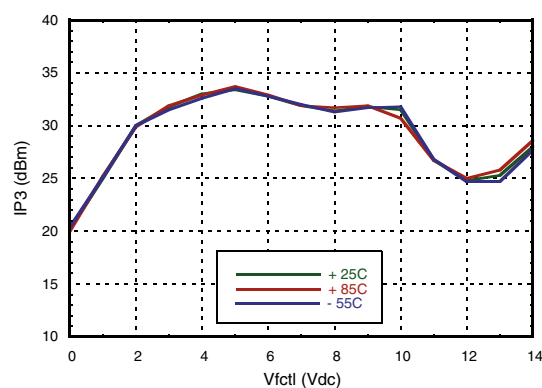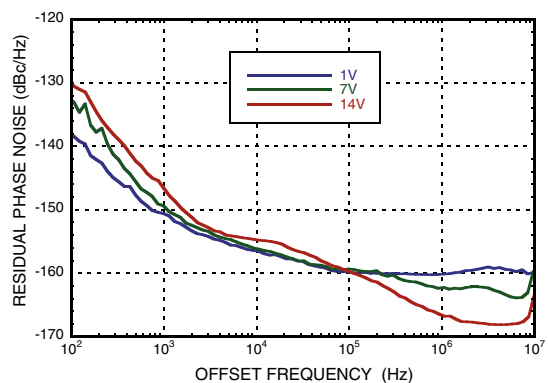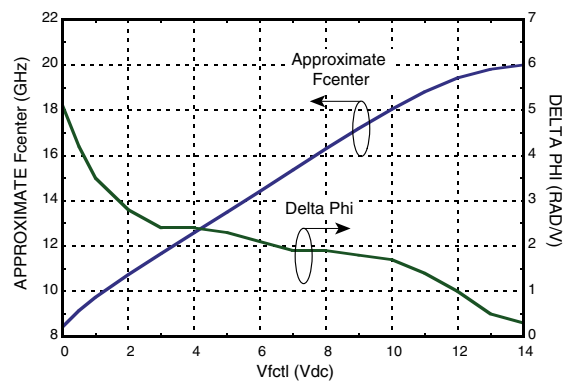3 dB Bandwidth vs. Temperature

Maximum Return Loss in a 2 dB Bandwidth vs Temperature

Low Side Rejection Ratio vs. Temperature ^[1]

High Side Rejection Ratio vs. Temperature ^[1]


[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB to the insertion loss at *f*_{center}.

FILTER - TUNABLE, BAND PASS **9 - 19 GHz**

Tuning Sensitivity vs. Vfctl

Group Delay vs. Frequency

Group Delay vs. Fcenter

Input IP3 vs. Temperature

Residual Phase Noise

Phase Sensitivity vs. Vfctl




MICROWAVE CORPORATION


v00.0112




HMC897

***FILTER - TUNABLE, BAND PASS
9 - 19 GHz***

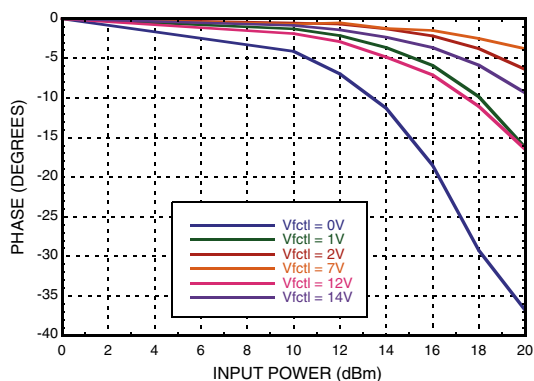Phase Shift vs. Pin



Frequency Shift vs. Pin

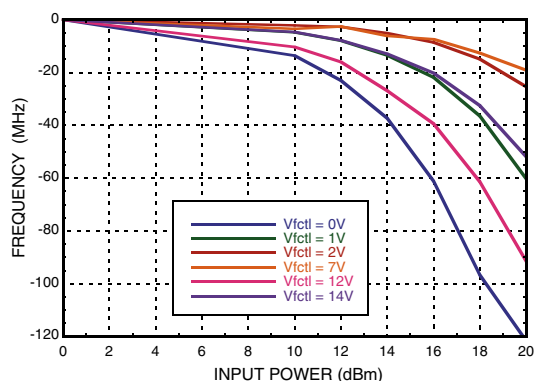

Absolute Maximum Ratings

Frequency Control Voltage (Vctl)	-0.5 to +15V
RF Power Input	27 dBm
Storage Temperature	-65 to +150 °C
ESD Sensitivity (HBM)	Class 1 A


Reliability Information

Junction Temperature to Maintain 1 Million Hour MTTF	150 °C
Nominal Junction Temperature (T= 85 °C and Pin = 27 dBm)	108 °C
Operating Temperature	-55 to +85 °C



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

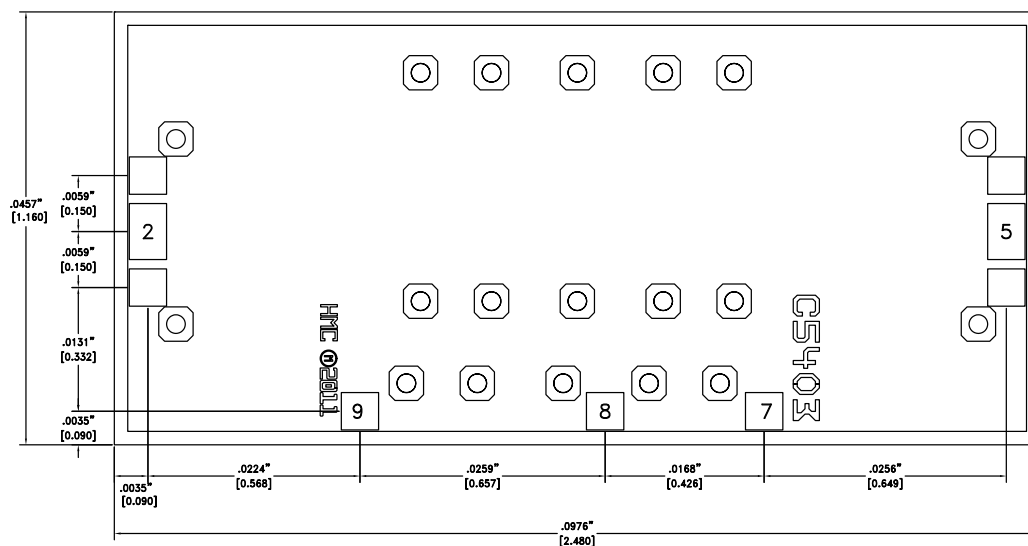Outline Drawing



Die Packaging Information [1]

Standard	Alternate
WP-9	[2]

[1] Refer to "Waffle-Pak & Gel-Pak" section for die packaging dimensions.
[2] For alternate packaging information contact Hittite Microwave Corporation.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2. DIE THICKNESS IS .004".
3. TYPICAL BOND PAD IS .004" SQUARE..
5. BOND PAD METALIZATION: GOLD
6. BACKSIDE METALIZATION: GOLD
7. BACKSIDE METAL IS GROUND
7. CONNECTION NOT REQUIRED FOR UNLABELED PADS.



MICROWAVE CORPORATION

v00.0112




HMC897

**FILTER - TUNABLE, BAND PASS
9 - 19 GHz**

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
Die Bottom	GND	Die bottom must be connected to RF/DC ground.	
2	RFIN	This pad is AC coupled and matched to 50 Ohms.	
5	RFOUT	This pad is AC coupled and matched to 50 Ohms.	
7, 8, 9	Vfctl	Center frequency control voltage. All pads are interconnected on the die. Only one bond on any of these pads is required for center frequency control.	

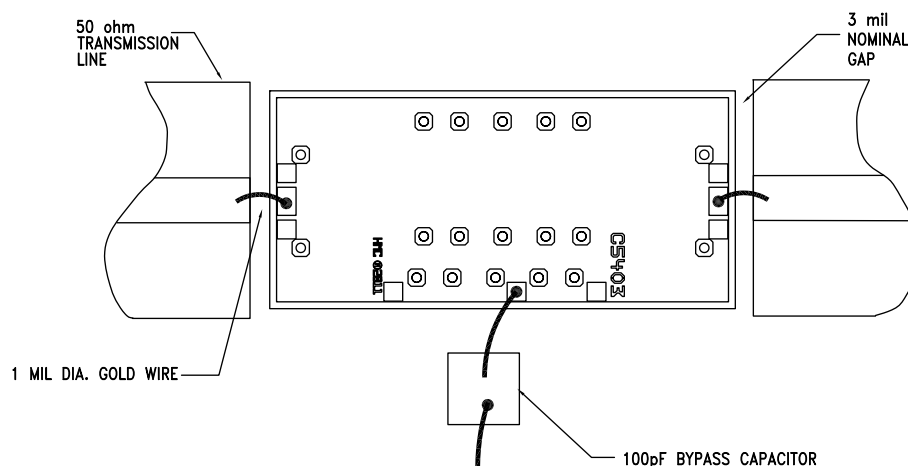Assembly Diagram



NOTES:

1. The HMC899 I/O's are inherently capacitive in order to accommodate bond wire connections.
2. 1 mil diameter bond wires can be used.
3. Ideally, double bond wires 20 mils long, or a single bond wire 12 mils long should be used (approx.140 pH).
4. It is recommended that on the opposite side of the bond wires, an additional 20-50 fF fringe capacitance be present.

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com



FILTER - TUNABLE, BAND PASS
9 - 19 GHz

NOTES:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[HMC897](#)