




Continuous Short
Circuit Protection

E_S-1WR & F_S-1WR Series

1W, FIXED INPUT, ISOLATED & UNREGULATED
DUAL/SINGLE OUTPUT DC-DC CONVERTER

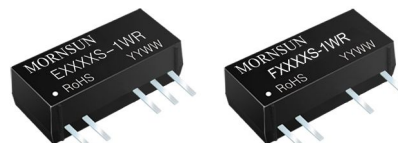

Patent Protection RoHS

FEATURES

- SIP Package
- Output Short Circuit Protection
- Little Isolation Capacitance
- 3000VDC Isolation Voltage
- Operating Temperature: -40°C~+85°C
- Internal SMD construction
- Industry Standard Pinout
- RoHS Compliance

APPLICATIONS

The E_S-1WR & F_S-1WR Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 3000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

F0505S-1WR

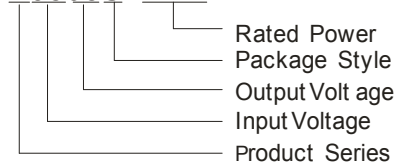

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R.China.

Tel: 86-20-38601850

Fax: 86-20-38601272

<http://www.mornsun-power.com>

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (%) (Typ.)
	Voltage(VDC)		Voltage (VDC)	Current (mA)		
	Nominal	Range		Max	Min	
F0303S-1WR	3.3	3.0-3.6	3.3	303	30	68
F0305S-1WR			5	200	20	70
E0505S-1WR	5	4.5-5.5	±5	±100	±10	69
E0509S-1WR			±9	±56	±5	73
E0512S-1WR			±12	±42	±4	74
E0515S-1WR			±15	±34	±3	74
E0524S-1WR			±24	±21	±2	76
F0505S-1WR			5	200	20	73
F0509S-1WR			9	112	11	73
F0512S-1WR			12	83	8	75
F0515S-1WR			15	67	6	75
F0524S-1WR			24	42	4	76
E1205S-1WR	12	10.8-13.2	±5	±100	±10	70
E1212S-1WR			±12	±42	±4	76
E1215S-1WR			±15	±34	±3	76
F1205S-1WR			5	200	20	73
F1209S-1WR			9	112	11	72
F1212S-1WR			12	83	8	75
F1215S-1WR			15	67	6	76
E1505S-1WR			15	13.5-16.5	±5	±100
F1515S-1WR	15	67			6	75
E2405S-1WR	24	21.6-26.4	±5	±100	±10	70
E2412S-1WR			±12	±42	±4	76
E2415S-1WR			±15	±34	±3	76
F2403S-1WR			3.3	303	30	70
F2405S-1WR			5	200	20	70
F2412S-1WR			12	83	8	76
F2415S-1WR			15	67	6	76

Note: Models listed with strike-through text have been officially discontinued.

COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Storage humidity		--	--	95	%
Operating Temperature		-40	--	85	°C
Storage Temperature		-55	--	125	
Temp. rise at full load		--	20	30	
Lead temperature	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			
Case material		Plastic (UL94-V0)			
Short circuit protection		Continuous, Auto-recovery			
MTBF		1940	--	--	K hours
Weight		--	2.3	--	g

INPUT SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max.	Units
Input current (No load/Full load)	3.3V input	--	50/420	--	mA
	5V input	--	30/260	--	
	12V input	--	12/110	--	
	15V input	--	12/100	--	
	24V input	--	7/55	--	
Surge voltage (1s Max)	3.3V input	--	--	7	V
	5V input	--	--	9	
	12V input	--	--	18	
	15V input	--	--	21	
	24V input	--	--	30	

OUTPUT SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max.	Units
Output power		0.1	--	1	W
Line regulation	For Vin change of $\pm 1\%$	--	± 1.1	± 1.5	--
Load regulation	10% to 100% load	--	10	20	%
Output voltage accuracy	Follow the tolerance envelope curve				
Temperature drift	100% full load	--	--	± 0.03	%/ $^{\circ}\text{C}$
Ripple & Noise*	20MHz Bandwidth	--	100	200	mVp-p
Switching frequency	Full load, nominal input	--	100	--	kHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

ISOLATION SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1 mA max	3000	--	--	VDC
Isolation resistance	Test at 500VDC	1000	--	--	M Ω
Isolation Capacitance	Input/Output, 100KHz/0.1V	--	6	15	pF

APPLICATION NOTE

① Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load. If the actual output power is very small, please connect a resistor with resistance of 10% rated power at the output end in parallel, or use our company's products with a lower rated output power

② Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a slow-blow fuse in series at the input end or add a circuit breaker to the circuit.

③ Recommended testing and application circuit

If you want to further decrease the input ripple or the input inrush current, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 1).


④ Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).



⑤ No parallel connection or plug and play

TYPICAL CHARACTERISTICS


3.3VDC/5VDC output

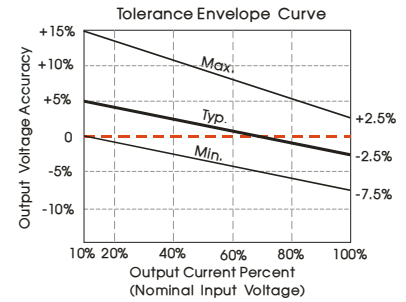


Other output

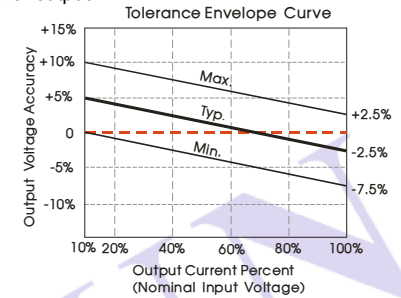

RECOMMENDED CIRCUIT

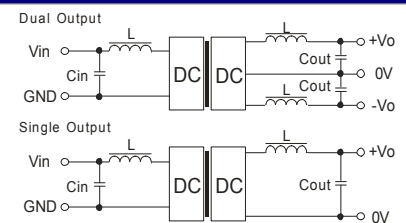

(Figure 1)

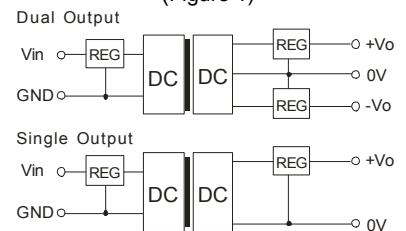


(Figure 2)

Recommended capacitance (Table 1)

Vin (VDC)	Cin (μF)	Single output (VDC)	Cout (μF)	Dual output (VDC)	Cout (μF)
5	4.7	5	10	± 5	4.7
12	2.2	9	4.7	± 9	2.2
15	2.2	12	2.2	± 12	1
24	1	15	1	± 15	0.47

OUTLINE DIMENSIONS & pIN CONNECTIONS


MECHANICAL DIMENSIONS

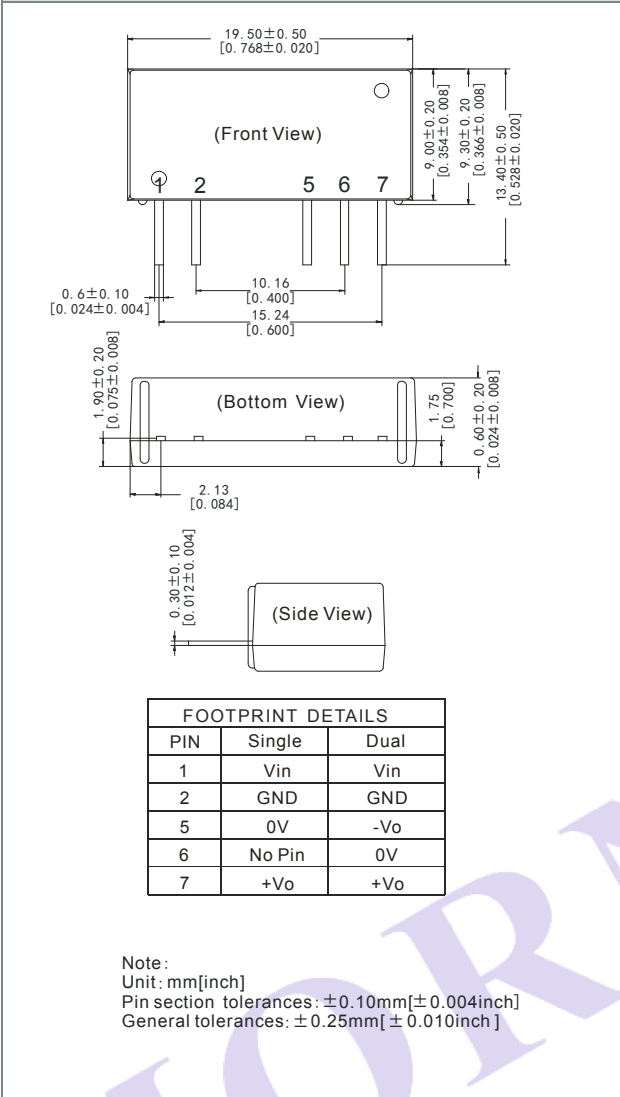


FOOTPRINT DETAILS		
PIN	Single	Dual
1	Vin	Vin
2	GND	GND
5	0V	-Vo
6	No Pin	0V
7	+Vo	+Vo

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10\text{mm}[\pm 0.004\text{inch}]$
General tolerances: $\pm 0.25\text{mm}[\pm 0.010\text{inch}]$

RECOMMENDED FOOTPRINT

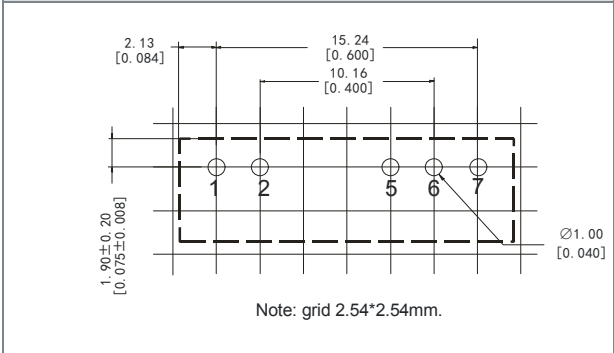

TUBE OUTLINE DIMENSIONS

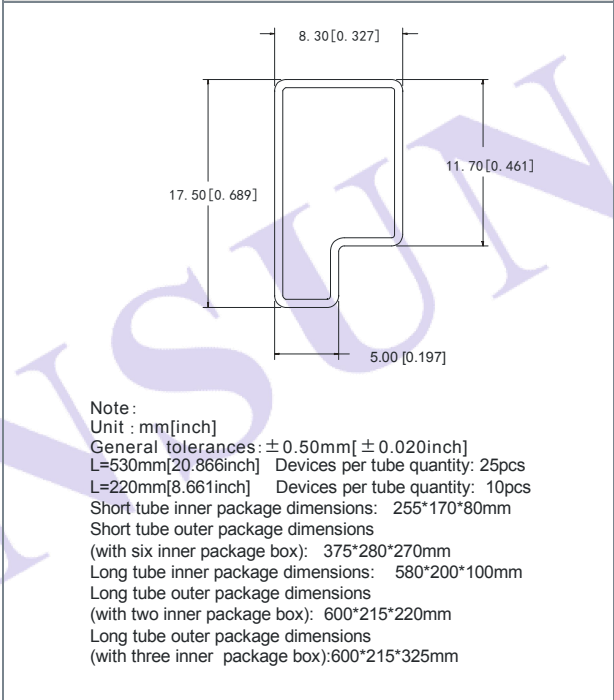

Note:
Unit : mm[inch]
General tolerances: $\pm 0.50\text{mm}$ [$\pm 0.020\text{inch}$]
L=530mm[20.866inch] Devices per tube quantity: 25pcs
L=220mm[8.661inch] Devices per tube quantity: 10pcs
Short tube inner package dimensions: 255*170*80mm
Short tube outer package dimensions
(with six inner package box): 375*280*270mm
Long tube inner package dimensions: 580*200*100mm
Long tube outer package dimensions
(with two inner package box): 600*215*220mm
Long tube outer package dimensions
(with three inner package box): 600*215*325mm

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
2. All specifications measured at $T_a=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
3. In this datasheet, all the test methods of indications are based on corporate standards.
4. Only typical models listed, other models may be different, please contact our technical person for more details.