



Connectors > Circular Connectors > DIN Connectors



Circular DIN Connector Type: **Circular DIN**
Connector System: **Wire-to-Board**
Number of Positions: **6**
Connector Contact Load Condition: **Selectively Loaded**
Mating Alignment Type: **Keyed**

Features

Product Type Features

Circular DIN Connector Type	Circular DIN
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	6
Connector Contact Load Condition	Selectively Loaded

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Shield Plating Thickness	2.54 µm[100 µin]
Shield Underplate Material	Nickel
Shield Underplate Thickness	1.27 µm[50 µin]
Shield Plating Material	Tin/Nickel
Shield Material	Brass



Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Thickness	2.54 µm[100 µin]
Contact Layout	Staggered
Contact Mating Area Plating Material Thickness	2.54 µm[100 µin]
Contact Mating Area Plating Material	Tin
Contact Shape & Form	Tuning Fork
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Current Rating (Max)	7.5 A
Termination Features	
Termination Post & Tail Length	3.56 mm[.14 in]
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
PCB Mount Alignment Type	Solder Tail Layout
Mating Retention	Without
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	Without
Mating Alignment Type	Keyed
PCB Mount Retention	With
PCB Mount Retention Type	Kinked Legs
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Nylon
Centerline (Pitch)	2.49 mm[.1 in]
Dimensions	
Connector Height	20.83 mm[.82 in]
PCB Thickness (Recommended)	2.36 mm
Product Width	15.75 mm[.62 in]
Product Length	21.84 mm[.86 in]



Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Shielded	Yes
Circuit Application	Signal

Industry Standards

Compatible With Approved Standards Products	CSA LR3507, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	100
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

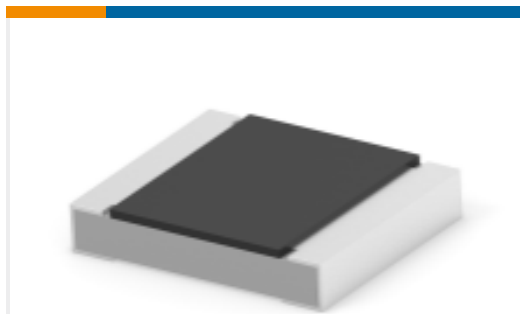
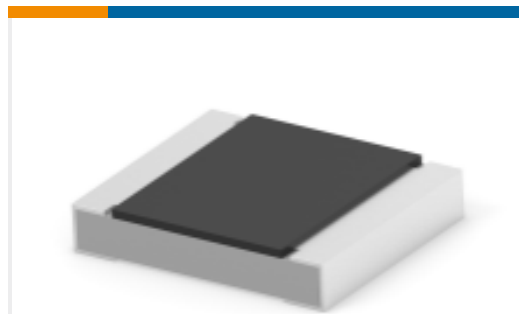
This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

 TE Part # 5750071-1 Mini DIN, 6 pos, R/A, Shield	 TE Part # 5749265-1 Mini DIN, 6 pos, R/A, Shield	 TE Part # 5749231-1 Mini DIN, 6 pos, R/A, Shield	 TE Part # 5212044-1 5 CIRC DIN RCPT GRND SHLD
 TE Part # 5786676-1 6 CIRC DIN RCPT W/GRND FINGERS	 TE Part # 5749266-1 Mini DIN, 6 pos, R/A, Shield	 TE Part # 5212046-1 7 CIRC DIN RCPT GRND SHLD	 TE Part # 1-5749180-1 Mini DIN, 6 pos, R/A, Shield
 TE Part # 5750725-1 Mini DIN, 6 pos, R/A, Shield	 TE Part # 5786290-1 6 CIRC DIN RCPT,GRND CLIP		

Customers Also Bought

 TE Part #6609065-1 1EDP=F7687 S0	 TE Part #1367073-1 20 POS SMT CONN, SFP, 15AU	 TE Part #5749265-1 Mini DIN, 6 pos, R/A, Shield	 TE Part #2-2176050-0 RLP73N 1E R33 5% 5K RL
 TE Part #747467-4 09 APFL PLUG RA 590 (IN)	 TE Part #ER9640-000 TMS-CT-50M-1/8-OUT-6	 TE Part #6-2176591-4 RLC73PD 2E R255 1% 1K RL	 TE Part #7-2176591-1 RLC73PD 2E R301 1% 1K RL



Documents

Product Drawings

6 CIRC DIN RCPT GRND SHLD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5212045-1_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5212045-1_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5212045-1_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

Agency Approval Document

English