


# R3005300L

30dB Reverse Hybrid  
5MHz to 300MHz (Low Current)

The R3005300L is a hybrid reverse amplifier. The part employs a silicon die. It has extremely low distortion and superior return loss performance. The part also provides optimal reliability with low noise and is well suited for 5MHz to 300MHz CATV amplifiers for reverse channel systems.

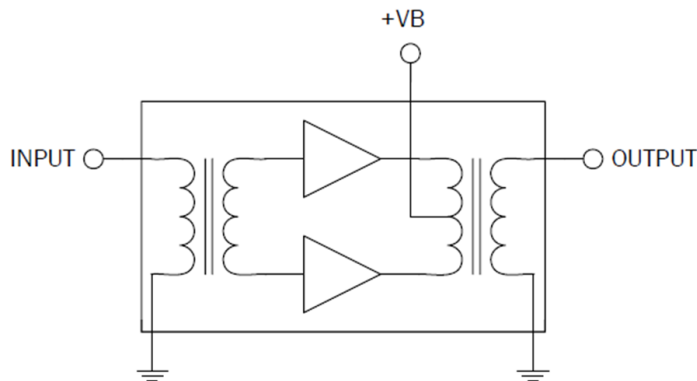

Package: SOT-115J

## Features

- Excellent Linearity
- Superior Return Loss Performance
- Extremely Low Distortion
- Optimal Reliability
- Low Noise
- Unconditionally Stable Under All Terminations
- 30.8dB Typical Gain at 300MHz
- 160mA Max. at 24V<sub>DC</sub>

## Applications

- 5MHz to 300MHz CATV Amplifier For Reverse Channel Systems

## Ordering Information

R3005300L                      Box with 50 pieces

## Absolute Maximum Ratings

| Parameter                           | Rating      | Unit |
|-------------------------------------|-------------|------|
| RF Input Voltage (single tone)      | 65          | dBmV |
| DC Supply Over-Voltage (5 minutes)  | 30          | V    |
| Storage Temperature                 | -40 to +100 | °C   |
| Operating Mounting Base Temperature | -30 to +100 | °C   |



**Caution!** ESD sensitive device.



RoHS (Restriction of Hazardous Substances): Compliant per EU Directive 2011/65/EU.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

## Nominal Operating Parameters

| Parameter                             | Specification |      |       | Unit | Condition                                                                   |
|---------------------------------------|---------------|------|-------|------|-----------------------------------------------------------------------------|
|                                       | Min           | Typ  | Max   |      |                                                                             |
| <b>General Performance</b>            |               |      |       |      | <b>V+ = 24V; T<sub>MB</sub> = 30°C; Z<sub>S</sub> = Z<sub>L</sub> = 75Ω</b> |
| Power Gain                            | 29.5          | 30.3 | 30.5  | dB   | f = 5MHz                                                                    |
|                                       | 29.3          | 30.8 | 31.5  | dB   | f = 300MHz                                                                  |
| Slope <sup>[1]</sup>                  | -0.2          | 0.5  | 1.0   | dB   | f = 5MHz to 300MHz                                                          |
| Flatness of Frequency Response        |               |      | ±0.4  | dB   | f = 5MHz to 300MHz (peak to valley)                                         |
| Input Return Loss                     | -20           |      |       | dB   | f = 5MHz to 200MHz                                                          |
|                                       | -18           |      |       | dB   | f = 200MHz to 300MHz                                                        |
| Output Return Loss                    | -20           |      |       | dB   | f = 5MHz to 200MHz                                                          |
|                                       | -18           |      |       | dB   | f = 200MHz to 300MHz                                                        |
| Noise Figure                          |               | 5.3  | 5.5   | dB   | f = 300MHz                                                                  |
| Total Current Consumption (DC)        | 140.0         | 148  | 160.0 | mA   |                                                                             |
| <b>Distortion Data 5MHz to 43MHz</b>  |               |      |       |      | <b>V+ = 24V; T<sub>MB</sub> = 30°C; Z<sub>S</sub> = Z<sub>L</sub> = 75Ω</b> |
| CTB                                   |               |      | -70   | dBc  | 7 ch flat; V <sub>0</sub> = 50dBmV <sup>[2]</sup>                           |
| XMOD                                  |               |      | -63   | dBc  |                                                                             |
| CSO                                   |               |      | -72   | dBc  |                                                                             |
| <b>Distortion Data 5MHz to 300MHz</b> |               |      |       |      | <b>V+ = 24V; T<sub>MB</sub> = 30°C; Z<sub>S</sub> = Z<sub>L</sub> = 75Ω</b> |
| CTB                                   |               |      | -60   | dBc  | 42 ch flat; V <sub>0</sub> = 44dBmV <sup>[3]</sup>                          |
| XMOD                                  |               |      | -60   | dBc  |                                                                             |
| CSO                                   |               |      | -62   | dBc  |                                                                             |

1. The slope is defined as the difference between the gain at the start frequency and the gain at the stop frequency.

2. 7 channels, NTSC frequency raster: T7-T13 (7.0MHz to 43MHz) +50dBmV flat output level.


3. 42 channels, NTSC frequency raster: T7-T13 (7.0MHz to 43MHz), 2-6 (55.25MHz to 83.25MHz), A-W / 7-13 (121.25MHz to 295.25MHz), +44dBmV flat output level.

Composite Second Order (CSO) - The CSO parameter (both sum and difference products) is defined by the NCTA.

Composite Triple Beat (CTB) - The CTB parameter is defined by the NCTA.


Cross Modulation (XMOD) - Cross modulation (XMOD) is measured at baseband (selective voltmeter method), referenced to 100% modulation of the carrier being tested.

# Package Drawing (Dimensions in millimeters)

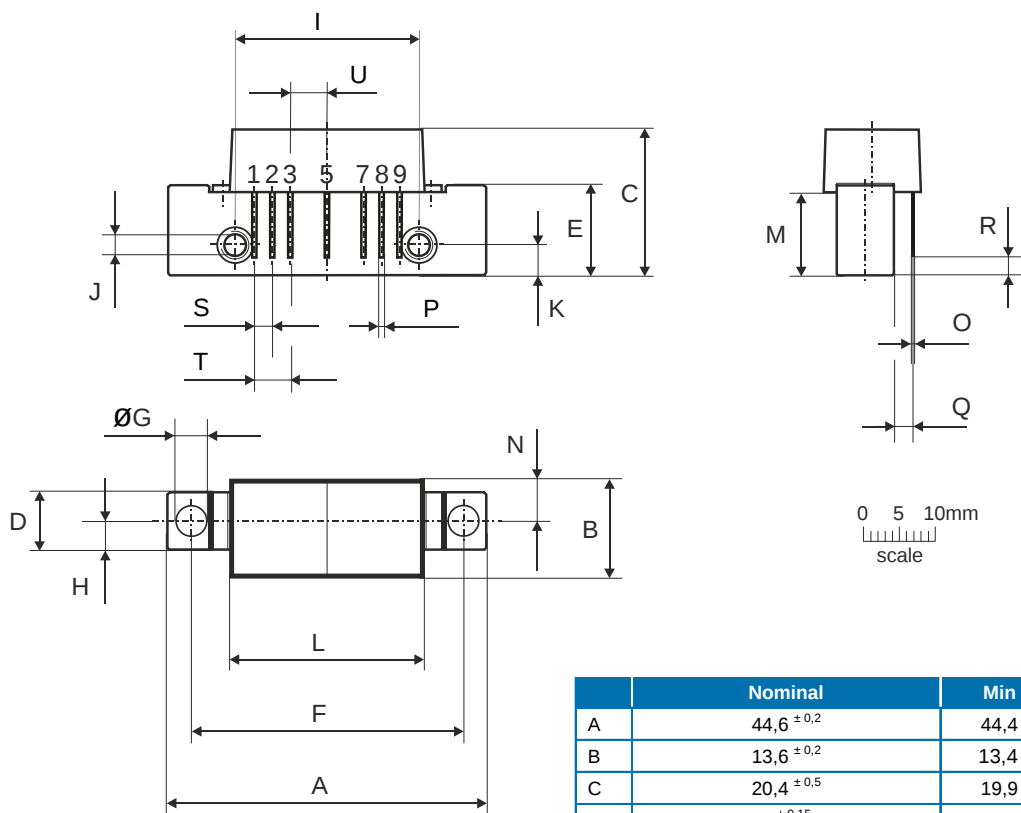

## Notes:

European  
Projection



## Pinning:

| Pin | Name   |
|-----|--------|
| 1   | Input  |
| 2-3 | GND    |
| 4   |        |
| 5   | +VB    |
| 6   |        |
| 7-8 | GND    |
| 9   | Output |

|   | Nominal                   | Min   | Max   |
|---|---------------------------|-------|-------|
| A | 44,6 ± 0,2                | 44,4  | 44,8  |
| B | 13,6 ± 0,2                | 13,4  | 13,8  |
| C | 20,4 ± 0,5                | 19,9  | 20,9  |
| D | 8 ± 0,15                  | 7,85  | 8,15  |
| E | 12,6 ± 0,15               | 12,45 | 12,75 |
| F | 38,1 ± 0,2                | 37,9  | 38,3  |
| G | 4 <sup>+0,2 / -0,05</sup> | 3,95  | 4,2   |
| H | 4 ± 0,2                   | 3,8   | 4,2   |
| I | 25,4 ± 0,2                | 25,2  | 25,6  |
| J | UNC 6-32                  | -     | -     |
| K | 4,2 ± 0,2                 | 4,0   | 4,4   |
| L | 27,2 ± 0,2                | 27,0  | 27,4  |
| M | 11,6 ± 0,5                | 11,1  | 12,1  |
| N | 5,8 ± 0,4                 | 5,4   | 6,2   |
| O | 0,25 ± 0,02               | 0,23  | 0,27  |
| P | 0,45 ± 0,03               | 0,42  | 0,48  |
| Q | 2,54 ± 0,3                | 2,24  | 2,84  |
| R | 2,54 ± 0,5                | 2,04  | 3,04  |
| S | 2,54 ± 0,25               | 2,29  | 2,79  |
| T | 5,08 ± 0,25               | 4,83  | 5,33  |
| U | 5,08 ± 0,25               | 4,83  | 5,33  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[R3005300L](#)