

**Xinger III**

**Hybrid Coupler**  
3 dB, 90°



### Description:

The X3C26P1-03S is a low profile, high performance 3dB hybrid coupler, with a high power rating of 80 Watts (AVG) and a peak to average ratio of 12dB, in a new easy to use, Xinger style manufacturing friendly surface mount package. It is designed particularly for 5G and S-Band applications in all end markets including telecom and COTS Mil-Aero. The X3C26P1-03S is designed particularly for high frequency radio link and other applications where low insertion loss and tight amplitude and phase balance is required.

Parts have been subjected to rigorous Xinger qualification testing and they are manufactured using materials with coefficients of thermal expansion (CTE) compatible with common substrates such as FR4, G-10, RF-35, RO4003 and polyimide. Produced with 6 of 6 RoHS compliant tin immersion finish.

### Features:


- 2300-2910 MHz
- 5G and S-Band COTS Mil-Aero
- High Power 80 Watts (AVG)
- Peak to Average Ratio 12dB
- Very Low Loss (<0.20dB)
- Tight Amp Bal (<0.40dB)
- High Isolation (>20dB)
- Production Friendly
- Tape and Reel
- Lead-Free

### Electrical Specifications:


| Frequency         | Isolation      | Insertion Loss           | VSWR            |
|-------------------|----------------|--------------------------|-----------------|
| <i>MHz</i>        | <i>dB Min</i>  | <i>dB Max</i>            | <i>Max : 1</i>  |
| 2300-2910         | 20             | 0.20                     | 1.22            |
| 2300-2400         | 23             | 0.18                     | 1.15            |
| 2300-2700         | 23             | 0.18                     | 1.15            |
| 2630-2690         | 23             | 0.18                     | 1.15            |
| Amplitude Balance | Phase          | Power                    | Operating Temp. |
| <i>dB Max</i>     | <i>Degrees</i> | <i>Avg. Watts @ 95°C</i> | <i>°C</i>       |
| ± 0.40            | 90 ± 4.0       | 80                       | -55 to +150     |
| ± 0.20            | 90 ± 4.0       | 100                      | -55 to +150     |
| ± 0.20            | 90 ± 4.0       | 85                       | -55 to +150     |
| ± 0.20            | 90 ± 4.0       | 85                       | -55 to +150     |

\*Specification based on performance of unit properly installed on TTM Technologies Test Board with small signal applied. Specifications subject to change without notice. Refer to parameter definitions for details.

### Outline Drawing:

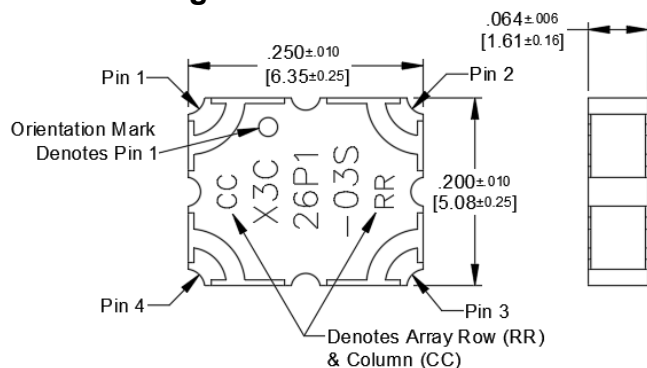


Dimensions are in Inches [Millimeters]  
X3C26P1-03S Mechanical Outline

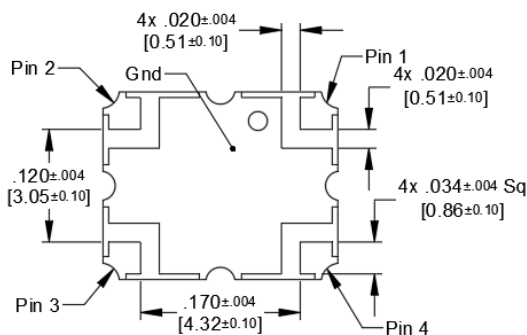

Tolerances are Non-Cumulative

## Hybrid Coupler Pin Configuration:

The X3C26P1-03S has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

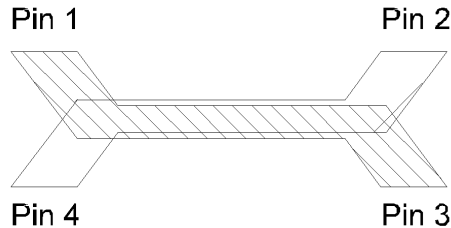


| Configuration    | Pin 1                    | Pin 2                    | Pin 3                    | Pin 4                    |
|------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <b>Splitter</b>  | Input                    | Isolated                 | -3dB $\angle\theta - 90$ | -3dB $\angle\theta$      |
| <b>Splitter</b>  | Isolated                 | Input                    | -3dB $\angle\theta$      | -3dB $\angle\theta - 90$ |
| <b>Splitter</b>  | -3dB $\angle\theta - 90$ | -3dB $\angle\theta$      | Input                    | Isolated                 |
| <b>Splitter</b>  | -3dB $\angle\theta$      | -3dB $\angle\theta - 90$ | Isolated                 | Input                    |
| <b>*Combiner</b> | $A \angle\theta - 90$    | $A \angle\theta$         | Isolated                 | Output                   |
| <b>*Combiner</b> | $A \angle\theta$         | $A \angle\theta - 90$    | Output                   | Isolated                 |
| <b>*Combiner</b> | Isolated                 | Output                   | $A \angle\theta - 90$    | $A \angle\theta$         |
| <b>*Combiner</b> | Output                   | Isolated                 | $A \angle\theta$         | $A \angle\theta - 90$    |



\*Notes: "A" is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.

## Peak Power Handling:

High-Pot testing of these couplers during the qualification procedure resulted in a minimum breakdown voltage of 1.4 Kv (minimum recorded value). This voltage level corresponds to a breakdown resistance capable of handling at least 12dB peak over average power levels, for very short durations. The breakdown location consistently occurred across the air interface at the coupler contact pads (see illustration below). The breakdown levels at these points will be affected by any contamination in the gap area around these pads. These areas must be kept clean for optimum performance. It is recommended that the user test for voltage breakdown under the maximum operating conditions and over worst case modulation induced power peaking. This evaluation should also include extreme environmental conditions (such as high humidity).

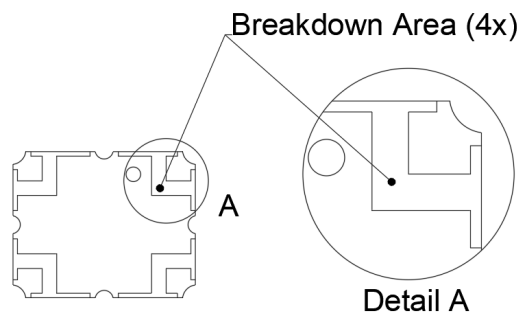

## Insertion Loss and Power Derating Curves:

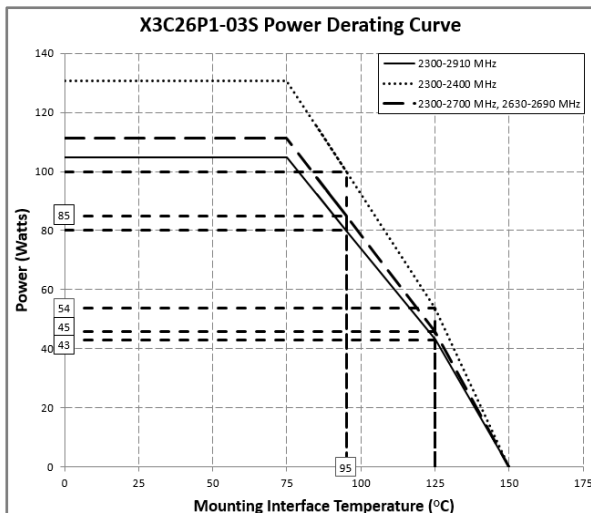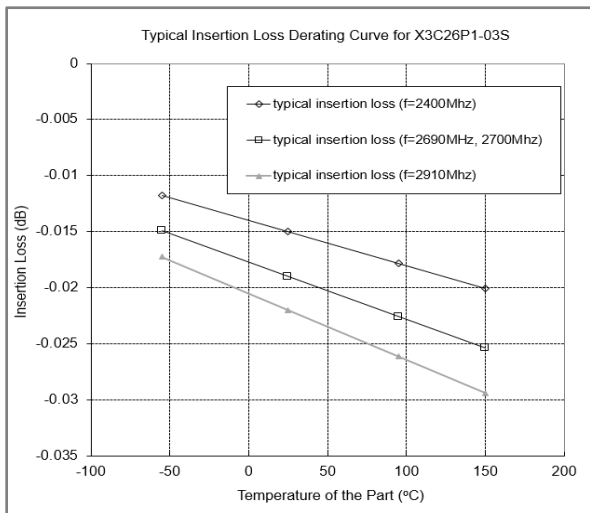

### Insertion Loss Derating:

The insertion loss, at a given frequency, of the coupler is measured at 25°C and then averaged. The measurements are performed under small signal conditions (i.e. using a Vector Network Analyzer). The process is repeated at 95°C and 150°C. A best-fit line for the measured data is computed and then plotted from -55°C to 150°C.









### Power Derating:

The power handling and corresponding power derating plots are a function of the thermal resistance, mounting surface temperature (base plate temperature), maximum continuous operating temperature of the coupler, and the thermal insertion loss. The thermal insertion loss is defined in the Power Handling section of the data sheet.

As the mounting interface temperature approaches the maximum continuous operating temperature, the power handling decreases to zero.

If mounting temperature is greater than 95°C, the Xinger coupler will perform reliably as long as the input power is derated to the curve above.

## Typical Performance: 2300-2910 MHz

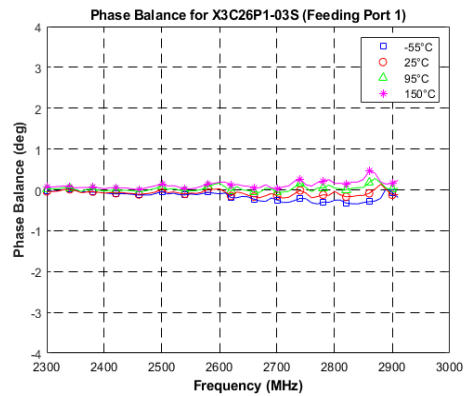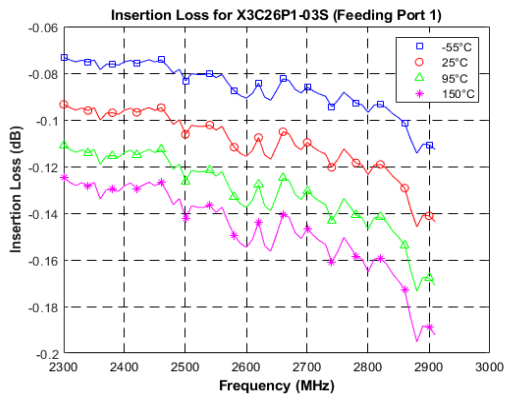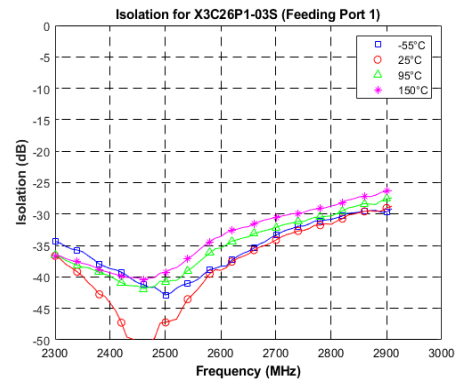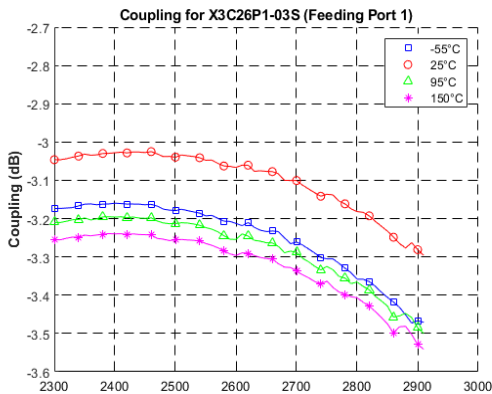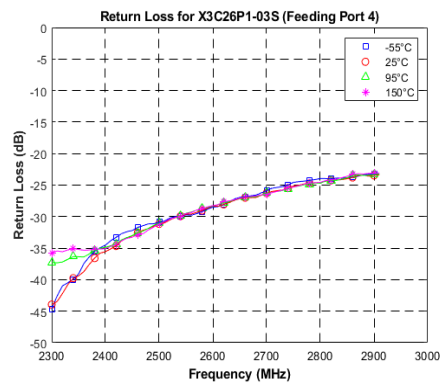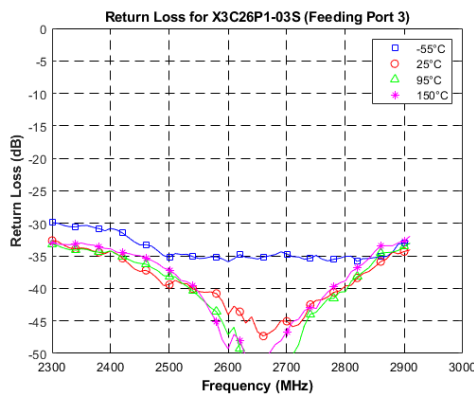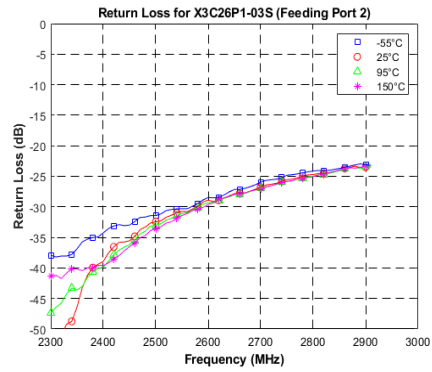
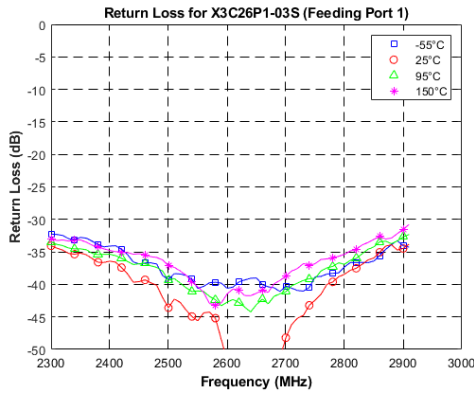


## Definition of Measured Specifications:

| Parameter                                    | Definition                                                                                             | Mathematical Representation                                                                                              |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>VSWR</b><br>(Voltage Standing Wave Ratio) | The impedance match of the coupler to a 50Ω system. A VSWR of 1:1 is optimal.                          | $VSWR = \frac{V_{max}}{V_{min}}$<br>Vmax = voltage maxima of a standing wave<br>Vmin = voltage minima of a standing wave |
| <b>Return Loss</b>                           | The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR. | $Return\ Loss(dB) = 20\log \frac{VSWR + 1}{VSWR - 1}$                                                                    |
| <b>Insertion Loss</b>                        | The input power divided by the sum of the power at the two output ports.                               | $Insertion\ Loss(dB) = 10\log \frac{P_{in}}{P_{cpl} + P_{direct}}$                                                       |
| <b>Isolation</b>                             | The input power divided by the power at the isolated port.                                             | $Isolation(dB) = 10\log \frac{P_{in}}{P_{iso}}$                                                                          |
| <b>Phase Balance</b>                         | The difference in phase angle between the two output ports.                                            | Phase at coupled port – Phase at direct port                                                                             |
| <b>Amplitude Balance</b>                     | The power at each output divided by the average power of the two outputs.                              | $10\log \frac{P_{cpl}}{(P_{cpl} + P_{direct})/2} \text{ and } 10\log \frac{P_{direct}}{(P_{cpl} + P_{direct})/2}$        |

## Packaging and Ordering Information:

Parts are available in a reel. Packaging follows EIA 481 for reels. Parts are oriented in tape and reel as shown below. Minimum order quantities are 2000 per reel.

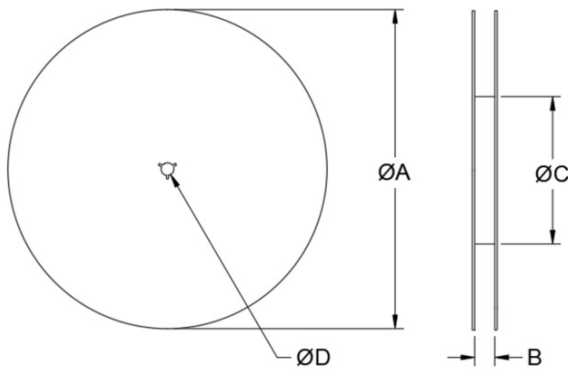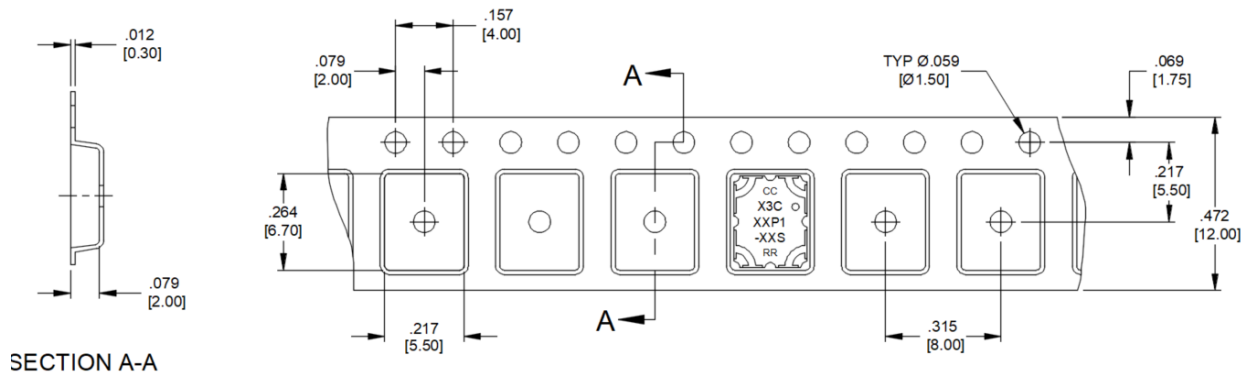

| TABLE 1                       |                |
|-------------------------------|----------------|
| REEL DIMENSIONS (inches [mm]) |                |
| ØA                            | 13.0 [330.0]   |
| B                             | .472 [12.0]    |
| ØC                            | 4.017 [102.03] |
| ØD                            | 512.0 [13.0]   |

**Contact us:**  
[rf&s\\_support@ttm.com](mailto:rf&s_support@ttm.com)