
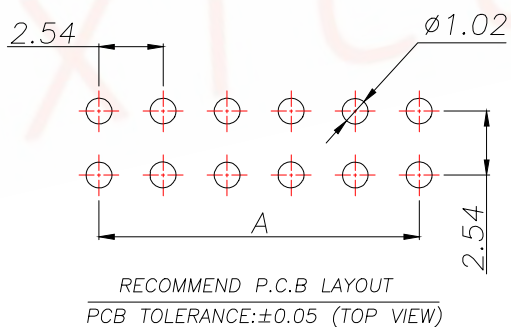




Current Rating:	3Amps
Insulation Resistance:	1000M Ω Min
Contact Resistance:	20M Ω Max
Withstanding Voltage:	AC 1000V
Operation Temperature:	-40° to+105°
Contact Material:	Copper Alloy
Standard:	PBT
Insrlator Material:	Polyester(UL 94V-0)
Contact Plating:	Gold Flash
Max.Processing Temp:	200°C for30-60seconds (220°C for5seconds)

<i>P/N</i>	<i>PIN</i>	<i>DIM.A</i>	<i>DIM.B</i>
<i>PZ2.54V-1202P-H25</i>	<i>2*1</i>	<i>0.00</i>	<i>2.54</i>
<i>PZ2.54V-1204P-H25</i>	<i>2*2</i>	<i>2.54</i>	<i>5.08</i>
<i>PZ2.54V-1206P-H25</i>	<i>2*3</i>	<i>5.08</i>	<i>7.62</i>
<i>PZ2.54V-1208P-H25</i>	<i>2*4</i>	<i>7.62</i>	<i>10.16</i>
<i>PZ2.54V-1210P-H25</i>	<i>2*5</i>	<i>10.16</i>	<i>12.70</i>
<i>PZ2.54V-1212P-H25</i>	<i>2*6</i>	<i>12.70</i>	<i>15.24</i>
<i>PZ2.54V-1214P-H25</i>	<i>2*7</i>	<i>15.24</i>	<i>17.78</i>
<i>PZ2.54V-1216P-H25</i>	<i>2*8</i>	<i>17.78</i>	<i>20.32</i>
<i>PZ2.54V-1218P-H25</i>	<i>2*9</i>	<i>20.32</i>	<i>22.86</i>
.....			
<i>PZ2.54V-1280P-H25</i>	<i>2*40</i>	<i>(40-1)X2.54</i>	<i>(40)X2.54</i>

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd							
X.X ±0.30	X.* ±5°	PART NO.		TITLE:					
.XX ±0.20	X.X* ±1°	PZ2.54V-12NP-H25		2.54PH H2.5 2xNPin 180# PC3.0 PA6.0 PB2.5 L11.5 PBT					
.XXX ±0.10	X.XX* ±0.5°	DESIGN: Ethan		MANUFACTURE DWG					
UNITS	mm	CHED: Olivia		 <table><tr><td>SCALE</td><td>SHEET</td></tr><tr><td>N:A</td><td>1/1</td></tr></table>		SCALE	SHEET	N:A	1/1
SCALE	SHEET								
N:A	1/1								
MATERILA	— — —	APPD: Ava							
FINISH	— — —								