

R0E000010ACB10

R20UT0164EJ0500


Rev.5.00

Jul 16, 2013

Isolator for the E1 Emulator

1. Preface

The R0E000010ACB10 is an isolator for the E1 and E8a emulators. This product is used for a debugging environment where there is a GND gap between the user system and emulator system.

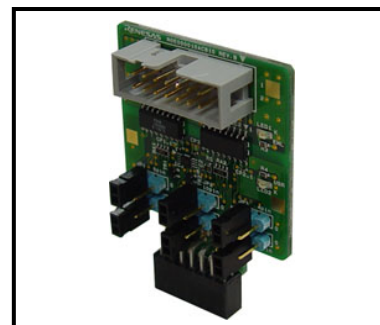

Package Components

Before using this product, check if your R0E000010ACB10 contains all of these items.

Table 1.1 Package Components

Item	Qty.
R0E000010ACB10 (Isolator for the E1 emulator)	1
R0E000010ACB10 User's Manual (English) (This manual)	1
R0E000010ACB10 User's Manual (Japanese)	1

Note: Please handle this product as precision equipment for transportation.

Important

CAUTION

Caution on Isolation Voltage:



This product is intended to isolate a small and electrically safe GND gap between the user system and emulator system. In any case isolation voltage must be maintained within SELV limits i.e. less than 42.4VAC, or 60VDC.

The isolator must never be used as an element of a safety isolation system. The part could be expected to function correctly at higher voltage across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

Caution to Be Taken for Disposal:



Penalties may be applicable for incorrect disposal of this waste, in accordance with your national legislation.

European Union regulatory notices:



The WEEE (Waste Electrical and Electronic Equipment) regulations put responsibilities on producers for the collection and recycling or disposal of electrical and electronic waste. Return of WEEE under these regulations is applicable in the European Union only. This equipment (including all accessories) is not intended for household use. After use the equipment cannot be disposed of as household waste, and the WEEE must be treated, recycled and disposed of in an environmentally sound manner. Renesas Electronics Europe GmbH can take back end of life equipment, register for this service at "<http://www.renesas.eu/weee>".

Cautions to Be Taken for Handling the Isolator:



- Take full care not to touch any parts or cause short circuits on this product.
- Protect this product from excessive physical shock.
- Do not modify this product. Modifying the product will void your warranty.

Cautions for Use Temperature:



The isolator is to be used in an environment with a maximum ambient temperature of 35°C. Care should be taken that this temperature is not exceeded.

**CAUTION****Cautions to Be Taken for Connecting the Isolator:**

- Always switch OFF the power before connecting or disconnecting this product.
- This product has some switches. Make settings depending on debugging interface you use. Before changing settings power off this product and other connected devices.
- To connect this product to the user system align the #1 pin of the connector to the right position.
- To connect this product to the emulator align the #1 pin of the connector to the right position.

Cautions to Be Taken for Power Supply When Disconnecting:

- Turn off the power supply of the user system when you disconnect the user system from the emulator debugger. Otherwise you may fail to reconnect the emulator debugger to the user system.
- When an attempt to reconnect to the user system has failed, turn off the user system and then unplug and plug the USB cable of the emulator before trying again.

European Union regulatory notices

This product complies with the following EU Directive.

Environmental Compliance and Certification:

- Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC

2. Specifications

Table 2.1 Product Specifications

Item	Specification	Remark
Supported Emulator	1) E1 emulator 2) E8a emulator	This isolator is not usable with the E20 emulator.
Power supply	Both of the following two power supplies are necessary. 1) Supply from the user system (UVCC) Voltage: 3.0 V to 5.5 V 2) Supply from the emulator's power supply facility Voltage: 3.3 V	Supply from the user system (UVCC) needs to be 50 mA (max).
Acceptable GND gap voltage	less than 42.4VAC, or 60VDC	
Applicable MCU Series	RX600 Series RX700 Series RX200 Series RX100 Series R32C/100 Series M32C/80 Series M16C/60 Series *1 M16C/50 Series *1 M16C/30 Series M16C/Tiny Series R8C/Lx Series R8C/Mx Series R8C/5x Series R8C/3xT-A Series R8C/3x Series R8C/2x Series R8C/1x Series H8S/Tiny Series H8/300H Tiny Series H8/300H Super Low Power Series H8/300L Super Low Power Series 38000 Series	Isolator's switch settings vary depending on the target MCU you use. See 4.5 Switch Settings for Each MCU for switch setting.
Device for isolation	ACSL-6420-00TE (Avago Technologies US Inc.) IL260-3E (NVE Corporation) IL261-3E (NVE Corporation)	
LED indication	LED1: Illuminated when power is supplied from the emulator LED2: Illuminated when power is supplied from the user system	This isolator is only usable when both LEDs are illuminated.

*1 Clock-asynchronous serial (communication via CNVss pin) of the M16C/60 Series and the M16C/50 Series is not supported.

3. Notes on Usage

Note on Power-Supply Voltage:

When you use an emulator with this isolator connected, power-supply voltage of the MCU on your system should be between 3.0 V and 5.5 V. Power-supply voltage less than 3.0 V is not supported.

Note on Signal Delay:

When this isolator is connected, because of signal delay in the isolation circuit, speed of the communication interface may be limited. As an example, the JTAG frequency of the RX600 series needs to be 12.38 MHz or less.

4.5 Switch Settings for Each MCU

Table 4.1 Correspondence between the MCUs Supported by the E1 and the Isolator Switch Settings

MCU	User interface	Switch setting No. See Table 4.3
RX Family RX600 Series RX Family RX700 Series	JTAG	Setting 1
	FINE	Setting 7
	When using Flash Development Toolkit	Setting 2
RX Family RX200 Series RX Family RX100 Series	FINE	Setting 7
	When using Flash Development Toolkit	Setting 2
R8C Family R8C/Lx Series	1-line clock-asynchronous serial (communication via MODE pin)	Setting 3
R8C Family R8C/5x Series		
R8C Family R8C/3xT-A Series		
R8C Family R8C/3x Series		

Table 4.2 Correspondence between the MCUs Supported by the E8a and the Isolator Switch Settings

MCU	User interface	Switch setting No. See Table 4.3
R8C Family R8C/Mx Series R8C Family R8C/Lx Series R8C Family R8C/3x Series R8C Family R8C/2x Series	1-line clock-asynchronous serial (communication via MODE pin)	Setting 3
R8C Family R8C/1x Series R8C/14,15,16,17,18,19,1A,1B Groups		
R8C Family R8C/1x Series R8C/10,11,12,13 Groups	Clock-synchronous serial (communication via P00/P37/CNVss pin)	Setting 4
	When using Flash Development Toolkit	Setting 3
M16C Family R32C/100 Series M16C Family M32C/80 Series	Clock-synchronous serial	Setting 6
M16C Family M16C/60 Series M16C/6S Group		
M16C Family M16C/60 Series M16C/6C,6B, 64A,65,63 Groups	Clock-asynchronous serial (communication via CNVss pin)	Not supported
	Clock-synchronous serial (communication via P64/P65/P66/P67)	Setting 6
M16C Family M16C/60 Series M16C/64,62P,6N Groups	Clock-synchronous serial (communication via P64/P65/P66/P67)	Setting 6
M16C Family M16C/50 Series	Clock-asynchronous serial (communication via CNVSS pin)	Not supported
	Clock-synchronous serial (communication via P64/P65/P66/P67)	Setting 6
M16C Family M16C/30 Series M16C Family M16C/Tiny Series	Clock-synchronous serial (communication via P64/P65/P66/P67)	Setting 6
H8 Family H8/300L Super Low Power Series H8 Family H8/300H Tiny Series H8 Family H8/300H Super Low Power Series H8S Family H8S/Tiny Series	Clock-synchronous serial	Setting 4
	When using Flash Development Toolkit	Setting 2
740 Family 38000 Series 38D5,38D2,3803L,3804L Groups	Clock-synchronous serial	Setting 5

Table 4.3 Isolator Switch Setting

Switch setting No.	Settings of JP1 to JP6
Setting 1	
Setting 2	
Setting 3	
Setting 4	
Setting 5	
Setting 6	
Setting 7	

* Do not use the isolator with settings other than the above.

5. Warranty

This product comes with a one-year warranty after purchase.

- (1) Should the product break down or be damaged while you're using it under normal condition based on its user's manual, it will be replaced free of cost.
- (2) However, if the following failure or damage occurs to the product under warranty, the product will be replaced at cost.
 - a) Failure or damage attributable to the misuse or abuse of the product or its use under other abnormal conditions.
 - b) Failure or damage attributable to improper handling of the product after purchase, such as dropping of the product when it is transported or moved.
 - c) Failure or damage to the product caused by other pieces of equipment connected to it.
 - d) Failure or damage attributable to fire, earthquakes, thunderbolts, floods, or other natural disasters or abnormal voltages, etc.
 - e) Failure or damage attributable to modifications, repairs, adjustments, or other acts made to the product by other than Renesas Electronics Corporation.
- (3) This product is accessories product. We cannot accept any request for repair.

Precautions

This product is only intended for use in a laboratory environment under ambient temperature and humidity conditions. A safe separation distance should be used between this and any sensitive equipment. Its use outside the laboratory, classroom, study area or similar such area invalidates conformity with the protection requirements of the Electromagnetic Compatibility Directive and could lead to prosecution.

The product generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off or on, you are encouraged to try to correct the interference by one or more of the following measures;

- ensure attached cables do not lie across the equipment
- reorient the receiving antenna
- increase the distance between the equipment and the receiver
- connect the equipment into an outlet on a circuit different from that which the receiver is connected
- power down the equipment when not in use
- consult the dealer or an experienced radio/TV technician for help

NOTE: It is recommended that wherever possible shielded interface cables are used.

The product is potentially susceptible to certain EMC phenomena. To mitigate against them it is recommended that the following measures be undertaken;

- The user is advised that mobile phones should not be used within 10m of the product when in use.
- The user is advised to take ESD precautions when handling the equipment.

This product does not represent an ideal reference design for an end product and does not fulfil the regulatory standards for an end product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
 3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
 6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
 7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
 11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.

2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited

1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada
Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited

Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.

11F., Samik Lavied' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141



CAUTION

If the requirements shown in the "CAUTION" sentences are ignored, the equipment may cause personal injury or damage to the products.

Renesas Tools Website <http://www.renesas.com/tools>
All trademarks and registered trademarks are the property of their respective owners.