


DESCRIPTION: 8W8 // M // COAXIAL // RA PCB MOUNT

SPECIFICATIONS:

ELECTRICAL:	
INSULATOR RESISTANCE:	5 GOHMS Min.
OPERATING TEMPERATURE:	-55° C ~ +125° C
CONTACT RESISTANCE:	2.7 Milliohms Max.
COAXIAL PINS:	50 OHM
MECHANICAL:	
CONTACT INSERTION FORCE:	4.5 Kg Max.
CONTACT SEPARATOR FORCE:	0.3Kg Min.
MATERIALS:	
CONTACTS:	COPPER ALLOY
INSULATOR:	PBT UL94V-0 RATED, BLACK 230°C PROCESS TEMP.
SHELL:	STEEL
FINISH:	
SHELL:	NICKEL
CONTACT PLATING:	SEE P/N KEY BELOW

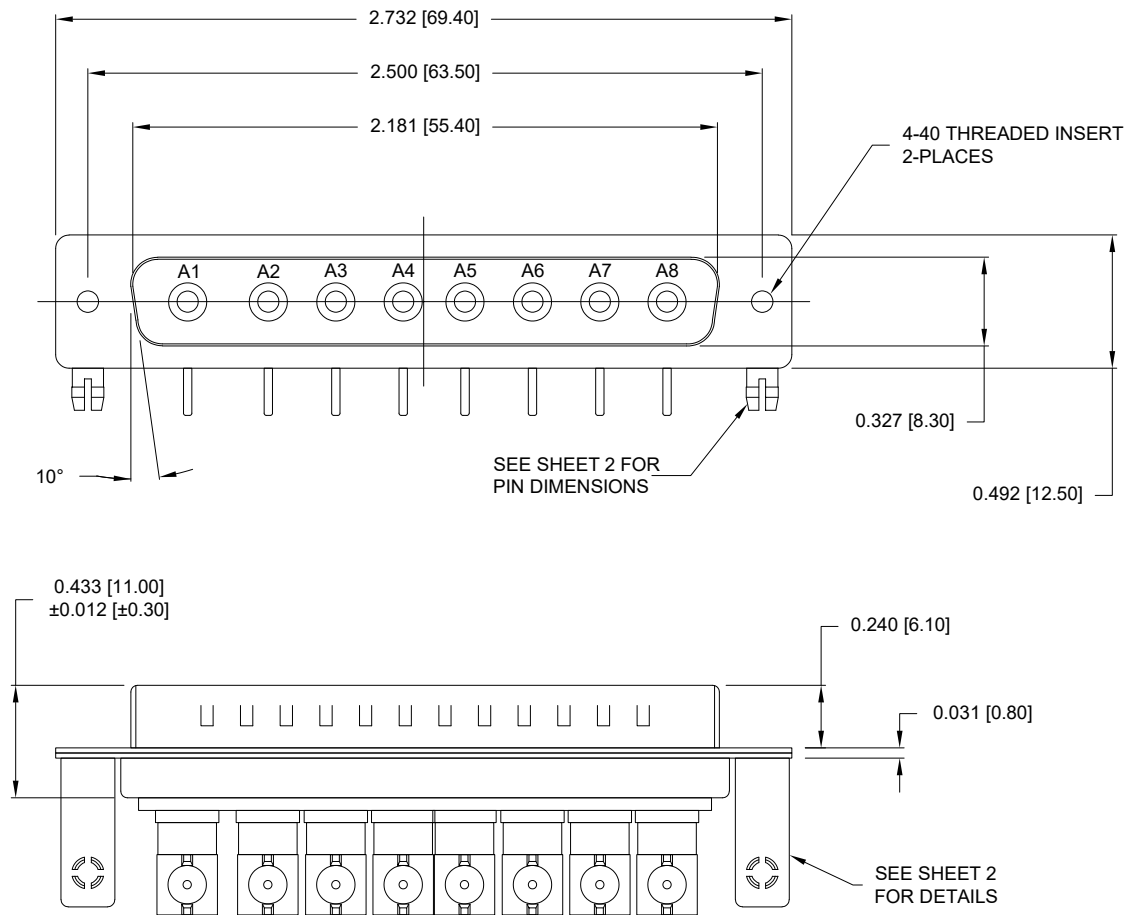

685M8W8103L461

46 = 4-40 INSERTS / BOARD LOCKS



CONTACT PLATING:
1 = GOLD FLASH
2 = 30µ" GOLD

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		SCALE: NTS	SHEET 1 OF 2	REV 3
		DATE: 03/10/2014		DWG NO: 685M8W8103L461		

NOTE:
COAXIAL CONTACTS COME
PRE-LOADED INTO INSULATORS

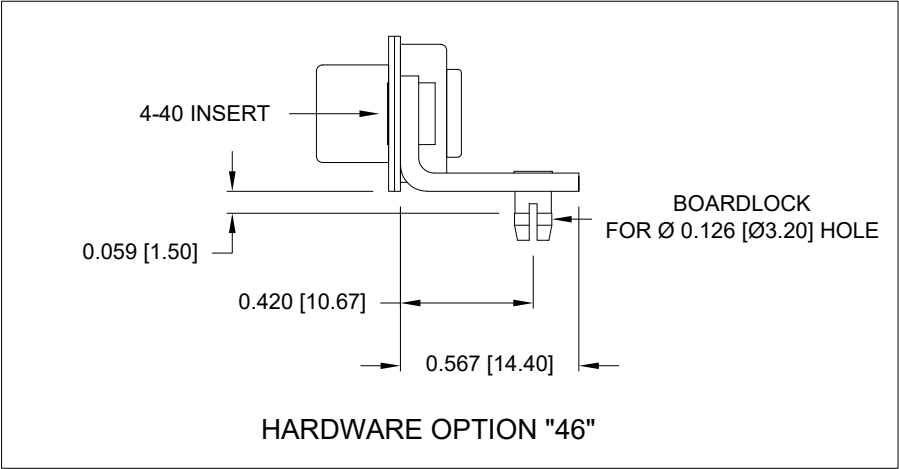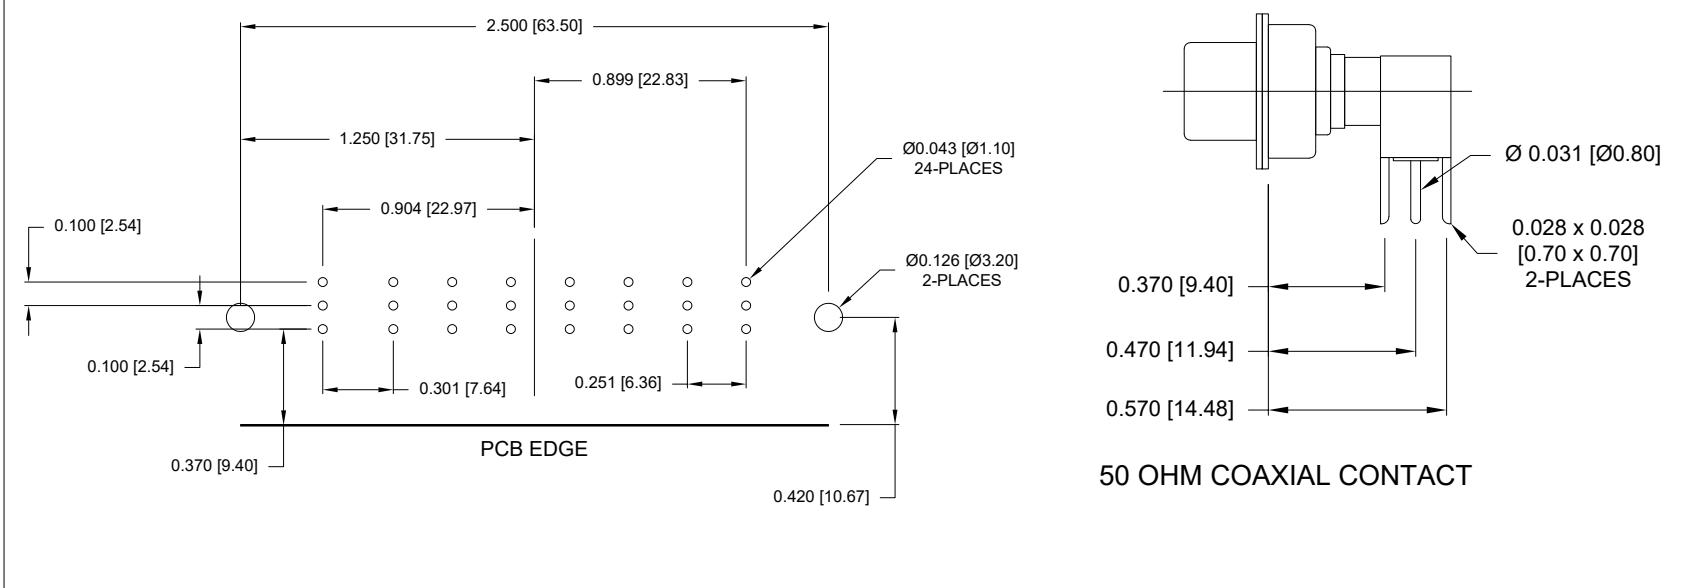

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		SCALE: NTS	SHEET 2	OF 2	REV 3
		DATE: 03/10/2014		DWG NO:	685M8W8103L461		