

PGA309

Voltage Output

Programmable Sensor Conditioner

User's Guide

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products | | Applications | |
|------------------|--|---------------------|--|
| Amplifiers | amplifier.ti.com | Audio | www.ti.com/audio |
| Data Converters | dataconverter.ti.com | Automotive | www.ti.com/automotive |
| DSP | dsp.ti.com | Broadband | www.ti.com/broadband |
| Interface | interface.ti.com | Digital Control | www.ti.com/digitalcontrol |
| Logic | logic.ti.com | Military | www.ti.com/military |
| Power Mgmt | power.ti.com | Optical Networking | www.ti.com/opticalnetwork |
| Microcontrollers | microcontroller.ti.com | Security | www.ti.com/security |
| | | Telephony | www.ti.com/telephony |
| | | Video & Imaging | www.ti.com/video |
| | | Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated

Preface

Read This First

About This Manual

This user's guide describes the function and operation of the PGA309.

Information About Cautions and Warnings

This book may contain cautions and warnings.

This is an example of a caution statement.

A caution statement describes a situation that could potentially damage your software or equipment.

This is an example of a warning statement.

A warning statement describes a situation that could potentially cause harm to you.

The information in a caution or a warning is provided for your protection. Please read each caution and warning carefully.

Related Documentation and Tools From Texas Instruments

| | |
|--|---------------------------|
| Data Sheets: | Literature Number: |
| PGA309 | SBOS292 |
| User's Guides: | Literature Number: |
| PGA309EVM User's Guide | SLOR087 |
| Sensor-Emulator-EVM Reference Guide | SBOA102 |
| Tools: | Literature Number: |
| PGA309EVM-US Evaluation Module (for US and Canada) | |
| PGA309EVM-EU Evaluation Module (for Europe) | |
| Sensor-Emulator-EVM Evaluation Module | |
| PGA309EVM Software (ZIP File) | SLOR088 |

Trademarks

All trademarks are the property of their respective owners.

Contents

| | | |
|----------|---|------------|
| 1 | Introduction | 1-1 |
| 1.1 | PGA309 Functional Description | 1-2 |
| 1.2 | Sensor Error Adjustment Range | 1-3 |
| 1.3 | Gain Scaling | 1-3 |
| 1.4 | Offset Adjustment | 1-4 |
| 1.5 | Voltage Reference | 1-4 |
| 1.6 | Sensor Excitation and Linearization | 1-4 |
| 1.7 | ADC for Temperature Sensing | 1-4 |
| 1.8 | External EEPROM and Temperature Coefficients | 1-5 |
| 1.9 | Fault Monitor | 1-6 |
| 1.10 | Over-Scale and Under-Scale Limits | 1-6 |
| 1.11 | Power-up and Normal Operation | 1-6 |
| 1.12 | Digital Interface | 1-7 |
| 1.13 | Pin Configuration | 1-8 |
| 2 | Detailed Description | 2-1 |
| 2.1 | Gain Scaling | 2-2 |
| 2.2 | Offset Scaling | 2-7 |
| 2.3 | Zero DAC and Gain DAC Architecture | 2-8 |
| 2.4 | Output Amplifier | 2-9 |
| 2.5 | Reference Voltage | 2-13 |
| 2.6 | Linearization Function | 2-14 |
| 2.6.1 | System Definitions | 2-18 |
| 2.6.2 | Key Linearization Design Equations | 2-19 |
| 2.6.3 | Key Ideal Design Equations | 2-20 |
| 2.7 | Temperature Measurement | 2-24 |
| 2.7.1 | Temp ADC Start-Convert Control | 2-29 |
| 2.7.2 | External Temperature Sensing with an Excitation Series Resistor | 2-31 |
| 2.8 | Fault Monitor | 2-33 |
| 2.9 | Over/Under Scale | 2-37 |
| 2.10 | Noise and Coarse Offset Adjust | 2-42 |
| 2.11 | General AC Considerations | 2-49 |
| 3 | Operating Modes | 3-1 |
| 3.1 | Power-On Sequence and Normal Stand-Alone Operation | 3-2 |
| 3.2 | EEPROM Content and Temperature Lookup Table Calculation | 3-5 |
| 3.2.1 | Temperature Lookup Table Calculation | 3-8 |
| 3.3 | Checksum Error Event | 3-15 |
| 3.4 | Test Pin | 3-15 |
| 3.5 | Power-On Initial Register States | 3-16 |

| | | |
|----------|--|------------|
| 4 | Digital Interface | 4-1 |
| 4.1 | Description | 4-2 |
| 4.2 | Two-Wire Interface | 4-2 |
| 4.2.1 | Device Addressing | 4-4 |
| 4.2.2 | Two-Wire Access to PGA309 | 4-4 |
| 4.3 | One-Wire Interface | 4-6 |
| 4.4 | One-Wire Interface Timeout | 4-11 |
| 4.5 | One-Wire Interface Timing Considerations | 4-11 |
| 4.6 | Two-Wire Access to External EEPROM | 4-12 |
| 4.7 | One-Wire Interface Initiated Two-Wire EEPROM Transactions | 4-14 |
| 4.8 | PGA309 Stand-Alone Mode and Two-Wire Transactions | 4-14 |
| 4.9 | PGA309 Two-Wire Bus Master Operation and Bus Sharing Considerations | 4-17 |
| 4.10 | One-Wire Operation with PRG Connected to V_{OUT} | 4-20 |
| 4.11 | Four-Wire Modules and One-Wire Interface (PRG) | 4-25 |
| 5 | Application Background | 5-1 |
| 5.1 | Bridge Sensors | 5-2 |
| 5.2 | System Scaling Options for Bridge Sensors | 5-4 |
| 5.2.1 | Absolute Scale | 5-4 |
| 5.2.2 | Ratiometric Scale | 5-5 |
| 5.3 | Trimming Real World Bridge Sensors for Linearity | 5-6 |
| 6 | Register Descriptions | 6-1 |
| 6.1 | Internal Register Overview | 6-2 |
| 6.2 | Internal Register Map | 6-3 |
| 6.2.1 | Register 0: Temp ADC Output Register | 6-3 |
| 6.2.2 | Register 1: Fine Offset Adjust (Zero DAC) Register | 6-5 |
| 6.2.3 | Register 2: Fine Gain Adjust (Gain DAC) Register | 6-6 |
| 6.2.4 | Register 3: Reference Control and Linearization Register | 6-7 |
| 6.2.5 | Register 4: PGA Coarse Offset Adjust and Gain Select/Output Amplifier Gain Select Register | 6-8 |
| 6.2.6 | Register 5: PGA Configuration and Over/Under-Scale Limit Register | 6-11 |
| 6.2.7 | Register 6: Temp ADC Control Register | 6-13 |
| 6.2.8 | Register 7: Output Enable Counter Control Register | 6-16 |
| 6.2.9 | Register 8: Alarm Status Register | 6-18 |
| A | External EEPROM Example | A-1 |
| A.1 | PGA309 External EEPROM Example | A-2 |
| B | Detailed Block Diagram | B-1 |
| B.1 | Detailed Block Diagram | B-2 |
| C | Glossary | C-1 |

Figures

| | | |
|-------|--|------|
| 1-1. | Simplified Diagram of the PGA309 | 1-2 |
| 1-2. | PGA309 Pin Assignments | 1-8 |
| 2-1. | Gain Blocks of the PGA309 | 2-2 |
| 2-2. | Front-End PGA Gain—Internal Node Calculations | 2-3 |
| 2-3. | Fine Gain Adjust of the PGA309 | 2-4 |
| 2-4. | Coarse and Fine Offset Adjust | 2-8 |
| 2-5. | Output Amplifier in a Common 3-Terminal Sensor Application | 2-9 |
| 2-6. | Output Amplifier Using External Feedback Resistors $R_{FO_{EXT}}$ and $R_{GO_{EXT}}$ | 2-11 |
| 2-7. | Output Amplifier Minimum Gain at Low Supply | 2-12 |
| 2-8. | PGA309 Reference Circuit | 2-13 |
| 2-9. | Bridge Pressure Nonlinearity Correction | 2-14 |
| 2-10. | Bridge Excitation Linearization Circuit | 2-14 |
| 2-11. | Linearization Circuit | 2-16 |
| 2-12. | Bridge Output vs Pressure | 2-17 |
| 2-13. | Bridge Nonlinearity (%FSR) vs Pressure | 2-17 |
| 2-14. | Corrected Bridge Parabolic Nonlinearity vs Pressure | 2-21 |
| 2-15. | Temperature Sense Block | 2-24 |
| 2-16. | Temp ADC Input Mux Options | 2-27 |
| 2-17. | I_{TEMP} for External Temperature Measurement | 2-28 |
| 2-18. | Temp ADC Continuous Start-Convert Control | 2-29 |
| 2-19. | Temp ADC Single Start-Convert Control | 2-30 |
| 2-20. | External Temperature Sensing of Bridge Sensor with Top-Side Series Resistor | 2-32 |
| 2-21. | External Temperature Sensing of Bridge Sensor with Bottom-Side Series Resistor | 2-32 |
| 2-22. | PGA309 Fault Monitor Circuitry(1)(2) | 2-33 |
| 2-23. | Fault Monitor Comparator Logic | 2-36 |
| 2-24. | Over-Scale and Under-Scale Limit Circuit | 2-37 |
| 2-25. | Absolute Scale System—PGA309 Connected to a System ADC | 2-40 |
| 2-26. | System ADC Range Budget for Over-Scale, Under-Scale, and Linear Output | 2-41 |
| 2-27. | V_{OUT} Noise Power Spectrum for Coarse Offset Adjust = 0mV, Gain = 1152, CLK_CFG = '00' (default). | 2-42 |
| 2-28. | V_{OUT} Noise, 0.1Hz to 10Hz Peak-to-Peak Noise | 2-43 |
| 2-29. | V_{OUT} Clock Feedthrough for Coarse Offset Adjust = 0mV, Gain = 1152, CLK_CFG = '00' (default). | 2-44 |
| 2-30. | V_{OUT} Clock Feedthrough Glitch, Coarse Offset Adjust = -59mV, Gain = 1152, V_{IN} = +61mV, CLK_CFG = '00' (default). V_{OUT} Glitch (RTI) = 347mV _{pp} . | 2-45 |
| 2-31. | 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise for Coarse Offset Adjust = -59mV, Gain = 1152, V_{IN} = +61mV, CLK_CFG = '00' (default). | 2-45 |
| 2-32. | V_{OUT} Noise Spectrum for Coarse Offset Adjust = -59mV, Gain = 1152, V_{IN} = +61mV, CLK_CFG = '00' (default). | 2-45 |
| 2-33. | 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise for Coarse Offset Adjust = -56mV, Gain = 1152, V_{IN} = +57mV, CLK_CFG = '01', V_{NPP} (RTI) = 4.44mV _{pp} . | 2-46 |
| 2-34. | V_{OUT} Noise Spectrum for Coarse Offset Adjust = -56mV, Gain = 1152, V_{IN} = +57mV, CLK_CFG = '01'. | 2-47 |
| 2-35. | 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise for Coarse Offset Adjust = -56mV, Gain = 1152, V_{IN} = +57mV, CLK_CFG = '10', V_{NPP} (RTI) = 18.4mV _{pp} . | 2-47 |
| 2-36. | V_{OUT} Noise Spectrum for Coarse Offset Adjust = -56mV, Gain = 1152, V_{IN} = +57mV, CLK_CFG = '10'. | 2-48 |
| 2-37. | 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise for Coarse Offset Adjust = -56mV, Gain = 1152, V_{IN} = +57mV, CLK_CFG = '11', V_{NPP} (RTI) = 42mV _{pp} . | 2-48 |

| | | |
|-------|---|------|
| 2-38. | V_{OUT} Noise Spectrum for Coarse Offset Adjust = -56mV , Gain = 1152, $V_{IN} = +57\text{mV}$, CLK_CFG = '11' | 2-48 |
| 2-39. | Input Filtering | 2-49 |
| 3-1. | State Machine—Power-On Sequence and Operation in Stand-Alone Mode | 3-4 |
| 3-2. | PGA309 Internal Registers Map to External EEPROM Addresses | 3-5 |
| 3-3. | Desired Gain DAC Values | 3-8 |
| 3-4. | Desired Zero DAC Values | 3-8 |
| 3-5. | Signal Path Functional Check with Test = '1' on Power-Up | 3-17 |
| 4-1. | Two-Wire Timing Diagram | 4-3 |
| 4-2. | Two-Wire Start and Acknowledge | 4-3 |
| 4-3. | External EEPROM and Control Byte Allocation | 4-4 |
| 4-4. | Two-Wire Access to PGA309 Timing | 4-5 |
| 4-5. | Typical PGA309 PRG To Controller Connection | 4-6 |
| 4-6. | One-Wire (PRG) Access to PGA309 and External EEPROM Timing | 4-8 |
| 4-7. | One-Wire Access to PGA309 Registers | 4-9 |
| 4-8. | One-Wire Access to External EEPROM | 4-10 |
| 4-9. | One-Wire Through PGA309 Timing Diagram | 4-11 |
| 4-10. | Two-Wire Access to External EEPROM Timing | 4-13 |
| 4-11. | First Part of External EEPROM Timing for Stand-Alone Mode | 4-15 |
| 4-12. | Second Part of External EEPROM Timing for Stand-Alone Mode | 4-16 |
| 4-13. | Two-Wire Bus Relinquish by PGA309 in Master Mode | 4-17 |
| 4-14. | Two-Wire Bus Master Algorithm | 4-18 |
| 4-15. | One-Wire Operation with PRG Tied to V_{OUT} | 4-20 |
| 4-16. | Output Enable/Disable State Machine | 4-23 |
| 4-17. | Four-Wire Sensor Module Application | 4-25 |
| 5-1. | Typical Bridge Sensor | 5-2 |
| 5-2. | Example of Span and Offset | 5-2 |
| 5-3. | Ideal Span and Offset vs Temperature | 5-3 |
| 5-4. | Effect of Nonlinearity on Bridge Sensor Span Over Temperature | 5-3 |
| 5-5. | Effect of Nonlinearity on Bridge Sensor Offset Over Temperature | 5-3 |
| 5-6. | Non-Ideal Curves for Both a Positive and Negative Nonlinear Bridge Sensor Output with Applied Pressure | 5-4 |
| 5-7. | Absolute Scaling Conditions | 5-4 |
| 5-8. | Ratiometric Configuration, 5V | 5-5 |
| 5-9. | Ratiometric Configuration, 3V | 5-5 |
| 5-10. | Typical Trim Configuration | 5-6 |
| 5-11. | PGA309 Trim Configuration | 5-6 |
| 6-1. | Internal Temperature Mode; Register 6[9] = '1' | 6-3 |
| 6-2. | External Signal Mode; Register 6 = '0000 0100 0011 0000' | 6-4 |
| 6-3. | Internal Temperature Mode (Register 6 [9] = '1') | 6-14 |
| 6-4. | External Signal Mode (Register 6 [9], TEN = '0') | 6-15 |
| 6-5. | Temp ADC Mux Configurations | 6-15 |
| A-1. | PGA309 Circuit for External EEPROM Example | A-2 |
| A-2. | Gain and Offset Scaling for External EEPROM Example | A-3 |
| B-1. | Detailed Block Diagram | B-2 |

Tables

| | | |
|-------|--|------|
| 1-1. | PGA309 Adjustment Capability | 1-3 |
| 1-2. | PGA309 Pin Descriptions | 1-8 |
| 2-1. | Output Amplifier Typical Gain Resistor Values | 2-10 |
| 2-2. | Output Amplifier Gain Selections—Register 4 | 2-11 |
| 2-3. | Register 3 Reference Control Bits | 2-13 |
| 2-4. | Range 0—Typical System Applications and Maximum Nonlinearity Correction | 2-23 |
| 2-5. | Range 1—Typical System Applications and Maximum Nonlinearity Correction | 2-23 |
| 2-6. | Internal Temperature Mode Configuration—Register 6 | 2-25 |
| 2-7. | Internal Temperature Mode Resolution—Register 6 | 2-25 |
| 2-8. | Internal Temperature Mode Data —Register 0 | 2-26 |
| 2-9. | Temp ADC PGA Gain Select—Register 6 | 2-27 |
| 2-10. | Temp ADC Reference Select—Register 6 | 2-28 |
| 2-11. | Temp ADC Resolution (Conversion time)—Register 6 | 2-28 |
| 2-12. | Temp ADC Start-Convert Control—Register 6 | 2-29 |
| 2-13. | Temp ADC Conversion Speed Options for External Temperature Mode | 2-30 |
| 2-14. | Bridge Sensor Faults and Fault Comparator States— V_{IN1} and V_{IN2} Have No Pull-Up or Pull-Down Resistors | 2-34 |
| 2-15. | Bridge Sensor Faults and Fault Comparator States— V_{IN1} and V_{IN2} are connected by 10M Ω Pull-Up Resistors to V_{EXC} | 2-35 |
| 2-16. | Bridge Sensor Faults and Fault Comparator States— V_{IN1} and V_{IN2} are connected by 10M Ω Pull-Down Resistors to GND | 2-35 |
| 2-17. | Over-Scale Threshold Selections (Register 5 Bits [5:3]). $V_{REF} = +5V$. | 2-38 |
| 2-18. | Under-Scale Threshold Selections (Register 5 Bits [2:0]). $V_{REF} = +5V$. | 2-38 |
| 2-19. | Electrical Characteristics for Over-Scale and Under-Scale Comparators and V_{REF} | 2-40 |
| 2-20. | Over-Scale and Under-Scale Min and Max Trip Point Calculations | 2-41 |
| 2-21. | PGA309 V_{OUT} Limits for System ADC Range Budget | 2-41 |
| 2-22. | PGA309 Clocking Schemes | 2-46 |
| 3-1. | 1k-Bit External EEPROM Contents | 3-6 |
| 3-2. | Temp ADC Temperature vs Counts | 3-9 |
| 3-3. | Gain DAC Temperature Coefficient Calculation | 3-10 |
| 3-4. | Zero DAC Temperature Coefficient Calculation | 3-11 |
| 3-5. | Lookup Table Contents | 3-12 |
| 3-6. | Gain DAC vs Temperature | 3-12 |
| 3-7. | Gain DAC Lookup Table Calculation Algorithm | 3-14 |
| 3-8. | POR States for Key Parameters | 3-16 |
| 4-1. | Two-Wire Timing Diagram Definitions | 4-3 |
| 4-2. | One-Wire Timing Diagram Definitions | 4-11 |
| 4-3. | Temp ADC—Delay After V_{OUT} Enable (Register 7) | 4-21 |
| 4-4. | Output Enable Counter for One-Wire Interface/ V_{OUT} Multiplexed Mode (Register 7) | 4-21 |
| 6-1. | Internal Register Overview | 6-2 |
| 6-2. | Internal Temperature Mode—Data Format (12-Bit Resolution). $TEN = 1$; $R1, R0 = '11'$ | 6-3 |
| 6-3. | External Signal Mode—Data Format Example (Register 6 = '0000 0100 0011 0011'), 15-Bit + Sign Resolution. $REN = 1$, $RS = 1$ | 6-4 |
| 6-4. | Zero DAC—Data Format Example ($V_{REF} = +5V$) | 6-5 |
| 6-5. | Gain DAC—Data Format | 6-6 |
| 6-6. | Linearization DAC—Data Format Example (Range 1: $-0.166V_{FB} < \text{Linearization DAC Range} < +0.166V_{FB}$) | 6-7 |

| | | |
|-------|---|------|
| 6-7. | Output Amplifier—Gain Select | 6-8 |
| 6-8. | Front End PGA—Gain Select | 6-9 |
| 6-9. | Coarse Offset Adjust on Front-End PGA—Data Format Example ($V_{REF} = +5V$) | 6-10 |
| 6-10. | Clock Configuration (Front End PGA Auto-Zero and Coarse Adjust DAC Chopping) .. | 6-11 |
| 6-11. | Over-Scale Threshold Select ($V_{REF} = +5V$) | 6-12 |
| 6-12. | Under-Scale Threshold Select ($V_{REF} = +5V$) | 6-12 |
| 6-13. | Temp ADC Reference Select | 6-14 |
| 6-14. | Temp ADC Input Mux Select | 6-14 |
| 6-15. | Temp ADC PGA Gain Select | 6-14 |
| 6-16. | Temp ADC—Resolution (Conversion Time) Select | 6-15 |
| 6-17. | Temp ADC—Delay After V_{OUT} Enable | 6-16 |
| 6-18. | Output Enable Counter for One-Wire Interface/ V_{OUT} Multiplexed Mode | 6-17 |
| A-1. | PGA309 Configuration for External EEPROM Example | A-3 |
| A-2. | Final Values for External EEPROM Example | A-4 |

Examples

| | | |
|------|---|------|
| 2-1. | Solving For Gain Settings | 2-5 |
| 2-2. | Lin DAC Counts Conversion | 2-20 |
| 2-3. | Linearization Design | 2-21 |
| 2-4. | Over/Under-Scale Calculation | 2-39 |
| 3-1. | Temperature Lookup Table Calculation | 3-8 |
| 3-2. | PGA309 Power-Up State | 3-16 |
| A-1. | Gain and Offset Scaling for External EEPROM | A-3 |

Introduction


This chapter provides a functional overview of the PGA309 Voltage Output Programmable Sensor Conditioner.

| Topic | Page |
|--|-------------|
| 1.1 PGA309 Functional Description | 1-2 |
| 1.2 Sensor Error Adjustment Range | 1-3 |
| 1.3 Gain Scaling | 1-3 |
| 1.4 Offset Adjustment | 1-4 |
| 1.5 Voltage Reference | 1-4 |
| 1.6 Sensor Excitation and Linearization | 1-4 |
| 1.7 ADC for Temperature Sensing | 1-4 |
| 1.8 External EEPROM and Temperature Coefficients | 1-5 |
| 1.9 Fault Monitor | 1-6 |
| 1.10 Over-Scale and Under-Scale Limits | 1-6 |
| 1.11 Power-Up and Normal Operation | 1-6 |
| 1.12 Digital Interface | 1-7 |
| 1.13 Pin Configuration | 1-8 |

1.1 PGA309 Functional Description

The PGA309 is a smart programmable analog signal conditioner designed for resistive bridge sensor applications. It is a complete signal conditioner with bridge excitation, initial span and offset adjustment, temperature adjustment of span and offset, internal/external temperature measurement capability, output over-scale and under-scale limiting, fault detection, and digital calibration. The PGA309, in a calibrated sensor module, can reduce errors to the level approaching the bridge sensor repeatability. Figure 1–1 shows a block diagram of the PGA309. Following is a brief overview of each major function.

Figure 1–1. Simplified Diagram of the PGA309

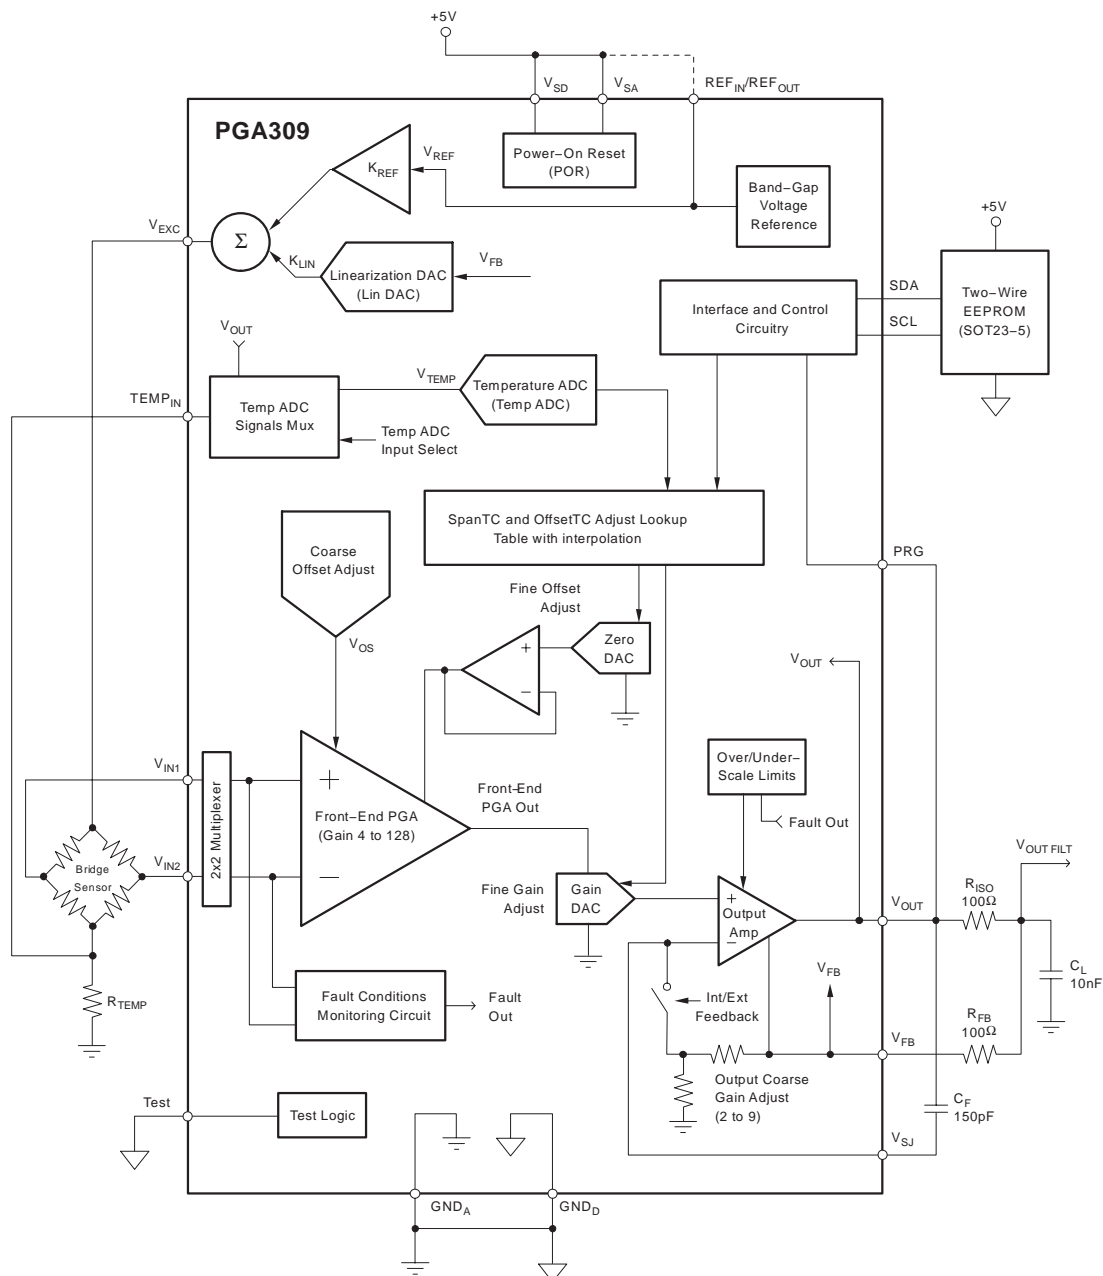

1.2 Sensor Error Adjustment Range

The adjustment capability of the PGA309 is summarized in Table 1–1.

Table 1–1. PGA309 Adjustment Capability

| | |
|-------------------------------------|--|
| FSS (full-scale bridge sensitivity) | 1mV/V to 245mV/V |
| Span TC | Over $\pm 3300\text{ppmFS}/^{\circ}\text{C}^{(1)}$ |
| Span TC nonlinearity | $\geq 10\%$ |
| Zero offset | $\pm 200\%\text{FS}^{(2)}$ |
| Zero offset TC | Over $\pm 3000\text{ppmFS}/^{\circ}\text{C}^{(2)}$ |
| Zero offset TC nonlinearity | $\geq 10\%$ |
| Sensor impedance | Down to $200\Omega^{(3)}$ |

- 1) Depends on the temperature sensing scheme.
- 2) Combined coarse and fine offset adjust.
- 3) Lower impedance possible by using a dropping resistor in series with the bridge.

1.3 Gain Scaling

The core of the PGA309 is the precision low-drift and no 1/f noise Front-End Programmable Gain Amplifier (Front-End PGA). The overall gain of the Front-End PGA + Output Amplifier can be adjusted from 2.7V/V to 1152V/V. The polarity of the inputs can be switched through the 2x2 input mux to accommodate sensors with unknown polarity output.

The Front-End PGA provides initial coarse signal gain using a no 1/f noise, auto-zero instrumentation amplifier. The fine gain adjust is accomplished by the 16-bit attenuating Gain Digital-to-Analog Converter (Gain DAC). The Gain DAC is controlled by the data in the Temperature Compensation Lookup Table driven by the Temperature Analog-to-Digital Converter (Temp ADC). In order to compensate for second-order and higher drift nonlinearity, the span drift can be fitted to piecewise linear curves during calibration with the coefficients stored in an external nonvolatile EEPROM lookup table.

Following the fine gain adjust stage is the Output Amplifier that provides additional programmable gain. Two key Output Amplifier connections, V_{FB} and V_{SJ} , are brought out on the PGA309 for application flexibility. These connections allow for an accurate conditioned signal voltage while also providing a means for PGA309 output overvoltage and large capacitive loading for RFI/EMI filtering required in many end applications.

1.4 Offset Adjustment

The sensor offset adjustment is performed in two stages. The input referred Coarse Offset Adjust DAC has approximately a $\pm 60\text{mV}$ offset adjustment range for a selected V_{REF} of 5V. The fine offset and the offset drift are canceled by the 16-bit Zero DAC that sums the signal with the output of the Front-End PGA. Similar to the Gain DAC, the input digital values of the Zero DAC are controlled by the data in the Temperature Compensation Lookup Table, stored in external EEPROM, driven by the Temp ADC. The programming range of the Zero DAC is 0 to V_{REF} , with an output range of 0.1V to $V_{\text{SA}} - 0.1\text{V}$.

1.5 Voltage Reference

The PGA309 contains a precision low-drift voltage reference (selectable for 2.5V or 4.096V) that can be used for external circuitry through the $\text{REF}_{\text{IN}}/\text{REF}_{\text{OUT}}$ pin. This same reference is used for the Coarse Offset Adjust DAC, Zero DAC, Over/Under-Scale Limits and sensor excitation/linearization through the V_{EXC} pin. When the internal reference is disabled, the $\text{REF}_{\text{IN}}/\text{REF}_{\text{OUT}}$ pin should be connected to an external reference or to V_{SA} for ratiometric-scaled systems.

1.6 Sensor Excitation and Linearization

A dedicated circuit with a 7-bit + sign DAC for sensor voltage excitation and linearization is provided on the PGA309. This block scales the reference voltage and sums it with a portion of the PGA309 output to compensate the positive or negative bow-shaped nonlinearity exhibited by many sensors over their applied pressure range. Sensors not requiring linearization can be connected directly to the supply (V_{SA}) or to the V_{EXC} pin with the Linearization DAC (Lin DAC) set to zero.

1.7 ADC for Temperature Sensing

The compensation for the sensor span and offset drifts is driven by the temperature sense circuitry. Either internal or external temperature sensing is possible. The temperature can be sensed in one of the following ways:

- ☐ Bridge impedance change (excitation current sense, in the positive or negative part of the bridge), for sensors with large temperature coefficient of resistance ($\text{TCR} > 0.1\%/^{\circ}\text{C}$)
- ☐ On-chip PGA309 temperature, when the chip is located sufficiently close to the sensor
- ☐ External diode, thermistor, or RTD placed on the sensor membrane. An internal $7\mu\text{A}$ current source may be register-enabled to excite these types of temperature sensors.

The temperature signal is digitized by the onboard Temp ADC. The output of the Temp ADC is used by the control digital circuit to read data from the Lookup Table in an external EEPROM, and set the output of the Gain DAC and the Zero DAC to the calibrated values as temperature changes.

An additional function provided through the Temp ADC is the ability to read the V_{OUT} pin back through the Temp ADC input mux. This provides flexibility for a digital output through either One-Wire or Two-Wire interface, as well as the possibility for an external microcontroller to perform real-time custom calibration of the PGA309.

1.8 External EEPROM and Temperature Coefficients

The PGA309 uses an industry-standard Two-Wire external EEPROM (typically, a SOT23-5 package). A 1k-bit (minimum) EEPROM is needed when using all 17 temperature coefficients. Larger EEPROMs may be used to provide user space for serial number, lot code, or other data.

The first part of the external EEPROM contains the configuration data for the PGA309, with settings for:

- ☐ Register 3—Reference Control and Linearization
- ☐ Register 4—PGA Coarse Offset and Gain/Output Amplifier Gain
- ☐ Register 5—PGA Configuration and Over/Under-Scale Limit
- ☐ Register 6—Temp ADC Control

This section of the EEPROM contains its own individual checksum (Checksum1).

The second part of the external EEPROM contains up to 17 temperature index values and corresponding temperature coefficients for the Zero DAC and Gain DAC adjustments with measured temperature and contains its own checksum (Checksum2). The PGA309 lookup logic contains a linear interpolation algorithm for accurate DAC adjustments between stored temperature indexes. This approach allows for a piecewise linear temperature compensation of up to 17 temperature indexes and associated temperature coefficients.

If either Checksum1, Checksum2, or both are incorrect, the output of the PGA309 is set to high-impedance.

1.9 Fault Monitor

To detect sensor burnout or a short-circuit, a set of four comparators are connected to the inputs of the Front-End PGA. If any of the inputs are taken to within 100mV of ground or V_{EXC} , or violate the input CMR of the Front-End PGA, then the corresponding comparator sets a sensor fault flag that causes the PGA309 V_{OUT} to be driven within 100mV of either V_{SA} or ground, depending upon the alarm configuration setting (Register 5—PGA Configuration and Over/Under-Scale Limit). This will be well above the set over-scale limit level or well below the set under-scale limit level. The state of the fault condition can be read in digital form in Register 8—Alarm Status Register. If the Over/Under-Scale Limit is disabled, the PGA309 output voltage will still be driven within 100mV of either V_{SA} or ground, depending upon the alarm configuration setting.

There are five other fault detect comparators that help detect subtle PGA309 front-end violations that could otherwise result in linear voltages at V_{OUT} that would be interpreted as valid states. These are especially useful during factory calibration and setup and are configured through Register 5—PGA Configuration and Over/Under-Scale Limit. Their status can also be read back through Register 8—Alarm Status Register.

1.10 Over-Scale and Under-Scale Limits

The over-scale and under-scale limit circuitry combined with the fault monitor circuitry provides a means for system diagnostics. A typical sensor-conditioned output may be scaled for 10% to 90% of the system ADC range for the sensor normal operating range. If the conditioned pressure sensor is below 4%, it is considered under-pressure; if over 96%, it is considered over-pressure.

The PGA309 over/under-scale limit circuit can be programmed individually for under-scale and over-scale that clip or limit the PGA309 output. From a system diagnostic view, 10% to 90% of ADC range is normal operation, < 4% is under-pressure, and > 96% is over-pressure. If the fault detect circuitry is used, a detected fault will cause the PGA309 output to be driven to positive or negative saturation. If this fault flag is programmed for high, then > 97% ADC range will be a fault; if programmed for low, then < 3% ADC range will be a fault. Now the system software can be used to distinguish between over- or under-pressure condition, which indicates an out-of-control process, or a sensor fault.

1.11 Power-up and Normal Operation

The PGA309 has circuitry to detect when the power supply is applied to the PGA309, and reset the internal registers and circuitry to an initial state. This reset also occurs when the supply is detected to be invalid, so that the PGA309 is in a known state when the supply becomes valid again. The rising threshold for this circuit is typically 2.2V and the falling threshold is typically 1.7V. After the power supply becomes valid, the PGA309 waits for approximately 25ms and then attempts to read the configuration data from the external EEPROM device.

If the EEPROM has the proper flag set in address location 0 and 1, then the PGA309 continues reading the EEPROM; otherwise, the PGA309 waits for one second before trying again. If the PGA309 detects no response from the EEPROM, the PGA309 waits for one second and tries again; otherwise, the PGA309 tries to free the bus and waits for 25ms before trying to read the EEPROM again. If successful (including valid checksum data), the PGA309 triggers the Temp ADC to measure temperature. For 16-bit resolution results the converter takes approximately 125ms to complete a conversion. Once the conversion is complete, the PGA309 begins reading the Lookup Table information from the EEPROM to calculate the settings for the Gain DAC and Zero DAC. This process is detailed in the flowchart shown in Figure 3–1.

The PGA309 reads the entire Lookup Table so that it can determine if the checksum for the Lookup Table is correct. Each entry in the Lookup Table requires approximately 500 μ s to read from the EEPROM. Once the checksum is determined to be valid, the calculated values for the Gain and Zero DACs are updated into their respective registers, and the Output Amplifier is enabled. The PGA309 then begins looping through this entire procedure, starting with reading the EEPROM configuration registers, then starting a new conversion on the Temp ADC, which then triggers reading the Lookup Table data from the EEPROM. This loop continues indefinitely.

1.12 Digital Interface

There are two digital interfaces on the PGA309. The PRG pin uses a One-Wire, UART-compatible interface with bit rates from 4.8Kbits/s to 38.4Kbits/s. The SDA and SCL pins together form an industry standard Two-Wire interface at clock rates from 1kHz to 400kHz. The external EEPROM uses the Two-Wire interface. Communication to the PGA309 internal registers, as well as to the external EEPROM, for programming and readback can be conducted through either digital interface.

It is also possible to connect the One-Wire communication pin, PRG, to the V_{OUT} pin in true three-wire sensor modules and still allow for programming. In this mode, the PGA309 Output Amplifier may be enabled for a set time period and then disabled again to allow sharing of the PRG pin with the V_{OUT} connection. This allows for both digital calibration and analog readback during sensor calibration in a three-wire sensor module.

The Two-Wire interface has timeout mechanisms to prevent bus lockup from occurring. The Two-Wire master controller in the PGA309 has a mode that attempts to free up a stuck-at-zero SDA line by issuing SCL pulses, even when the bus is not indicated as idle after the timeout period has expired. The timeout will only apply when the master portion of the PGA309 is attempting to initiate a Two-Wire communication.

1.13 Pin Configuration

Figure 1–2. PGA309 Pin Assignments

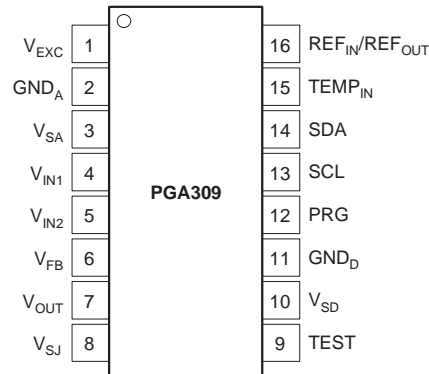


Table 1–2. PGA309 Pin Descriptions

| PIN | NAME | DESCRIPTION |
|-----|---------------------------------------|---|
| 1 | V _{EXC} | Bridge sensor excitation. Connect to bridge if linearization and/or internal reference for bridge excitation is to be used. |
| 2 | GND _A | Analog ground. Connect to analog ground return path for V _{SA} . Should be same as GND _D . |
| 3 | V _{SA} | Analog voltage supply. Connect to analog voltage supply. To be within 200mV of V _{SD} . |
| 4 | V _{IN1} | Signal input voltage 1. Connect to + or – output of sensor bridge. Internal multiplexer can change connection internally to Front-End PGA. |
| 5 | V _{IN2} | Signal input voltage 2. Connect to + or – output of sensor bridge. Internal multiplexer can change connection internally to Front-End PGA. |
| 6 | V _{FB} | V _{OUT} feedback pin. Voltage feedback sense point for over/under-scale limit circuitry. When internal gain set resistors for the Output Amplifier are used, this is also the voltage feedback sense point for the Output Amplifier. V _{FB} in combination with V _{SJ} allows for ease of external filter and protection circuits without degrading the PGA309 V _{OUT} accuracy. V _{FB} must always be connected to either V _{OUT} or the point of feedback for V _{OUT} , if external protection is used. |
| 7 | V _{OUT} | Analog output voltage of conditioned sensor. |
| 8 | V _{SJ} | Output Amplifier summing junction. Use for Output Amplifier compensation when driving large capacitive loads (> 100pF) and/or for using external gain setting resistors for the Output Amplifier. |
| 9 | TEST | Test/External Controller Mode pin. Pull to GND _D in normal mode. |
| 10 | V _{SD} | Digital voltage supply. Connect to digital voltage supply. To be within 200mV of V _{SA} . |
| 11 | GND _D | Digital ground. Connect to digital ground return path for V _{SD} . Should be same as GND _A . |
| 12 | PRG | Single-wire interface program pin. UART-type interface for digital calibration of the PGA309 over a single wire. Can be connected to V _{OUT} for a three-lead (V _S , GND, V _{OUT}) digitally programmable sensor assembly. |
| 13 | SCL | Clock input/output for Two-Wire, industry-standard compatible interface for reading and writing digital calibration and configuration from external EEPROM. Can also communicate directly to the registers in the PGA309 through the Two-Wire, industry-standard compatible interface. |
| 14 | SDA | Data input/output for Two-Wire, industry-standard compatible interface for reading and writing digital calibration and configuration from external EEPROM. Can also communicate directly to the registers in the PGA309 through the Two-Wire, industry-standard compatible interface. |
| 15 | TEMP _{IN} | External temperature signal input. PGA309 can be configured to read a bridge current sense resistor as an indicator of bridge temperature, or an external temperature sensing device such as diode junction, or RTD, or thermistor. This input can be internally gained up by 1, 2, 4, or 8. In addition, this input can be read differentially with respect to V _{GND_A} , V _{EXC} , or the internal V _{REF} . There is also an internal, register-selectable, 7μA current source (I _{TEMP}) that can be connected to TEMP _{IN} as an RTD, thermistor, or diode excitation source. |
| 16 | REF _{IN} /REF _{OUT} | Reference input/output pin. As an output, the internal voltage reference (selectable as 2.5V or 4.096V) is available for system use on this pin. As an input, the internal voltage reference may be disabled and an external voltage reference can then be applied as the reference for the PGA309. |

Detailed Description


This chapter provides a detailed description of the PGA309.

| Topic | Page |
|--|-------------|
| 2.1 Gain Scaling | 2-2 |
| 2.2 Offset Scaling | 2-7 |
| 2.3 Zero DAC and Gain DAC Architecture | 2-8 |
| 2.4 Output Amplifier | 2-9 |
| 2.5 Reference Voltage | 2-13 |
| 2.6 Linearization Function | 2-14 |
| System Definitions | 2-18 |
| Key Linearization Design Equations | 2-19 |
| Key Ideal Design Equations | 2-20 |
| 2.7 Temperature Measurement | 2-24 |
| Temp ADC Start-Convert Control | 2-29 |
| External Temperature Sensing with an Excitation Series Resistor | 2-31 |
| 2.8 Fault Monitor | 2-33 |
| 2.9 Over/Under Scale | 2-37 |
| 2.10 Noise and Coarse Offset Adjust | 2-42 |
| 2.11 General AC Considerations | 2-49 |

2.1 Gain Scaling

The PGA309 contains three main gain blocks for scaling differential input bridge sensor signals, as shown in Figure 2–1. The Front-End PGA contains the highest gain selection to allow for the highest signal-to-noise ratio by applying the largest gain at the front of the signal chain before the addition of other noise sources. The Front-End PGA gain select has eight gain settings (4, 8, 16, 23.27, 32, 42.67, 64, and 128) and is set by Register 4 bits (11:8). Bit 11 selects the polarity of the input mux.

Figure 2–1. Gain Blocks of the PGA309

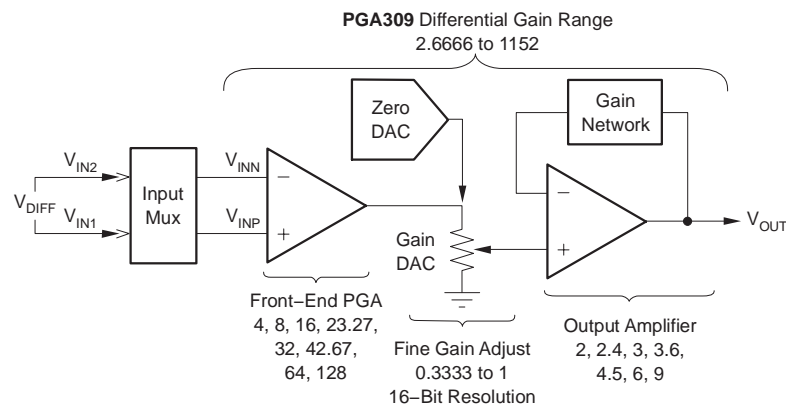


The Front-End PGA is followed by the Gain DAC. The fine gain adjust is controlled by the 16-bit Gain DAC and is adjustable from 0.3333 to 1. Register 2 is used only for the Gain DAC setting.

Final signal gain is applied through the Output Amplifier, which has an internal select of seven gain settings (2, 2.4, 3, 3.6, 4.5, 6, 9). The Output Amplifier has a selection to disable the internal gain and allow user-supplied external resistors to set the Output Amplifier gain. Register 4 bits (14:12) select the internal Output Amplifier gains, except when programmed with '111' when the internal feedback is disabled. The combined gain blocks allow for a V_{OUT}/V_{DIFF} signal gain of 2.666 (400kHz bandwidth) to 1152 (60kHz bandwidth).

The Front-End PGA of the PGA309 is a three op amp instrumentation amplifier for optimum rejection of common-mode voltages. This instrumentation amplifier is constructed using op amps with auto-zero front-ends to virtually eliminate $1/f$ noise.

As with any instrumentation amplifier, there are limitations on the output voltage swing and input common-mode voltage range. The circuit in Figure 2–2 is representative of the Front-End PGA inside of the PGA309 and is used to evaluate critical internal node voltages to ensure that output voltage swing and common-mode limits are not violated. It is possible to violate the limits of these internal nodes and still have apparently valid output voltages at V_{OUT} of the PGA309. There are internal comparators that can be set to monitor these internal nodes to indicate an out-of-limit condition during sensor calibration (see Section 2.8, *Fault Monitor*).

Figure 2–2. Front-End PGA Gain—Internal Node Calculations

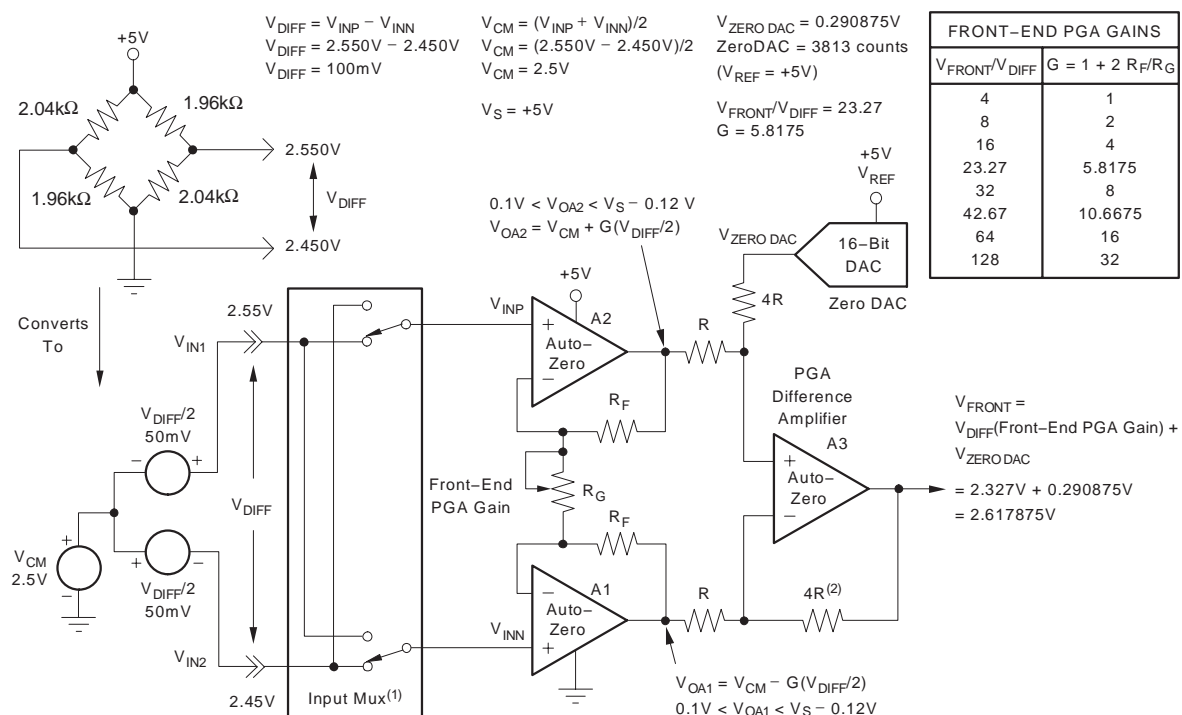

NOTES: (1) Input mux allows for sensor output polarity reversal.
 (2) PGA difference amplifier gain of 4 allows full range out of Zero DAC and full voltage swing out of A1 and A2 without common-mode violation on A3 input.

After choosing appropriate scaling for the PGA309 gain blocks, a simple hand analysis can check for internal node limit violations. It is important to convert the PGA309 input voltages (V_{INP} , V_{INN}) to common-mode and differential components for the maximum sensor output. The model for this conversion is illustrated in Figure 2–2. The Front-End PGA has a gain of 4 in difference amplifier A3. To analyze important internal nodes V_{OA1} and V_{OA2} , it is necessary to assign the proper gain factor (G) to op amps A1 and A2. This is detailed in Figure 2–2 with the respective equations for the output voltages shown at the appropriate nodes. For maximum V_{DIFF} output of the sensor, V_{OA1} and V_{OA2} are within the allowed voltage swing of: $0.1V < (V_{OA1} \text{ or } V_{OA2}) < V_S - 0.12$. Or, for this example: $0.1V < (V_{OA1} \text{ or } V_{OA2}) < 4.88V$.

Other applications may yield different results that require different gain scaling or a resistor in the positive or negative leg of the sensor excitation path to adjust the common-mode input voltage of the PGA309. The maximum allowable input voltage range (IVR) of the PGA309 is specified as $0.2V < IVR < V_{SA} - 1.5V$, which for this application translates to $0.2V < IVR < 3.5V$. In Figure 2–2 we see $V_{INP} = 2.550V$ and $V_{INN} = 2.450V$, which is within the acceptable IVR specification.

The output (V_{FRONT}) of difference amplifier A3 has a gain of 4 in it for voltages out of A2 and A1, but a gain of 1 for voltages out of the Zero DAC. V_{FRONT} is shown with the contribution from V_{DIFF} times the Front-End PGA gain plus the Zero DAC output voltage. The V_{FRONT} signal is further processed through the Gain DAC and Output Amplifier gain blocks.

Figure 2–3 depicts the Gain DAC and Output Amplifier gain blocks inside the PGA309. For this example the Gain DAC was set to 0.859475571 and the Output Amplifier to a gain of 2. As shown in Figure 2–3, the net output voltage, V_{OUT} , is 4.5V for the maximum V_{DIFF} output of the sensor.

For $V_{\text{OUT MIN}}$, the sensor output of zero volts:

$$V_{\text{OUT MIN}} = V_{\text{ZERO DAC}} [(\text{Gain DAC}) (\text{Output Amplifier Gain})]$$


For this example:

$$V_{\text{OUT MIN}} = 0.290908813\text{V} [(0.859475571)(2)] = 0.5000\text{V}$$

The Output Amplifier has external connections, which allow the end-user maximum flexibility in Output Amplifier configurations for a variety of applications. The use of the V_{FB} and V_{SJ} pins, are described in the Output Amplifier section.

Example 2–1 shows the procedure for solving for gain settings.

Figure 2–3. Fine Gain Adjust of the PGA309

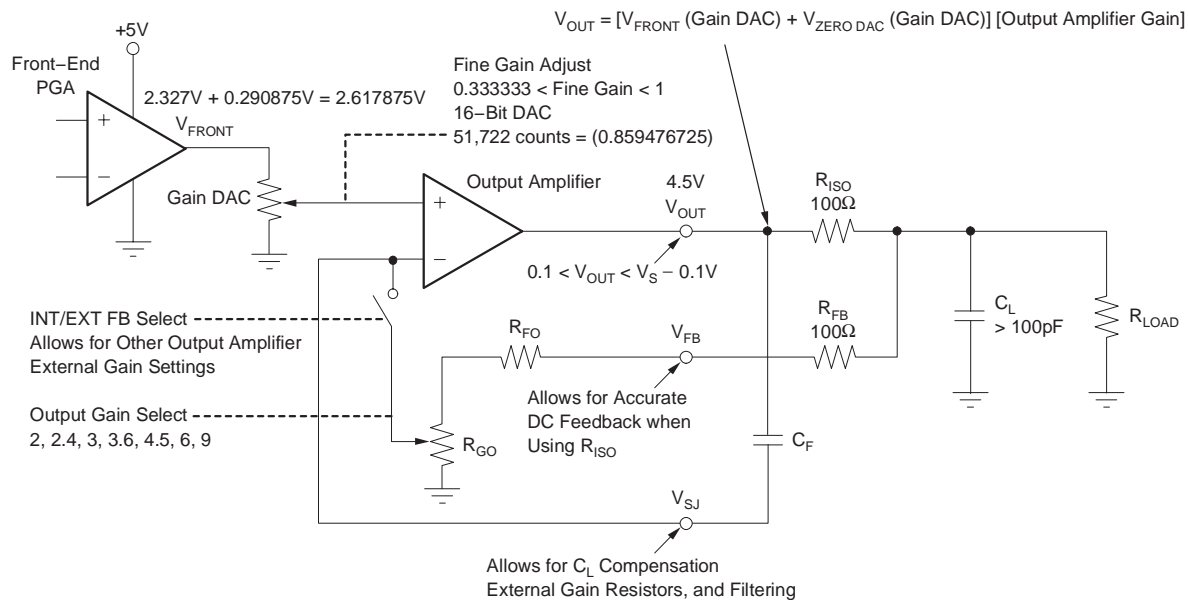

Example 2–1. Solving For Gain Settings

An example bridge sensor application will be used to examine internal nodes of the PGA309 that are related to the gain blocks (refer to Figure 2–2 and Figure 2–3).

Given: Full-Scale Bridge Sensitivity (FSS) = 20mV/V (sensor span)

$V_{OS} = 0\text{mV}$ (sensor offset)

$V_{REF} = +5\text{V}$ (sensor excitation)

$V_B = +5\text{V}$, $V_S = +5\text{V}$

$R_{BRG} = 2\text{k}\Omega$

$V_{OUT\ MIN} = +0.5\text{V}$

$V_{OUT\ MAX} = +4.5\text{V}$

Find: Front-End PGA Gain

Gain DAC Setting

Zero DAC Setting

Output Amplifier Gain

Solution:

- 1) Maximum Sensor Output:

$$V_{BR\max} = (\text{FSS})(V_B)$$

$$V_{BR\max} = (20\text{mV/V})(5\text{V})$$

$$V_{BR\max} = 100\text{mV}$$

- 2) Total Desired Gain:

$$G_T = (V_{OUT\ MAX} - V_{OUT\ MIN})/V_{BR\max}$$

$$G_T = (4.5\text{V} - 0.5\text{V})/100\text{mV}$$

$$G_T = 40$$

- 3) Partition the Gain; Determine the Desired Gain DAC Setting:

Choose Front-End PGA Gain = 23.27

Choose Output Amplifier Gain = 2

$$\text{Gain DAC} = 0.859475719$$

$$\text{Gain DAC} = G_T / [(\text{Front-End PGA})(\text{Output Amplifier Gain})]$$

$$\text{Gain DAC} = 40 / [(23.27)(2)]$$

$$\text{Gain DAC} = 0.859475719$$

- 4) Calculate exact programmable Gain DAC value:

$$\text{Decimal \# counts} = (\text{Gain DAC} - 1/3)(3/2)(65536)$$

$$\text{Decimal \# counts} = (0.859475719 - 1/3)(3/2)(65536) = 51,721.90133$$

$$\text{Use } 51,722 \text{ counts} \rightarrow \text{CA0Ah} \rightarrow 1100\ 1010\ 0000\ 1010 \rightarrow 0.859476725$$

$$\text{Gain DAC} = (\# \text{ counts}/65536)(2/3) + (1/3)$$

- 5) Calculate Zero DAC value

$$V_{ZERO\ DAC} = V_{OUT\ MIN} / [(\text{Gain DAC})(\text{Output Amplifier Gain})]$$

$$V_{ZERO\ DAC} = 0.5\text{V} / [(0.859475719)(2)] = 0.29087505\text{V}$$

$$\text{Decimal \# counts} = V_{ZERO\ DAC} / (V_{REF}/65536)$$

$$\text{Decimal \# counts} = 0.29087505 / (5/65536) = 3812.55746$$

$$\text{Use } 3813 \text{ counts} \rightarrow 0\text{EE5h} \rightarrow 0000\ 1110\ 1110\ 0101 \rightarrow 0.290908813\text{V}$$

$$V_{ZERO\ DAC} = (\# \text{ counts}/65536)(V_{REF})$$

- 6) Calculate V_{CM} and V_{DIFF} for Maximum Sensor Output (see Figure 2–2):

$$V_{DIFF} = V_{INP} - V_{INN}$$

$$V_{DIFF} = 2.550 - 2.450$$

$$V_{DIFF} = 100\text{mV}; V_{DIFF}/2 = 50\text{mV}$$

$$V_{CM} = (V_{INP} + V_{INN})/2$$

$$V_{CM} = (2.550\text{V} + 2.450\text{V})/2$$

$$V_{CM} = 2.5\text{V}$$

- 7) Check Internal Nodes V_{OA2} and V_{OA1} :
 Front-End PGA Gain = 23.27
 $G = 5.8175$ (see Figure 2-2)
 $V_{OA1} = V_{CM} - G(V_{DIFF}/2)$
 $V_{OA1} = 2.5V - 5.8175(50mV)$
 $V_{OA1} = 2.209125$
 $V_{OA2} = V_{CM} + G(V_{DIFF}/2)$
 $V_{OA2} = 2.5V + 5.8175(50mV)$
 $V_{OA2} = 2.790875$
 $0.1V \leq V_{OA1}$ and $V_{OA2} \leq V_S - 0.12V$
 $0.1V \leq V_{OA1}$ and $V_{OA2} \leq 4.88V$
 Therefore, V_{OA1} and V_{OA2} are valid.
- 8) Check Internal Nodes V_{OA3} (V_{FRONT}):
 $V_{FRONT} = V_{DIFF}$ (Front-End PGA Gain) + V_{ZERO} DAC
 $V_{DIFF} \text{ MIN} = 0V$
 $V_{DIFF} \text{ MAX} = 100mV$
 Front-End PGA Gain = 23.27
 $V_{ZERO} \text{ DAC} = 0.290908813V$
 $V_{FRONT} \text{ MIN} = (0)(23.27) + 0.290908813V = 0.290908813V$
 $V_{FRONT} \text{ MAX} = (100mV)(23.27) + 0.290908813V = 2.6179V$
 $0.05V < V_{FRONT} \text{ MIN}$ and $V_{FRONT} \text{ MAX} < V_{SA} - 0.1V$
 $0.05V < 0.290908813V$ and $2.6179V < V_{SA} - 0.1V$
 $V_{FRONT} \text{ OK!}$

2.2 Offset Scaling

The coarse offset adjust is implemented before the Front-End PGA gain to allow for maximum dynamic range. Many bridge sensors have initial offsets comparable to their maximum scale outputs. The coarse offset adjust can be applied as positive or negative. It is implemented in a 4-bit DAC + sign and contains 14 positive selections, 14 negative selections, and zero.


The resolution in either the positive or negative range is $V_{REF}/1200$. For a +5V reference, this translates to 4.2mV steps. Figure 2–4 depicts the PGA309 with the gain settings used for the example bridge sensor application detailed in Section 2.1, *Gain Scaling*.

The conversion of the bridge initial differential offset plus its common-mode to the differential plus common-mode voltage source model is shown in Figure 2–4 for an initial bridge sensor offset of -34mV ($V_{INP} - V_{INN}$). Conceptually, this divides into two 17mV offset voltages with polarities as shown. If the coarse offset adjust is set for +34mV offset ($V_{INP} - V_{INN}$), then the initial bridge offset is cancelled exactly. Any residual initial bridge offset not cancelled by the coarse offset adjust will be gained up by the Front-End PGA gain and needs to be accounted for when setting the fine offset adjust by using the Zero DAC.

The coarse offset adjust is set by Register 4 bits (4:0), with bit 4 determining the coarse offset polarity as negative for a '1' and positive for a '0'. The internal architecture of the coarse offset adjust does yield duplicate digital codes for both $-7(V_{REF})(0.85e^{-3})$ and $+7(V_{REF})(0.85e^{-3})$. See Section 6.2.5, *Register 4*, for a complete mapping of the coarse offset adjust settings.

The fine offset adjust is set by the Zero DAC. The Zero DAC setting is gained by the Gain DAC and the Output Amplifier gain and is referred-to-output (RTO). The Zero DAC is a unipolar, 16-bit DAC, with its reference being the V_{REF} setting of the PGA309. The range of the Zero DAC is ensured to be linear from $2\%V_{REF}$ to $98\%V_{REF}$, for $V_{REF} = +5\text{V}$ (for $V_{REF} < +5\text{V}$, the upper end of the Zero DAC range can extend to V_{REF}). The Zero DAC analog range is $0.1\text{V} \leq \text{Zero DAC analog range} \leq (V_{SA} - 0.1\text{V})$. The Zero DAC programming range is $0\text{V} \leq \text{Zero DAC programming range} \leq V_{REF}$. The data format is 16-bit unsigned. Register 1 bits (15:0) are used for the Zero DAC setting.

Figure 2–4. Coarse and Fine Offset Adjust

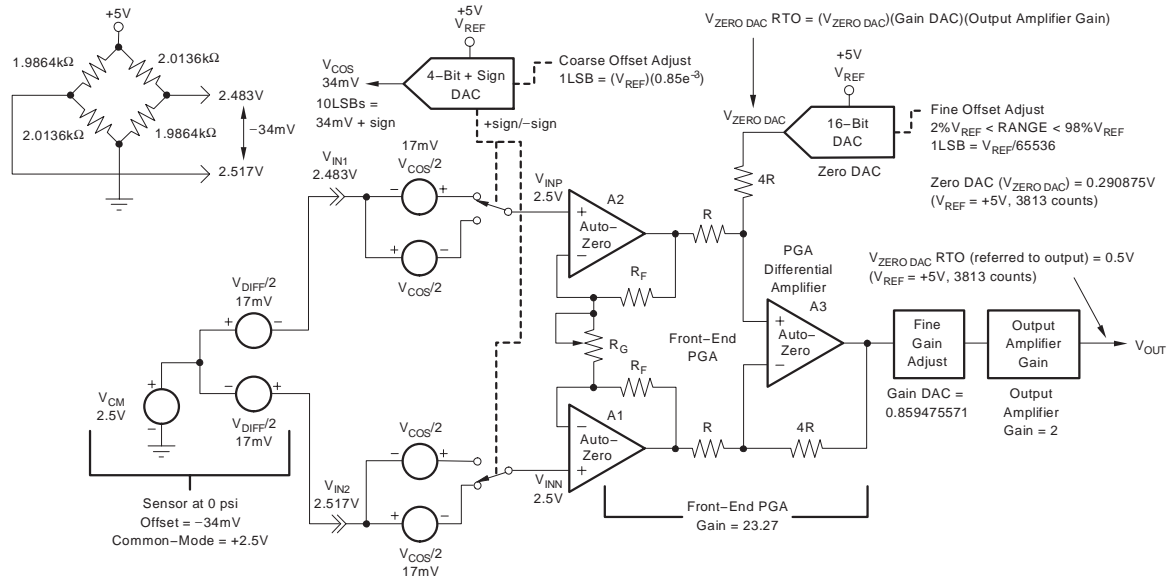

2.3 Zero DAC and Gain DAC Architecture

Two 16-bit DACs are incorporated into the PGA309 for fine adjustment of the Zero DAC and Gain DAC. These DACs are based on a Resistor String (R-String) architecture with very low integral and differential nonlinearities.

The Zero DAC incorporates a buffer amplifier in a gain of 2V/V. The DAC resistor string is connected between the REF_{IN}/REF_{OUT} (V_{REF} voltage) pins and GND_A . The input digital value adjusts the point on the resistor string where the noninverting amplifier input is connected between $0 \times V_{REF}$ to $0.5 \times V_{REF}$, thus adjusting the Zero DAC output voltage from 0V to V_{REF} . Due to the device output saturation of the buffer amplifier, the linearity of the Zero DAC is specified from 2% to 98% of the digital scale with $V_{REF} = V_{SA}$. However, for cases when $V_{REF} < V_{SA}$ (for example, when using the PGA309 internal reference), the Zero DAC is linear to 100% of full-scale.

The Gain DAC uses a similar R-String architecture. However, the Output Amplifier is performing the function of the buffer amplifier. The R-String of the DAC is connected between the output of the Front-End PGA, V_{FRONT} , and GND_A (see Figure 2–3). The input digital value adjusts the value of the noninverting amplifier input between $1/3 \times V_{FRONT}$ to $1 \times V_{FRONT}$, thus setting the attenuation factor of the Gain DAC from 0.333V/V to 1V/V with 16-bit precision.

The output of both the Zero and Gain DACs are calculated and adjusted on every Temp ADC measurement according to the Lookup Table stored in EEPROM (see section 3.2, *EEPROM Content and Lookup Table Calculation*). This leads to DAC code adjustments on small temperature changes. Unlike some string DACs, the proprietary switch architecture of the PGA309 Zero and Gain DACs allows switching with very low glitch energy and essentially no dependency on the code being changed. The glitch energy is normally lower than the voltage noise level at the output of the PGA309.

2.4 Output Amplifier

The Output Amplifier section of the PGA309 is configured to allow maximum flexibility and accuracy in the end application. Figure 2–5 depicts the Output Amplifier in a common three-terminal sensor application. In this application, it is desired to provide overvoltage protection due to mis-wires on the output of the PGA309, as well as a 10nF capacitor on the sensor module output for EMI/RFI filtering. In this configuration, R_{ISO} and R_{FB} provide overvoltage protection on $V_{OUT\ FILT}$ to 16V by limiting the current into V_{OUT} and V_{FB} to about 150mA $[(16V - 0.7V)/100\Omega]$. The 0.7V drop results from the internal ESD structure to GND or V_{SA} . In addition, R_{ISO} serves to isolate the 10nF RFI/EMI capacitive load from V_{OUT} . R_{FB} adds a slight gain error that is calibrated out with the PGA309 + sensor calibration. Note that the point of feedback around the Output Amplifier is taken from $V_{OUT\ FILT}$ and as such, after PGA309 + sensor calibration, the Output Amplifier will accurately scale $V_{OUT\ FILT}$ to match the desired conditioned sensor voltage. C_F provides a second feedback path around the Output Amplifier for stability. With the configuration shown, the Output Amplifier is stable for internal Output Amplifier gains from 2 (125kHz bandwidth, 63° loop gain phase margin, typical values) to 9 (64kHz bandwidth, 86° loop gain phase margin, typical values). Table 2–1 details the typical Output Amplifier resistor values for R_{FO} and R_{GO} , as well as open-loop output resistance. These values, combined with the typical Output Amplifier open-loop gain curve and standard op amp stability techniques, allow the Output Amplifier to be tailored and configured for the specific sensor application.

Figure 2–5. Output Amplifier in a Common 3-Terminal Sensor Application

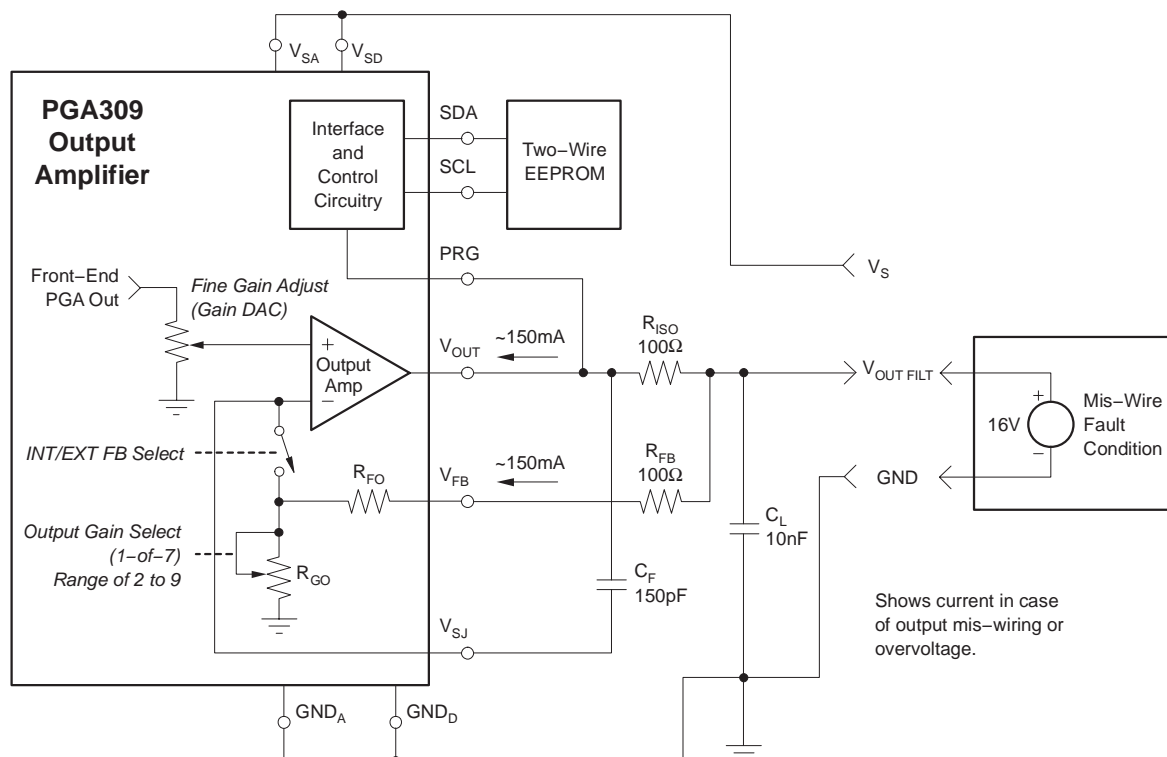


Table 2–1. Output Amplifier Typical Gain Resistor Values


| Gain | R_{FO} Typical (k Ω) | R_{GO} Typical (k Ω) |
|------|--------------------------------------|--------------------------------------|
| 2 | 18 | 18 |
| 2.4 | 21 | 15 |
| 3 | 24 | 12 |
| 3.6 | 26 | 10 |
| 4.5 | 28 | 8 |
| 6 | 30 | 6 |
| 9 | 32 | 4 |

NOTE: R_O = open-loop output impedance = 675 Ω , typical at $f = 1\text{MHz}$, $I_{OUT} = 0$.

In addition to using its own internal gain setting resistors, R_{FO} and R_{GO} , the Output Amplifier may use external feedback resistors R_{FOEXT} and R_{GOEXT} , as shown in Figure 2–6. Table 2–2 details the bits used in Register 4 for the desired Output Amplifier gain configurations. To use the external feedback resistors, set GO2, GO1, and GO0 to all 1s. In addition to allowing external feedback resistors to be used, this configuration provides a handy mechanism for testing the Output Amplifier stability, even if internal gain settings are to be used. As shown in Figure 2–6, external feedback resistors R_{FOEXT} and R_{GOEXT} are both set to 18k Ω , equivalent to the typical resistor values used for an internal gain setting of 2. If V_{OUT} is biased to mid-scale (+2.5V for $V_{SA} = +5\text{V}$) through the Zero DAC and by setting $V_{DIFF} = 0\text{V}$, a signal generator may be used to inject a 200mV_{PP} square wave (1kHz) into the end of R_{GOEXT} and a response measured at V_{OUT} . This provides a transient response for the Output Amplifier in a given configuration. Standard stability transient response criteria for a dominant two-pole system may be used to determine suitable phase margin based upon the measured overshoot and ringing on V_{OUT} .

For low-supply applications, the minimum gain for the Output Amplifier is related to its IVR and output voltage swing. In Figure 2–7, the supply is lowered to +2.7V. The tested IVR of the Output Amplifier is 0V to $V_{SA}-1.5V$, as reflected in Figure 2–7. The output voltage swing is tested to be 0.1V to +2.6V for a 10k Ω load, as shown. This calculates to a minimum gain of 2.08. For best performance, the Output Amplifier should be scaled for a minimum gain of 2.4 for this application. Usually, this is only a factor at lower voltages but is easily checked for each individual application.

Figure 2–7. Output Amplifier Minimum Gain at Low Supply

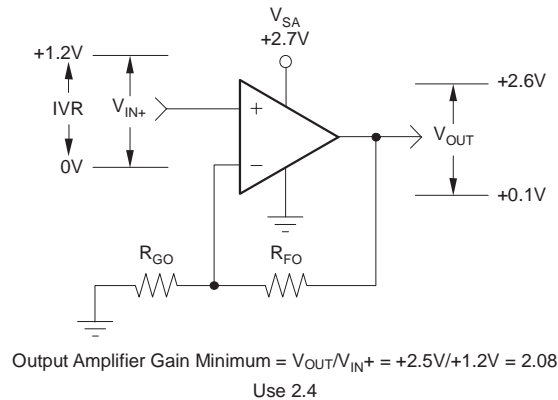

2.5 Reference Voltage

The PGA309 can be configured for use with an internal or external voltage reference. The reference voltage is used by the Zero DAC, Over/Under-Scale Limit, Coarse Offset Adjust DAC, Temp ADC, and Bridge Excitation Linearization Circuit. Figure 2–8 depicts the PGA309 reference circuit. If internal reference is selected, either 2.5V or 4.096V can be chosen. In this mode, a typically better than 2% initial accuracy, low drift, $\pm 10\text{ppm}/^\circ\text{C}$ reference is available for internal and external use. Up to 5mA can be supplied through the $\text{REF}_{\text{IN}}/\text{REF}_{\text{OUT}}$ pin in internal reference mode. If external reference mode is chosen, then an external reference from +2.0V to $+V_{\text{SA}}$ may be applied to the $\text{REF}_{\text{IN}}/\text{REF}_{\text{OUT}}$ pin. During power-on, the external reference mode is selected. Table 2–3 details the Register 3 bits (9:8) used for the reference mode selections.

Figure 2–8. PGA309 Reference Circuit

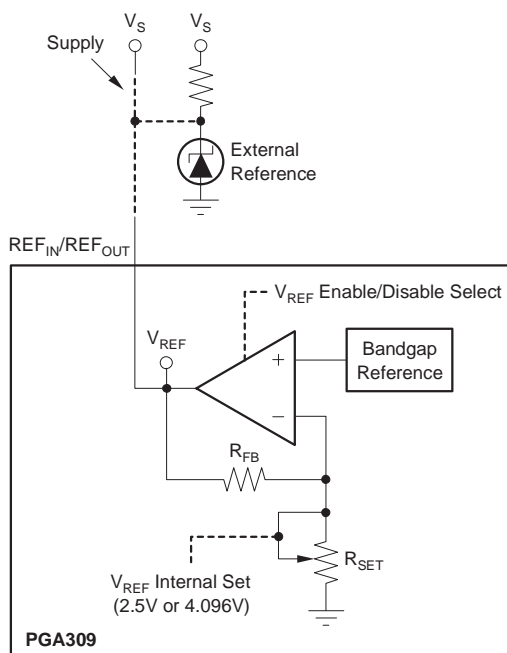



Table 2–3. Register 3 Reference Control Bits

| D9 | D8 | V_{REF} | Reference Configuration |
|----|-----|--|--|
| RS | REN | | |
| X | 0 | $\text{REF}_{\text{IN}}/\text{REF}_{\text{OUT}}$ | External Reference (disable internal reference) |
| 0 | 1 | 4.096V | Internal Reference |
| 1 | 1 | 2.5V | Internal Reference |

2.6 Linearization Function


Many bridge sensors have an inherently nonlinear output with applied pressure. Figure 2–9 illustrates a typical nonlinearity correction using the PGA309 linearization circuit.

Figure 2–9. Bridge Pressure Nonlinearity Correction

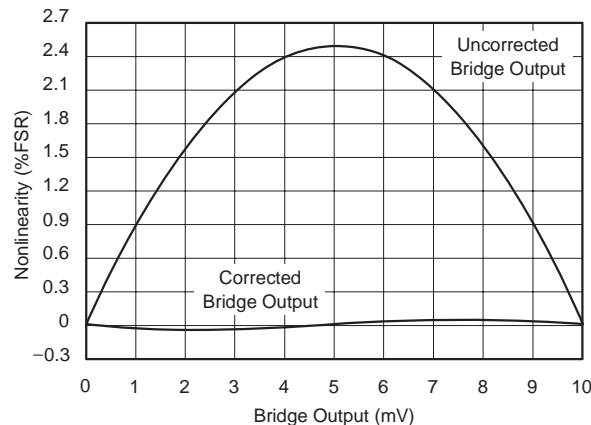

The PGA309 contains a dedicated circuit for sensor voltage excitation and linearization, as shown in Figure 2–10. The Linearization Circuit scales the selected V_{REF} and sums it together with a portion of the output voltage (V_{OUT}) through the feedback pin (V_{FB}) to compensate for the bow-shaped nonlinearity of the bridge sensor output versus pressure. Using this technique, it is possible to compensate for parabolic nonlinearity resulting in up to a 20:1 improvement over an uncompensated bridge output, as shown in Figure 2–9. K_{LIN} is a bipolar scale factor of V_{OUT} produced by the Lin DAC. K_{EXC} is a set attenuation factor of V_{REF} to allow for increases or decreases to V_{EXC} , as required. There are two ranges available in the Linearization Circuit, with a different respective range and a different respective fixed attenuation for K_{LIN} .

Figure 2–10. Bridge Excitation Linearization Circuit

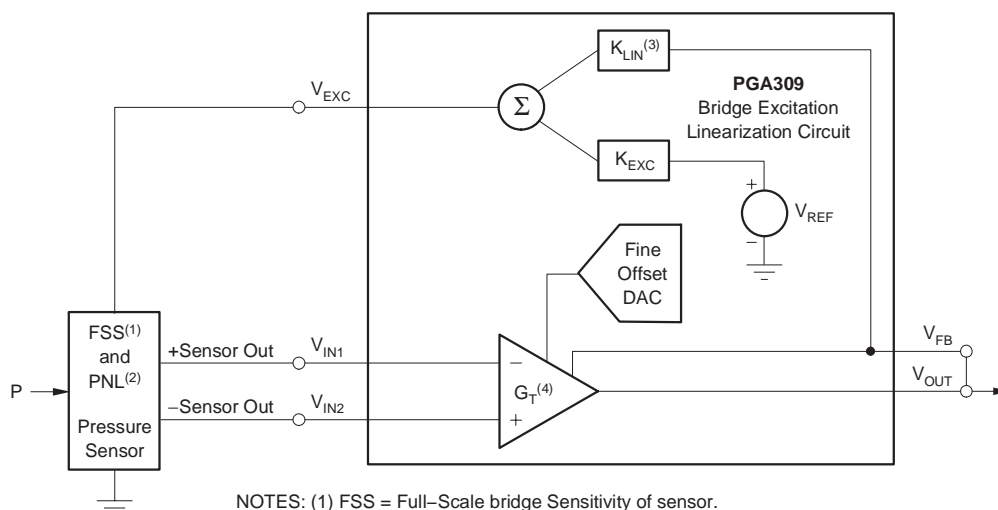

- NOTES: (1) FSS = Full-Scale bridge Sensitivity of sensor.
 (2) PNL = Pressure NonLinearity of sensor.
 (3) K_{LIN} = Linearization coefficient set by the Lin DAC.
 (4) G_T = (Front-End PGA Gain)(Gain DAC)(Output Amplifier Gain).


If no sensor voltage excitation linearization is needed, there are several options for the bridge excitation. In ratiometric systems, the bridge should be tied directly to V_{SA} . In systems that provide an external reference for V_{REF} , the sensor should be tied to this external sensor. For systems that use the PGA309 internal reference, it is recommended that V_{EXC} be used for sensor excitation, and Lin DAC be set to zero. The reason for this is to minimize any large current draws from the REFIN/REFOUT pin that could affect the internal VREF value used by the internal circuits.

In systems that do not use V_{EXC} , both the Lin DAC and V_{EXC} may be disabled by setting the appropriate Register 3 bits (10, 7:0) to '0'. This results in 50 μ A to 100 μ A of lower total quiescent current.

The typical bandwidth of the Linearization Circuit from the V_{FB} pin to V_{EXC} is 35kHz.

The output signal-dependence (V_{OUT} dependence) of the bridge excitation (V_{EXC}) adds a second-order term to the overall system transfer function (PGA309 + bridge sensor). The Lin DAC shown in Figure 2–11 scales a portion of V_{OUT} that is then summed with a scaled version of the reference voltage, V_{REF} . The Lin DAC code can be set to compensate for each individual bridge sensor nonlinearity. As illustrated in Figure 2–11, there are two ranges available in the PGA309 Linearization Circuit to accommodate a variety of sensor nonlinearities and V_{REF} combinations.

Figure 2–11. Linearization Circuit

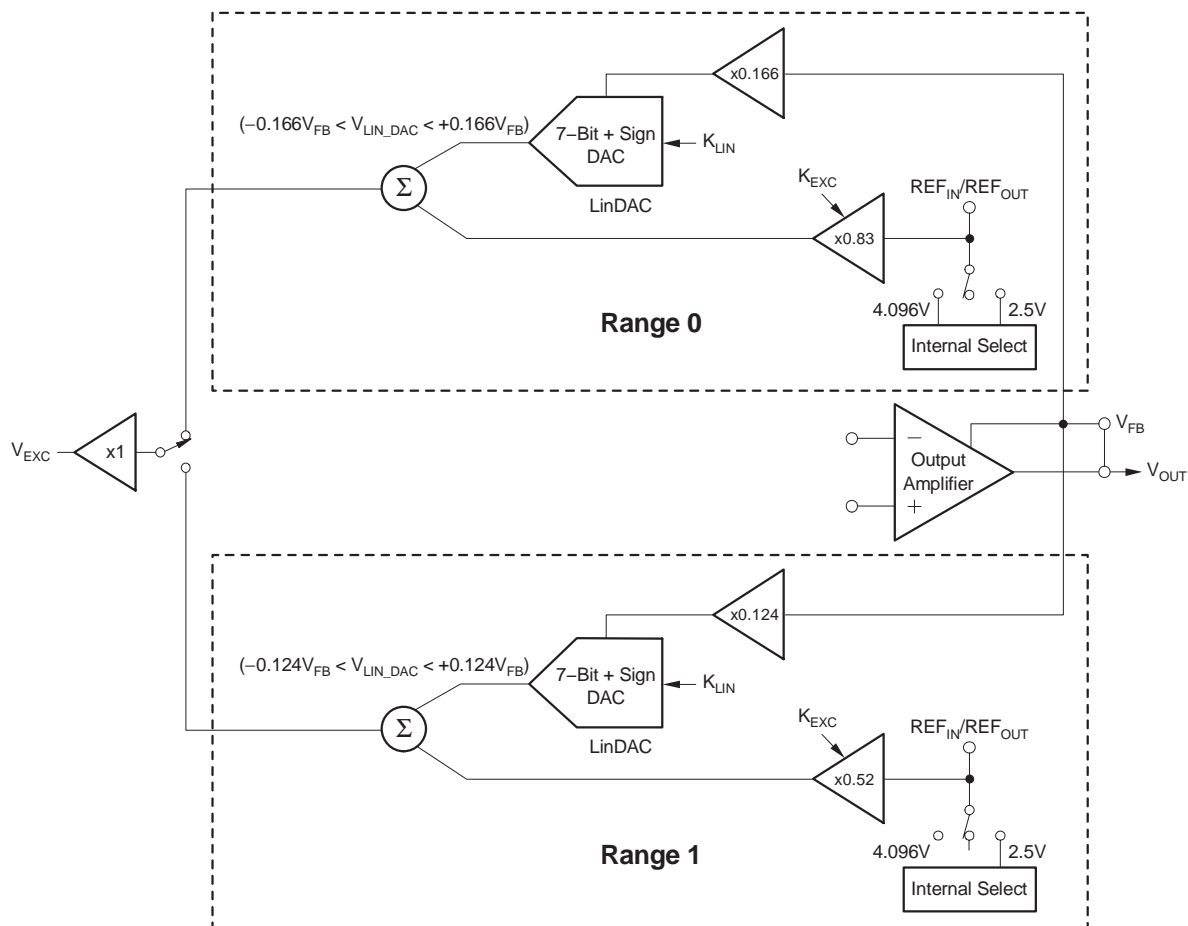

To determine the value for the Lin DAC, also called the linearization coefficient K_{LIN} , the nonlinearity of the bridge sensor with constant excitation voltage must be known. The PGA309 linearization circuitry can only compensate for the parabolic-shaped portions of a sensor's nonlinearity with applied pressure. This nonlinearity is assumed to be constant over temperature or the temperature variations are assumed to be an insignificant contribution to the system error budget. For the typical PGA309 application, the K_{LIN} factor is not adjusted with temperature changes. Optimum correction occurs when maximum deviation from a linear output occurs at mid-scale, as shown in Figure 2–12 and Figure 2–13. Sensors with nonlinearity curves similar to that of Figure 2–12, but not peaking at exactly mid-scale, can still be substantially improved. A sensor with an S-shaped nonlinearity curve (equal positive and negative nonlinearity) cannot be improved by using the PGA309 Linearization Circuit.

Figure 2–12. Bridge Output vs Pressure


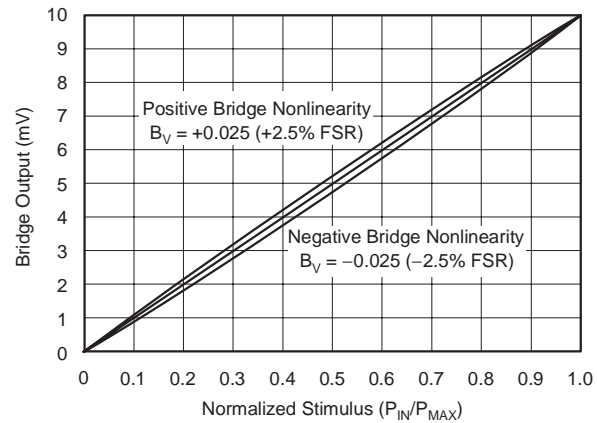


Figure 2–13. Bridge Nonlinearity (%FSR) vs Pressure

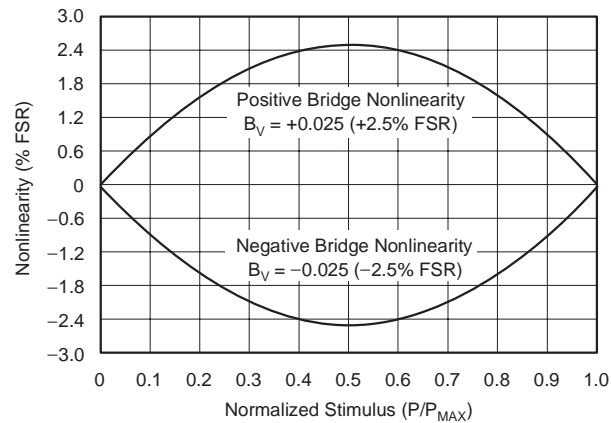

Either positive or negative bridge nonlinearities can be compensated by the proper setting of the Lin DAC polarity. To correct for positive bridge nonlinearity (upward bowing—shown in Figure 2–13), the Lin DAC value should be set positive. For negative bridge nonlinearity (downward bowing—shown in Figure 2–13), set the Lin DAC value negative.

The excitation voltage (V_{EXC}) directly scales the bridge sensor output, and therefore, must be accounted for in the gain and offset setting of the PGA309 when the linearization circuit is used.

Key definitions and design equations for the linearization circuit are given in the following sections.

2.6.1 System Definitions

B_V: Bridge Nonlinearity with Applied Pressure. Maximum error at mid-scale input range given as a decimal equivalent of % of full-scale range (%FSR). For Example, %FS: +2.5% FS = 0.025, -2.5% = -0.025.

FSS: Full-Scale Bridge Sensitivity for Sensor at P_{MAX} (i.e., 5mV/V)

G_L: Total PGA309 Gain of V_{OUT}/V_{IN} when using the Linearization Circuit.

G_T: Total PGA309 Gain of V_{OUT}/V_{IN}.

G_T = (Front-End PGA Gain)(Gain DAC)(Output Amplifier Gain).

K_{EXC}: PGA Excitation Coefficient. Scale factor on V_{REF}.

K_{LIN}: PGA309 Linearization Coefficient

K_P: Pressure Constant. Converts linear input pressure to nonlinear pressure detected by sensor. Referenced to full-scale input pressure.

P: Pressure Input to Sensor

P_{MIN}: Minimum Sensor Input Pressure

P_{MAX}: Maximum Sensor Input Pressure

P_{NL}: Nonlinear Pressure Output of Bridge with Linear Pressure Input P

V_{EXC}: Bridge Voltage Excitation (generated by PGA309 based on V_{REF}, K_{LIN}, K_{EXC}, V_{OUT})

V_{OUT MIN}: Minimum PGA309 V_{OUT} Voltage for P_{MIN} Bridge Sensor Input

V_{OUT MAX}: Maximum PGA309 V_{OUT} Voltage for P_{MAX} Bridge Sensor Input

V_{REF}: PGA309 Reference Voltage

2.6.2 Key Linearization Design Equations

The focus of this section is to define the design equations used to scale the PGA309 when using the Linearization Circuit.

Equation 2–1. Nonlinear Pressure Conversion for Bridge Sensor Parabolic Nonlinearity
(B_V = positive for a positive parabolic nonlinearity, B_V = negative for a negative parabolic nonlinearity; see Figure 2–13)

$$PNL = P + 4(B_V) \cdot P_{MAX} \cdot \left[\left(\frac{P}{P_{MAX}} \right) - \left(\frac{P}{P_{MAX}} \right)^2 \right]$$

Equation 2–2. Pressure Constant (PNL referenced to full-scale input pressure)

$$K_P = \frac{PNL}{P_{MAX}}$$

$$K_P = \frac{\left(P + 4(B_V) \cdot P_{MAX} \cdot \left[\left(\frac{P}{P_{MAX}} \right) - \left(\frac{P}{P_{MAX}} \right)^2 \right] \right)}{P_{MAX}}$$

Equation 2–3. Linearization Coefficient

$$K_{LIN} = \frac{4 \cdot B_V \cdot V_{REF} \cdot K_{EXC}}{(V_{OUT MAX} - V_{OUT MIN}) - 2 \cdot B_V \cdot (V_{OUT MAX} + V_{OUT MIN})}$$

Equation 2–4. Total PGA309 Gain Required When Using Linearization Circuit

$$G_L = \frac{(V_{OUT MAX} - V_{OUT MIN})}{(V_{REF} \cdot K_{EXC} \cdot FSS) + (K_{LIN} \cdot V_{OUT MAX} \cdot FSS)}$$

Equation 2–5. PGA309 V_{OUT}

$$V_{OUT} = \frac{(FSS \cdot G_L \cdot K_P \cdot V_{REF} \cdot K_{EXC}) + V_{OUT MIN}}{1 - (FSS \cdot G_L \cdot K_P \cdot K_{LIN})}$$

Equation 2–6. PGA309 V_{EXC}

$$V_{EXC} = V_{REF} \cdot K_{EXC} + K_{LIN} \cdot V_{OUT}$$

Equation 2–7. Lin DAC Counts Conversion

$$\text{Decimal \# Counts} = \frac{|K_{LIN}|}{(\text{Full-ScaleRatio}/127)}$$

where Full-Scale Ratio = 0.166 (Range 0) or 0.124 (Range 1)

Example 2–2. Lin DAC Counts Conversion

Given: Range 0: $-0.166V_{FB} < \text{Lin DAC} < +0.166V_{FB}$
 Find: Lin DAC value for $K_{LIN} = -0.082$
 Solution:
 1) Absolute value of $K_{LIN} = |-0.082| = 0.082$
 2) Decimal # Counts = $0.082 / (0.166/127) = 62.7349$
 3) Use 63 counts $\rightarrow 3Fh \rightarrow 0011\ 1111$
 4) However, -0.082 is needed. Add 1 in the sign bit (MSB, Bit 7) for negative ratio
 5) Final Lin DAC setting: $1011\ 1111 \rightarrow BFh$

2.6.3 Key Ideal Design Equations

Equation 2–8. Ideal Gain, G

$$G_{IDEAL} = \frac{V_{OUT\ MAX} - V_{OUT\ MIN}}{V_{REF} \cdot FSS}$$

Equation 2–9. V_{OUT} Ideal as a Function of Pressure, P

$$V_{OUT\ IDEAL} = FSS \cdot G_{IDEAL} \cdot \left(\frac{P}{P_{MAX}} \right) \cdot V_{REF} + V_{OUT\ MIN}$$

Equation 2–10. Full-Scale Range of Output

$$FSR = V_{OUT\ MAX} - V_{OUT\ MIN}$$


Equation 2–11. V_{OUT} Error (%FSR).

$$V_{OUT\ ERR_FSR} = \left(\frac{V_{OUT} - V_{OUT\ IDEAL}}{FSR} \right) \cdot 100$$

Example 2–3. Linearization Design

| System Inputs | | Value | | Units | |
|---|----------------|-------------------------|-------------------------|-------------------------------|----------------------------------|
| P _{MIN} | | 0 | | psi | |
| P _{MAX} | | 100 | | psi | |
| FSS | | 0.005 | | V/V | |
| B _v | | +0.025 (+0.025 = +2.5%) | | %FSR | |
| V _{OUT MAX} | | 4.5 | | V | |
| V _{OUT MIN} | | 0.5 | | V | |
| V _{REF} | | 5 | | V | |
| K _{EXC} | | 0.83 | | | |
| PGA309 Calculations for Using Linearization Circuit | | | | | |
| K _{LIN} | | +0.110667 | | V/V | |
| G _L | | 172.117 | | V/V | |
| V _{OUT IDEAL} | | | | | |
| G _{IDEAL} | | 160 | | V/V | |
| FSR | | 4 | | V | |
| P (psi) | K _P | V _{OUT} (V) | V _{EXC} (V) | V _{OUT IDEAL} (V) | V _{OUT Error} (%FSR) |
| 0 | 0.0000 | 0.5000 | 4.2053 | 0.5000 | 0 |
| 10 | 0.1090 | 0.8986 | 4.2494 | 0.9000 | −0.03464537 |
| 20 | 0.2160 | 1.2981 | 4.2937 | 1.3000 | −0.04667445 |
| 30 | 0.3210 | 1.6983 | 4.3380 | 1.7000 | −0.04126142 |
| 40 | 0.4240 | 2.0990 | 4.3823 | 2.1000 | −0.02381898 |
| 50 | 0.5250 | 2.5000 | 4.4267 | 2.5000 | 1.1102E−14 |
| 60 | 0.6240 | 2.9010 | 4.4710 | 2.9000 | 0.02430134 |
| 70 | 0.7210 | 3.3017 | 4.5154 | 3.3000 | 0.04294918 |
| 80 | 0.8160 | 3.7020 | 4.5597 | 3.7000 | 0.04956629 |
| 90 | 0.9090 | 4.1015 | 4.6039 | 4.1000 | 0.03753519 |
| 100 | 1.0000 | 4.5000 | 4.6480 | 4.5000 | 2.2204E−14 |

Figure 2–14. Corrected Bridge Parabolic Nonlinearity vs Pressure

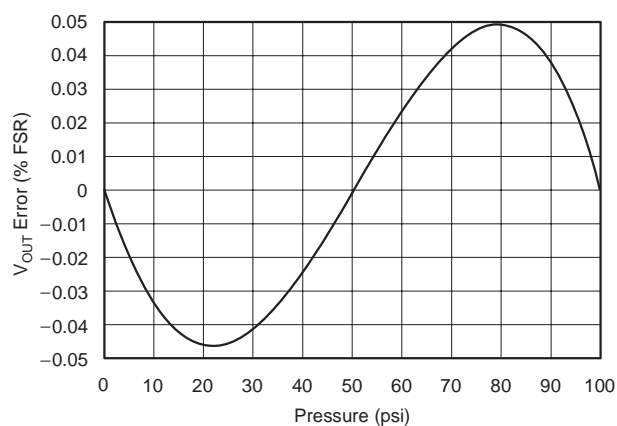

In each end application, the Linearization Circuit limits should be checked for operation within the allowed range.

Table 2–4 and Table 2–5 illustrate the linearization range for several typical system applications. These tables account for the internal limits of the PGA309 linearization circuit and assume that V_{OUT} scaling is to account for over-scale and under-scale limits and fault detection. For specific end applications not listed, the following equations may be used to calculate critical design values, once the system design choices for V_{REF} , $V_{OUT\ MAX}$, $V_{OUT\ MIN}$ and linearization range, are made:

- 1) $V_{EXC\ MAX}$: Use Equation 2–6 at $V_{OUT\ MAX}$
- 2) $V_{EXC\ MIN}$: Use Equation 2–6 at $V_{OUT\ MIN}$
- 3) B_V (maximum nonlinearity that can be compensated): Use $K_{LIN+MAX}$ to calculate $+B_V$ and $K_{LIN-MAX}$ to calculate $-B_V$ by Equation 2–3 solved for B_V as:

$$B_V = \frac{V_{OUT\ MAX} - V_{OUT\ MIN}}{\left(\frac{4 \cdot V_{REF} \cdot K_{EXC}}{K_{LIN}} \right) + 2 \cdot (V_{OUT\ MAX} + V_{OUT\ MIN})}$$

For Range 0: $K_{LIN-MAX} = -0.166$
 $K_{LIN+MAX} = +0.166$

For Range 1: $K_{LIN-MAX} = -0.124$
 $K_{LIN+MAX} = +0.124$

- 4) $V_{Lin\ DAC\ MAX} = ((V_{REF}/4) - V_{OUT\ MAX}/10) \geq 300mV$
- 5) $V_{EXC\ MAX} \leq V_{SA} - 0.5V$
- 6) $K_{LIN-MAX} \leq K_{LIN} \leq K_{LIN+MAX}$

When using the Linearization Circuit, to ensure that the bridge sensor output common-mode voltage remains within the PGA309 input specifications, Equation 2–6 on page 2-19 can be used to calculate V_{EXC} at full-scale signal ($V_{OUT\ MAX}$). The common-mode voltage (V_{CM}) of the bridge sensor output is one-half of V_{EXC} if no common-mode or temperature sensing additional resistor is used in series with the bridge sensor.

During the sensor calibration process using the PGA309, a two-step process can be employed. First, the nonlinearity of the sensor bridge is measured with an initial gain and offset and with $K_{LIN} = 0$ (Lin DAC set to Zero). Using the resulting sensor nonlinearity (B_V), values for K_{LIN} , Gain, and Offset are calculated. A second calibration measurement can be taken to adjust K_{LIN} , to account for any offsets and mismatches in the Linearization Circuit. This calibration procedure is most easily performed using the PGA309 Designer's Kit and associated software and calibration spreadsheets, which can be downloaded from www.ti.com.

Table 2–4. Range 0—Typical System Applications and Maximum Nonlinearity Correction

| $V_{SA\ MIN}$ (V) | $V_{SA\ MAX}$ (V) | V_{REF} (V) | ADC REF (V) | $V_{OUT\ MIN}$ (V) | $V_{OUT\ MAX}$ (V) | RANGE 0 + $B_V\ MAX$ | | | | RANGE 0 – $B_V\ MAX$ | | | | LinDAC MAX > 0.3V? (V) |
|----------------------|----------------------|------------------|-------------------|-----------------------|-----------------------|-----------------------------|-----------------------|-----------------------|-----------------------|-------------------------------|-----------------------|-----------------------|--------|---------------------------------|
| | | | | | | + B_V (0.025= 2.5%) | $V_{EXC\ MAX}$ (V) | $V_{EXC\ MIN}$ (V) | G_T | – B_V (–0.025= –2.5%) | $V_{EXC\ MAX}$ (V) | $V_{EXC\ MIN}$ (V) | G_T | |
| 2.7 | 5.5 | 2.5 | 2.5 | 0.175 | 2.225 | 0.0136 ⁽³⁾ | 2.202 ⁽³⁾ | 2.085 ⁽³⁾ | 186.21 ⁽³⁾ | –0.0454 | 2.046 | 1.706 | 240.38 | 0.4025 |
| 2.7 | 5.5 | 2.5 | 2.048 | 0.123 | 1.761 | 0.0305 | 2.367 | 2.095 | 138.38 | –0.0354 | 2.055 | 1.783 | 183.77 | 0.4489 |
| 4.5 | 5.5 | 4.096 | 2.5 | 0.175 | 2.175 | 0.0231 | 3.761 | 3.429 | 106.36 | –0.0259 | 3.371 | 3.039 | 131.64 | 0.8065 |
| 4.5 | 5.5 | 4.096 | 4.096 | 0.246 | 3.564 | 0.0371 | 3.991 | 3.441 | 166.26 | –0.0447 | 3.359 | 2.808 | 236.32 | 0.6676 |
| 4.5 | 5.5 | 4.096 | 2.048 | 0.143 | 1.782 | 0.0191 | 3.695 | 3.423 | 88.70 | –0.0210 | 3.376 | 3.104 | 105.61 | 0.8458 |
| 4.7 | 5.5 | 4.5 | 4.5 | 0.27 | 4.185 | 0.0275 ⁽³⁾ | 4.204 ⁽³⁾ | 3.765 ⁽³⁾ | 186.26 ⁽³⁾ | –0.0483 | 3.690 | 3.040 | 257.54 | 0.7065 |
| 5 | 5.5 | 5 | 5 | 0.3 | 4.65 | 0.0188 ⁽³⁾ | 4.499 ⁽³⁾ | 4.173 ⁽³⁾ | 193.39 ⁽³⁾ | –0.0483 | 4.100 | 3.378 | 257.54 | 0.785 |

PGA309
 V_{SA}
Operating
Range

PGA309
 V_{REF}

System
ADC REF

PGA309
 V_{OUT}
Linear
Range

PGA309
+ $B_V\ MAX$

PGA309
 V_{EXC} Range
for + $B_V\ MAX$

PGA309 Gain
 $V_{OUT}/V_{DIFF\ IN}$
for + $B_V\ MAX$

PGA309
– $B_V\ MAX$

PGA309
 V_{EXC} Range
for – $B_V\ MAX$

PGA309 Gain
 $V_{OUT}/V_{DIFF\ IN}$
for – $B_V\ MAX$

PGA309
LinDAC
Max
Check

Assumes: 1) Over-scale and under-scale limits and fault detection desired.
 2) FSS used to calculate a representative gain value (G_T) for completeness.
 3) Limited by $V_{EXC\ MAX} \leq (V_{SA} - 0.5V)$.

NOTE: Range 0, $K_{EXC} = 0.83$, $K_{LIN\ -MAX} = -0.166$, $K_{LIN\ +MAX} = 0.166$, $FSS = 0.005V/V$

Table 2–5. Range 1—Typical System Applications and Maximum Nonlinearity Correction

| $V_{SA\ MIN}$ (V) | $V_{SA\ MAX}$ (V) | V_{REF} (V) | ADC REF (V) | $V_{OUT\ MIN}$ (V) | $V_{OUT\ MAX}$ (V) | RANGE 1 + $B_V\ MAX$ | | | | RANGE 1 – $B_V\ MAX$ | | | | LinDAC MAX > 0.3V? (V) |
|----------------------|----------------------|------------------|-------------------|-----------------------|-----------------------|-----------------------------|-----------------------|-----------------------|--------|-------------------------------|-----------------------|-----------------------|--------|---------------------------------|
| | | | | | | + B_V (0.025= 2.5%) | $V_{EXC\ MAX}$ (V) | $V_{EXC\ MIN}$ (V) | G_T | – B_V (–0.025= –2.5%) | $V_{EXC\ MAX}$ (V) | $V_{EXC\ MIN}$ (V) | G_T | |
| 2.7 | 5.5 | 2.5 | 2.5 | 0.175 | 2.225 | 0.0439 | 1.576 | 1.322 | 260.17 | –0.0552 | 1.278 | 1.024 | 400.35 | 0.4025 |
| 2.7 | 5.5 | 2.5 | 2.048 | 0.123 | 1.761 | 0.0358 | 1.518 | 1.315 | 215.76 | –0.0429 | 1.285 | 1.082 | 302.87 | 0.4489 |
| 4.5 | 5.5 | 4.096 | 2.5 | 0.175 | 2.175 | 0.0272 | 2.400 | 2.152 | 166.69 | –0.0312 | 2.108 | 1.860 | 215.03 | 0.8065 |
| 4.5 | 5.5 | 4.096 | 4.096 | 0.246 | 3.564 | 0.0435 | 2.572 | 2.160 | 258.02 | –0.0543 | 2.099 | 1.688 | 393.13 | 0.6676 |
| 4.5 | 5.5 | 4.096 | 2.048 | 0.143 | 1.782 | 0.0226 | 2.351 | 2.148 | 139.44 | –0.0253 | 2.112 | 1.909 | 171.72 | 0.8458 |
| 4.7 | 5.5 | 4.5 | 4.5 | 0.27 | 4.185 | 0.0464 | 2.859 | 2.373 | 273.88 | –0.0588 | 2.307 | 1.821 | 429.97 | 0.7065 |
| 5 | 5.5 | 5 | 5 | 0.3 | 4.65 | 0.0464 | 3.177 | 2.637 | 273.88 | –0.0588 | 2.563 | 2.023 | 429.97 | 0.785 |

PGA309
 V_{SA}
Operating
Range

PGA309
 V_{REF}

System
ADC REF

PGA309
 V_{OUT}
Linear
Range

PGA309
+ $B_V\ MAX$

PGA309
 V_{EXC} Range
for + $B_V\ MAX$

PGA309 Gain
 $V_{OUT}/V_{DIFF\ IN}$
for + $B_V\ MAX$

PGA309
– $B_V\ MAX$

PGA309
 V_{EXC} Range
for – $B_V\ MAX$

PGA309 Gain
 $V_{OUT}/V_{DIFF\ IN}$
for – $B_V\ MAX$

PGA309
LinDAC
Max
Check

Assumes: 1) Over-scale and under-scale limits and fault detection desired.
 2) FSS used to calculate a representative gain value (G_T) for completeness.

NOTE: Range 1, $K_{EXC} = 0.52$, $K_{LIN\ -MAX} = -0.124$, $K_{LIN\ +MAX} = 0.124$, $FSS = 0.005V/V$

2.7 Temperature Measurement

The center of the PGA309 temperature measurement circuitry is the Temp ADC. The Temp ADC and its associated PGA, input mux, and REF mux provide a flexible and configurable temperature sensing block for reading either on-chip or external temperatures. Figure 2–15 illustrates the PGA309 temperature sense block.

The internal temperature sensing is accomplished by using on-chip diode junctions. The Internal Temperature Mode is configured through setting the bits in Register 6 to the values shown in Table 2–6 and Table 2–7. The Temp ADC output is presented in Register 0 in 12-bit + sign extended, right-justified, two's complement data format (see Table 2–8). The resolution, for the Temp ADC in Internal Temperature Mode, is $0.0625^{\circ}\text{C}/\text{count}$ and the accuracy is $\pm 2^{\circ}\text{C}$. The temperature accuracy is a relative error that is calibrated out with the PGA309 + sensor calibration to the accuracy of the calibration temperature measurement equipment.

Figure 2–15. Temperature Sense Block

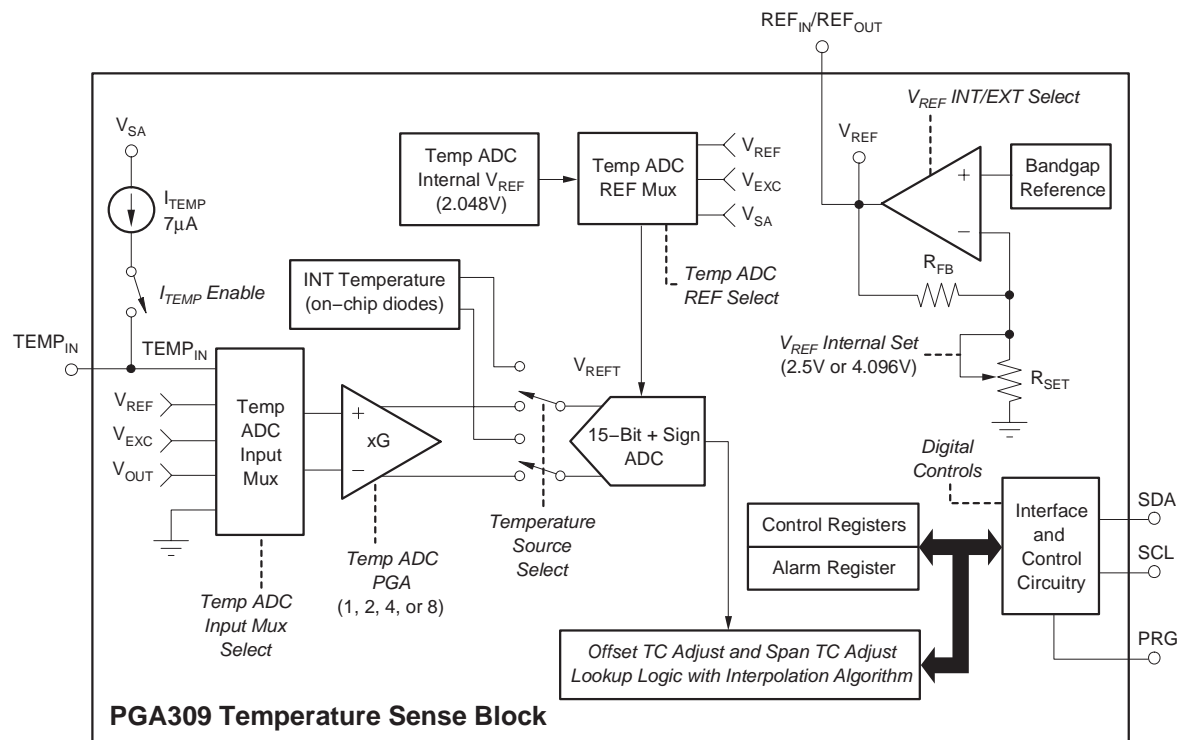


Table 2–6. Internal Temperature Mode Configuration—Register 6

| Bit | Bit Name | Bit State | Configuration |
|-----|----------|-----------|---|
| 15 | RFB | 0 | Reserved Factory Bit—set to zero for proper operation |
| 14 | RFB | 0 | Reserved Factory Bit—set to zero for proper operation |
| 13 | ADC2X | 0 | Unused for Internal Temperature Mode; set to zero. |
| 12 | ADCS | 0 | |
| 11 | ISEN | 0 | |
| 10 | CEN | 1 | |
| 9 | TEN | 1 | Internal Temperature Mode selected |
| 8 | AREN | 0 | Unused for Internal Temperature Mode; set to zero. |
| 7 | RV1 | 0 | |
| 6 | RV0 | 0 | |
| 5 | M1 | 0 | |
| 4 | M0 | 0 | |
| 3 | G1 | 0 | |
| 2 | G0 | 0 | |
| 1 | R1 | 1 | See Table 2–7 |
| 0 | R0 | 1 | See Table 2–7 |

Table 2–7. Internal Temperature Mode Resolution—Register 6

| Temp ADC Resolution (Conversion time) Select | | |
|--|----|--|
| R1 | R0 | TEN = '1' |
| 0 | 0 | 9-Bit + Sign, Right-Justified, Sign-Extended, Two's Complement, 0.5°C (3ms) |
| 0 | 1 | 10-Bit + Sign, Right-Justified, Two's Complement, Sign-Extended, 0.25°C (6ms) |
| 1 | 0 | 11-Bit + Sign, Right-Justified, Two's Complement, Sign-Extended, 0.125°C (12ms) |
| 1 | 1 | 12-Bit + Sign, Right-Justified, Two's Complement, Sign-Extended, 0.0625°C (24ms) |

Table 2–8. Internal Temperature Mode Data —Register 0

| Temperature (°C) | Digital Output (Binary) AD15.....AD0 | Digital Output (Hex) |
|---------------------|---|-------------------------|
| 128 | 0000 1000 0000 0000 | 0800 |
| 127.9375 | 0000 0111 1111 1111 | 07FF |
| 100 | 0000 0110 0100 0000 | 0640 |
| 80 | 0000 0101 0000 0000 | 0500 |
| 75 | 0000 0100 1011 0000 | 04B0 |
| 50 | 0000 0011 0010 0000 | 0320 |
| 25 | 0000 0001 1001 0000 | 0190 |
| 0.25 | 0000 0000 0000 0100 | 0004 |
| 0.0 | 0000 0000 0000 0000 | 0000 |
| –0.25 | 1111 1111 1111 1100 | FFFC |
| –25 | 1111 1110 0111 0000 | FE70 |
| –55 | 1111 1100 1001 0000 | FC90 |
| –128 | 1111 1000 0000 0000 | F800 |

NOTE: The resolution for the Temp ADC in Internal Temperature Mode is 0.0625°C/count.

For Positive Temperatures (for example, 50°C):

Two's Complement is not performed on positive numbers. Therefore, simply convert the number to binary code with the 16-bit, right-justified format, and MSB = 0 to denote a positive sign. Extend this sign into the upper 4 bits.

Example: $(50^{\circ}\text{C}) / (0.0625^{\circ}\text{C/count}) = 800 = 320\text{h} = 0011\ 0010\ 0000$

Two's Complement 16-bit, right-justified, sign-extended format =
0000 0011 0010 0000 = 0320h.

For Negative Temperatures (for example, –25°C):

Generate the Two's Complement of a negative number by complementing the absolute value binary number and adding 1. Extend the sign, denoting a negative number with MSB = 1. Extend the sign to the upper 4 bits to form the 16-bit word.

Example: $(|-25^{\circ}\text{C}|) / (0.0625^{\circ}\text{C/count}) = 400 = 190\text{h} = 0001\ 1001\ 0000$

Two's Complement format: 1110 0111 0000


Extend the sign and create the 16-bit word: 1111 1110 0111 0000 = FE70h

There are several configurations possible for the Temp ADC when External Temperature Mode is selected. In this mode, the $TEMP_{IN}$ pin is read to determine temperature. $TEMP_{IN}$ may be referenced to GND, V_{EXC} , or V_{REF} . V_{OUT} may also be selected to be read relative to GND through the Temp ADC. Figure 2–16 shows the allowable Temp ADC input mux configurations.

Note:

In Configuration #3, the V_{OUT} pin is read, not the V_{FB} pin. Therefore, this value may be different from $V_{OUT\ FILT}$. Refer to Figure 1–1 and Figure 2–5.

Figure 2–16. Temp ADC Input Mux Options

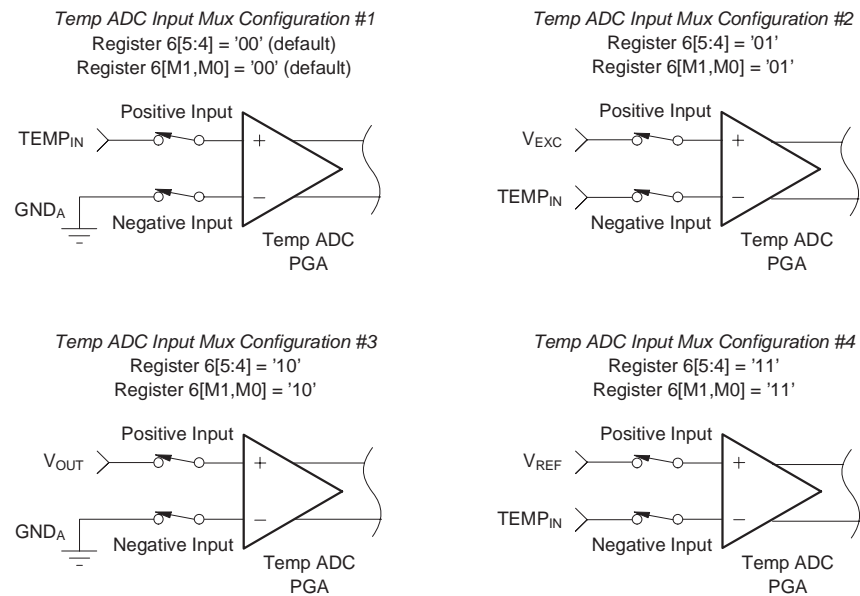


The Temp ADC PGA has four available gain settings that are detailed in Table 2–9.

Table 2–9. Temp ADC PGA Gain Select—Register 6

| G1 [3] | G0 [2] | Temp ADC PGA Gain |
|-----------|-----------|----------------------|
| 0 | 0 | 1 |
| 0 | 1 | 2 |
| 1 | 0 | 4 |
| 1 | 1 | 8 |

The temperature sense block also contains a $7\mu\text{A}$ (typ) current source, I_{TEMP} , that is enabled by a logic '1' written to Register 6, bit 11, I_{SEN} . A logic '0' disables I_{TEMP} from the TEMP_{IN} pin. This current source can be used to excite an external resistive temperature device or diode for bridge sensor temperature measurement, as shown in Figure 2–17.

Figure 2–17. I_{TEMP} for External Temperature Measurement

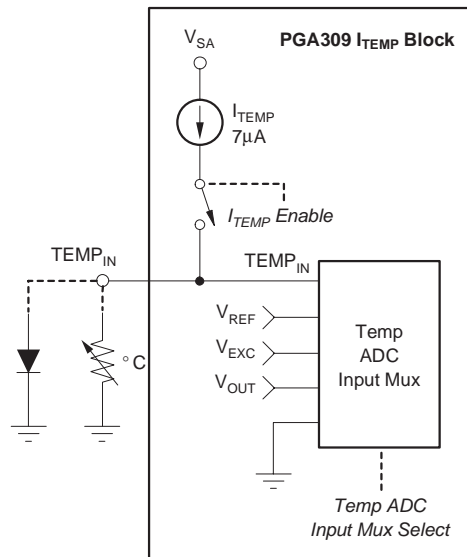

The Temp ADC has several choices for its reference voltage for analog-to-digital conversions when used in External Temperature mode; these are illustrated in Table 2–10 and Figure 2–15. The resolution of the Temp ADC when used in External Temperature mode is also register-selectable (see Table 2–11).

Table 2–10. Temp ADC Reference Select—Register 6

| AREN [8] | RV1 [7] | RV0 [6] | Temp ADC Reference (V_{REFT}) |
|-------------|------------|------------|---|
| 0 | 0 | 0 | V_{REF} |
| 0 | 0 | 1 | V_{EXC} |
| 0 | 1 | 0 | V_{SA} |
| 0 | 1 | 1 | Factory Reserved |
| 1 | X | X | Temp ADC Internal REF (2.048V) |

NOTE: 'X' = don't care.

Table 2–11. Temp ADC⁽¹⁾ Resolution (Conversion time)—Register 6

| R1 [1] | R0 [0] | External Signal Mode [TEN=0], External Reference [AREN=0] | External Signal Mode [TEN=0], Internal Reference [2.048V, AREN=1] |
|-----------|-----------|--|--|
| 0 | 0 | 11-Bit + Sign, Right-Justified, Sign-Extended (6ms) | 11-Bit + Sign, Right-Justified, Sign-Extended (8ms) |
| 0 | 1 | 13-Bit + Sign, Right-Justified, Sign-Extended (24ms) | 13-Bit + Sign, Right-Justified, Sign-Extended (32ms) |
| 1 | 0 | 14-Bit + Sign, Right-Justified, Sign-Extended (50ms) | 14-Bit + Sign, Right-Justified, Sign-Extended (64ms) |
| 1 | 1 | 15-Bit + Sign, Right-Justified, Sign-Extended (100ms) | 15-Bit + Sign, Right-Justified, Sign-Extended (128ms) |

1) Temp ADC uses Two's Complement data format.

2.7.1 Temp ADC Start-Convert Control


The Temp ADC has two conversion modes: Single and Continuous. In Continuous Conversion mode (CEN = '1'), the Temp ADC initiates the next conversion cycle immediately after a conversion is complete. In Single Conversion mode (CEN = '0') the Temp ADC start-convert bit (ADCS) acts as a start-convert/busy bit and must be set to '1' before a conversion is initiated. Setting ADCS to '1' occurs when the register configuration section of the EEPROM (part one) contains ADCS = '1' and the EEPROM is read. Furthermore, ADCS will be reset to '1' for each successive EEPROM read. After ADCS is set to '1', it will be a '1' if read immediately and can be polled until it returns to a '0', indicating the conversion is complete. The Start-Convert modes are shown in Table 2–12.

Table 2–12. Temp ADC Start-Convert Control—Register 6

| CEN [10] | ADCS [12] | Conversion Mode | Comments |
|----------|-----------|-----------------|--|
| 0 | 0 | Single | Temp ADC in standby mode—no conversions. |
| 0 | 1 | Single | Temp ADC starts conversion and ADCS acts as busy bit with it changing to a '0' at end of conversion. |
| 1 | X | Continuous | ADCS bit exercises no control—typically ADCS = '1' since conversions are continuous. |

In Figure 2–18 continuous start-convert control is selected. After an initial power-on reset timeout of typically 25ms, the register configuration section of the EEPROM (part one) is read. Immediately after this, a Temp ADC conversion is started. At the end of this first conversion, the temperature coefficients section of the EEPROM (part two) are read, and Zero and Gain DAC settings are adjusted. Since CEN = '1', the end of each conversion will start the next conversion. After the temperature coefficients section of the EEPROM (part two) has been read, the register configuration values are read. Note that reading of the second half of the EEPROM (temperature coefficients) is triggered by a valid register configuration read of the EEPROM. This operation yields the most temperature updates over a given time period.

Figure 2–18. Temp ADC Continuous Start-Convert Control

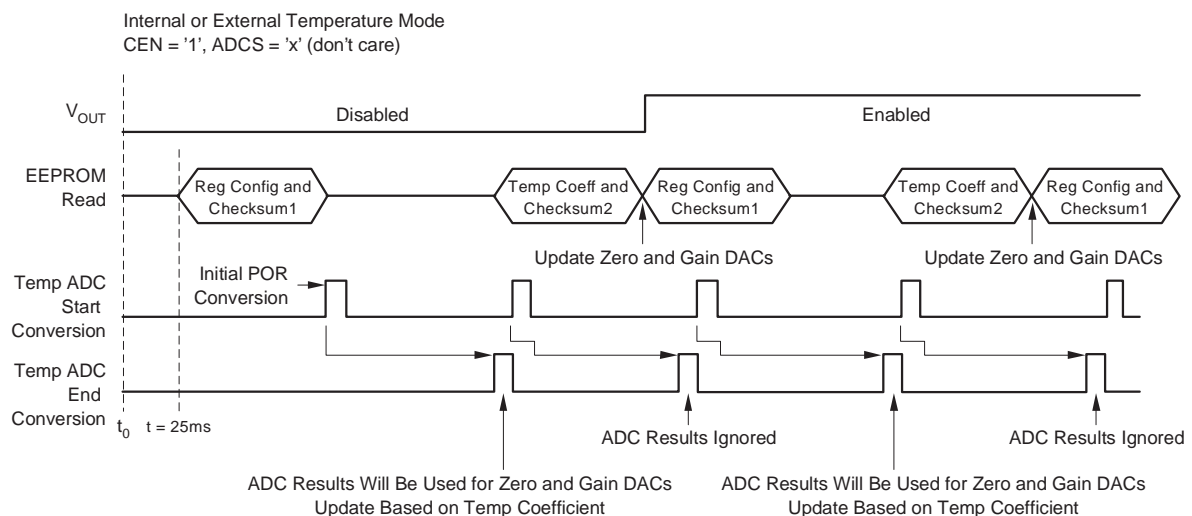

In Figure 2–19, Single Conversion mode is selected (CEN = '0'). After an initial power-on reset timeout of typically 25ms, the register configuration (part one) of the EEPROM is read. Immediately after this, a Temp ADC conversion is started if CEN = '0' and ADCS = '1'. At the end of this first conversion, the temperature coefficients (part two) of the EEPROM are read, and Zero and Gain DAC settings are adjusted. When CEN = '0' and ADCS = '1', a new start conversion occurs only after reading the register configuration part of the EEPROM. At the end of this conversion, the second part of the EEPROM (temperature coefficients) is read, the Gain and Zero DAC temperature calculations are done, and each respective DAC updated. Note that in the Single Start-Convert mode, if CEN = '0' and ADCS = '0' (no Temp ADC conversions), the PGA309 will wait 25ms after power-on, read the register configuration part of the EEPROM, and without an ADC conversion, read the Lookup Table and calculate Gain and Zero DAC values. These values are based on the current ADC output register (all zero on power-up). The PGA309 output will then be enabled and will wait about 25ms, and read the register configuration part of the EEPROM. The output remains enabled with a continuous loop of reading the register configuration part of the EEPROM, waiting 25ms, and read again.

One final control option for External Temperature Mode is the ADC2X bit, Register 6 bit [13]. This bit allows the conversion speed of the Temp ADC to be increased for external temperature readings only.

Table 2–13 shows the typical settings and the effect of the ADC2X bit.

Figure 2–19. Temp ADC Single Start-Convert Control

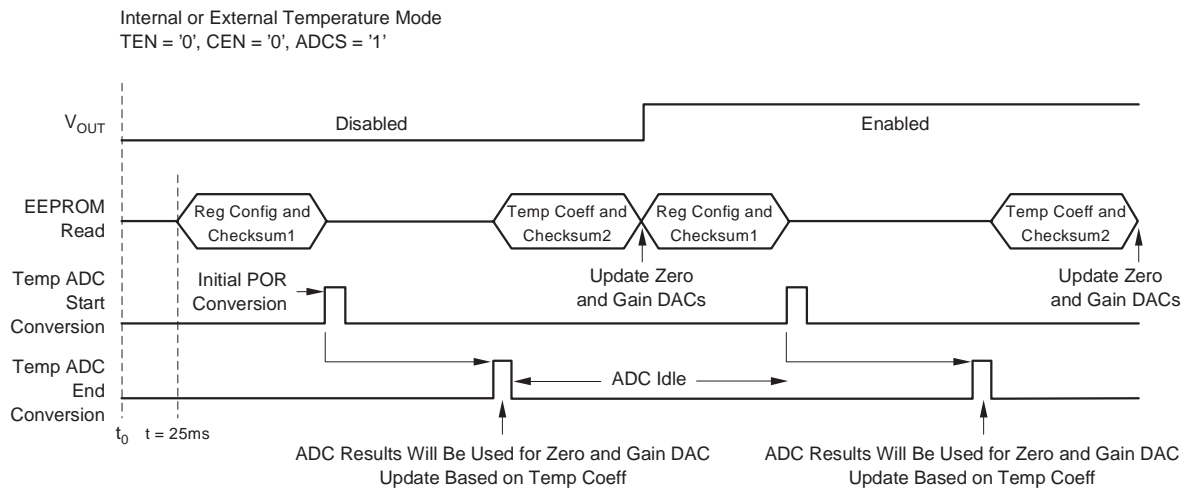


Table 2–13. Temp ADC⁽¹⁾ Conversion Speed Options for External Temperature Mode

| R1 [1] | R0 [0] | [TEN=0], [AREN=0], [ADC2X=0] | [TEN=0], [AREN=0], [ADC2X=1] | [TEN=0] [2.048V, AREN=1], [ADC2X=0] | [TEN=0] [2.048V, AREN=1], [ADC2X=1] |
|-----------|-----------|------------------------------------|------------------------------------|---|---|
| 0 | 0 | 11-Bit + Sign (6ms) | 11-Bit + Sign (3ms) | 11-Bit + Sign (8ms) | 11 Bit + Sign (4ms) |
| 0 | 1 | 13-Bit + Sign (24ms) | 13-Bit + Sign (12ms) | 13-Bit + Sign (32ms) | 13 Bit + Sign (16ms) |
| 1 | 0 | 14-Bit + Sign (50ms) | 14-Bit + Sign (25ms) | 14-Bit + Sign (64ms) | 14 Bit + Sign (32ms) |
| 1 | 1 | 15-Bit + Sign (100ms) | 15-Bit + Sign (50ms) | 15-Bit + Sign (128ms) | 15 Bit + Sign (64ms) |

1) Temp ADC data uses a 16-bit, sign-extended, right-justified Two's Complement data format.

2.7.2 External Temperature Sensing with an Excitation Series Resistor

Some bridge sensor applications measure the temperature of the bridge sensor by the change in the bridge resistance. This is accomplished by adding a series resistor in either the top or the bottom of the bridge excitation connections. When this is done, the common-mode voltage range of the PGA309 inputs must be observed over the operating temperature range of the application.

Figure 2–20 shows a top-side series resistor (R_{T+}) used to monitor the change in bridge resistance with temperature. For simplification of analysis, the effective bridge resistance is converted to one resistor (R_{BT}), as shown. For a given temperature, R_{BT} will be a fixed value; for this example, $1.8\text{k}\Omega$ at 70°C . Since R_T has a negligible change in temperature ($50\text{ppm}/^\circ\text{C}$) compared with R_{BT} ($3500\text{ppm}/^\circ\text{C}$), R_T is used to detect a change in R_{BT} . For this application, the Temp PGA is configured for V_{EXC} on the +input, and $TEMP_{IN}$ on the –input. The Temp ADC uses V_{EXC} as its reference, V_{REFT} . The Temp PGA is set to a gain of 8. Notice that two different values for V_{EXC} will be analyzed to emulate the changing voltage on V_{EXC} due to the linearization block adjusting V_{EXC} to minimize error on the bridge sensor output with applied pressure. The square-boxed values show numerical results for $V_{EXC} = 2.9\text{V}$ and the oval-ringed values for $V_{EXC} = 2.4\text{V}$. The final Temp ADC reading will be the same value regardless of what value V_{EXC} is used by the linearization block.

Figure 2–21 shows a bottom-side series resistor (R_{T-}) used to monitor the change in bridge resistance with temperature. Again, for simplification of analysis, the effective bridge resistance is converted to one resistor (R_{BT}) as shown. For 70°C , R_{BT} is $1.8\text{k}\Omega$ for this example. R_T is used to measure the change in R_{BT} . The Temp PGA is configured for $TEMP_{IN}$ on the +input and GND on the –input. V_{EXC} is selected as the Temp ADC reference, V_{REFT} . The PGA gain is 8. The square-boxed values are results for $V_{EXC} = 2.9\text{V}$ and the oval-ringed values for $V_{EXC} = 2.4\text{V}$. It is seen that the final Temp ADC reading will be the same regardless of the V_{EXC} value.

If the linearization block is not used in the application, the bridge sensor top excitation connection is made to either V_{SA} or V_{REF} instead of V_{EXC} . In either of these cases, top-side (Figure 2–20) or bottom-side (Figure 2–21), external temperature sensing can be done by adding a series resistor, R_T . The Temp ADC reference (V_{REFT}) should be changed to the bridge excitation voltage (V_{SA} or V_{REF}) for the specific application. This yields a constant Temp ADC output at a given temperature independent of changes in the bridge excitation voltage.

Figure 2–20. External Temperature Sensing of Bridge Sensor with Top-Side Series Resistor


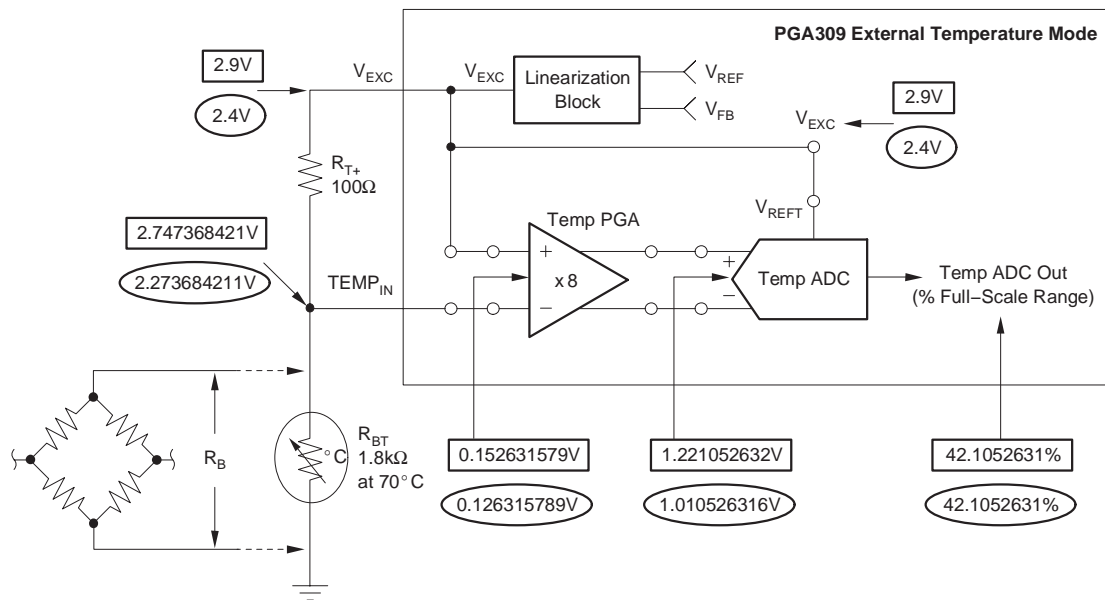



Figure 2–21. External Temperature Sensing of Bridge Sensor with Bottom-Side Series Resistor

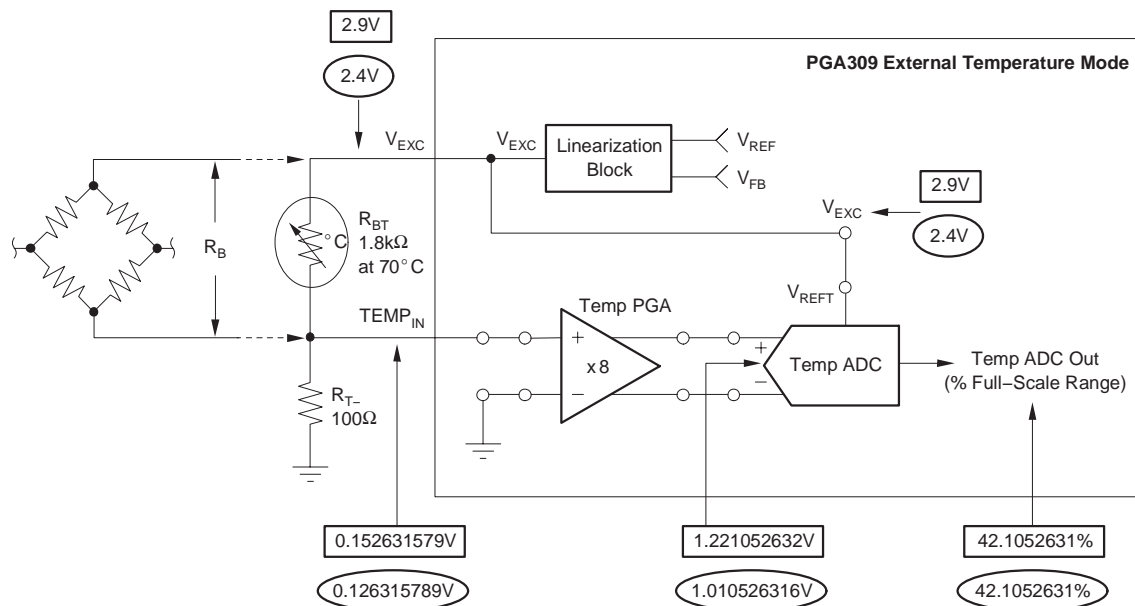

2.8 Fault Monitor

Fault monitoring of external bridge sensors is provided on the PGA309 through nine internal comparators. Refer to Figure 2–22. These comparators are grouped into two sets: Internal Fault Comparators and External Fault Comparators. In Figure 2–22, these are denoted as EXT for those in the External Fault Comparator group and INT for those in the Internal Fault Comparator group.

Figure 2–22. PGA309 Fault Monitor Circuitry⁽¹⁾⁽²⁾

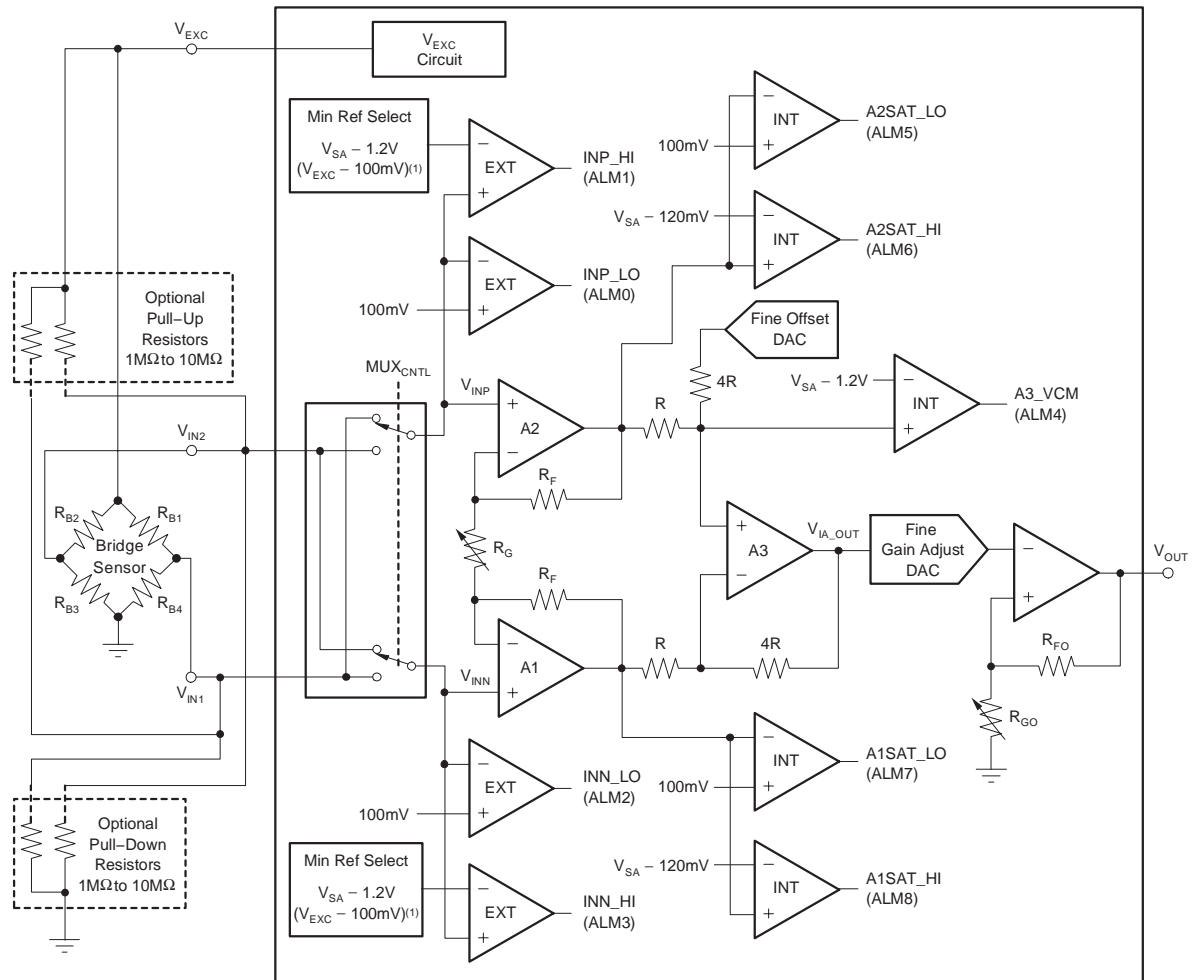

- Notes:**
- 1) When V_{EXC} is enabled, a minimum reference selector circuit becomes the reference for the INN_HI and INP_HI comparator threshold. This minimum reference selector circuit uses $V_{EXC} - 100mV$ and $V_{SA} - 1.2V$, and compares the V_{INX} pin to the lower of the two references. This ensures accurate fault monitoring in conditions where V_{EXC} might be higher or lower than the input voltage range of the Front-End PGA amplifier relative to V_{SA} .
 - 2) All comparator outputs are high for fault condition.

The external fault comparators are used to monitor proper operation of the bridge sensor and report input fault conditions. Table 2–14 enumerates the possible fault cases for a bridge sensor and the associated fault comparator outputs for each fault condition. Due to the extremely low input bias currents of the PGA309, if fault detection of floating inputs (sensor disconnected entirely from one or both of the PGA309 inputs) is to be accurately reported, it is necessary to add either pull-up or pull-down resistors to each of these inputs (V_{IN1} and V_{IN2}), shown in Figure 2–22 as optional. The value of these resistors can be between $1\text{M}\Omega$ and $10\text{M}\Omega$ in order to minimize signal loading of the bridge sensor's output. Offset and other errors from these optional resistors will be cancelled out during the PGA309 + sensor calibration. Table 2–15 itemizes the special cases for floating inputs on the PGA309 when using pull-up resistors. Table 2–16 lists the special cases for floating inputs on the PGA309 when using pull-down resistors. All other fault cases not listed as special cases are the same as those detailed in Table 2–14.

Table 2–14. Bridge Sensor Faults and Fault Comparator States— V_{IN1} and V_{IN2} Have No Pull-Up or Pull-Down Resistors

| Case | V_{IN2} (V_{INN}) (V) | V_{IN1} (V_{INP}) (V) | V_{IA_OUT} (V) | Logic Level Outputs | | | | Comments |
|---|-----------------------------------|-----------------------------------|----------------------|---------------------|------------------|------------------|------------------|---|
| | | | | INN_HI (ALM3) | INN_LO (ALM2) | INP_HI (ALM1) | INP_LO (ALM0) | |
| Normal | 1.7 | 1.7 | Linear | 0 | 0 | 0 | 0 | |
| R_{B1} Open | 1.7 | 0 | ~ 0 | 0 | 0 | 0 | 1 | |
| R_{B2} Open | 0 | 1.7 | $\sim V_{SA}$ | 0 | 1 | 0 | 0 | |
| R_{B3} Open | 3.4 | 1.7 | ~ 0 | 1 | 0 | 0 | 0 | |
| R_{B4} Open | 1.7 | 3.4 | $\sim V_{SA}$ | 0 | 0 | 1 | 0 | |
| R_{B1} Short | 1.7 | 3.4 | $\sim V_{SA}$ | 0 | 0 | 1 | 0 | |
| R_{B2} Short | 3.4 | 1.7 | ~ 0 | 1 | 0 | 0 | 0 | |
| R_{B3} Short | 0 | 1.7 | ? | 0 | 1 | 0 | 0 | |
| R_{B4} Short | 1.7 | 0 | ~ 0 | 0 | 0 | 0 | 1 | |
| Open Sensor GND | 3.4 | 3.4 | ~ 0 | 1 | 0 | 1 | 0 | |
| Open Sensor V_{EXC} | 0 | 0 | ~ 0 | 0 | 1 | 0 | 1 | |
| V_{EXC} Short GND | 0 | 0 | ~ 0 | 1(1) | 1 | 1(1) | 1 | |
| V_{IN1} (V_{INP}) Open(2) | 1.7 | $\sim V_{SA}-0.7$ | $\sim V_{SA}$ | 0 | 0 | 0 | 0 | Under-scale limit on V_{OUT} ; no fault detect—Int or Ext |
| V_{IN2} (V_{INN}) Open(2) | $\sim V_{SA}-0.7$ | 1.7 | ~ 0 | 0 | 0 | 0 | 0 | Over-scale limit on V_{OUT} ; no fault detect—Int or Ext |
| V_{IN1} (V_{INP}) Short GND | 1.7 | 0 | ~ 0 | 0 | 0 | 0 | 1 | |
| V_{IN2} (V_{INN}) Short GND | 0 | 1.7 | $\sim V_{SA}$ | 0 | 1 | 0 | 0 | |
| V_{IN1} (V_{INP}) Short V_{EXC} | 1.7 | 3.4 | $\sim V_{SA}$ | 0 | 0 | 1 | 0 | |
| V_{IN2} (V_{INN}) Short V_{EXC} | 3.4 | 1.7 | ~ 0 | 1 | 0 | 0 | 0 | |
| V_{IN1} (V_{INP}), V_{IN2} (V_{INN}) Open(2) | $\sim V_{SA}-0.7$ | $\sim V_{SA}-0.7$ | Linear? | 0 | 0 | 0 | 0 | Typically drifts to over-scale limit slowly; no Ext Fault detect (ALM7), Int Fault set = A1 Sat Low |
| V_{IN1} (V_{INP}), V_{IN2} (V_{INN}) Short GND | 0 | 0 | $\sim V_{SA}$ | 0 | 1 | 0 | 1 | |
| V_{IN1} (V_{INP}), V_{IN2} (V_{INN}) Short V_{EXC} | 3.4 | 3.4 | ~ 0 | 1 | 0 | 1 | 0 | |

NOTE: $V_{SA} = +5\text{V}$, $V_{REF} = +4.096\text{V}$, $K_{EXC} = 0.83$, $K_{LIN} = 0$, and $V_{EXC} = 3.4\text{V}$.

(1) Typically, a logic 1, but not ensured by design and nature of fault.

(2) Accurate detection of these faults requires a pull-up or pull-down resistor on each input (V_{IN1} and V_{IN2}).

Table 2–15. Bridge Sensor Faults and Fault Comparator States— V_{IN1} and V_{IN2} are connected by $10M\Omega$ Pull-Up Resistors to V_{EXC}

| SPECIAL CASE(1) | V_{IN2} (V_{INN}) (V) | V_{IN1} (V_{INP}) (V) | V_{IA_OUT} (V) | Logic Level Outputs | | | |
|---|-----------------------------------|-----------------------------------|----------------------|---------------------|------------------|------------------|------------------|
| | | | | INN_HI (ALM3) | INN_LO (ALM2) | INP_HI (ALM1) | INP_LO (ALM0) |
| V_{IN1} (V_{INP}) Open | 1.7 | V_{EXC} | $\sim V_{SA}$ | 0 | 0 | 1 | 0 |
| V_{IN2} (V_{INN}) Open | V_{EXC} | 1.7 | ~ 0 | 1 | 0 | 0 | 0 |
| V_{IN1} (V_{INP}), V_{IN2} (V_{INN}) Open | V_{EXC} | V_{EXC} | ~ 0 | 1 | 0 | 1 | 0 |

NOTE: $V_{SA} = +5V$, $V_{REF} = +4.096V$, $K_{EXC} = 0.83$, $K_{LIN} = 0$, and $V_{EXC} = 3.4V$.

(1) All other cases not listed are the same as those in Table 2–14.

Table 2–16. Bridge Sensor Faults and Fault Comparator States— V_{IN1} and V_{IN2} are connected by $10M\Omega$ Pull-Down Resistors to GND

| SPECIAL CASE(1) | V_{IN2} (V_{INN}) (V) | V_{IN1} (V_{INP}) (V) | V_{IA_OUT} (V) | Logic Level Outputs | | | |
|---|--------------------------------|--------------------------------|----------------------|---------------------|------------------|------------------|------------------|
| | | | | INN_HI (ALM3) | INN_LO (ALM2) | INP_HI (ALM1) | INP_LO (ALM0) |
| V_{IN1} (V_{INP}) Open | 1.7 | ~ 0 | $\sim V_{SA}$ | 0 | 0 | 0 | 1 |
| V_{IN2} (V_{INN}) Open | ~ 0 | 1.7 | ~ 0 | 0 | 1 | 0 | 0 |
| V_{IN1} (V_{INP}), V_{IN2} (V_{INN}) Open | ~ 0 | ~ 0 | ~ 0 | 0 | 1 | 0 | 1 |

NOTE: $V_{SA} = +5V$, $V_{REF} = +4.096V$, $K_{EXC} = 0.83$, $K_{LIN} = 0$, and $V_{EXC} = 3.4V$.


(1) All other cases not listed are the same as those in Table 2–14.

When V_{EXC} is enabled, external fault comparators INP_HI and INP_LO have a minimum reference selector circuit that selects between a typical trip point of either $V_{EXC} - 100mV$ or $V_{SA} - 1.2V$. This ensures accurate fault monitoring in conditions where the Linearization Circuit increases V_{EXC} , and the bridge sensor has fault conditions that violate the IVR, relative to V_{SA} , of the Front-End PGA in the PGA309. If V_{EXC} is disabled, these comparators default to the $V_{SA} - 1.2V$ threshold.

The internal fault comparators are used to monitor the Front-End PGA internal nodes of the PGA309 (see Figure 2–22). When PGA309 + Sensor calibration is in process, it is crucial to have the internal comparator group enabled because it can alert the user to an internal node violation. Such a violation may still yield an output voltage within the expected linear range, but it will not be an accurate one. Each of the front-end amplifiers, A1 and A2, of the Front-End PGA have their outputs monitored for both saturation to the positive supply or to ground. If either of these comparators trips during calibration, it is an indication of an out-of-range scaling condition due either to the incorrect Front-End PGA gain select or coarse offset adjust. The A3 amplifier in the Front-End PGA is also monitored for common-mode violations that can occur if the Zero DAC is combined incorrectly with the Front-End PGA gain select.

Each individual internal and external fault comparator can be read through one of the digital interfaces: Two-Wire or One-Wire. The current results are stored in Register 8—Alarm Status Register. When the PGA309 output is enabled, the value of the Alarm Status Register reflects the current state of the fault comparators. When V_{OUT} is disabled, the value in the register is the comparator status immediately before the output was disabled. This allows for easier identification and debugging of a three terminal sensor module (PRG shorted to V_{OUT}). See Section 4.10, *One-Wire Operation with PRG Connected to V_{OUT}* , on page 4-20 for details. In addition, each group of comparators, internal fault and external fault, can be programmed such that if any comparator in their respective group is logic high, indicating a fault, the PGA309 output (V_{OUT}) will be forced to a fault indicating voltage level of either positive ($V_{SA} - 0.1V$ max with a $10k\Omega$ load) or negative ($0.1V$ max with a $10k\Omega$ load). The logic for this is shown in Figure 2–23.

Figure 2–23. Fault Monitor Comparator Logic

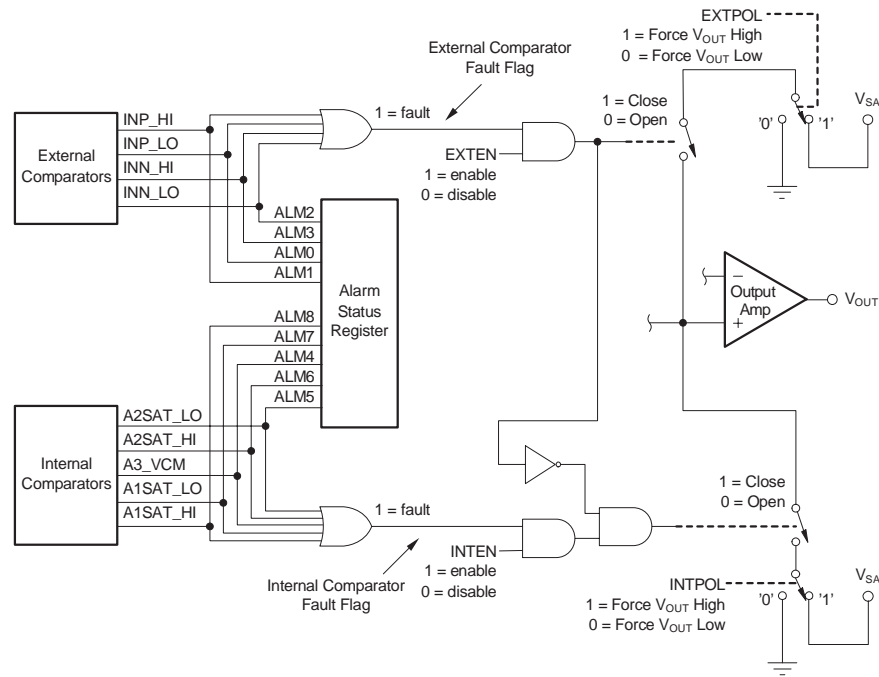

Configuration for the fault monitor comparator logic is provided in Register 5—PGA Configuration and Over/Under Scale Limit. The individual comparator outputs in each group are combined to generate an Internal Comparator Fault flag and an External Comparator Fault flag. For the External Comparator group, EXTEN, Register 5 (bit 11) enables or disables whether the External Comparator Fault flag will be sent forward to force V_{OUT} to a fault indication state. For the Internal Comparator group, INTEN, Register 5 (bit 10), enables or disables whether the Internal Comparator Fault flag will be sent forward to force V_{OUT} to a fault indication state. For each of the comparator groups, there is programmability of the fault indication state on V_{OUT} (either V_{SA} or GND). INTPOL, Register 5 (bit 8), selects this state for the Internal Comparator group and EXTPOL, Register 5 (bit 9) selects for the External Comparator group. The External Comparator Fault flag has priority over the Internal Comparator

Fault flag, as shown in Figure 2–23. For example, if the Internal Fault Comparator group is set to force V_{OUT} low and the External Fault Comparator group is set to force V_{OUT} high, and both groups detect a fault (which is possible if both are enabled), then the External Fault Comparator group prevails and V_{OUT} is forced high. This is to ensure that for most real-world applications, a critical sensor fault would be reported as priority over an internal node violation. Assuming there is a valid linear output on V_{OUT} at the time of a detected fault, the fault logic always prevails (if enabled), and will override the linear output to indicate a fault on V_{OUT} as positive or negative V_{OUT} saturation.

2.9 Over/Under Scale

The Over-Scale and Under-Scale Limit circuit provides a programmable upper and lower clip limit for the PGA309 output voltage. This circuit can be enabled by setting Register 5, bit D6 to '1'. When combined with the Fault Monitor circuitry, system diagnostics can be performed to determine if a conditioned sensor is defective or if the process being monitored by the sensor is out of range. Figure 2–24 details the key sections of the Over-Scale and Under-Scale Limit circuit. The selected PGA309 V_{REF} is divided down by a precision resistor string to form the over-scale and under-scale thresholds, as shown in Table 2–17 and Table 2–18. Register 5 bits [5:0] set the desired thresholds. These resistor ratios are extremely accurate and produce no significant initial or temperature errors. As shown in Figure 2–24, there are two separate comparators: over-scale and under-scale, which use the over-scale or under-scale threshold, respectively, and determine where the PGA309 output (V_{OUT}) will be clipped. The dominant errors in the Over-Scale and Under-Scale Limit circuit are due to the comparators offset and offset temperature drift.

Figure 2–24. Over-Scale and Under-Scale Limit Circuit

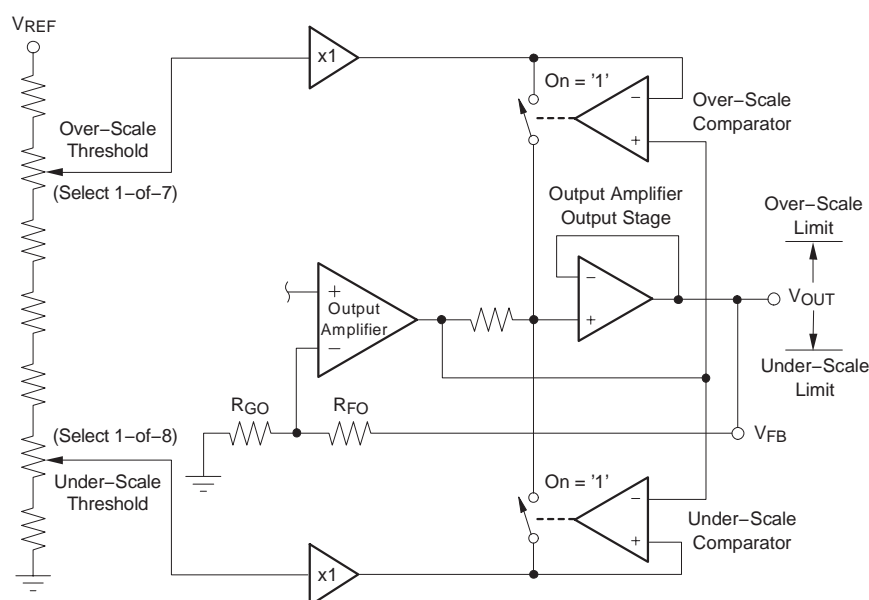


Table 2–17. Over-Scale Threshold Selections (Register 5 Bits [5:3]). $V_{REF} = +5V$.

| HL2 [5] | HL1 [4] | HL0 [3] | Over-Scale Threshold (V) | Over-Scale Threshold |
|---------|---------|---------|--------------------------|----------------------|
| 0 | 0 | 0 | 4.854 | $0.9708 V_{REF}$ |
| 0 | 0 | 1 | 4.805 | $0.9610 V_{REF}$ |
| 0 | 1 | 0 | 4.698 | $0.9394 V_{REF}$ |
| 0 | 1 | 1 | 4.580 | $0.9160 V_{REF}$ |
| 1 | 0 | 0 | 4.551 | $0.9102 V_{REF}$ |
| 1 | 0 | 1 | 3.662 | $0.7324 V_{REF}$ |
| 1 | 1 | 0 | 2.764 | $0.5528 V_{REF}$ |
| 1 | 1 | 1 | Reserved | — |

Table 2–18. Under-Scale Threshold Selections (Register 5 Bits [2:0]). $V_{REF} = +5V$.

| LL2 [2] | LL1 [1] | LL0 [0] | Under-Scale Threshold (V) | Under-Scale Threshold |
|---------|---------|---------|---------------------------|-----------------------|
| 0 | 0 | 0 | 0.127 | $0.02540 V_{REF}$ |
| 0 | 0 | 1 | 0.147 | $0.02930 V_{REF}$ |
| 0 | 1 | 0 | 0.176 | $0.03516 V_{REF}$ |
| 0 | 1 | 1 | 0.196 | $0.03906 V_{REF}$ |
| 1 | 0 | 0 | 0.225 | $0.04492 V_{REF}$ |
| 1 | 0 | 1 | 0.254 | $0.05078 V_{REF}$ |
| 1 | 1 | 0 | 0.274 | $0.05468 V_{REF}$ |
| 1 | 1 | 1 | 0.303 | $0.06054 V_{REF}$ |

The design considerations in using the Over-Scale and Under-Scale Limit circuit are best understood through a definition by example, as shown in Example 2–4.

Example 2–4. Over/Under-Scale Calculation

Given: Absolute Scale System—PGA309 connected to a system ADC (see Figure 2–25)

System ADC Reference: $V_{REF\ ADC} = 4.096V$

PGA309 Reference: $V_{REF} = 4.096V$ (use PGA309 internal reference)

Operating Temperature Range: $-40^{\circ}C$ to $+125^{\circ}C$

PGA309 $V_{SA}, V_{SD} = +5V$

External Fault Monitor; Trip High when Fault Detected

Find: Recommended levels to allow for Over/Under-Scale Limits as well as Fault Detection.

- A) Over-Scale Limit
- B) Under-Scale Limit
- C) Useable Linear PGA309 Output Range
- D) System ADC Trip Points: Over-Scale, Under-Scale, Fault Detect

Solution:

- 1) Analyze the worst case offset errors on the over-scale and under-scale comparators over the operating temperature range. Table 2–19 contains key electrical characteristics needed for this computation.

Over-Scale Comparator Offset Calculation:

Over-Scale Temperature Drift:

$-40^{\circ}C$ to $25^{\circ}C$: $-24.05mV = (+0.37mV/^{\circ}C)(-40^{\circ}C - 25^{\circ}C)$

$25^{\circ}C$ to $+125^{\circ}C$: $+37.00mV = (+0.37mV/^{\circ}C)(+125^{\circ}C - 25^{\circ}C)$

Over-Scale Offset Min and Max:

$V_{OS\ min} = +6mV - 24.05mV = -18.05mV$

$V_{OS\ max} = +114mV + 37.00mV = +151.00mV$

Under-Scale Comparator Offset Calculation:

Under-Scale Temperature Drift:

$-40^{\circ}C$ to $25^{\circ}C$: $+9.75mV = (-0.15mV/^{\circ}C)(-40^{\circ}C - 25^{\circ}C)$

$25^{\circ}C$ to $+125^{\circ}C$: $-15.00mV = (-0.15mV/^{\circ}C)(+125^{\circ}C - 25^{\circ}C)$

Under-Scale Offset Min and Max:

$V_{US\ min} = -7mV + 9.75mV = -2.75mV$

$V_{US\ max} = -93mV - 15.00mV = -108mV$

- 2) Analyze the worst-case change in V_{REF} over the operating temperature range.

V_{REF} Temperature Drift:

$-40^{\circ}C$ to $+125^{\circ}C$: $[(\pm 10ppm/^{\circ}C)/(1e6)][+125^{\circ}C - (-40^{\circ}C)]V_{REF} = \pm 0.00165 V_{REF}$

V_{REF} Min and Max:

$V_{REF\ min} = 4.00V - (0.00165)(4.00V) = 3.9934V$

$V_{REF\ max} = 4.14V + (0.00165)(4.00V) = 4.1466V$

- 3) Calculate the over-scale and under-scale min and max trip points over the operating temperature range for each over-scale and under-scale threshold (refer to Table 2–20).

Over-Scale (OS) Min and Max Trip Points:

$OS\ min = V_{REF\ min} (OS\ ratio) + V_{OS\ min}$

$OS\ max = V_{REF\ max} (OS\ ratio) + V_{OS\ max}$

Under-Scale (US) Min and Max Trip Points:

$US\ min = V_{REF\ min} (US\ ratio) + V_{US\ max}$

$US\ max = V_{REF\ max} (US\ ratio) + V_{US\ min}$

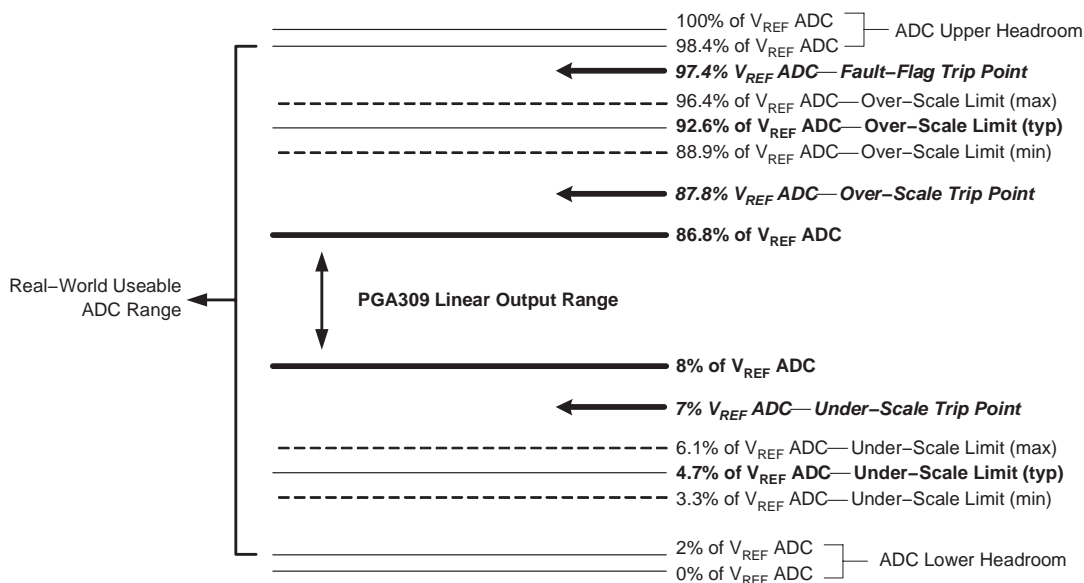
- 4) From the over-scale and under-scale min and max trip point calculations, choose the best selection that will allow for the optimum system ADC range budget (see Figure 2–26). For this example, the PGA309 is scalable for a linear output of 8% to 80.8% of the system ADC reference. In addition, we can set reasonable trip points for detecting over-scale limit, under-scale limit, and fault detect.
- 5) Check that the PGA309 V_{OUT} can support the voltage swings defined in the System ADC range budget. Table 2–21 confirms that for our example the PGA309 V_{OUT} can meet the limiting conditions for our desired scaling.

Table 2–20. Over-Scale and Under-Scale Min and Max Trip Point Calculations

| Threshold U = Under-Scale O = Over-Scale | Threshold Ratio to V_{REF} | Min Trip (V) | Min Trip (% V_{REF} ADC) | Max Trip (V) | Max Trip (% V_{REF} ADC) | Typ Trip (V) | Typ Trip (% V_{REF} ADC) |
|--|---------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|
| U7 | 0.0605 | 0.1338 | 3.2656 | 0.2483 | 6.0616 | 0.1910 | 4.6636 |
| U6 | 0.0547 | 0.1104 | 2.6943 | 0.2240 | 5.4684 | 0.1672 | 4.0814 |
| U5 | 0.0508 | 0.0948 | 2.3141 | 0.2078 | 5.0736 | 0.1513 | 3.6938 |
| U4 | 0.0449 | 0.0714 | 1.7428 | 0.1835 | 4.4804 | 0.1274 | 3.1116 |
| U3 | 0.0391 | 0.0480 | 1.1714 | 0.1592 | 3.8871 | 0.1036 | 2.5293 |
| U2 | 0.0352 | 0.0324 | 0.7912 | 0.1430 | 3.4923 | 0.0877 | 2.1418 |
| U1 | 0.0293 | 0.0090 | 0.2199 | 0.1187 | 2.8991 | 0.0639 | 1.5595 |
| U0 | 0.0254 | –0.0066 | –0.1603 | 0.1026 | 2.5042 | 0.0480 | 1.1719 |
| O6 | 0.5528 | 2.1895 | 53.4546 | 2.4432 | 59.6494 | 2.3164 | 56.5520 |
| O5 | 0.7324 | 2.9067 | 70.9648 | 3.1880 | 77.8313 | 3.0473 | 74.3980 |
| O4 | 0.9102 | 3.6167 | 88.2994 | 3.9252 | 95.8309 | 3.7710 | 92.0652 |
| O3 | 0.9160 | 3.6399 | 88.8649 | 3.9493 | 96.4181 | 3.7946 | 92.6415 |
| O2 | 0.9394 | 3.7333 | 91.1462 | 4.0463 | 98.7870 | 3.8898 | 94.9666 |
| O1 | 0.9610 | 3.8196 | 93.2521 | 4.1359 | 100.9737 | 3.9777 | 97.1129 |
| O0 | 0.9708 | 3.8587 | 94.2076 | 4.1765 | 101.9658 | 4.0176 | 98.0867 |

NOTE: V_{REF} min = 3.9934V, V_{REF} max = 4.1466V, V_{REF} ADC = 4.096V, V_{OS} min = –0.01805V, V_{OS} max = 0.151V, V_{US} min = –0.00275V, V_{US} max = –0.108V. **Bold Italics** indicate final choice for Example 2–4.

Figure 2–26. System ADC Range Budget for Over-Scale, Under-Scale, and Linear Output

Table 2–21. PGA309 V_{OUT} Limits for System ADC Range Budget

| Limiting Condition | PGA309 V_{OUT} (V) | PGA309 V_{OUT} Limit (V) |
|--|-------------------------|-------------------------------|
| 96.4% V_{REF} ADC—Over-Scale Limit (max) | 3.9493 | 4.9 |
| 3.3% V_{REF} ADC—Under-Scale Limit (min) | 0.1338 | 0.1 |


NOTE: V_{REF} ADC = 4.096V, V_{SA} = 5V.

2.10 Noise and Coarse Offset Adjust

The PGA309 Front-End PGA contains auto-zero operational amplifiers that allow precision, low-noise measurements free from flicker, or $1/f$ noise, that is typically present in regular low-voltage CMOS op amps.

This auto-zero topology operates by canceling amplifier low-frequency noise and offset during each clock cycle of an internal oscillator. This flattens the low-frequency noise voltage spectrum of the PGA309, leaving only a small residual clock feedthrough component at $\sim 7\text{kHz}$ and its multiples. Figure 2–27 details the PGA309 voltage noise spectrum for coarse offset adjust = 0mV . This auto-zero method allows higher precision measurement by filtering the output of the PGA309 proportionally. Conventional CMOS operational amplifiers that use averaging do not improve the signal-to-noise ratio in the $1/f$ noise region. In addition, the auto-zero technique allows the PGA309 input offset voltage to achieve very good temperature and time stability.

Figure 2–27. Voltage Noise Power Spectrum Referred to Input (RTI), Coarse Offset Adjust = 0mV , Gain = 1152, CLK_CFG = '00' (default).

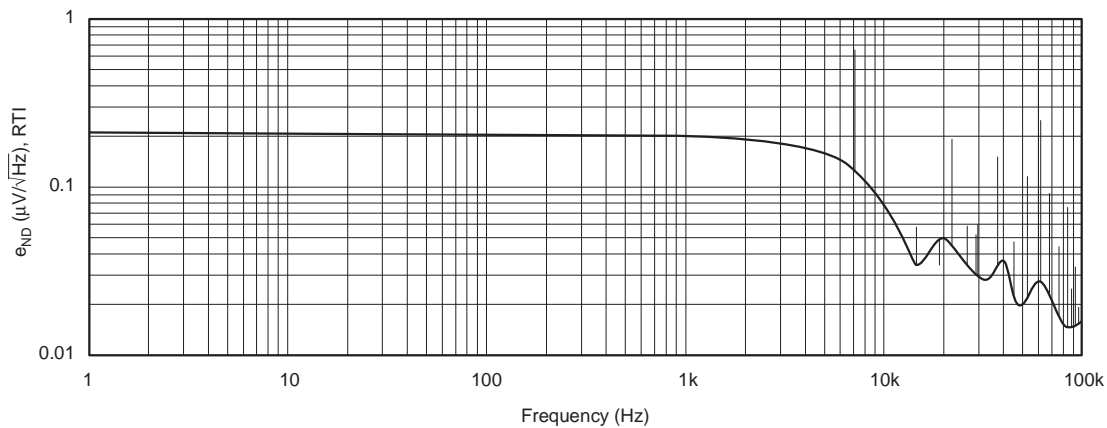

The PGA309 low-frequency voltage noise density (RTI) is $\sim 210\text{nV}/\sqrt{\text{Hz}}$. To convert this to a peak-to-peak amplitude for oscilloscope measurements, the following equation is supplied:

$$V_{\text{NPP}} = (e_{\text{ND}})(\sqrt{\text{BW}})(\text{crest factor})$$

where:

V_{NPP} = voltage noise peak-to-peak (nV_{PP})

e_{ND} = voltage noise density (nV/ $\sqrt{\text{Hz}}$)

BW = bandwidth of interest (Hz)


Crest Factor = probability factor for conversion of rms noise to peak-to-peak noise (crest factor of 6 reduces probability of seeing a larger peak-to-peak amplitude to < 0.3%).

PGA309 peak-to-peak noise, RTI, BW = 10Hz:

$$V_{\text{NPP}} = (210\text{nV}/\sqrt{\text{Hz}})(\sqrt{10\text{Hz}})(6) = 3984\text{nV}_{\text{PP}} = 3.98\mu\text{V}_{\text{PP}} \text{ (RTI)}$$

For a PGA309 total gain of 1152, this implies the noise at V_{OUT} will be 4.58mV_{PP}, as shown in Figure 2–28.

Figure 2–28. V_{OUT} Noise, 0.1Hz to 10Hz Peak-to-Peak Noise

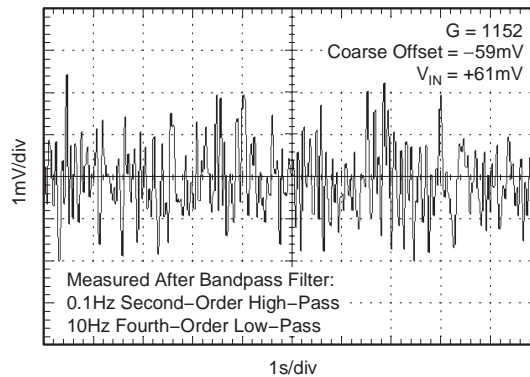


To compensate for bridge sensors with a large initial offset, the input stages of the PGA309 Front-End PGA incorporate a patented circuit for the coarse offset adjust based on the auto-zero topology. For each clock cycle of the internal auto-zero oscillator, the offsets and noise of the input amplifier stages are subtracted from the input signal, and the result is summed with a small voltage produced by the Coarse Offset Adjust DAC. This resulting value becomes the input-referred offset of the PGA309. This value can be positive or negative as described Section 2.2, *Offset Scaling*. This operation does not increase the low frequency $1/f$ noise of the PGA309. However, the mismatches of internal elements in the Coarse Offset DAC can produce temperature and long-term stability errors on the same order of magnitude as regular, traditional CMOS op amps (that is, temperature drift of input offset voltage of up to $10\mu\text{V}/^\circ\text{C}$).

To produce a value that is temperature- and time-stable, the Coarse Offset DAC circuitry incorporates a chopping circuit that rotates internal components, averaging the mismatch error on the output of the Coarse Offset Adjust DAC. This produces a very time- and temperature-stable coarse offset adjust.

The design compromise of the Coarse Offset DAC chopping technique is a clock feedthrough glitch that can be seen at V_{OUT} , the output of the PGA309, due to the rotating elements. With the Coarse Offset Adjust set to 0mV the clock feedthrough components are practically negligible on the V_{OUT} signal of the PGA309, as shown in Figure 2–29.

Figure 2–29. Unfiltered V_{OUT} Clock Feedthrough, Coarse Offset Adjust = 0mV, Gain = 1152, CLK_CFG = '00' (default).

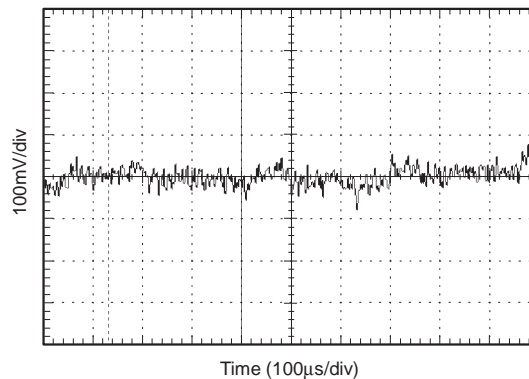

As the Coarse Offset Adjust DAC value increases the amplitude of the clock feedthrough glitch also increases. For $V_{REF} = +5V$ and a full-scale Coarse Offset DAC value of $-59mV$, the clock feedthrough glitch is shown in Figure 2–30. This scope photo is for the PGA309 set in its maximum internal gain of 1152, with the Coarse Offset Adjust DAC set to $-59mV$ and V_{IN} set to $+61mV$. Referred to input (RTI), this V_{OUT} glitch is only $347\mu V_{PP}$ ($0.4V_{PP}/1152$). This glitch occurs at half of the internal auto-zero clock; typically, 3.5kHz. This glitch does not reflect back into the low-frequency range and can be filtered out if the signal of interest is at or below 1kHz. Figure 2–31 is a scope photo of V_{OUT} peak-to-peak noise for this case. Figure 2–32 shows the voltage noise spectrum for the case where the Coarse Offset Adjust DAC is set to $-59mV$ and $V_{IN} = +61mV$. In Figure 2–32, the baseband noise is about the same as when the coarse offset adjust was set to zero, as in Figure 2–27, but with an additional spike at about 3.5kHz.

Figure 2–30. Unfiltered V_{OUT} Clock Feedthrough Glitch, Coarse Offset Adjust = -59mV , Gain = 1152, $V_{IN} = +61\text{mV}$, CLK_CFG = '00' (default).
 V_{OUT} Glitch (RTI) = $347\mu\text{V}_{PP}$.

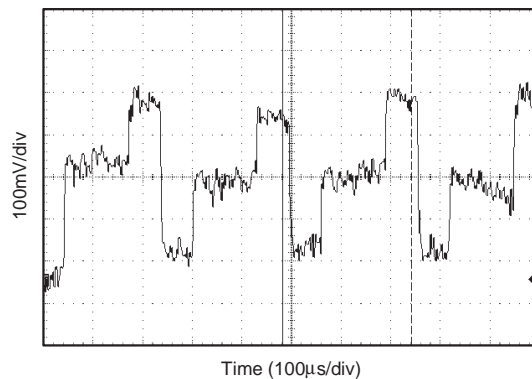


Figure 2–31. Filtered 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise, Coarse Offset Adjust = -59mV , Gain = 1152, $V_{IN} = +61\text{mV}$, CLK_CFG = '00' (default).


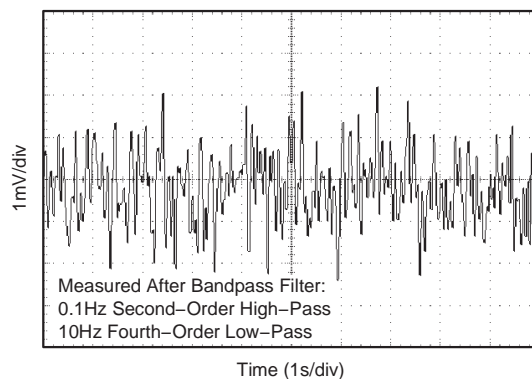


Figure 2–32. Voltage Noise Spectrum (RTI), Coarse Offset Adjust = -59mV , Gain = 1152, $V_{IN} = +61\text{mV}$, CLK_CFG = '00' (default).

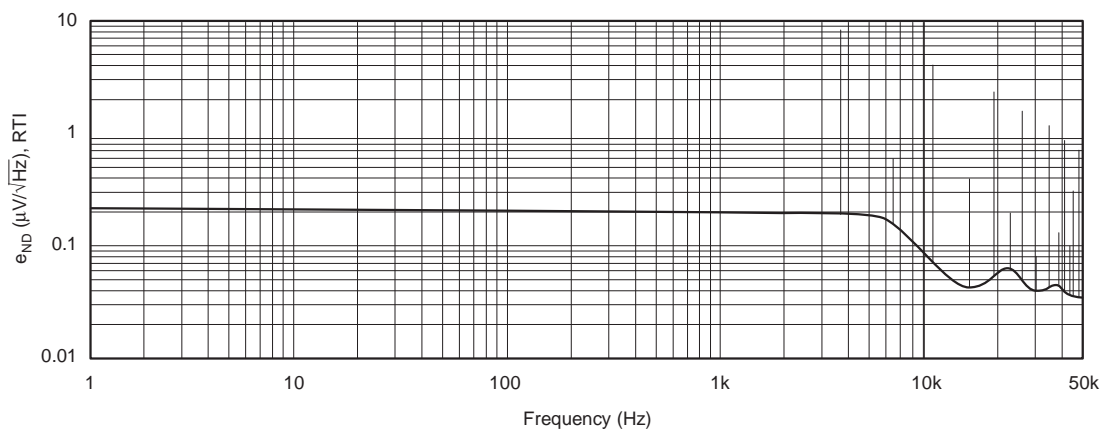

For applications where the clock feedthrough glitch from the Coarse Offset Adjust DAC chopping circuitry is an issue, there are alternate modes that can be selected for the Coarse Offset DAC clocking and the auto-zero clocking of the Front-End PGA. Register 5 bits (13:12) are referenced as CLK_CFG1 and CLK_CFG0, respectively. Table 2–22 outlines the clocking schemes available using these bits. Up to this point, CLK_CFG = '00' has been discussed.

Table 2–22. PGA309 Clocking Schemes

| CLK_CFG Mode | CLK_CFG1 Bit D13 | CLK_CFG0 Bit D12 | Auto-Zero PGA Front-End | Chopping Coarse Offset DAC |
|--------------|------------------|------------------|-------------------------------|---------------------------------|
| 00 (default) | 0 | 0 | 7kHz typical | 3.5kHz typical |
| 01 | 0 | 1 | 7kHz typical | Off (none) |
| 10 | 1 | 0 | 7kHz typical, Random Clocking | 3.5kHz typical, Random Clocking |
| 11 | 1 | 1 | 7kHz typical | 3.5kHz typical, Random Clocking |

In the CLK_CFG = '01' mode, the Coarse Offset Adjust DAC chopping is turned off. The clock feedthrough glitch is no longer present (Figure 2–33 shows the 0.1Hz to 10Hz V_{OUT} peak-to-peak noise) and the V_{OUT} noise spectrum is clean, as shown in Figure 2–34. However, the input Coarse Offset Adjust DAC is no longer temperature-stable. Typical span drift is generally linear with temperature and may be acceptable in applications where the PGA309 is located close to the bridge sensor and they are both calibrated together. The drift of the Coarse Offset Adjust DAC simply sums with the bridge sensor offset drift, and they are both calibrated out.

Figure 2–33. 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise for Coarse Offset Adjust = -56mV , Gain = 1152, $V_{IN} = +57\text{mV}$, CLK_CFG = '01', $V_{NPP} (RTI) = 4.44\mu\text{V}_{PP}$.


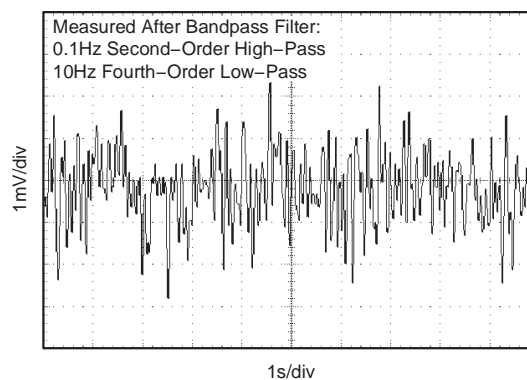


Figure 2–34. V_{OUT} Noise Spectrum for Coarse Offset Adjust = -56mV , Gain = 1152, $V_{IN} = +57\text{mV}$, CLK_CFG = '01'.

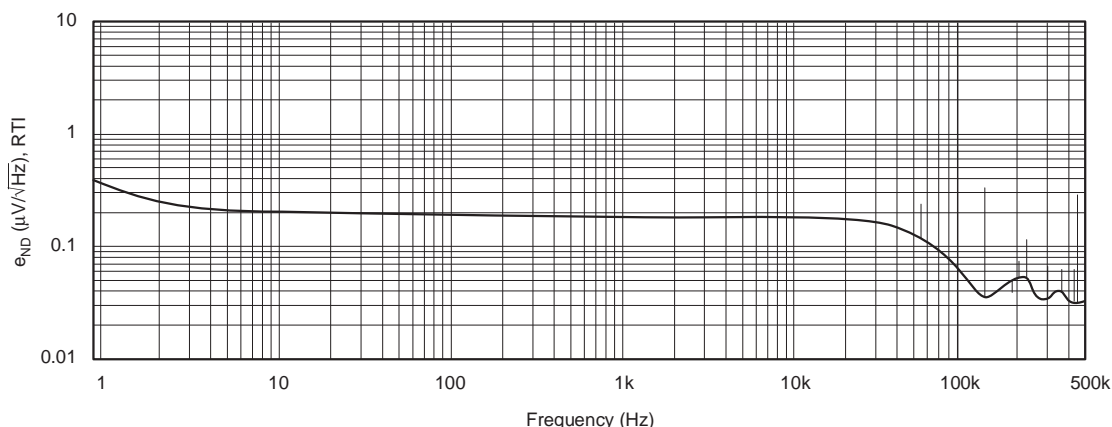

CLK_CFG = '10' mode and CLK_CFG = '11' mode turn on different clock randomization schemes for the Front-End PGA auto-zero and Coarse Offset DAC chopping. Although this does not reduce the amplitude of the clock feed-through glitch (see Figure 2–30), it does spread the glitch energy over a wider frequency range. This removes the fixed spike at half of the input auto-zero clock frequency, but raises the noise floor in the lower frequency range, thus increasing the baseband noise. CLK_CFG = '11' mode simply *whitens* the peak-to-peak noise from the 1Hz region to about the 7kHz region by modulating both the auto-zero and chopping clocks. In CLK_CFG = '10' mode, the Coarse Offset DAC chopping clock is modulated but not the auto-zero clock. The results of these two modes are shown in both voltage noise spectrum and peak-to-peak noise plots in Figure 2–35, Figure 2–36, Figure 2–37, and Figure 2–38.

Figure 2–35. 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise for Coarse Offset Adjust = -56mV , Gain = 1152, $V_{IN} = +57\text{mV}$, CLK_CFG = '10', V_{NPP} (RTI) = $18.4\mu\text{V}_{PP}$.

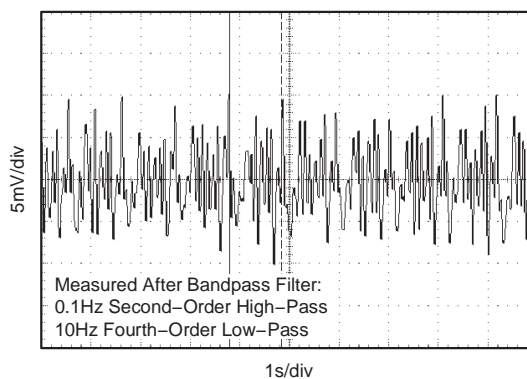


Figure 2–36. V_{OUT} Noise Spectrum for Coarse Offset Adjust = -56mV , Gain = 1152, $V_{IN} = +57\text{mV}$, CLK_CFG = '10'.

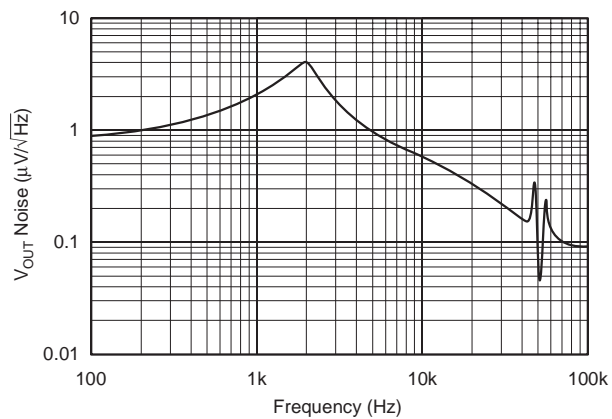


Figure 2–37. 0.1Hz to 10Hz V_{OUT} Peak-to-Peak Noise for Coarse Offset Adjust = -56mV , Gain = 1152, $V_{IN} = +57\text{mV}$, CLK_CFG = '11', V_{NPP} (RTI) = $42\mu\text{V}_{PP}$.


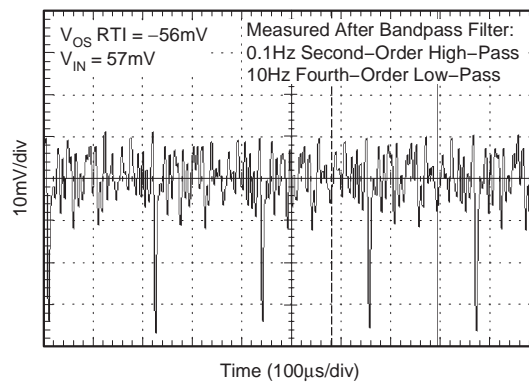


Figure 2–38. V_{OUT} Noise Spectrum for Coarse Offset Adjust = -56mV , Gain = 1152, $V_{IN} = +57\text{mV}$, CLK_CFG = '11'.

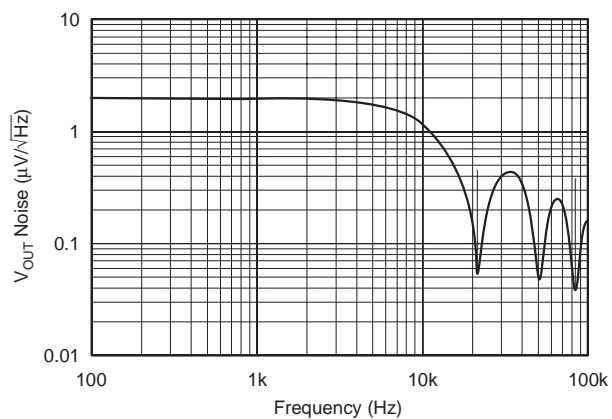


2.11 General AC Considerations

In addition to normal good analog layout and design practices, there are a few key items to check when designing with the PGA309.

- 1) REF_{IN}/REF_{OUT} , pin 16: Keep capacitive loading to 200pF or less.
- 2) V_{EXC} , pin 1: Keep capacitive loading to 200pF or less.
- 3) V_{SA} , pin 3 and V_{SD} , pin 10: Keep these within 200mV of each other. Internally, the PGA309 separates its digital and analog power supplies to minimize cross-talk between the two. Externally, tie the two together and bypass, directly at the pins, with a 0.1 μ F capacitor. If an RC filter is used between the two supplies, ensure that maximum drop is never more than 200mV.
- 4) GND_A , pin 2 and GND_D , pin 11: Ensure that these are both tied directly together and connected to the same ground point.
- 5) V_{SJ} , pin 8: This is the negative input to the Output Amplifier and as such, it is high-impedance. Route low-impedance traces, such as V_{OUT} , and noisy traces away from V_{SJ} . Minimize trace lengths to avoid unwanted additional capacitance on V_{SJ} .
- 6) V_{IN1} , pin 4 and V_{IN2} , pin 5: For source resistances greater than or equal to 10k Ω , add a capacitor of 1nF to 2nF between V_{IN1} and V_{IN2} to minimize noise coupling.
- 7) V_{IN1} , pin 4 and V_{IN2} , pin 5: RFI filtering is always a concern for instrumentation amplifier applications. RFI signals injected into instrumentation amplifiers become rectified and appear on the output as a DC drift or offset; high-gain circuits amplify this effect. Figure 2–39 depicts input filtering for the PGA309. Depending upon the distance of the bridge sensor from the PGA309 and the sensor module shielding, R_1 and R_2 may be required. C_1 should be equal to C_2 , and C_3 should be ten times larger than C_1 to attenuate any common-mode signals that become differential due to the mismatch in C_1 and C_2 . All input filter components should be located directly at the PGA309 inputs to avoid and trace lengths from becoming receiving RFI antennas.

Figure 2–39. Input Filtering

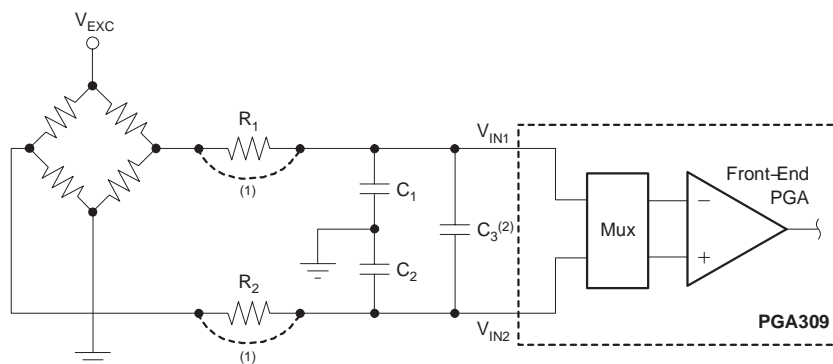

NOTES: (1) Depends on bridge sensor resistance and distance from bridge sensor to PGA309.

(2) $C_1 = C_2$, $C_3 = 10 \times C_1$.

Operating Modes

This chapter describes the operating modes of the PGA309.

| Topic | Page |
|--|------|
| 3.1 Power-On Sequence and Normal Stand-Alone Operation | 3-2 |
| 3.2 EEPROM Content and Temperature Lookup Table Calculation | 3-5 |
| Temperature Lookup Table Calculation | 3-8 |
| 3.3 Checksum Error Event | 3-15 |
| 3.4 Test Pin | 3-15 |
| 3.5 Power-On Initial Register States | 3-16 |

3.1 Power-On Sequence and Normal Stand-Alone Operation

The PGA309 internal state machine controls the operations of the part in Stand-Alone Mode, without any external digital controller. In this mode, the PGA309 performs the functions of a Two-Wire interface master to read the data from the EEPROM.

The PGA309 has power-on reset (POR) circuitry to reset the internal registers and subcircuits to their initial states. This power-on reset also occurs when the supply is detected to be too low so that the PGA309 is in a known state when the supply becomes valid again. The threshold for the POR circuit is typically 2.2V for V_{SA} rising and 1.7V for V_{SA} falling.

After the power supply becomes valid, the PGA309 waits for approximately 25ms and then attempts to read the configuration register data (Register 3—Register 6 bit settings) from the first part of the external EEPROM device. If the EEPROM has the proper programmed flag word (0x5449, “TI” ASCII) in address locations 0 and 1, the PGA309 will continue reading the EEPROM. Otherwise, the PGA309 will wait for one second before trying again. If the PGA309 detects that there was no response from the EEPROM and the Two-Wire bus was in a valid idle state ($SCL = '1'$, $SDA = '1'$), then the PGA309 will wait for 1s and try again. If the Two-Wire bus is stuck with $SDA = '0'$, the PGA309 will try to free the bus by sending extra clocks down SCL (see Chapter 4, *Digital Interface*, for details), and wait for 25ms before trying to read the EEPROM again. If the EEPROM configuration read is successful (including valid Checksum1 data) and either bits ADCS or CEN in Register 6 are set to '1', the PGA309 will trigger the Temp ADC to measure the temperature information as configured in the configuration registers. For 16-bit resolution results, the converter takes approximately 125ms to complete a conversion. Once the conversion is complete, the PGA309 begins reading the Lookup Table from EEPROM address locations 16 and higher, to calculate the settings for the Gain and Zero DACs using the piecewise linear interpolation algorithm. The PGA309 reads the entire Lookup Table and determines if the checksum for the Lookup Table (Checksum2) is correct. Each entry in the Lookup Table requires approximately 500 μ s to read from the EEPROM. Once Checksum2 is determined to be valid, the calculated value for the Gain and Zero DACs is updated into their respective registers, and the Output Amplifier (V_{OUT}) is enabled. The PGA309 then begins looping through this entire procedure, starting again with reading the configuration data from the first part of the EEPROM. This loop continues indefinitely.


Note: For PRG Pin Connected to V_{OUT}

During the entire initial power-on sequence, the PGA309 V_{OUT} is disabled (high-impedance) until valid EEPROM contents are verified and an ADC conversion is complete, as described above and illustrated in Figure 3–1. In true three-wire connection (V_S , GND, and V_{OUT} with PRG pin shorted to V_{OUT}), with $OWD = '1'$ (Register 4, bit D15), the time interval after power-up is the only opportunity that an external communications controller can initiate digital communication with the PGA309 and trigger a one second delay in the internal state machine. After V_{OUT} is enabled no further digital communication is possible, unless power is cycled.

If the PGA309 detects that there is no EEPROM device present (that is, it does not receive an acknowledge to a slave address byte sent to the EEPROM), the PGA309 will wait for approximately one second and try again. It will continue in this loop indefinitely with V_{OUT} disabled.

At any time, if the PGA309 is addressed through the Two-Wire or One-Wire interface with $OWD = '0'$ (Register 4, bit D15), the internal state machine aborts its cycle and initiates a 1s delay. After the 1s delay has timed out, a EEPROM read is started. The 1s delay is reset every time the PGA309 is addressed. This allows an external microcontroller to control the function of the PGA309, as long as some communication activity is addressed to the PGA309 at least once per second. V_{OUT} will stay in the state (enabled or disabled) that it was in before the PGA309 was addressed. If full microcontroller control of the PGA309 is desired from initial power-on, then the Test pin should be brought high to enable the output after the internal PGA309 registers have been configured to their desired states.

Figure 3–1. State Machine—Power-On Sequence and Operation in Stand-Alone Mode

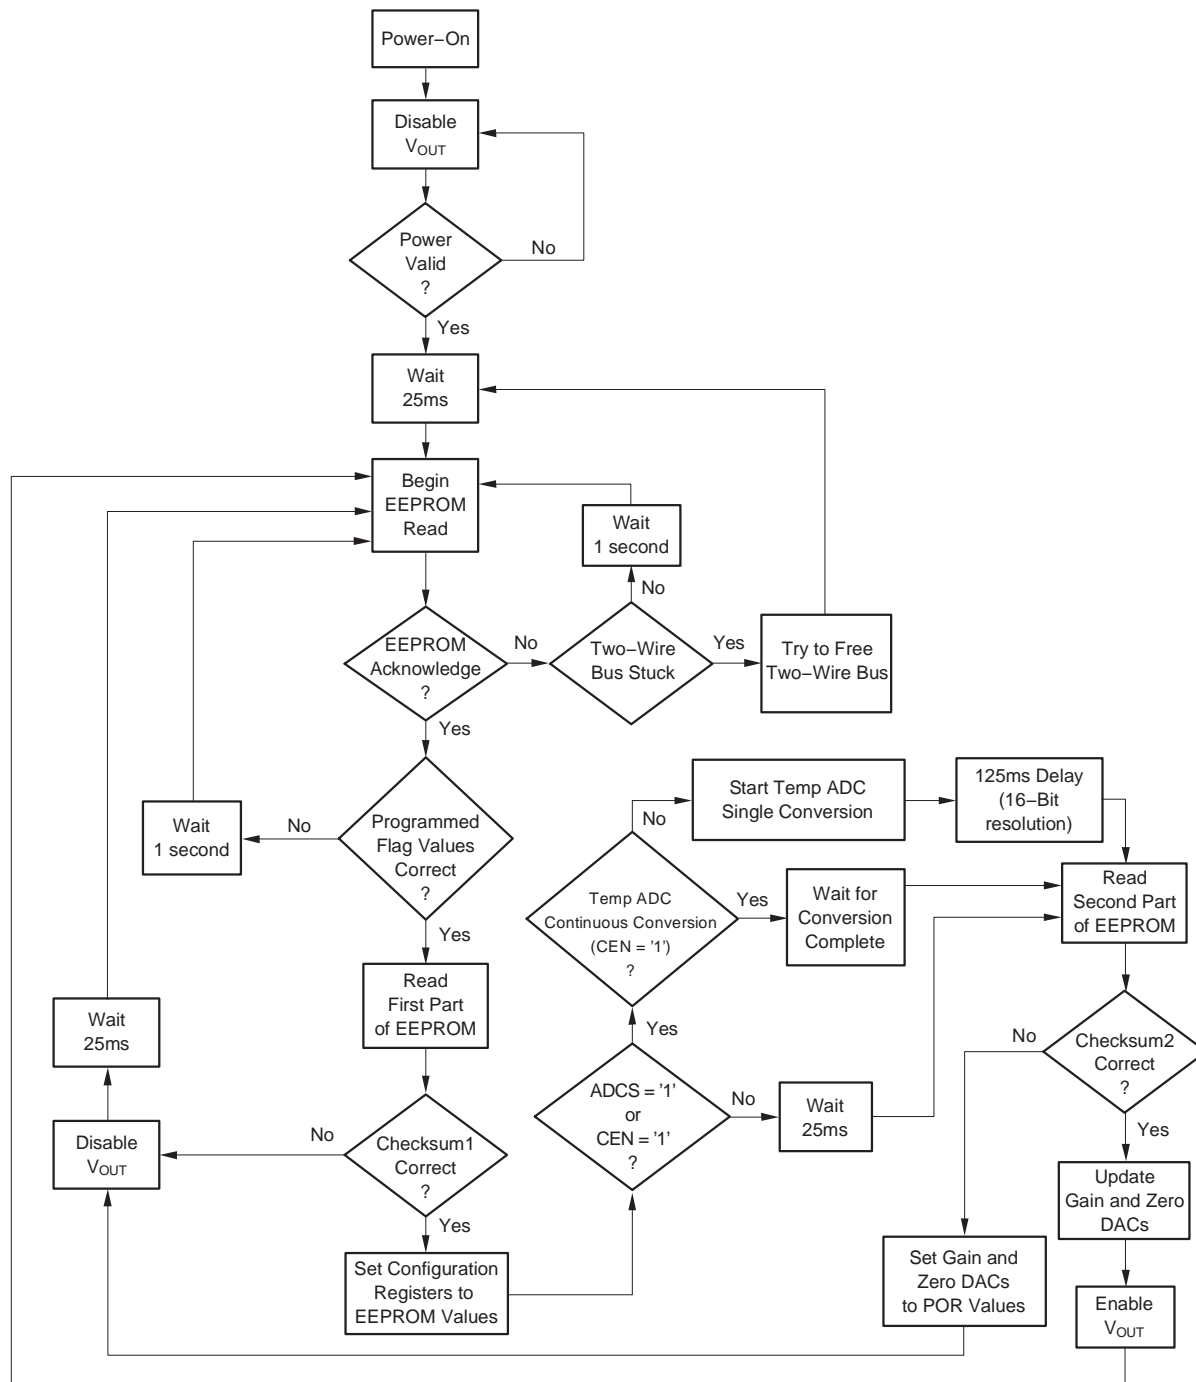

3.2 EEPROM Content and Temperature Lookup Table Calculation

The PGA309 uses an industry standard, Two-Wire, external EEPROM (typically, a SOT23 package). A 1k-bit minimum EEPROM is needed if all 17 temperature coefficients are used. Larger EEPROMs may be used to provide additional user space for serial number, lot code, or other product data.

The 16-bit data words used by the PGA309 are stored in the external EEPROM, least significant 8-bit byte first, as shown in Figure 3–2.

Table 3–1 outlines the external EEPROM contents for a 1k-bit EEPROM. For a detailed External EEPROM Example refer to Appendix A.

The first part of the EEPROM (16 8-bit bytes), address location 1/0 through address location 15/14, contains the EEPROM Programmed Flag and the PGA309 configuration data for Registers 3, 4, 5, and 6. Included at the end of this section is Checksum1, at address location 15/14.

The second part of the EEPROM (108 8-bit bytes), address location 17/16 through address location 123/122, contains the temperature coefficient Look-up Table for the Zero DAC (Fine Offset Adjust) and Gain DAC (Fine Gain Adjust). There can be up to 17 temperature index values with corresponding scale factors for the Gain DAC and Zero DAC. The temperature values in the Lookup Table represent points on the piecewise linear curves that compensate for sensor span and offset temperature drifts. Each temperature value corresponds to respective slope factors for the Gain DAC and Zero DAC. The DAC values are linearly interpolated for a measured temperature that does not fall directly on a stored temperature value.

Figure 3–2. PGA309 Internal Registers Map to External EEPROM Addresses

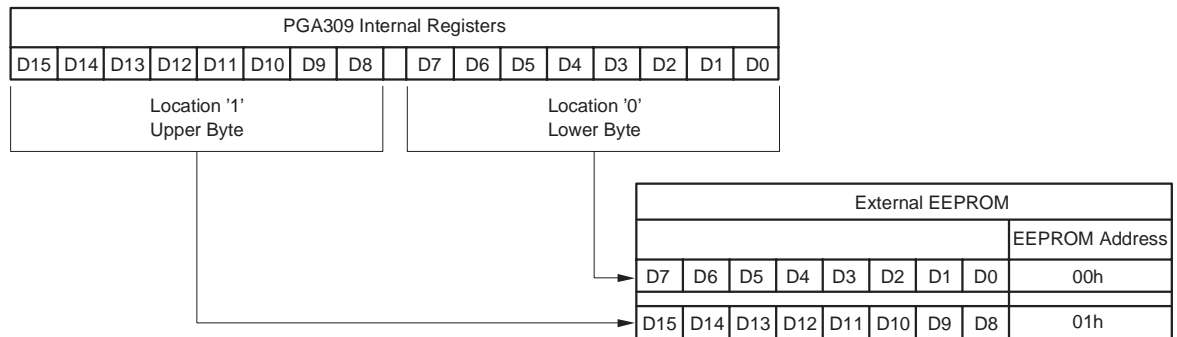


Table 3–1. 1k-Bit External EEPROM Contents

| | EEPROM Address Location '1' (Decimal) | EEPROM Address Location '0' (Decimal) | Content (all data is stored as two 8-bit bytes) |
|-------------|--|--|---|
| First Part | 1 | 0 | EEPROM Programmed Flag; 5449h = "T1" ascii |
| | 3 | 2 | Not used, but include in Checksum1 calculation; available for user data. |
| | 5 | 4 | Not used, but include in the Checksum1 calculation; available for user data. |
| | 7 | 6 | Value for PGA309 Register 3, Reference Control and Linearization |
| | 9 | 8 | Value for PGA309 Register 4: PGA Coarse Offset and Gain/Output Amplifier Gain |
| | 11 | 10 | Value for PGA309 Register 5: PGA Configuration and Over/Under-Scale Limit |
| | 13 | 12 | Value for PGA309 Register 6: Temp ADC Control |
| | 15 | 14 | Checksum1= FFFFh – sum(hex values of location 1/0 thru 13/12) Checksum1 truncated above 16 bits |
| Second Part | 17 | 16 | T0 (Temperature Index Value for Temp ≤ T0) |
| | 19 | 18 | Z0 (Zero DAC Value for Temp ≤ T0) |
| | 21 | 20 | G0 (Gain DAC Value for Temp ≤ T0) |
| | 23 | 22 | T1 (Temperature Index Value T1) |
| | 25 | 24 | ZM1 (Zero DAC Multiplying Slope Factor for T1 ≤ Temp ≤ T0) |
| | 27 | 26 | GM1 (Gain DAC Multiplying Slope Factor for T1 ≤ Temp ≤ T0) |
| | ... | ... | ... |
| | ... | ... | ... |
| | ... | ... | ... |
| | 113 | 112 | T16 (Temperature Index Value T1) |
| | 115 | 114 | ZM16 (Zero DAC Multiplying Slope Factor for T15 ≤ Temp ≤ T16) |
| | 117 | 116 | GM16 (Gain DAC Multiplying Slope Factor for T15 ≤ Temp ≤ T16) |
| | 119 | 118 | TEND (End of Lookup Table → 7FFFh) |
| | 121 | 120 | ZMEND (End of Lookup Table; value ignored but included in Checksum2) |
| | 123 | 122 | GMEND (End of Lookup Table; value ignored but included in Checksum2) Checksum2 = FFFFh – sum(Hex values of location 17/16 thru 123/122) Checksum2 truncated above 16 bits |
| | 125 | 124 | Not used; available for user data |
| | 127 | 126 | Not used; available for user data |

T0, T1, T2 ... Tx (where $x \leq 16$) are the temperature index values in the Lookup Table. These are output results from the Temp ADC. The values must be monotonically increasing from minimum to maximum for the Lookup Table to function correctly. Note that this does not necessarily correspond to increasing temperature. For example, if a diode voltage is being measured by the Temp ADC, its readings will be decreasing with temperature. However, the Lookup Table must still be built from minimum Temp ADC reading to the maximum Temp ADC reading. The data format for Tx is 16-bit data with a format dependent upon which Temp ADC mode is selected (see Section 6.2.7 on page 6-13, *Register 6: Temp ADC Control Register*).

Z0 is the value of the Zero DAC setting for temperatures T0 and below. Z0 data format is unsigned 16-bit data. The equation for the Zero DAC value is:

$$Zx = \left(\frac{V_{Z\text{desired}}}{V_{\text{REF}}} \right) \cdot 65,536 \quad (\text{counts})$$

where $0 \leq Zx \leq 65535$ (programmable range) and $0.1V \leq \text{Zero DAC} \leq V_{SA} - 0.1V$ (analog limits).

G0 is the value of the Gain DAC setting for temperatures T0 and below. G0 data format is unsigned 16-bit data. The equation for the Gain DAC value is:

$$Gx = \left(\text{Gain}_{\text{desired}} - \frac{1}{3} \right) \cdot \frac{3}{2} \cdot 65,536 \quad (\text{counts})$$

where $0.3333333 \leq \text{Gain DAC} \leq 0.9999898$ and $0 \leq Gx \leq 65535$.

ZM1, ZM2 ... ZMi are multiplying slope factors for each piecewise linear segment for the Zero DAC adjustment. They are calculated based on the desired values Z1, Z2 ... Zx (calculated same as Z0) of the Zero DAC for T1, T2 ... Tx respectively. The equation for calculating the ZMi slope factors is:

$$ZMi = 256 \left[\frac{Zx - Z(x-1)}{Tx - T(x-1)} \right] \quad (\text{counts})$$

The ZMi scale factor of 256 is to format the decimal value for PGA309 internal binary arithmetic. These numbers are 16-bit, Two's Complement data format. See Table 3–2 for an example of the Lookup Table.

GM1, GM2 ... GMi are multiplying slope factors for each piecewise linear segment for the Gain DAC adjustment. They are calculated based on the desired values G1, G2 ... Gx (calculated the same as G0) of the Gain DAC for T1, T2, T3 ...Tx, respectively. The equation for calculating the GMi slope factors is:

$$GMi = 256 \left[\frac{Gx - G(x-1)}{Tx - T(x-1)} \right] \quad (\text{counts})$$

The GMi scale factor of 256 is to format the decimal value for PGA309 internal arithmetic. These numbers are 16-bit, Two's-Complement data format.

The end of the Lookup Table is flagged by temperature index value $T_{\text{END}} = 7FFFh$ in the temperature index data. The ZM_{END} value of this entry is ignored but is included in Checksum2. The ZM_{END} value should be set to zero. The GM_{END} value of this entry becomes Checksum2, the checksum for the second part of the EEPROM.

Example 3–1 details the calculation of Lookup Table values and how the PGA309 lookup table linear interpolation algorithm works.

3.2.1 Temperature Lookup Table Calculation

Example 3–1. Temperature Lookup Table Calculation

In Figure 3–3, G0–G7 are the exact desired settings at T0–T7, respectively, for the Gain DAC. GM1–GM7 are the slopes of the piecewise linear curves that connect G0 to G1, G1 to G2, G2 to G3, G3 to G4, G4 to G5, G5 to G6, and G6 to G7. This example demonstrates how the Lookup Table is constructed and how the Lookup Logic with Linear Interpolation Algorithm accurately calculates the setting for the Gain DAC at $T_{\text{READ}} = 25^\circ\text{C}$. Note that $T_{\text{READ}} = 25^\circ\text{C}$ does not fall on an exact data point (T_x, G_x). Temperature coefficients for both the Gain DAC and the Zero DAC are calculated to complete the Lookup Table.

Given:

- 1) Desired Gain DAC values as in Figure 3–3 and Zero DAC values as in Figure 3–4.
- 2) Internal Temperature Mode with resolution set to 12-bit (16-bit data format: 12-bit, sign-extended, right-justified, Two's Complement).
- 3) $V_{\text{REF}} = +5\text{V}$.

Find: Gain DAC slope factors (GMi) and Zero DAC slope factors (ZMi).

Figure 3–3. Desired Gain DAC Values


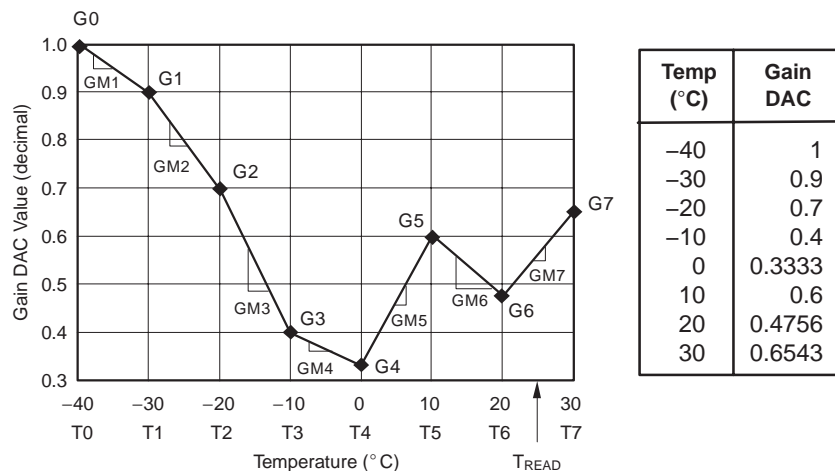


Figure 3–4. Desired Zero DAC Values

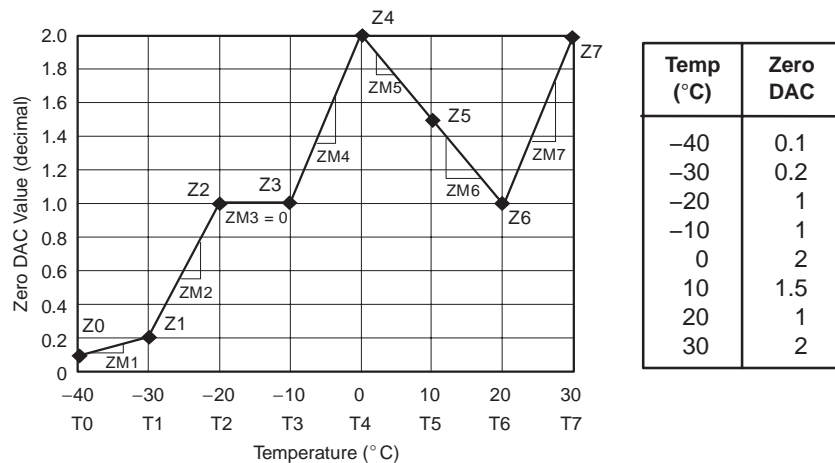

Step 1: Calculate Temp ADC counts for the temperature range of interest using Table 3–2.

Table 3–2. Temp ADC Temperature vs Counts

| Temperature (°C) | Temp ADC (Counts) | Temp ADC (Hex) |
|---------------------|----------------------|-------------------|
| –40 | –640 | FD80 |
| –30 | –480 | FE20 |
| –20 | –320 | FEC0 |
| –10 | –160 | FF60 |
| 0 | 0 | 0000 |
| 10 | 160 | 00A0 |
| 20 | 320 | 0140 |
| 25 | 400 | 0190 |
| 30 | 480 | 01E0 |

The resolution for the Temp ADC in Internal Temperature Mode is 0.0625°C/count.

For positive temperatures (for example, 20°C):

$$(20^{\circ}\text{C})/(0.0625^{\circ}\text{C/count}) = 320 \rightarrow 140\text{h} \rightarrow 0001\ 0100\ 0000$$

Two's Complement is not performed on positive numbers. Simply convert the number to binary code with 16-bit, right-justified format, and MSB = '0' to denote a positive sign. Extend the sign to the upper 4 bits.

20°C will be read by the Temp ADC as 0000 0001 0100 0000 \rightarrow 140h

For negative temperatures (that is, –20°C):

$$(|-20|)/(0.0625^{\circ}\text{C/count}) = 320 \rightarrow 140\text{h} \rightarrow 0001\ 0100\ 0000$$

Generate the Two's Complement of a negative number by complementing the absolute value binary number and adding 1. Extend the sign, denoting a negative number by MSB = '1'. Extend the sign to the upper 4 bits to form the 16-bit word.

–20°C will be read by the Temp ADC as 1111 1110 1100 0000 \rightarrow FEC0h.

Step 2: Calculate Gain DAC temperature coefficients using Table 3–3.

For the Gain DAC desired counts (that is, $G3 = 0.4$):

$$Gx = (\text{Gain}_{\text{DESIRED}} - 1/3)(3/2)(65536)$$

$$G3 = (0.4 - 1/3)(3/2)(65536) = 6553.6$$

$$0 \leq Gx \leq 65535$$

$$0.3333333 \leq \text{Gain DAC} \leq 0.9999898$$

For positive slopes (that is, GM5):

$$GM5 = [(G5 - G4)/(T5 - T4)][256]$$

$$GM5 = [(26214.4 - 0)/(160 - 0)][256] = 41943.04$$

$$\text{Integer}[41943.04] = 41943$$

$$GM5 = 41943 \rightarrow A3D7h \rightarrow 1010\ 0011\ 1101\ 0111$$

For negative slopes (that is, GM2):

$$GM2 = [(G2 - G1)/(T2 - T1)][256]$$

$$GM2 = [(36044.8 - 55705.6)/(-320 - \{-480\})][256] = -31457.28$$

$$\text{Integer}[-31457.28] = -31457$$

Generate the Two's Complement of -31457:

$$GM2 = 851Fh \rightarrow 1000\ 0101\ 0001\ 1111$$

Note: Gain DAC Slopes

If the Gain DAC slope computes to a count > 65535, there is a problem. The Temp ADC must be reconfigured for lower resolution or the number of points in the Lookup Table must be increased to bring the slopes within the PGA309 computation region.

Table 3–3. Gain DAC Temperature Coefficient Calculation

| Temp (°C) | Temp Index | Temp ADC (Counts) | Gain DAC Desired Value | Gain DAC Desired Index | Gain DAC Desired (Counts) | Gain DAC Slope | Gain DAC Slope Formula | Gain DAC Slope ⁽¹⁾ (Counts) | Gain DAC Slope (Hex) |
|-----------|------------|-------------------|------------------------|------------------------|---------------------------|----------------|------------------------------------|--|----------------------|
| -40 | T0 | -640 | 1 | G0 | 65535 | G0 | $G0 = G0$ | 65535 | FFFF |
| -30 | T1 | -480 | 0.9 | G1 | 55705.6 | GM1 | $GM1 = [(G1 - G0)/(T1 - T0)][256]$ | -15727 | C291 |
| -20 | T2 | -320 | 0.7 | G2 | 36044.8 | GM2 | $GM2 = [(G2 - G1)/(T2 - T1)][256]$ | -31457 | 851F |
| -10 | T3 | -160 | 0.4 | G3 | 6553.6 | GM3 | $GM3 = [(G3 - G2)/(T3 - T2)][256]$ | -47104 | 4800 |
| 0 | T4 | 0 | 0.3333 | G4 | 0 | GM4 | $GM4 = [(G4 - G3)/(T4 - T3)][256]$ | -10496 | D700 |
| 10 | T5 | 160 | 0.6 | G5 | 26214.4 | GM5 | $GM5 = [(G5 - G4)/(T5 - T4)][256]$ | 41943 | A3D7 |
| 20 | T6 | 320 | 0.4756 | G6 | 13985.4 | GM6 | $GM6 = [(G6 - G5)/(T6 - T5)][256]$ | -19566 | B392 |
| 30 | T7 | 480 | 0.6543 | G7 | 31552.3 | GM7 | $GM7 = [(G7 - G6)/(T7 - T6)][256]$ | 28107 | 6DCB |

1) Integer [Gain DAC Slope Formula].

Step 3: Calculate Zero DAC temperature Coefficients using Table 3–4.

For the Zero DAC desired counts (for example, Z5 = 1.5):

$$Zx = (V_{ZDESIRE}/V_{REF})(65536)$$

$$Z5 = (1.5/5)(65536) = 19660.8$$

$$0 \leq Zx \leq 65535$$

$$0.1V \leq \text{Zero DAC Analog Range} \leq (V_{SA} - 0.1V)$$

$$0V \leq \text{Zero DAC Programming Range} \leq V_{REF}$$

For positive slopes (for example, ZM4):

$$ZM4 = [(Z4 - Z3)/(T4 - T3)][256]$$

$$ZM4 = [(26214.4 - 13107.2)/(0 - \{-160\})][256] = 20971.52$$

$$\text{Integer } [20971.52] = 20972$$

$$ZM4 = 20972 \rightarrow 51ECh \rightarrow 0101\ 0001\ 1110\ 1101$$

For negative slopes (for example, ZM6):

$$ZM6 = [(Z6 - Z5)/(T6 - T5)][256]$$

$$ZM6 = [(13107.2 - 19660.8)/(320 - 160)][256] = -10485.76$$

$$\text{Integer } [-10485.76] = -10486$$

Generate the Two's Complement of -10486:

$$ZM6 = D70Ah \rightarrow 1101\ 0111\ 0000\ 1010$$

Note: Zero DAC Slopes

If the Zero DAC slope computes to a count > 65535, there is a problem. The Temp ADC must be reconfigured for lower resolution or the number of points in the Lookup Table must be increased to bring the slopes within the PGA309 computation region.

Table 3–4. Zero DAC Temperature Coefficient Calculation

| Temp (°C) | Temp Index | Temp ADC (Counts) | Zero DAC Desired Value | Zero DAC Desired Index | Zero DAC Desired (Counts) | Zero DAC Slope | Zero DAC Slope Formula | Zero DAC Slope(1) (Counts) | Zero DAC Slope (Hex) |
|-----------|------------|-------------------|------------------------|------------------------|---------------------------|----------------|------------------------------------|----------------------------|----------------------|
| -40 | T0 | -640 | 0.1 | Z0 | 1310.7 | Z0 | $Z0 = Z0$ | 1311 | 051F |
| -30 | T1 | -480 | 0.2 | Z1 | 2621.4 | ZM1 | $ZM1 = [(Z1 - Z0)/(T1 - T0)][256]$ | 2097 | 0831 |
| -20 | T2 | -320 | 1 | Z2 | 13107.2 | ZM2 | $ZM2 = [(Z2 - Z1)/(T2 - T1)][256]$ | 16777 | 4189 |
| -10 | T3 | -160 | 1 | Z3 | 13107.2 | ZM3 | $ZM3 = [(Z3 - Z2)/(T3 - T2)][256]$ | 0 | 0000 |
| 0 | T4 | 0 | 2 | Z4 | 26214.4 | ZM4 | $ZM4 = [(Z4 - Z3)/(T4 - T3)][256]$ | 20972 | 51EC |
| 10 | T5 | 160 | 1.5 | Z5 | 19660.8 | ZM5 | $ZM5 = [(Z5 - Z4)/(T5 - T4)][256]$ | -10486 | D70A |
| 20 | T6 | 320 | 1 | Z6 | 13107.2 | ZM6 | $ZM6 = [(Z6 - Z5)/(T6 - T5)][256]$ | -10486 | D70A |
| 30 | T7 | 480 | 2 | Z7 | 26214.4 | ZM7 | $ZM7 = [(Z7 - Z6)/(T7 - T6)][256]$ | 20972 | 51EC |

1) Integer [Zero DAC Slope Formula].

Step 4: Assemble the Lookup Table, as shown in Table 3–5.

Table 3–5. Lookup Table Contents

| Temp (°C) | Temp Index | Zero DAC Slope | Gain DAC Slope | EEPROM Tx (Hex) | EEPROM ZMi (Hex) | EEPROM GMi (Hex) |
|-----------|------------------|-------------------|-------------------|-----------------|------------------|------------------|
| –40 | T0 | Z0 | G0 | FD80 | 051F | FFFF |
| –30 | T1 | ZM1 | GM1 | FE20 | 0831 | C291 |
| –20 | T2 | ZM2 | GM2 | FEC0 | 4189 | 851F |
| –10 | T3 | ZM3 | GM3 | FF60 | 0000 | 4800 |
| 0 | T4 | ZM4 | GM4 | 0000 | 51EC | D700 |
| 10 | T5 | ZM5 | GM5 | 00A0 | D70A | A3D7 |
| 20 | T6 | ZM6 | GM6 | 0140 | D70A | B392 |
| 30 | T7 | ZM7 | GM7 | 01E0 | 51EC | 6DCB |
| — | T _{END} | ZM _{END} | GM _{END} | 7FFF | 0000 | B5D8 |

Use the calculated values from Step 2 and Step 3.

Set TM_{END} to 7FFFh to indicate the end of the Lookup Table.

Set ZM_{END} to 0000h.

Calculate GM_{END} as Checksum2 (truncate results above 16-bit):

GM_{END} = Checksum2 = FFFFh – sum(Hex values of all entries in the Lookup Table *except* GM_{END})

GM_{END} = FFFFh – C4A27h

GM_{END} = FFFFF4B5D8h

GM_{END} = Checksum2 = B5D8h

Step 5: Calculate Ideal value for Gain DAC at T_{READ} = +25°C using Table 3–6.

Table 3–6. Gain DAC vs Temperature

| Tx | Temp (°C) | Gx | Gain DAC |
|-------------------|-----------|-------------------|------------|
| T0 | –40 | G0 | 1 |
| T1 | –30 | G1 | 0.9 |
| T2 | –20 | G2 | 0.7 |
| T3 | –10 | G3 | 0.4 |
| T4 | 0 | G4 | 0.3333 |
| T5 | 10 | G5 | 0.6 |
| T6 | 20 | G6 | 0.4756 |
| T _{READ} | 25 | G _{READ} | Calculated |
| T7 | 30 | G7 | 0.6543 |

Linear Interpolation for Gain DAC (T_{READ} = 25°C):

G_{READ} = $\{[(G7 - G6)/(T7 - T6)] [T_{\text{READ}} - T6]\} + G6$

G_{READ} = $\{[(0.6543 - 0.4756)/(30 - 20)] [25 - 20]\} + 0.4756$

G_{READ} = 0.56495

Step 6: Reference calculation algorithm for Gain DAC using Lookup Table.

Table 3–7 outlines the calculation algorithm used inside the PGA309 for linear interpolation and calculation of the Gain DAC setting for $T_{\text{READ}} = 25^{\circ}\text{C}$. From Table 3–3 the computations for GM1-GM7 at T1-T7, for given values at G1-G7, are known. In addition, the starting values (T0 and G0) were defined. Step 5 shows the Actual Gain DAC value for $T_{\text{READ}} = 25^{\circ}\text{C}$ should be 0.56495 V/V if the linear interpolation part of the calculation algorithm is working properly.

Each time the Temp ADC does a conversion, it reads the entire external EEPROM. The first part of the EEPROM is dedicated to fixed setup parameters for the PGA309 that do not change with temperature. As the PGA309 reads the second half of the EEPROM, it begins a running calculation of the Gain DAC setting with temperature (the PGA309 runs a similar calculation for the Zero DAC setting). The model in Table 3–7 includes an accumulator named GAC (G Accumulator). When the PGA309 reads T0, the initial Gain DAC setting (G0) is stored in GAC0 (GAC at $T0_{\text{READ}}$). Next, T1 is read and slope GM1 is multiplied by the difference between T1 and T0 (a scale divisor of 256 is used to convert back to *decimal* counts for our model) and added to GAC0 to form the new accumulator value, GAC1 (GAC at $T1_{\text{READ}}$). This process continues in a sequential fashion as the PGA309 reads through the entire Lookup Table. As each temperature index value (Tx) is read, it is compared against T_{READ} , the current Temp ADC conversion result. If $T_x > T_{\text{READ}}$, it is known that T_{READ} is between Tx and $T(x - 1)$. In this example, it occurs after T7 is read. The accumulator contents, GAC6 (GAC at T6), are modified by the addition of $(T_{\text{READ}} - T6)(\text{GM7})$. The resulting GAC_ T_{READ} is the linearly interpolated setting for the Gain DAC at $T_{\text{READ}} = 25^{\circ}\text{C}$. The actual Gain DAC value is slightly different than the theoretical value calculated in Step 5 due to Gain DAC resolution and computation rounding. The rest of the EEPROM is read through T_{END} for error checking with Checksum2 at the end of the Lookup Table. If Checksum2 is valid then the Gain DAC is updated with the computed value $\text{GAC}_{T_{\text{READ}}} = 0.565399169$.

Table 3–7. Gain DAC Lookup Table Calculation Algorithm

| Temp (°C) | T _x | Temp ADC (Counts) | G _{Mi} | Gain DAC Slope ⁽¹⁾ (Counts) | GAC Calculation | Running GAC Value ⁽¹⁾ (Counts) | Actual Gain DAC (V/V) |
|-----------|-------------------|-------------------|-----------------|--|---|---|-----------------------|
| -40 | T ₀ | -640 | G ₀ | 65535 | $GAC_0 = G_0$ | 65535 | 0.9999898 |
| -30 | T ₁ | -480 | G _{M1} | -15727 | $GAC_1 = GAC_0 + [GM_1(T_1 - T_0)/256]$ | 55706 | 0.9000041 |
| -20 | T ₂ | -320 | G _{M2} | -31457 | $GAC_2 = GAC_1 + [GM_2(T_2 - T_1)/256]$ | 36045 | 0.7000020 |
| -10 | T ₃ | -160 | G _{M3} | -47104 | $GAC_3 = GAC_2 + [GM_3(T_3 - T_2)/256]$ | 6605 | 0.4005229 |
| 0 | T ₄ | 0 | G _{M4} | -10496 | $GAC_4 = GAC_3 + [GM_4(T_4 - T_3)/256]$ | 45 | 0.3337911 |
| 10 | T ₅ | 160 | G _{M5} | 41943 | $GAC_5 = GAC_4 + [GM_5(T_5 - T_4)/256]$ | 26259 | 0.6004537 |
| 20 | T ₆ | 320 | G _{M6} | -19566 | $GAC_6 = GAC_5 + [GM_6(T_6 - T_5)/256]$ | 14030 | 0.4760539 |
| 30 | T ₇ | 480 | G _{M7} | 28107 | $T_7 > T_{READ} \rightarrow \text{YES!}$ | — | — |
| 25 | T _{READ} | 400 | — | — | $GAC_{TREAD} = GAC_6 + [GM_7(T_{READ} - T_6)/256]$ | 22813 | 0.565399169 |
| — | T _{END} | 32767 (7FFFh) | — | — | The Lookup Table is read to the end to verify Checksum2 | — | — |

1) Integer [GAC Calculation].

GAC Calculation (for example, GAC₂):

$$GAC_1 = 55706; GM_2 = -31457; T_2 = -320; T_1 = -480$$

$$GAC_2 = GAC_1 + [GM_2(T_2 - T_1)/256]$$

$$GAC_2 = 55706 + [-31457(-320 - \{-480\})/256] = 36045.375$$

$$\text{Integer}[GAC_2] = \text{Integer}[36045.375] = 36045$$

$$GAC_2 = 36045$$

Actual Gain DAC (for example, GAC₂):

$$GAC_2 = 36045$$

$$\text{Gain DAC} = [(GAC_x/65536)(2/3)] + 1/3$$

$$\text{Gain DAC} = [(36045 / 65536)(2/3)] + 1/3 = 0.7000020$$

$$\text{Gain DAC at } GAC_2 = 0.7000020$$

3.3 Checksum Error Event

If at any time the PGA309 detects an invalid Checksum1 from the first part of the EEPROM, the PGA309 will disable V_{OUT} , wait for approximately 25ms, and try to read the EEPROM again from the beginning. It will continue to re-read the EEPROM indefinitely.

If at any time the PGA309 detects an invalid Checksum2 from the second part of the EEPROM (the Lookup Table data), it will disable V_{OUT} , set the Gain and Zero DACs to their POR values, return to the read configuration register portion (first part of the EEPROM) of the loop, and then try to read the EEPROM Lookup Table again when the next temperature conversion completes.

3.4 Test Pin

The PGA309 has a user-accessible test pin (Test, pin 9), which stops the internal state machine cycle and enables the output drive (V_{OUT}) when it is brought high (logic '1'). This mode can be used for ease of troubleshooting or initial configuration diagnostics during the system design. During normal (stand-alone) operation, the Test pin must be connected to GND (logic '0').

If the Test pin is brought high at any time, the following happens:

- ☐ The state machine described previously is interrupted and reset to its initial state. Any EEPROM transactions are interrupted and the Two-Wire bus is released.
- ☐ The PGA309 output (V_{OUT}) is enabled.
- ☐ All internal registers are kept to their current values. If the Test pin is high when the supply becomes valid, the registers stay in the initial (POR) state and output is enabled immediately.
- ☐ An external controller can modify any of the writable PGA309 registers using either a One-Wire or Two-Wire digital interface.

In this mode, a test signal can be applied to the front end of the PGA309, which quickly verifies if the signal path through the PGA309 is functioning correctly.

Test mode (Test pin = high) is recommended during initial calibration because the values in the external EEPROM are ignored and the PGA309 registers can be individually set as desired.

3.5 Power-On Initial Register States

In a power-up or low-voltage event, the POR circuit resets all the PGA309 registers to their initial state. All registers are set to zeros except for the Gain and Zero DACs, which both are set to 4000h.

Table 3–8 summarizes the key settings for the POR states.

Table 3–8. POR States for Key Parameters

| Parameter | POR State |
|-----------------------|---|
| Coarse Offset | 0V |
| Front-End PGA Gain | 4 ($V_{IN1} = V_{INP}$, $V_{IN2} = V_{INN}$) |
| Gain DAC | 0.5 |
| Output Amplifier Gain | 2 |
| Zero DAC | $0.25V_{REF}$ |
| V_{REF} Select | External Reference |
| Lin DAC | 0 |
| Fault Monitor | Disabled |
| Over/Under-Scale | Disabled |
| V_{EXC} | Disabled |
| I_{TEMP} | Disabled |
| Temp ADC | External Signal Mode |

Example 3–2 and Figure 3–5 show by example how the PGA309 functions on power-up with the Test pin high.

Example 3–2. PGA309 Power-Up State


For a +5V supply and configuration as shown in Figure 3–5 with Test pin high, the gain and offset scaling through the PGA309 on power-up becomes:

$$V_{OUT} = V_{DIFF} (\text{Front-End PGA Gain})(\text{Output Amplifier Gain})(\text{Fine Gain}) + 0.25V_{REF}(\text{Fine Gain})(\text{Output Amplifier Gain})$$

$$V_{OUT} = V_{DIFF} (4)(2)(0.5) + (0.25(5)(0.5)) \times 2$$

$$V_{OUT} = 4 V_{DIFF} + 1.25V$$

Figure 3–5. Signal Path Functional Check with Test = '1' on Power-Up

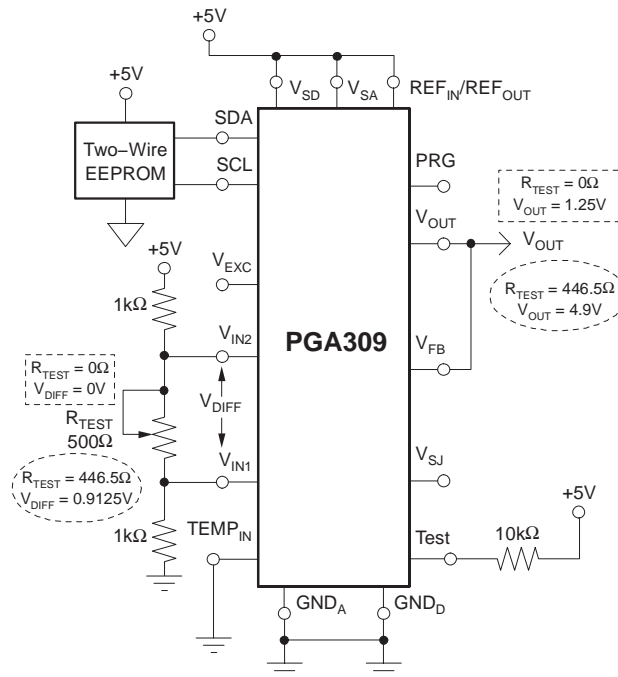

Note: Two conditions for V_{DIFF} and the resulting V_{OUT} are shown in this figure. Condition one is in a dashed, square box. Condition two is shown in a dashed oval.

Digital Interface

This chapter describes the digital interface of the PGA309.

| Topic | Page |
|--|-------------|
| 4.1 Description | 4-2 |
| 4.2 Two-Wire Interface | 4-2 |
| Device Addressing | 4-4 |
| Two-Wire Access to PGA309 | 4-4 |
| 4.3 One-Wire Interface | 4-6 |
| 4.4 One-Wire Interface Timeout | 4-11 |
| 4.5 One-Wire Interface Timing Considerations | 4-11 |
| 4.6 Two-Wire Access to External EEPROM | 4-12 |
| 4.7 One-Wire Interface Initiated Two-Wire EEPROM Transactions | 4-14 |
| 4.8 PGA309 Stand-Alone Mode and Two-Wire Transactions | 4-14 |
| 4.9 PGA309 Two-Wire Bus Master Operation and Bus Sharing Considerations | 4-17 |
| 4.10 One-Wire Operation with PRG Connected to V_{OUT} | 4-20 |
| 4.11 Four-Wire Sensor Modules and One-Wire Interface (PRG) | 4-25 |

4.1 Description

There are two digital interfaces on the PGA309. The PRG pin uses a One-Wire, UART-compatible interface, with bit rates from 4.8kbits/s (4800 baud) to 38.4kbits/s (38400 baud). The SDA and SCL pins together form an industry standard Two-Wire interface at clock rates from 1kHz to 400kHz. The external EEPROM uses the Two-Wire interface for programming and reading. Communication to the PGA309 internal registers can be conducted through either digital interface, One-Wire or Two-Wire. Additionally, the external EEPROM can be programmed either through the PGA309 One-Wire interface pin, PRG, or by direct connection to the SDA and SCL lines of the Two-Wire interface.

4.2 Two-Wire Interface

The industry standard Two-Wire timing diagram is shown in Figure 4–1, with the timing diagram definitions in Table 4–1. The key operating states are:

- ☐ **Bus Idle:** Both SDA and SCL lines remain high.
- ☐ **START Condition:** A START condition is defined by a change from high to low in the state of the SDA line, while the SCL line is high. Each data transfer is initiated with a START condition (see Figure 4–1).
- ☐ **STOP Condition:** A STOP condition is defined by a change from low to high in the state of the SDA line, while the SCL line is high. Each data transfer is terminated with a repeated START or STOP condition (see Figure 4–1).
- ☐ **Data Transfer:** The number of data bytes transferred between a START and a STOP condition is not limited and is determined by the master device. The receiver acknowledges the transfer of each 8-bit byte of data.
- ☐ **Acknowledge:** Each receiving device, when addressed, is obliged to generate an Acknowledge bit. A device acknowledges by pulling down the SDA line during the Acknowledge clock pulse in such a way that the SDA line is stable low during the high period of the Acknowledge clock pulse. Setup and hold times must be taken into account. On a master receive, the master may terminate the transaction by generating a Not Acknowledge on the last byte that has been transmitted by the slave (see Figure 4–2).

Table 4–1. Two-Wire Timing Diagram Definitions

| Parameter | | MIN | MAX | UNITS |
|---|-------------|------|-----|-------|
| SCL Operating Frequency | f_{SCL} | 1 | 400 | kHz |
| Bus Free Time Between STOP and START Conditions | t_{BUF} | 600 | | ns |
| Hold Time After Repeated START Condition. After this period, the first clock is generated. | t_{HDSTA} | 600 | | ns |
| Repeated START Condition Setup Time | t_{SUSTA} | 600 | | ns |
| STOP Condition Setup Time | t_{SUSTO} | 600 | | ns |
| Data Hold Time | t_{HDDAT} | 0 | | ns |
| Data Setup Time | t_{SUDAT} | 100 | | ns |
| SCL Clock LOW Period | t_{LOW} | 1300 | | ns |
| SCL Clock HIGH Period | t_{HIGH} | 600 | | ns |
| Clock/Data Fall Time | t_F | | 300 | ns |
| Clock/Data Rise Time | t_R | | 300 | ns |

Figure 4–1. Two-Wire Timing Diagram


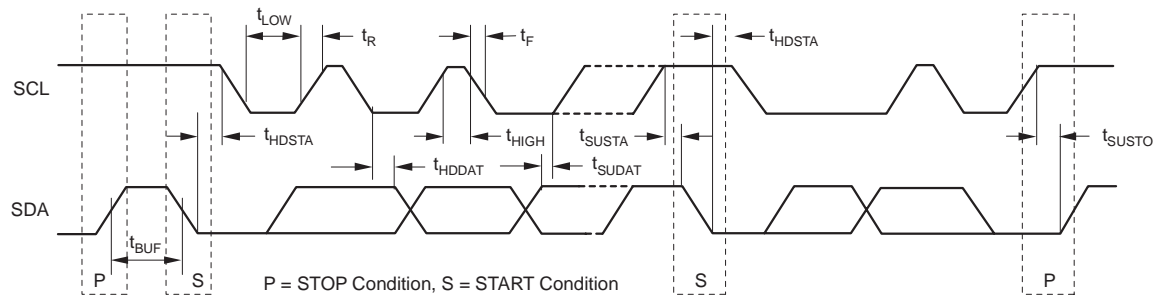


Figure 4–2. Two-Wire Start and Acknowledge

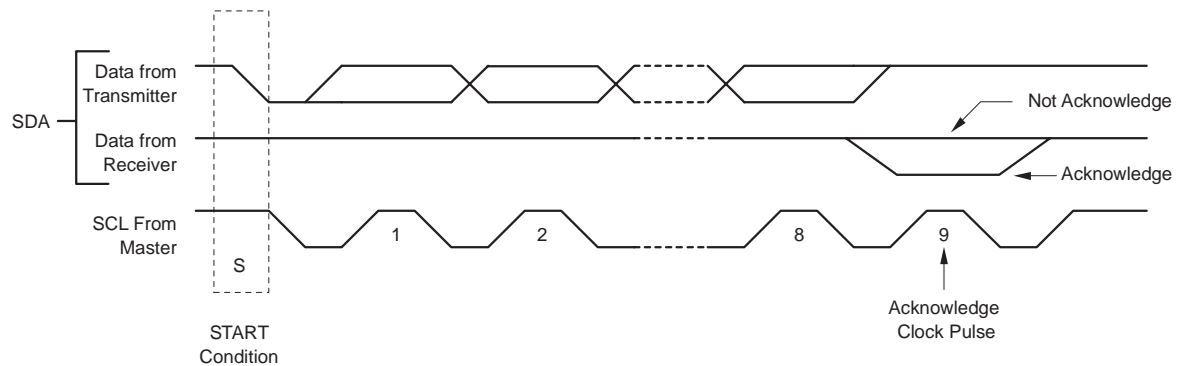

4.2.1 Device Addressing

Following a START condition issued by the master, a control byte is the first byte received. The seven most significant bits (MSBs) of the control byte are the slave address for the part being addressed. The last bit of the control byte is a Read/Write control bit (Read = '1', Write = '0'). The slave addresses for the PGA309 and supported external EEPROM are shown in Figure 4–3.

4.2.2 Two-Wire Access to PGA309

Figure 4–4 shows the Two-Wire read and write timing supported for interfacing directly with the PGA309 internal registers.

Figure 4–3. External EEPROM and Control Byte Allocation


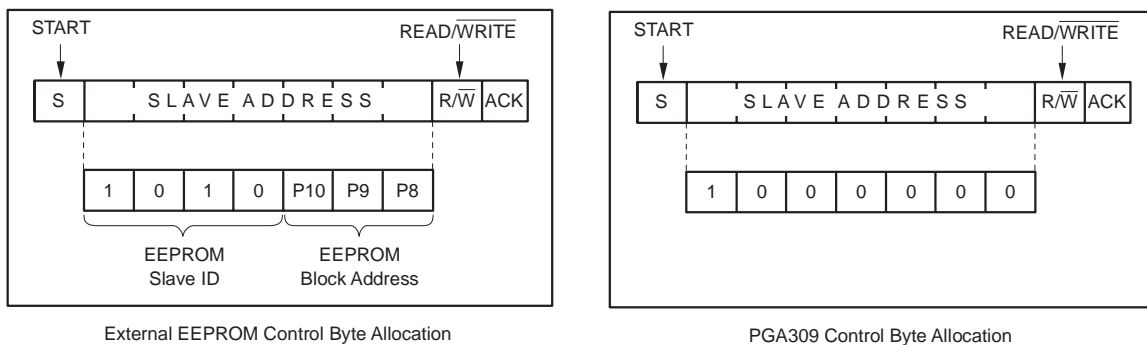


Figure 4-4. Two-Wire Access to PGA309 Timing

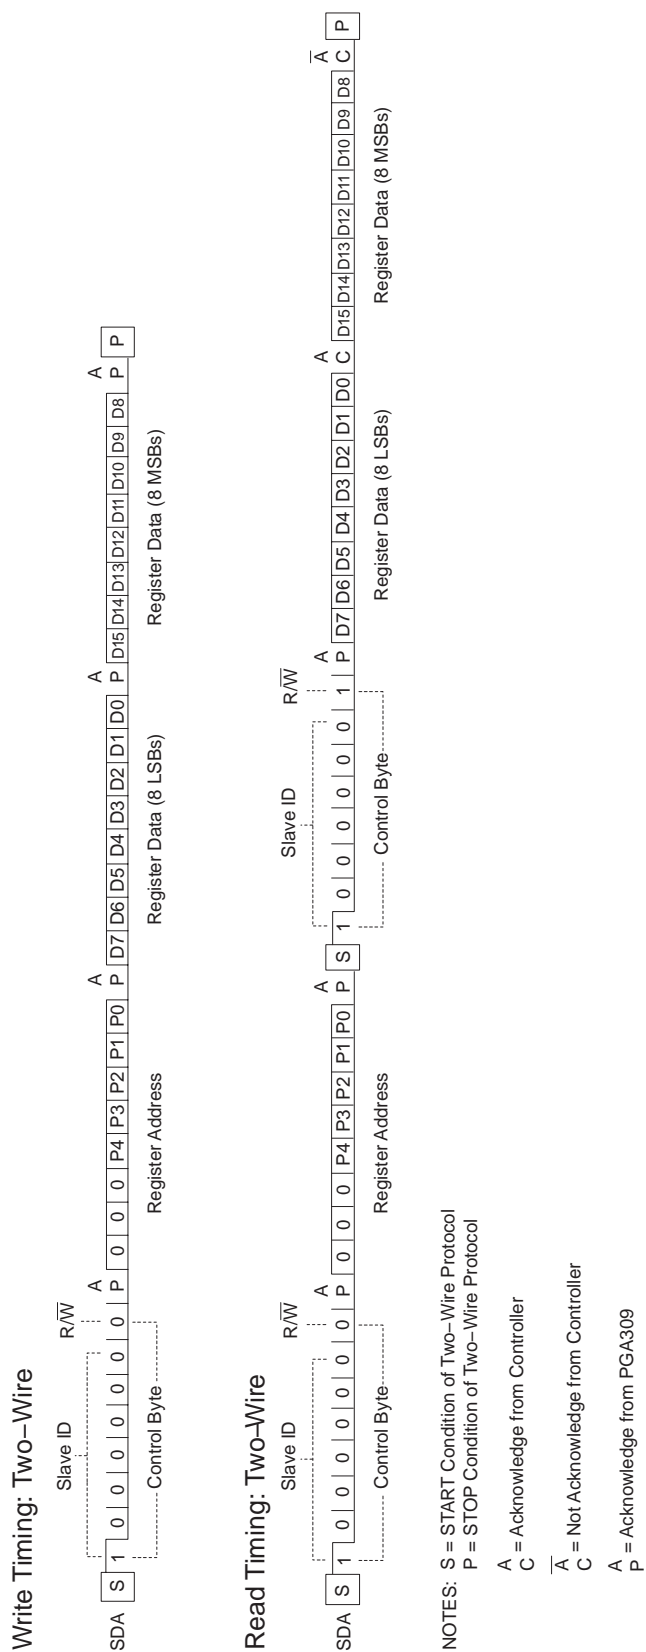


4.3 One-Wire Interface

The PGA309 may be configured through a One-Wire UART-compatible interface (PRG pin). This interface also allows programming of the external industry-standard Two-Wire EEPROM device. There are six possible communication transactions. These transactions allow the internal register pointer to be updated, the external EEPROM pointer to be updated, internal registers to be read, internal registers to be written, EEPROM data to be read, and EEPROM data to be written. It is possible to connect the PRG pin, which uses the One-Wire interface, to the V_{OUT} pin in true three-wire sensor module applications and still allow for digital programming.

Each transaction consists of several bytes of data transfer. Each byte consists of 10 bit periods. The first bit is the start bit and is always zero. The PRG pin should always be high when no communication is in progress. The one-to-zero (high-to-low) transition of the PRG pin signals the start of a byte transfer and all timing information for the current byte is referenced to this transition. Bits 2 thru 9 are the eight data bits for the byte and are transferred least significant bit (LSB) first. The tenth bit is the stop bit and is always '1'. The recommended circuit implementation to interface to the PRG pin uses a pull-up resistor and/or pull-up current source with an open drain (or open collector) driver connected to the PRG pin. (The PRG pin is also an open drain output. The PRG pin may be driven high by the digital programmer (controller) during transmit from the controller, but some form of pull-up will be required to allow the signal to go high during a receive transaction, since the PGA309 can only pull the output low. Figure 4–5 shows a typical connection between the PGA309 PRG pin and the controller.

Figure 4–5. Typical PGA309 PRG To Controller Connection

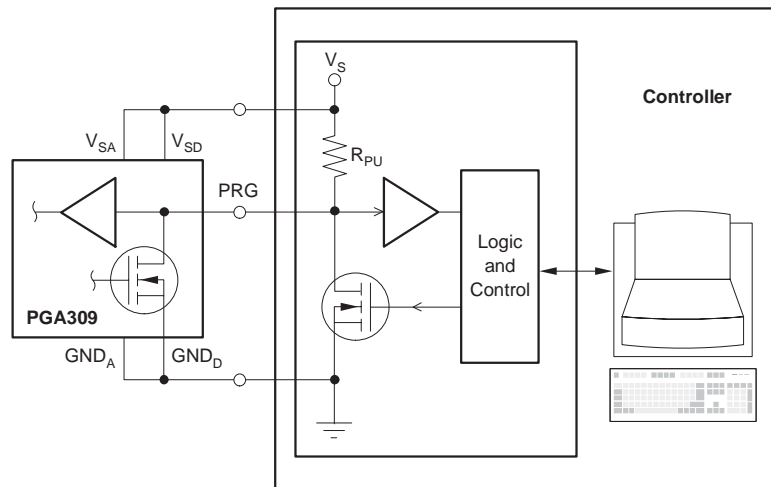


All communication transactions start with an initialization byte transmitted by the controller. This byte (55h) is used to sense the baud rate used for the communication transaction. The baud rate is sensed during the initialization byte of every transaction. This baud rate is used for the entire transaction. Each transaction may use a different baud rate if desired. Baud rates of 4800 to 38400 are supported. The second byte is a command byte transmitted by the controller.

There are six possible commands:

- ☐ Set PGA309 Register Address Pointer (01h)
- ☐ Set EEPROM Address Pointer (02h)
- ☐ Write PGA309 Register (04h)
- ☐ Write EEPROM (08h)
- ☐ Read PGA309 Register (10h)
- ☐ Read EEPROM (20h)

See Figure 4–6 for timing details of these transactions.

Figure 4-6. One-Wire (PRG) Access to PGA309 and External EEPROM Timing

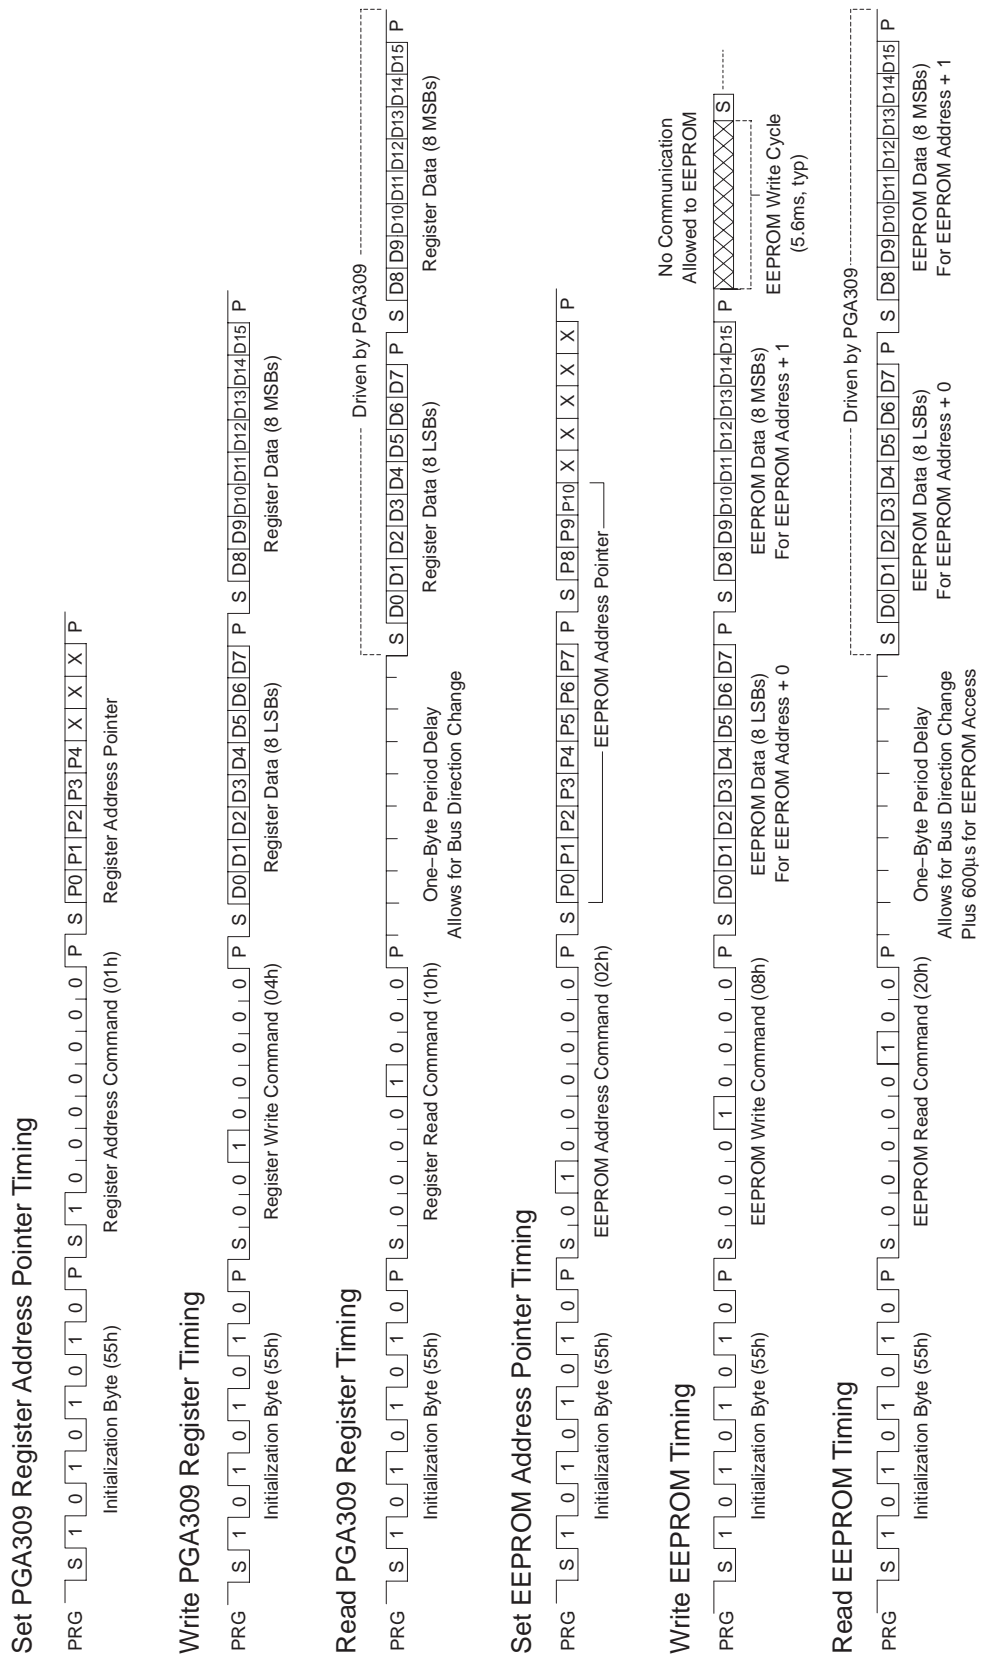


NOTES: S = START Condition of One-Wire Protocol
P = STOP Condition of One-Wire Protocol
Unless otherwise noted, all transactions are

Data transfer occurs after the command byte. The number of bytes and direction of data transfer depend on the command byte.

For the Set PGA309 Register Address Pointer (01h) command, one additional byte is required to be transmitted by the controller. This is used to select the PGA309 internal register for the next PGA309 Write Register (04h) or PGA309 Read Register (10h) command. For the PGA309 Write Register command, two additional bytes are required to be transmitted by the controller. These two bytes, transmitted least significant byte first, are stored in the PGA309 internal register pointed to by the register address pointer. The addressed register will be updated with all 16 bits simultaneously at the completion of the transfer of the second byte. For the PGA309 Read Register (10h) command, two additional bytes are transmitted by the PGA309. The PGA309 waits for eight bit periods after the completion of the command byte before beginning transmission. This allows time for the controller to ensure that the PGA309 will be able to control the One-Wire interface. The first byte transmitted is the least significant byte of the register and the second byte is the most significant byte of the register.

For a One-Wire PGA309 sequence, the transactions may be repeated immediately one after the other, as shown in Figure 4–7. For a One-Wire PGA309 register read sequence, the transactions may be repeated after the data has been received from the PGA309, also shown in Figure 4–7.

Figure 4–7. One-Wire Access to PGA309 Registers

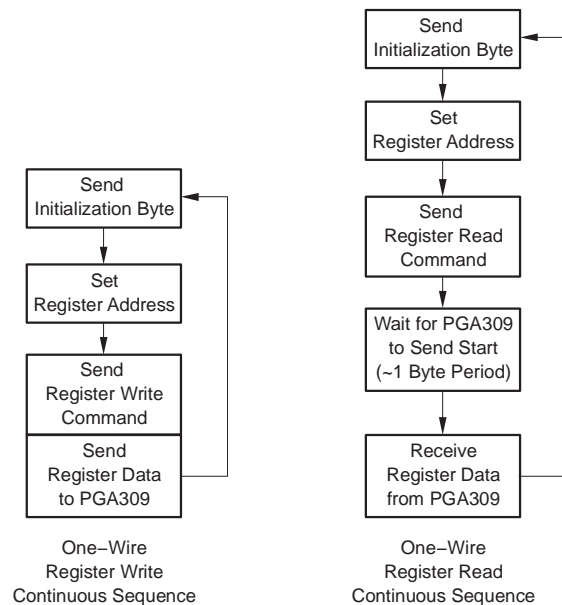


For the Set EEPROM Address Pointer (02h) command, two additional bytes must be transmitted by the controller. These are used for the EEPROM address for the next Write EEPROM (08h) or Read EEPROM (20h) command. For the Write EEPROM (08h) command, two additional bytes are transmitted by the controller. These two bytes are written to the EEPROM and stored at the address contained in the EEPROM address pointer. The first byte (least significant byte) is written to the address in the EEPROM address pointer. The second byte (most significant byte) is written to the address in the EEPROM address pointer plus one. To avoid any confusion, the EEPROM address pointer is always set to a value that is even. The first byte is written to the even address and the second byte is written to the next consecutive odd address.

The controller is responsible for ensuring that the EEPROM device has enough time to successfully complete the write operation before additional EEPROM communication occurs. For a typical EEPROM, this will be about 5.6ms (0.6ms for the PGA309 to write a 16-bit byte into the EEPROM and 5ms for the EEPROM nonvolatile internal write cycle). For the Read EEPROM (20h) command, two additional bytes are transmitted by the PGA309. The PGA309 waits for eight bit periods after the completion of the command byte to allow time for data direction change. The PGA309 also waits for a read communication from the EEPROM device to occur. This will typically be 600µs of additional delay. The first byte transmitted is the least significant byte (from EEPROM address) and the second byte transmitted is the most significant byte (from EEPROM address + 1).

For continuous One-Wire PGA309 EEPROM writes, the controller must insert a typical 5.6ms delay between transactions, as shown in Figure 4–8. For continuous One-Wire PGA309 EEPROM reads, transactions may be repeated after the data has been received from the PGA309, as shown in Figure 4–8.

Figure 4–8. One-Wire Access to External EEPROM

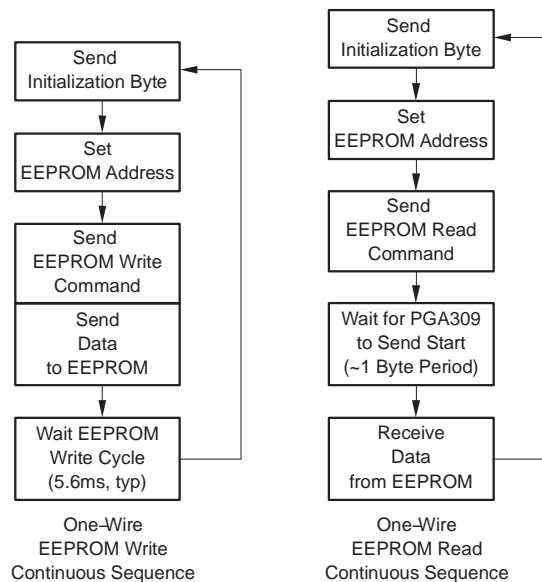

If there is an invalid communication transaction or disconnect with the EEPROM, a One-Wire EEPROM Read will be all 1s.

4.4 One-Wire Interface Timeout

A timeout mechanism is implemented to allow for resynchronization of the One-Wire interface, or if synchronization between the controller and the PGA309 is lost for any reason. The timeout period is set to approximately 25ms to 35ms. If the timeout period expires between the initialization byte and the command byte, between the command byte and any data byte, or between any data bytes, the PGA309 will reset the One-Wire interface circuitry to expect an initialization byte. Every time a byte is transmitted on the One-Wire interface, this timeout period is restarted.

4.5 One-Wire Interface Timing Considerations

Figure 4–9 illustrates the key timing and jitter considerations for the One-Wire interface and Table 4–2 contains the specifications for ensured, reliable operation. During a transaction, the baud rate must remain within $\pm 1\%$ of its initialization byte value; however, the baud rate can change from transaction to transaction.

Figure 4–9. One-Wire Through PGA309 Timing Diagram

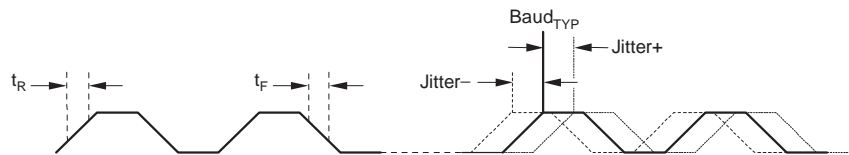



Table 4–2. One-Wire Timing Diagram Definitions

| PARAMETER | MIN | TYP | MAX | UNITS |
|--|------|-----|---------|--------|
| Baud | 4.8K | | 38.4K | Bits/s |
| Rise Time, t_R | | | 0.5 | %Baud |
| Fall Time, t_F | | | 0.5 | %Baud |
| Jitter ⁽¹⁾ | | | ± 1 | %Baud |
| ⁽¹⁾ Transmit jitter from controller to PGA309. Standard UART interfaces will accept data sent from the PGA309 during One-Wire transactions. | | | | |

4.6 Two-Wire Access to External EEPROM

Figure 4–10 shows the read and write timing for the PGA309 interface to the external EEPROM when the PGA309 receives commands through the One-Wire interface (PRG pin). All manufacturer reading and writing modes are allowed when direct Two-Wire access is made to the external EEPROM. Note that full 10-bit EEPROM addressing mode is supported by the PGA309 One-Wire access to the external EEPROM through the PGA309 Two-Wire interface. A 1k-bit EEPROM minimum is needed for the PGA309 Configuration Register and 17 Lookup Table coefficients. A larger EEPROM can be used to store other configuration information such as serial number, date code, lot code, etc. In addition, note that the PGA309 SCL and SDA pins have light internal pull-up current sources to V_{SD} (85 μ A typical on each pin). This is more than adequate for most applications that involve placing only the external EEPROM close to the PGA309 on the same printed circuit board (PCB). Other applications that add load and capacitance to the SDA and SCL lines may need additional external pull-up resistors to V_{SD} to ensure rise timing requirements are met at all times. At the end of a EEPROM write cycle, there is a typical 5ms EEPROM write cycle during which the data is stored in a nonvolatile fashion internally to the EEPROM. During this time, if Two-Wire direct access is attempted, there will be no acknowledge from the EEPROM. If communicating to the external EEPROM through the PGA309 One-Wire interface, this EEPROM write cycle time is a *No Communication Allowed* time period.

Figure 4–10. Two-Wire Access to External EEPROM Timing

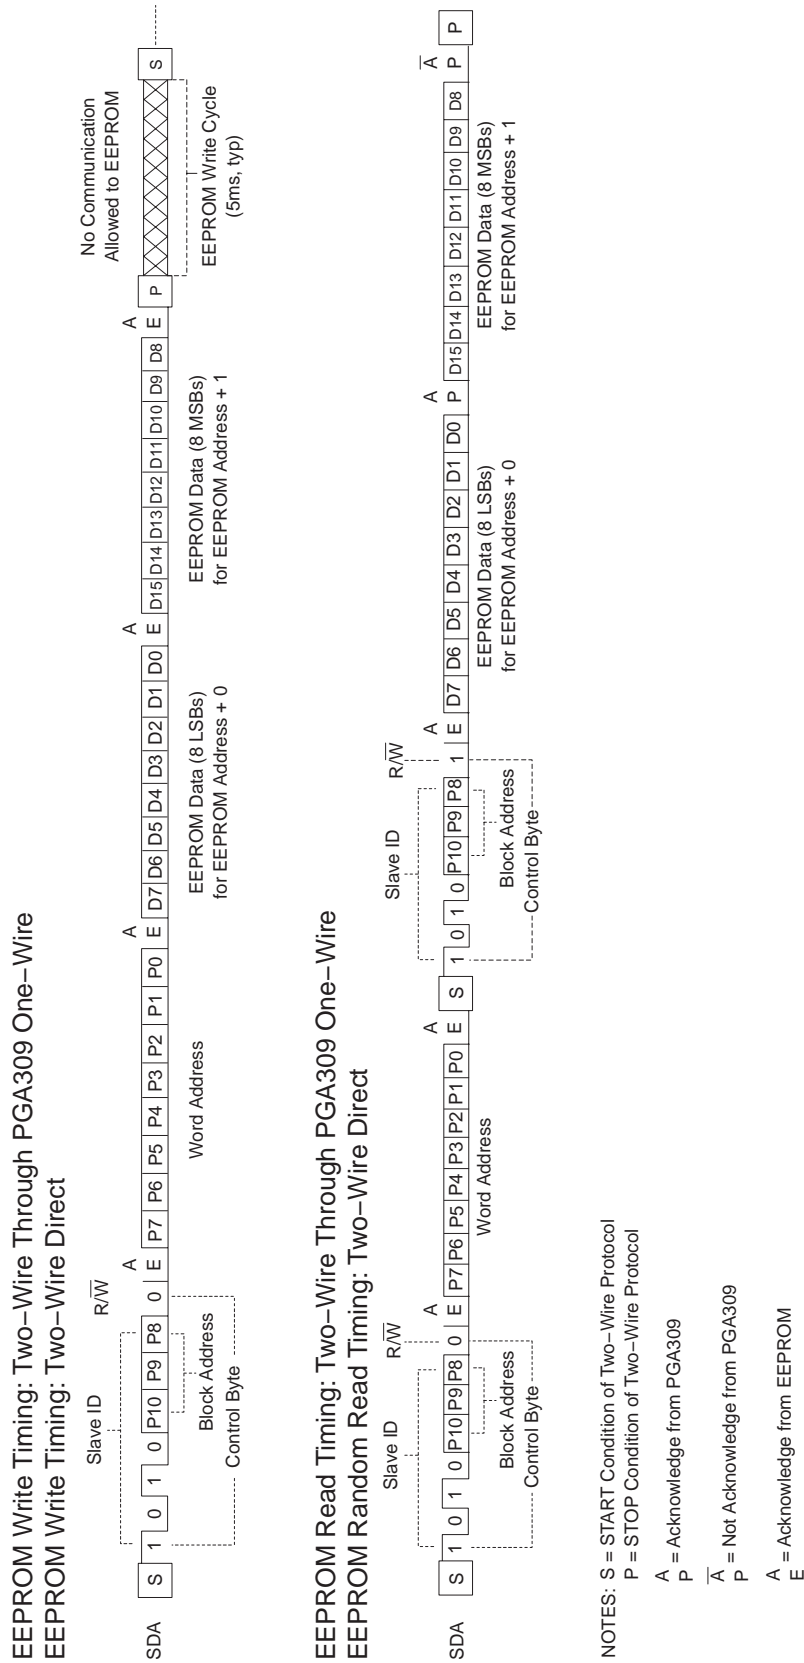

4.7 One-Wire Interface Initiated Two-Wire EEPROM Transactions

The Write EEPROM and Read EEPROM One-Wire commands initiate a communication transaction on the Two-Wire bus between the PGA309 and the EEPROM device (see Figure 4–10).

The Write EEPROM command causes the PGA309 to generate a Two-Wire start condition and send a Two-Wire slave address byte to the EEPROM device with the four MSBs set to '1010' and the three LSBs set to bits 10–8 of the EEPROM address pointer. The R/\overline{W} bit is set to '0' to indicate a write instruction. If the PGA309 receives an acknowledge from the EEPROM device, it then sends a byte with eight LSBs of the EEPROM address pointer. If the PGA309 receives an acknowledge from this byte, the PGA309 sends the least significant byte of the data to the EEPROM. Upon successful receipt of an acknowledge to this byte, the PGA309 transmits the most significant byte. After the acknowledge bit of this byte, the PGA309 generates a Two-Wire stop condition to terminate data transfer to the EEPROM.

The Read EEPROM command causes the PGA309 to generate a Two-Wire start condition and send a Two-Wire slave address byte to the EEPROM with the four MSBs set to '1010', the three LSBs set to bits 10–8 of the EEPROM Address Pointer, and the R/\overline{W} bit set to '0' to indicate a write instruction. If the PGA309 receives an acknowledge from the EEPROM device, it will then send a byte with the eight LSBs of the EEPROM address pointer. If the PGA309 receives an acknowledge from this byte, the PGA309 generates another Two-Wire START condition, send another slave address byte but this time with the R/\overline{W} bit set to '1' to indicate a read instruction. If the PGA309 receives an acknowledge, it continues to clock the SCL line to receive the first byte from the EEPROM, acknowledge this byte, receive the second byte, not acknowledge the second byte to terminate data transfer, and then generate a Two-Wire STOP condition.

4.8 PGA309 Stand-Alone Mode and Two-Wire Transactions

In Stand-Alone Mode (see Chapter 3, Operating Modes), the PGA309 accesses the external EEPROM in a different fashion than that presented for the *One-Wire Interface Initiated Two-Wire Transactions*. If all other POR conditions have been met to allow a PGA309 to allow access to a properly programmed external EEPROM, the PGA309 will first access the first part of the external EEPROM (configuration register data) as shown in Figure 4–11.

If the Checksum1 is correct and the PGA309 is triggered by the Temp ADC to read the second part of the EEPROM, it will proceed as shown in Figure 4–12. If the One-Wire disable bit, OWD, bit 15, in Register 4 is set to '1', initial POR is completed, and a valid Checksum2 is received, the One-Wire interface will be disabled, the PRG pin becomes high impedance, and One-Wire communication cannot take place unless power is cycled. This is necessary to allow for direct connection of the PRG pin to V_{OUT} .

Figure 4–11. First Part of External EEPROM Timing for Stand-Alone Mode


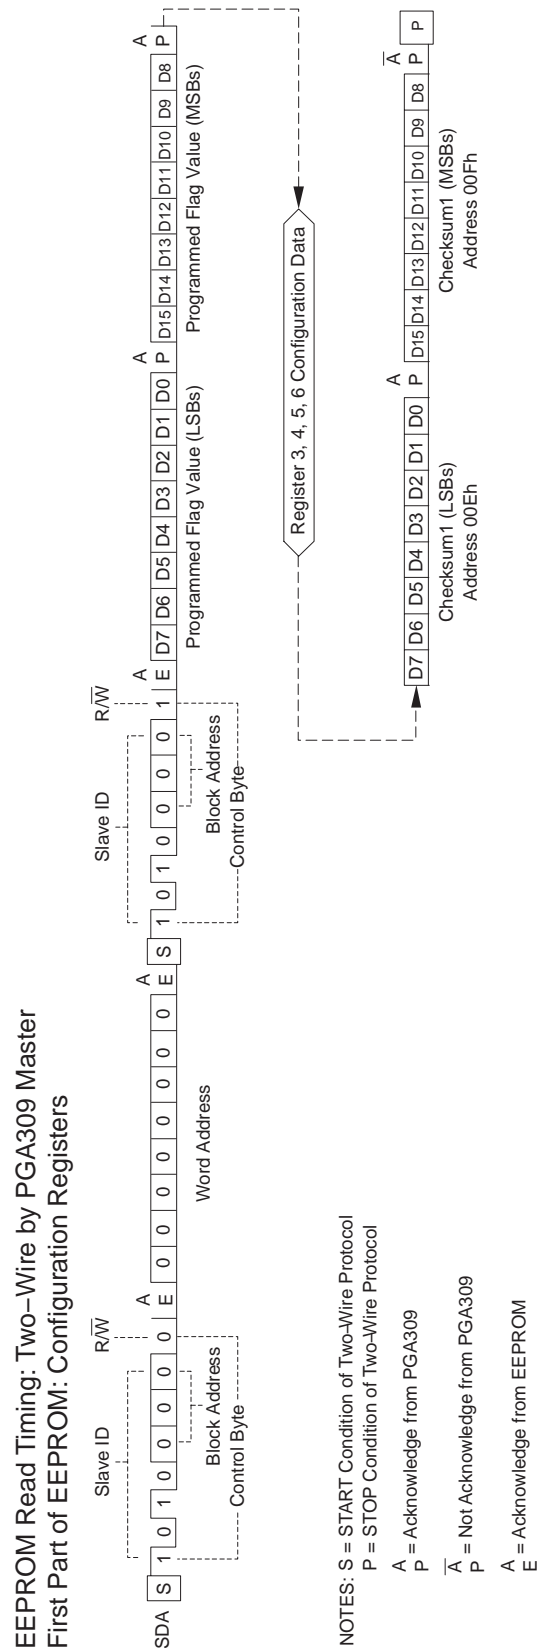


Figure 4–12. Second Part of External EEPROM Timing for Stand-Alone Mode

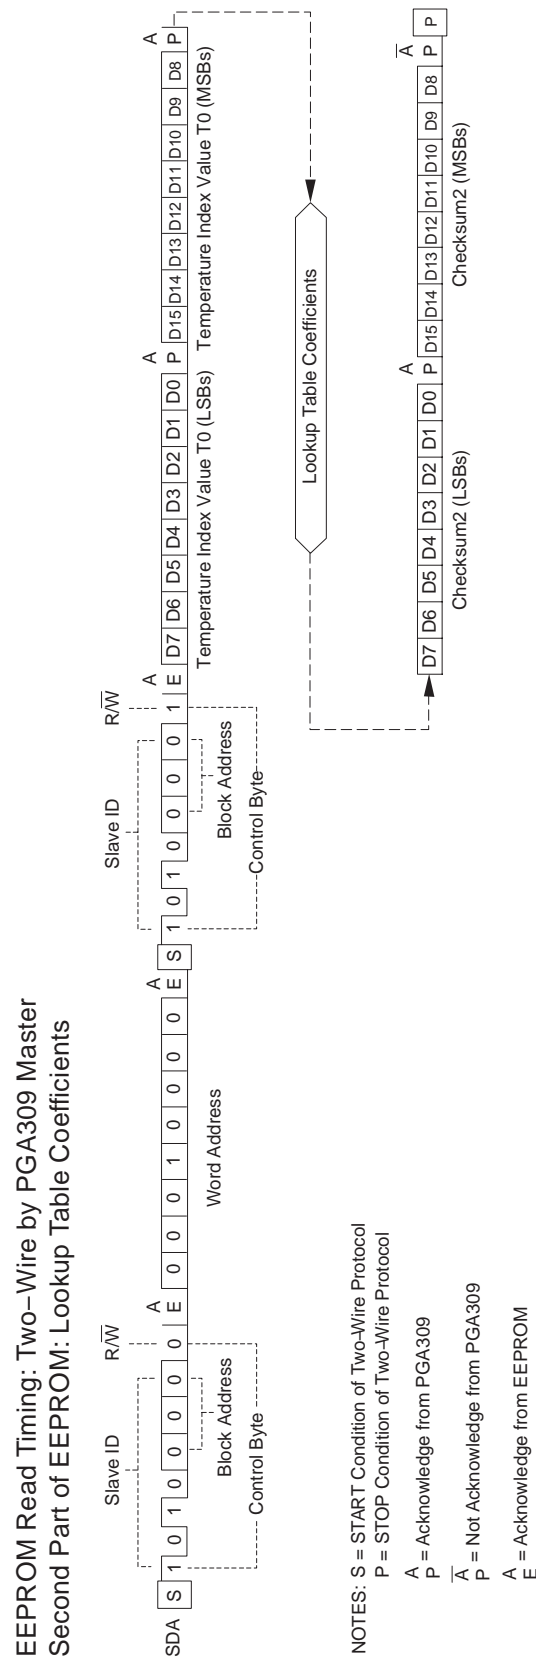

4.9 PGA309 Two-Wire Bus Master Operation and Bus Sharing Considerations

Whenever the PGA309 is called upon to communicate to the external EEPROM, the PGA309 must become the master on the Two-Wire interface bus. In order to do this in a reliable and orderly fashion, the PGA309 contains fault diagnostics to attempt to free a stuck bus. Several monitors and algorithms check for bus availability, prevent bus contention in case other devices are connected in parallel with the External EEPROM.

If the PGA309 is ever addressed on its Two-Wire or One-Wire interface, with the PGA309 providing a successful acknowledge, the PGA309 will cease all transactions as a master on the Two-Wire bus and give up control for one second. Each time the PGA309 is addressed on the Two-Wire bus, the one second timeout is reset, as shown in Figure 4–13.

Figure 4–13. Two-Wire Bus Relinquish by PGA309 in Master Mode


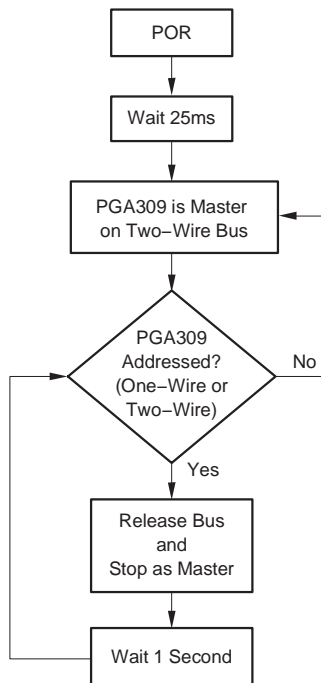


Figure 4–14 details the algorithms used by the PGA309 when it must become master on the Two-Wire bus. A 25ms timer is started. Now SCL is monitored for being low. If SCL is not low, the PGA309 checks to see if communication on the Two-Wire bus is between a START and a STOP. If the bus communication is between a START and a STOP, the PGA309 waits for the 25ms timer to time out, and then checks if SDA is low. If SDA is not low and SCL is high, the PGA309 becomes bus master. If there is any SCL activity during the 25ms interval, the 25ms timer will restart.

Figure 4–14. Two-Wire Bus Master Algorithm

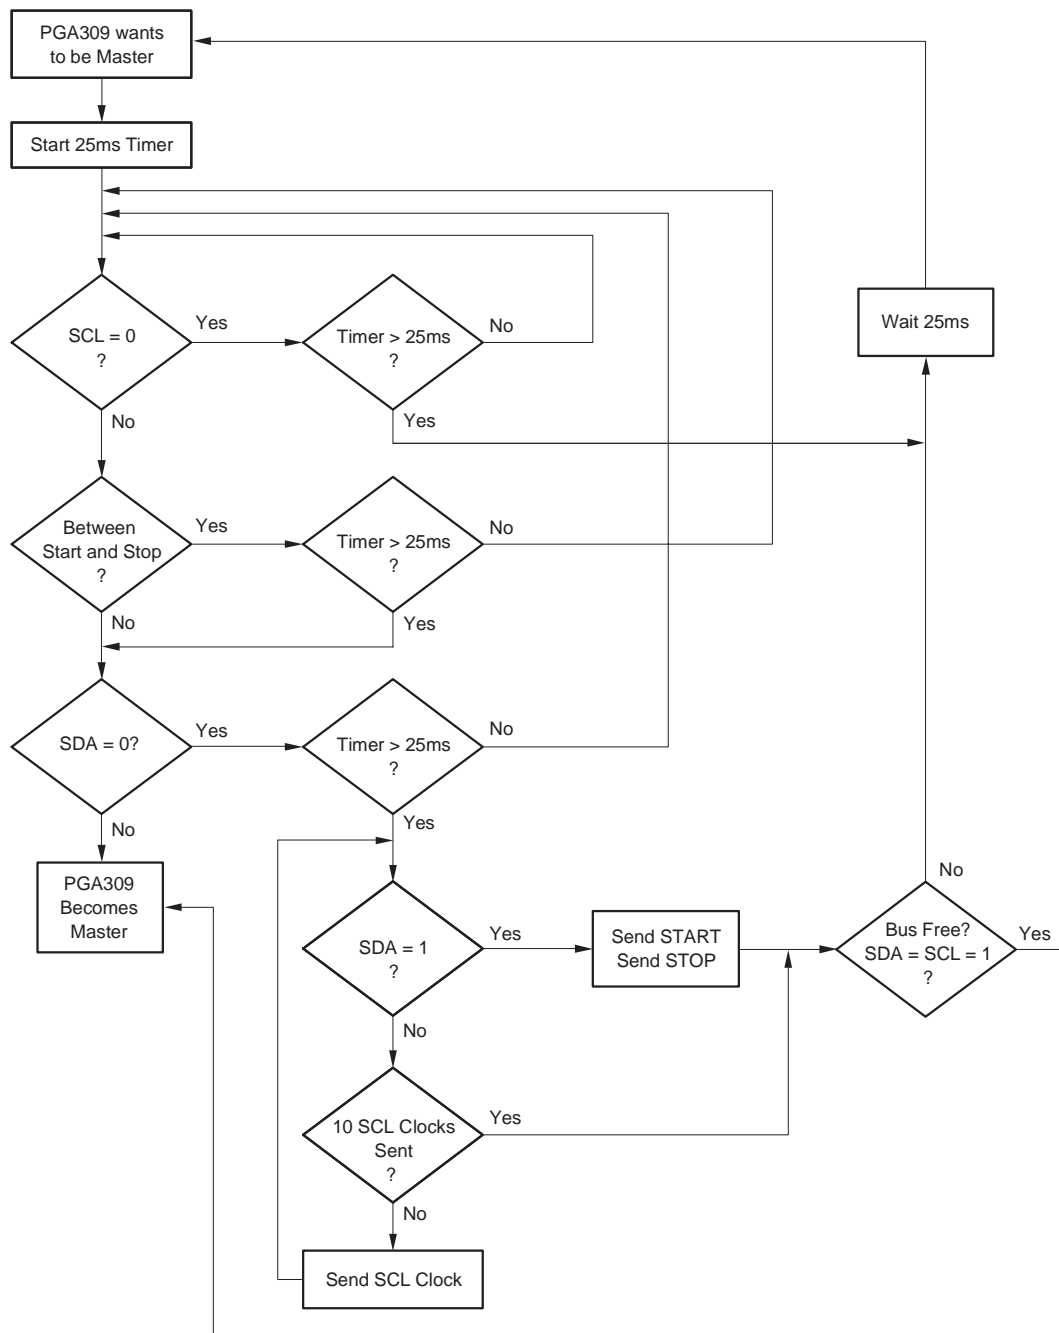

If SCL remains low for the entire 25ms timer countdown, the PGA309 waits 25ms before starting the 25ms timer again to begin to check the bus for an idle state (SDA = SCL = '1').

If SDA is low after the 25ms timer counts down, the PGA309 interprets this as a *stuck-bus* condition. The PGA309 attempts to free the stuck bus by sending up to ten clocks down SCL to free up SDA. If it is successful in causing SDA to go high, the PGA309 sends a START and then STOP sequence to ensure a complete reset of whichever device was causing the stuck bus. Now the bus should be in an idle state (SDA = SCL = '1') and the PGA309 can become the master on the bus.

If the PGA309 is communicating on the bus as a master and it sees contention, the PGA309 will release the bus and retry in 25ms. Contention is defined as the PGA309 wanting SCL high and SCL is low, or wanting SDA high and SDA is low.

4.10 One-Wire Operation with PRG Connected to V_{OUT}

Some sensor applications, require the end-user access to three pins, V_S, GND, and Sensor Out. It is also desired in these applications to digitally calibrate the sensor module after its final assembly of sensor and electronics. The PGA309 has a mode that allows the One-Wire interface pin (PRG) to be tied directly to the PGA309 output pin (V_{OUT}), as shown in Figure 4–15.

For the PGA309 + sensor calibration, it is necessary to configure and reconfigure internal registers on the PGA309 and then measure the analog voltage on V_{OUT} as a result of these register value settings. To do this while V_{OUT} is tied to PRG requires the ability to enable and disable V_{OUT}. This allows a multiplexing operation between PRG using the connection as a bidirectional digital interface and V_{OUT} driving the connection as a conditioned sensor output voltage. In addition, it is convenient to configure the Temp ADC for Single Start Convert mode and delay the start of the Temp ADC until after V_{OUT} is enabled and internal circuitry has had a chance to settle to accurate final values. This is especially important in applications that use the Linearization Circuit, tie the sensor to V_{EXC}, and measure temperature external to the PGA309 (that is, a temperature sense series resistor in the upper or lower excitation leg of the bridge sensor).

Register 7 (Output Enable Counter Control Register) contains the control bits for setting both the amount of time V_{OUT} is active on the common connection and also the delay from the time V_{OUT} is enabled to the start of a Temp ADC conversion. These individual bits are defined in Table 4–3 and Table 4–4.

Figure 4–15. One-Wire Operation with PRG Tied to V_{OUT}

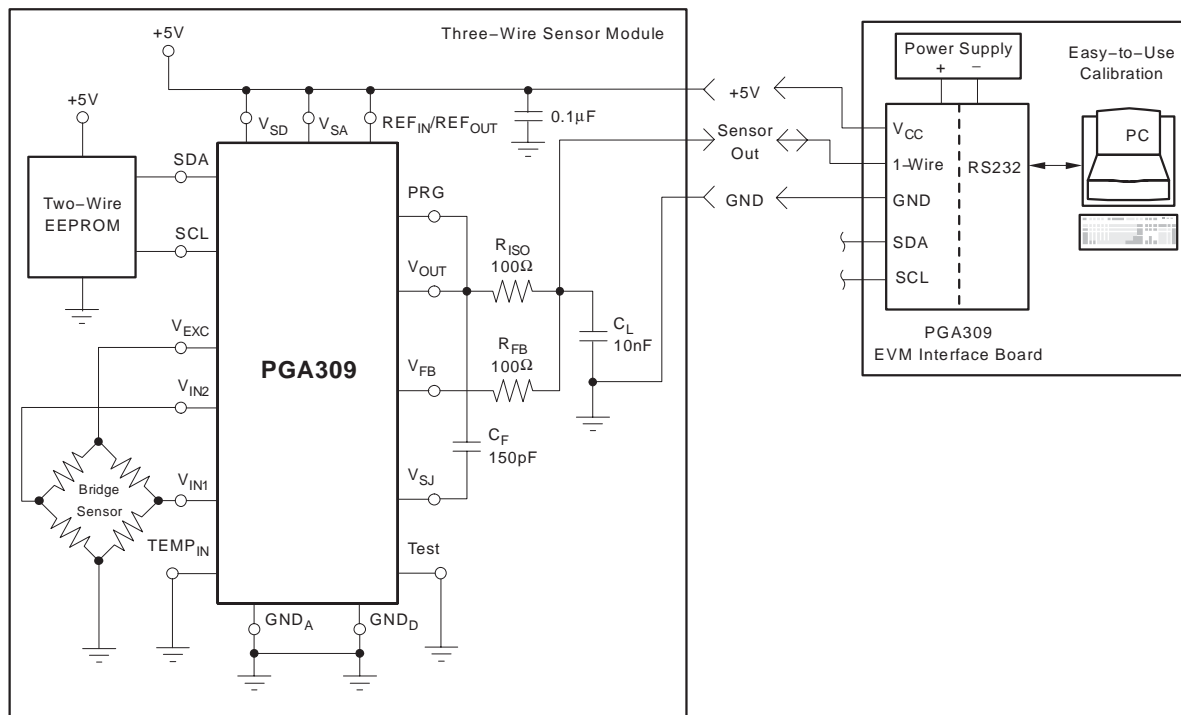


Table 4–3. Temp ADC—Delay After V_{OUT} Enable (Register 7)

| DLY3 [11] | DLY2 [10] | DLY1 [9] | DLY0 [8] | Decimal Equivalent (Initial Counter Value) | Temp ADC Delay (ms) |
|--------------|--------------|-------------|-------------|---|---------------------------|
| 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 1 | 10 |
| 0 | 0 | 1 | 0 | 2 | 20 |
| 0 | 0 | 1 | 1 | 3 | 30 |
| 0 | 1 | 0 | 0 | 4 | 40 |
| 0 | 1 | 0 | 1 | 5 | 50 |
| 0 | 1 | 1 | 0 | 6 | 60 |
| 0 | 1 | 1 | 1 | 7 | 70 |
| 1 | 0 | 0 | 0 | 8 | 80 |
| 1 | 0 | 0 | 1 | 9 | 90 |
| 1 | 0 | 1 | 0 | 10 | 100 |
| 1 | 0 | 1 | 1 | 11 | 110 |
| 1 | 1 | 0 | 0 | 12 | 120 |
| 1 | 1 | 0 | 1 | 13 | 130 |
| 1 | 1 | 1 | 0 | 14 | 140 |
| 1 | 1 | 1 | 1 | 15 | 150 |

NOTE: Temp ADC delay = initial counter value x 10ms.


Table 4–4. Output Enable Counter for One-Wire Interface/V_{OUT} Multiplexed Mode (Register 7)

| Digital Input (Binary) OEN7.....OEN0 [7.....0] | Decimal Equivalent (Initial Counter Value) | V _{OUT} Enable Timeout (ms) |
|--|---|---|
| 0000 0000 | 0 | 0 (V _{OUT} Disabled) |
| 0010 0000 | 32 | 320 |
| 0100 0000 | 64 | 640 |
| 0110 0000 | 96 | 960 |
| 1000 0000 | 128 | 1280 |
| 1010 0000 | 160 | 1600 |
| 1100 0000 | 192 | 1920 |
| 1110 0000 | 224 | 2240 |
| 1111 1111 | 255 | 2550 |

NOTE: V_{OUT} enable timeout = initial counter value x 10ms.

Figure 4–16 details the output enable/disable state machine. Upon initial POR, there is a 25ms wait for communication through either digital interface to prevent the PGA309 from going through its POR sequence and reaching Stand-Alone Mode. The output enable/disable state machine can be forced to run at any time the PGA309 is powered and either digital interface (One-Wire or Two-Wire) can write to Register 7. Writing a non-zero value to OEN7:OEN0 will cause V_{OUT} to be immediately enabled and the Output Enable Counter to be loaded with the OEN7:OEN0 value (decimal equivalent $\times 10\text{ms}$ = initial Output Enable Counter value). V_{OUT} remains enabled until this initial Output Enable Counter value is decremented to 0 by 10ms increments. V_{OUT} is then disabled and a one second timeout begins waiting for bus activity on either digital interface (PRG pin for three-wire sensor application). As long as there is activity on the PRG pin, the one second timeout will be continually reset. After one second of no bus activity, the PGA309 stops and the state machine will try to read the EEPROM. It is important to store *invalid* data in the programmed flag values of the EEPROM for this calibration process, to prevent it from being read, which could change the register settings in the PGA309. This will also force the one second timeout to be reset and allow as long as needed for communication to start and stop on PRG. Once all registers in the PGA309 have been set to their desired values, another write to Register 7 will start the process all over again so a new analog value of V_{OUT} can be measured.

Figure 4–16. Output Enable/Disable State Machine

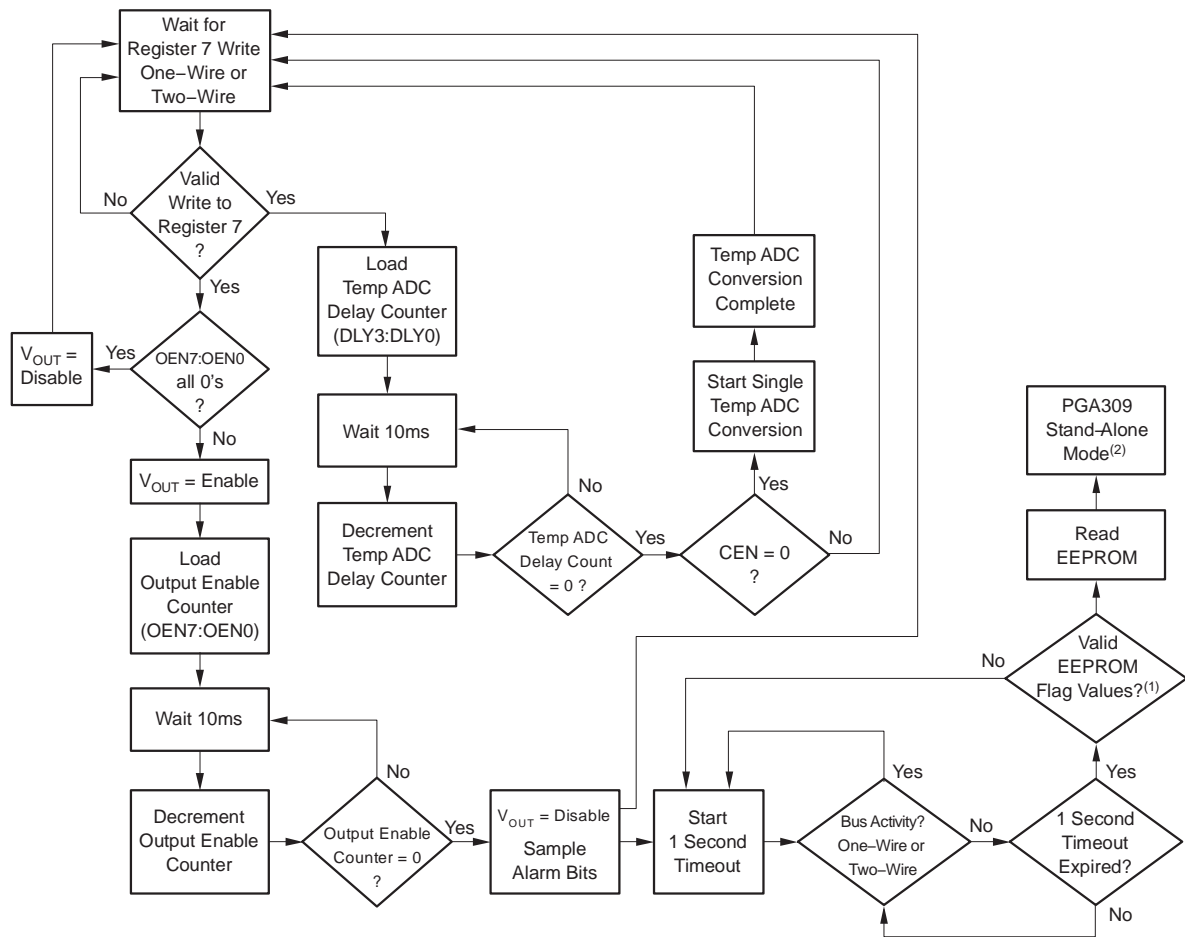

NOTES: (1) For calibration using PRG tied to V_{OUT} , set EEPROM programmed flag values to invalid values to prevent PGA309 registers from having their values changed by EEPROM register configuration and lookup table data.

(2) In PGA309 Stand-Alone mode, if OWD (Register 4 [15]) is set to '1' in the first part of EEPROM (configuration part), then the One-Wire interface is disabled and the only way to communicate over the One-Wire interface is to cycle power on the PGA309 and begin communication over the One-Wire interface within 25ms of power on.

The second part of the output enable/disable state machine is the Temp ADC delay. During calibration, the Temp ADC conversion results will be needed at different calibration temperatures. These readings combined with measured V_{OUT} at the respective calibration temperatures are used to calculate the final temperature coefficients to be stored in the Lookup Table part of the external EEPROM. To use this function, the Temp ADC must be set to Single Start Convert mode (CEN = 0, Register 6 [10]). After a write to Register 7, the Temp ADC delay counter is loaded with the DLY3:DLY0 value (decimal equivalent $\times 10\text{ms}$ = initial Temp ADC delay counter value). This initial Temp ADC delay counter value is decremented to 0 by 10ms increments. When it reaches 0, a single Temp ADC conversion is triggered. No additional write to Register 6 [12] (the ADCS bit) is needed to initiate the conversion. Upon completion of the conversion, this branch of the state machine returns to waiting for the next valid Register 7 write.

The output enable/disable state machine allows three-wire sensor applications to measure temperature through the PGA309, against the calibration

standard, for the PGA309 + sensor combination. It also allows PGA309 + sensor characteristics over pressure and temperature to be measured through the PGA309. These real-world results allow for accurate calculation of temperature coefficients for the Lookup Table and, therefore, accurate PGA309 + sensor digital calibration on a module-by-module basis.

The values of the Fault Monitor Alarm bits are latched immediately before the output is disabled to allow their values to be read through the One-Wire interface during factory calibration.


Once the final values are to be programmed into the EEPROM, it is desirable to have the One-Wire Interface disabled in three-wire sensor applications. This prevents V_{OUT} changes in the final end-use from being read back into the PGA309 through the One-Wire interface (PRG pin) and potentially misinterpreted as bus activity, which could then cause V_{OUT} to become disabled. To disable the One-Wire Interface, set the OWD bit to '1' during the final EEPROM program write. The OWD (One-Wire Disable) bit is located in Register 4 [15]. After this final programming, the only way to communicate to the One-Wire Interface (PRG pin) is to cycle power on the PGA309 and begin communication within 25ms.

4.11 Four-Wire Modules and One-Wire Interface (PRG)

When using the PGA309 in a four-wire (V_S , PRG, V_{OUT} , and GND) sensor module application as shown in Figure 4–17, there is an optimal way to deal with the PRG pin. For minimum component count, the required pull-up resistor (R_P) for One-Wire (PRG) communication can be placed directly on the PGA309 PC interface board. After sensor calibration is complete, a final write to the EEPROM is performed. During this final write to the EEPROM, the PGA309 One-Wire interface (PRG pin) can be configured to be disabled. This means that the PRG pin can now float without any adverse consequences, such as high current draw through V_S or erroneous digital communication because of transients on the PRG pin.

To disable the One-Wire interface, set the One-Wire Disable (OWD) bit to '1' during the final EEPROM program write. The OWD bit is located in Register 4, bit 15. After this final programming, all is not lost, since any power-up sequence will allow the One-Wire interface (PRG pin) control, as long as communication is initiated within 25ms of the application of power to the PGA309.

Figure 4–17. Four-Wire Sensor Module Application

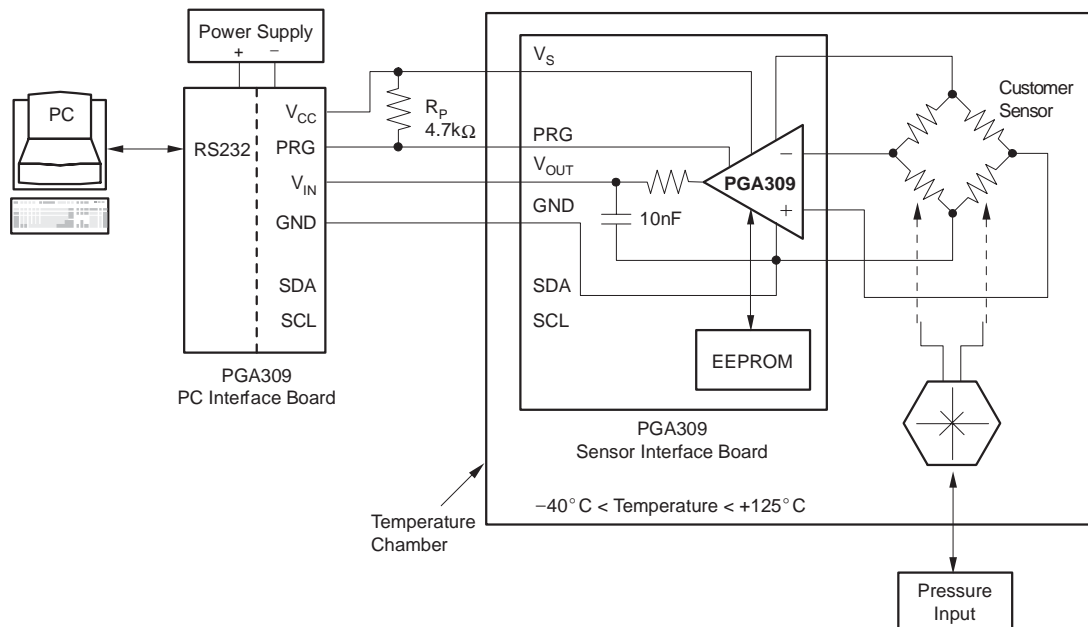

Application Background


This chapter describes the application background of the PGA309.

| Topic | Page |
|---|------------|
| 5.1 Bridge Sensors | 5-2 |
| 5.2 System Scaling Options for Bridge Sensors | 5-4 |
| Absolute Scale | 5-4 |
| Ratiometric Scale | 5-5 |
| 5.3 Trimming Real World Bridge Sensors for Linearity | 5-6 |

5.1 Bridge Sensors

A typical bridge pressure sensor is shown in Figure 5–1. For a given bridge excitation voltage (V_{EXC}), the output voltage of the bridge ($V_P - V_N$) is a voltage proportional to the pressure applied to the sensor.


Figure 5–1. Typical Bridge Sensor

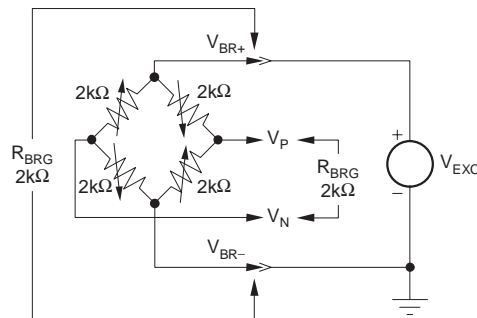

Span is the scale factor for $V_P - V_N$ at full-scale pressure input relative to the bridge excitation ($V_{BR+} - V_{BR-}$). Span is also called FSO (Full-Scale Output), FSS (Full-Scale Sensitivity), Sensitivity, or Gain. For example, with a bridge excitation voltage of 5V, a 2mV/V FSS implies that the bridge output will be 10mV at full-scale pressure.

Offset, also known as Zero, is the output of the bridge ($V_P - V_N$) with zero pressure applied. Often a bridge sensor's Zero may be equal to or greater than its FSS for a given excitation voltage. Figure 5–2 graphically illustrates the definition of Span and Offset.

Figure 5–2. Example of Span and Offset

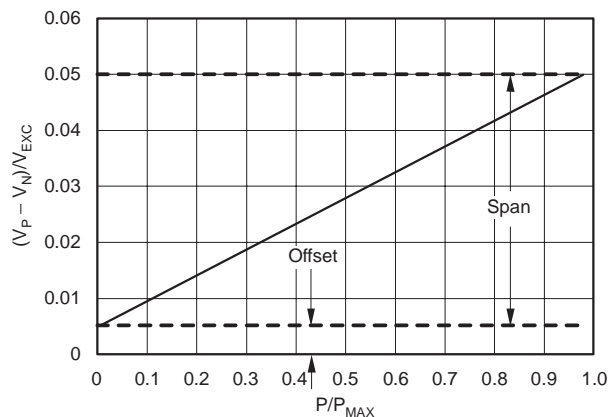

An ideal sensor would have span and offset curves over temperature, as shown in Figure 5–3. Real-world sensors have span and offset changes that change over temperature. Both span and offset have variations at +25°C, linear changes with temperature, and nonlinear changes with temperature. Figure 5–4 and Figure 5–5 illustrate span and offset changes over temperature for a bridge sensor with second-order nonlinearities. TC1 coefficients represent a linear change with temperature, and TC2 a second-order change with temperature.

Figure 5–3. Ideal Span and Offset vs Temperature

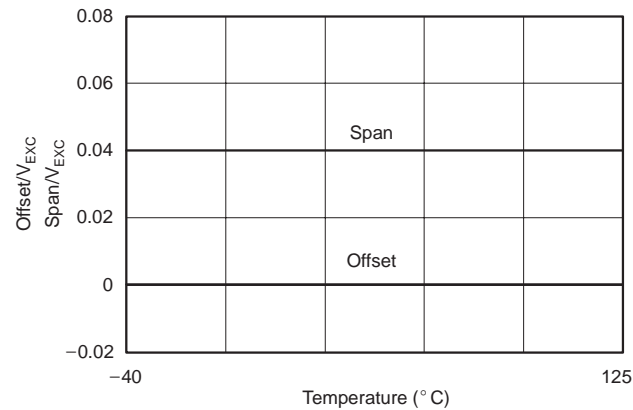


Figure 5–4. Effect of Nonlinearity on Bridge Sensor Span Over Temperature



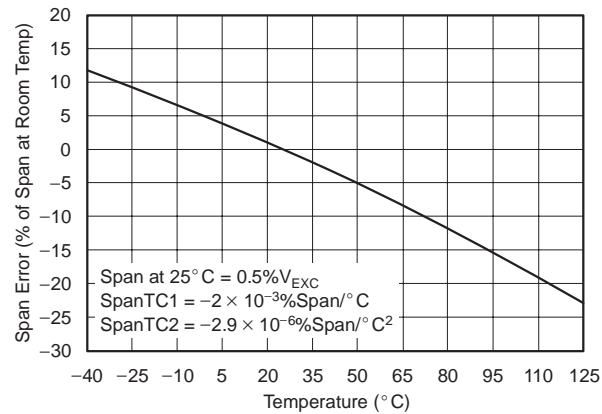


Figure 5–5. Effect of Nonlinearity on Bridge Sensor Offset Over Temperature

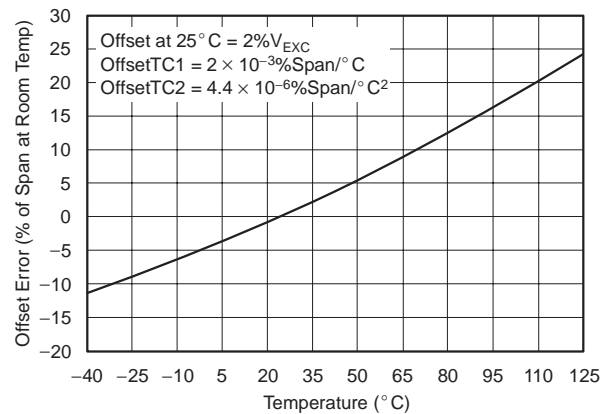

Many bridge sensors have a nonlinear output with applied pressure. Figure 5–6 shows the non-ideal curves for both a positive and negative nonlinear bridge sensor output with applied pressure. The PGA309 provides calibration over temperature for both span and offset, and has dedicated linearization circuitry to linearize many types of bridge sensors whose outputs are not linear with applied pressure.

Figure 5–6. Non-Ideal Curves for Both a Positive and Negative Nonlinear Bridge Sensor Output with Applied Pressure

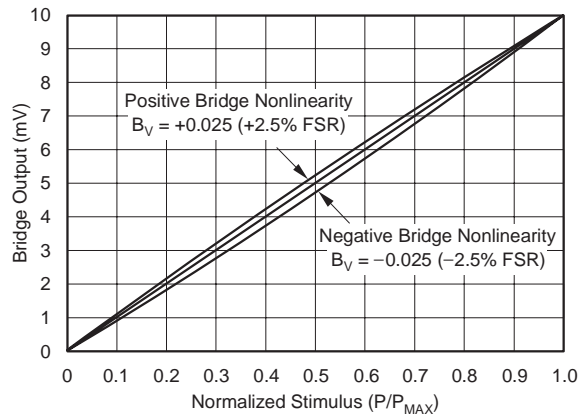


5.2 System Scaling Options for Bridge Sensors

There are two system scaling options for bridge sensor outputs: Absolute Scale and Ratiometric Scale.

5.2.1 Absolute Scale

Absolute Scale scales the output range as a percentage of a reference voltage, V_{REF} . For example, the absolute-scaled output of a bridge sensor can be set to the range of 10% to 90% of V_{REF} . Figure 5–7 illustrates such a case.

Figure 5–7. Absolute Scaling Conditions

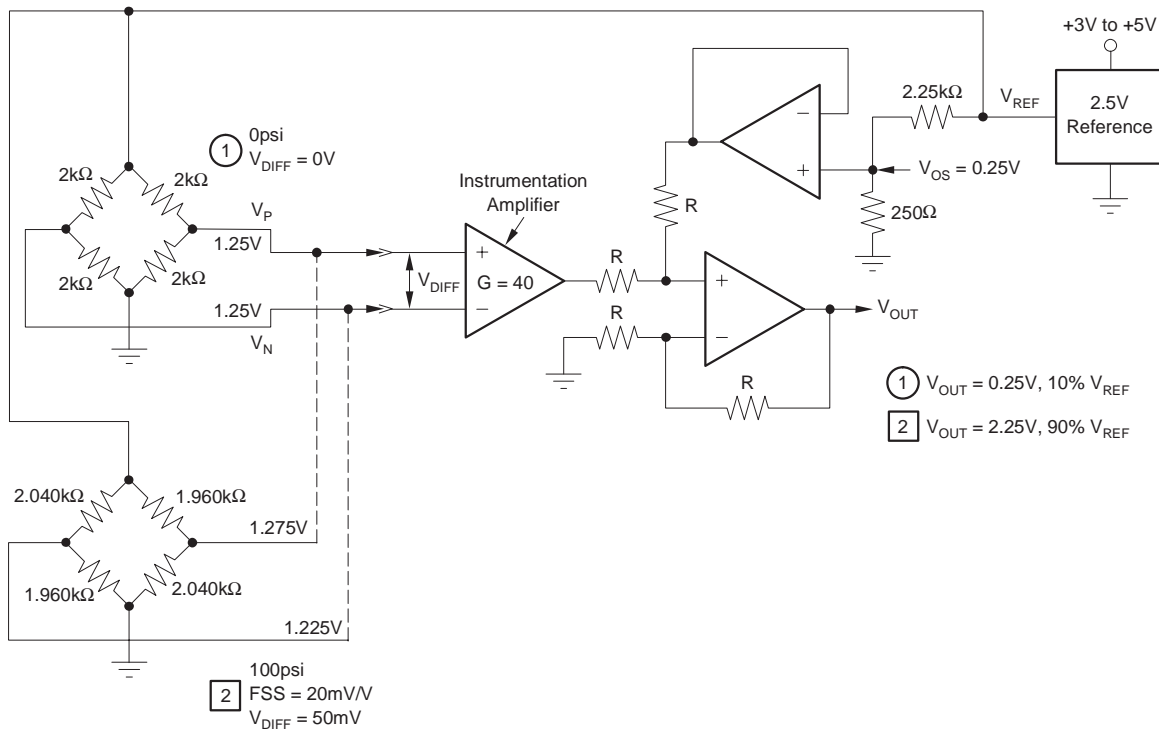

5.2.2 Ratiometric Scale

Ratiometric Scale scales the output range as a percentage of the supply voltage. For example, the ratiometric-scaled output of a bridge sensor can be set to the range of 10% to 90% of V_S , shown in Figure 5–8. Figure 5–9 shows that as the supply voltage, V_S , is lowered from +5V to +3V the range for V_{OUT} of 10% to 90% of V_S remains the same. The PGA309 accommodates both Absolute and Ratiometric scaling of bridge sensors.

Figure 5–8. Ratiometric Configuration, 5V


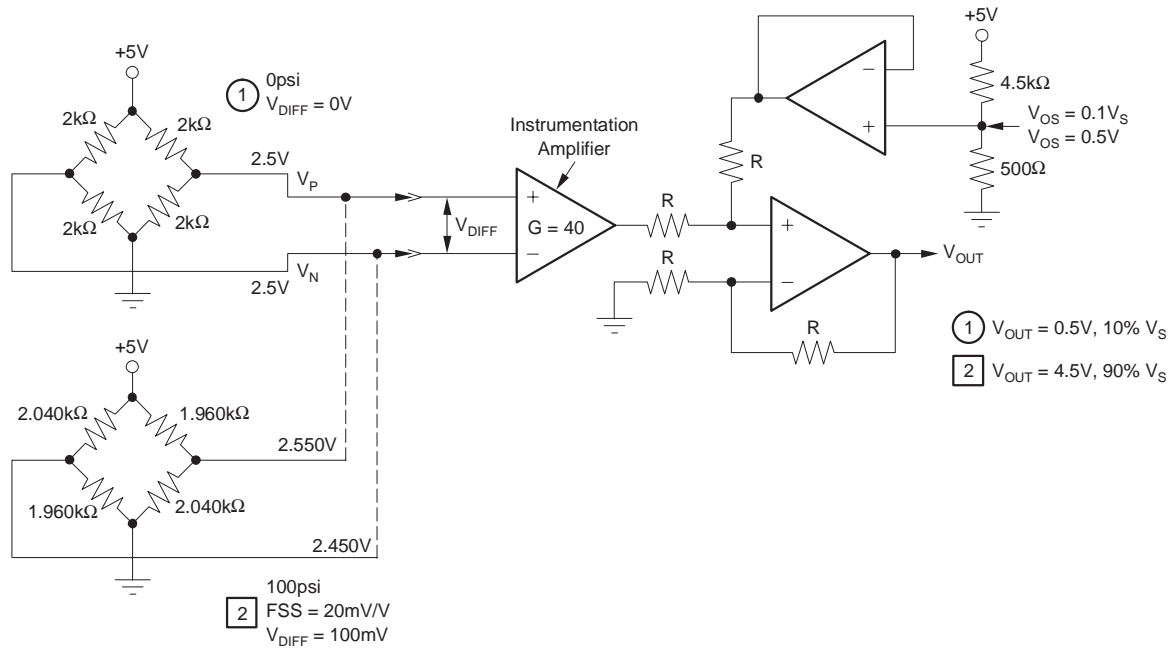



Figure 5–9. Ratiometric Configuration, 3V

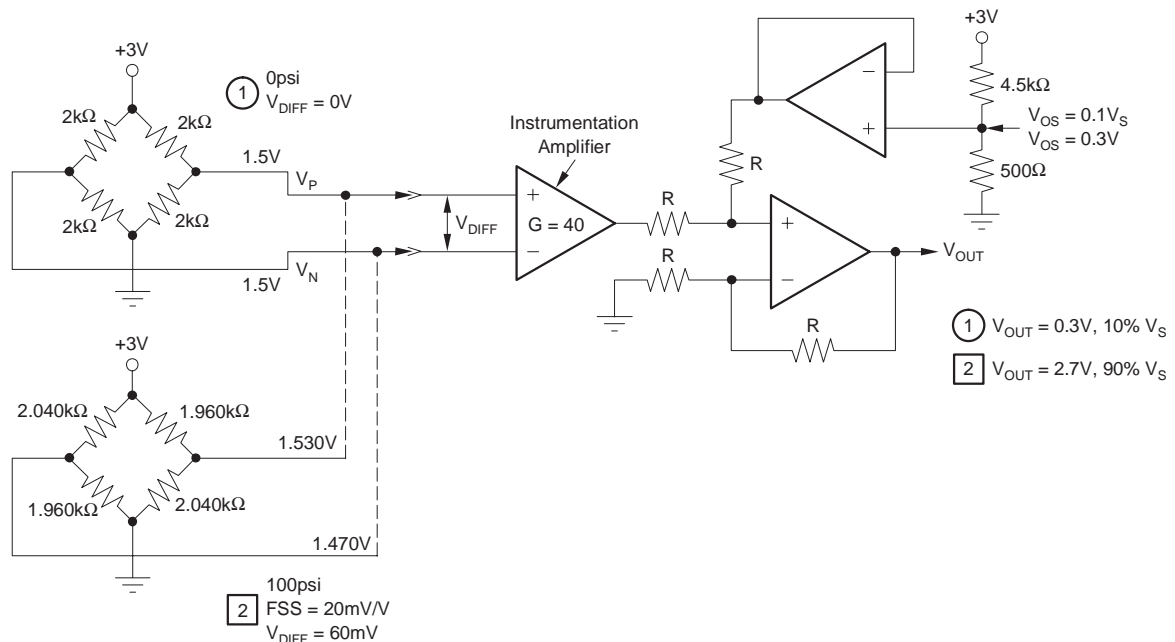

5.3 Trimming Real World Bridge Sensors for Linearity


Traditional methods for trimming nonlinear, real-world bridge sensors to a linear, useful function require additional resistors to be added around the base bridge sensor, as shown in Figure 5–10. This approach often requires special prepackaged fixtures and special laser trim or manual trim resistors. The trims are interactive with each other, which requires multiple test/trim/test/trim passes; this only allows for a finite number of trims and range for a particular bridge sensor.

Figure 5–10. Typical Trim Configuration

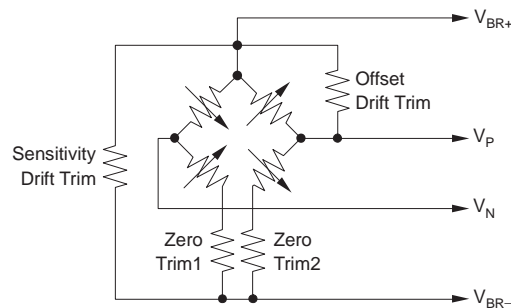

The PGA309 provides a modern digital trim approach for bridge sensors, as shown in Figure 5–11. This technique allows for post-package trim of both the bridge sensor and its signal conditioning electronics. The digital trimming is simplified through the use of a computer interface and spreadsheet analysis computation tools. A near-infinite number of trim cycles can be performed with finer resolution, wider range, and less interaction between trimmed parameters than the traditional trim method. Packaging shifts are eliminated.

Figure 5–11. PGA309 Trim Configuration

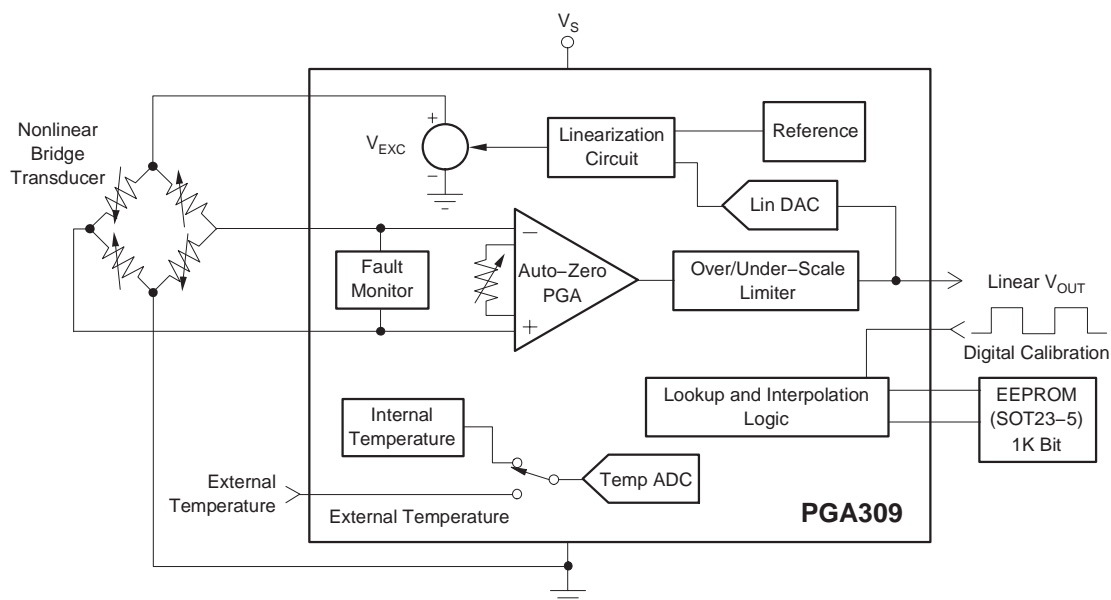

Register Descriptions

This chapter describes the PGA309 registers and their contents.

| Topic | Page |
|--|------------|
| 6.1 Internal Register Overview | 6-2 |
| 6.2 Internal Register Map | 6-3 |
| Register 0: Temp ADC Output Register | 6-3 |
| Register 1: Fine Offset Adjust (Zero DAC) Register | 6-5 |
| Register 2: Fine Gain Adjust (Gain DAC) Register | 6-6 |
| Register 3: Reference Control and Linearization Register | 6-7 |
| Register 4: PGA Coarse Offset Adjust and Gain Select/Output Amplifier Gain Select Register | 6-8 |
| Register 5: PGA Configuration and Over/Under-Scale Limit Register | 6-11 |
| Register 6: Temp ADC Control Register | 6-13 |
| Register 7: Output Enable Counter Control Register | 6-16 |
| Register 8: Alarm Status Register | 6-18 |

6.1 Internal Register Overview

Table 6–1. Internal Register Overview

| Address Pointer | | | | | Register Description | Type ⁽¹⁾ | Register Controls |
|-----------------|----|----|----|----|---|---------------------|---|
| P4 | P3 | P2 | P1 | P0 | | | |
| 0 | 0 | 0 | 0 | 0 | Register 0—Temp ADC Output | R | Temp ADC Output Data |
| 0 | 0 | 0 | 0 | 1 | Register 1—Fine Offset Adjust (Zero DAC) | R/W | Fine Offset Adjust (Zero DAC) Setting |
| 0 | 0 | 0 | 1 | 0 | Register 2—Fine Gain Adjust (Gain DAC) | R/W | Fine Gain Adjust (Gain DAC) Setting |
| 0 | 0 | 0 | 1 | 1 | Register 3—Reference Control and Linearization Register | R/W | Reference Configuration Settings; V _{EXC} Enable; Linearization Setting |
| 0 | 0 | 1 | 0 | 0 | Register 4—Front End PGA Coarse Offset Adjust and Gain Select; Output Amplifier Gain Select | R/W | Front End PGA Coarse Offset Setting; PGA Gain Select; Output Amplifier Gain Select; One-Wire Disable |
| 0 | 0 | 1 | 0 | 1 | Register 5—PGA Configuration and Over/Under Scale Limit | R/W | Over/Under Scale Limits, Polarities, Enable; Fault Comparator Select |
| 0 | 0 | 1 | 1 | 0 | Register 6—Temp ADC Control Register | R/W | Temp ADC Conversion Speed, Ref Select; Int/Ext Temp Mode Select; Ext Temp PGA Configuration; TEMP _{IN} Current Source Enable |
| 0 | 0 | 1 | 1 | 1 | Register 7—Output Enable Counter Control | R/W | Temp ADC Delay Setting; One-Wire Interface Output Enable Setting |
| 0 | 1 | 0 | 0 | 0 | Register 8—Alarm Status | R | Fault Monitor Comparator Outputs |

(1) Type: R = Read-only, R/W = Read/Write

6.2 Internal Register Map

6.2.1 Register 0: Temp ADC Output Register (Read Only, Address Pointer = 00000)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit Name | AD15 | AD14 | AD13 | AD12 | AD11 | AD10 | AD9 | AD8 | AD7 | AD6 | AD5 | AD4 | AD3 | AD2 | AD1 | AD0 |
| POR Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:

AD[15:0] Temp ADC Output

Internal Temperature Mode: 12-bit + sign extended, right justified, Two's Complement data format

External Temperature Mode: 15-bit + sign extended, right-justified, Two's Complement data format

Figure 6–1. Internal Temperature Mode; Register 6[9] = '1'.

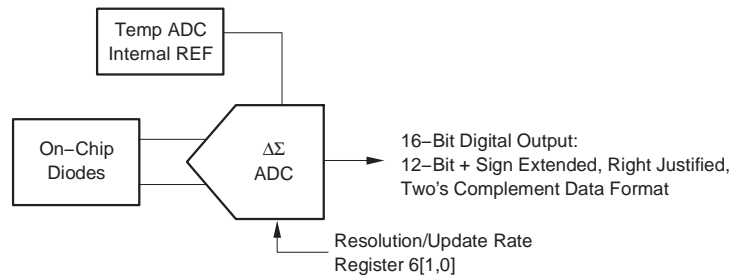


Table 6–2. Internal Temperature Mode–Data Format (12-Bit Resolution). $TEN = 1$; $R_1, R_0 = '11'$

| Temperature (°C) | Digital Output AD15.....AD0 (Binary) | Digital Output (Hex) |
|------------------|--|-------------------------|
| 150 | 0000 1001 0110 0000 | 0960 |
| 128 | 0000 1000 0000 0000 | 0800 |
| 127.9375 | 0000 0111 1111 1111 | 07FF |
| 100 | 0000 0110 0100 0000 | 0640 |
| 80 | 0000 0101 0000 0000 | 0500 |
| 75 | 0000 0100 1011 0000 | 04B0 |
| 50 | 0000 0011 0010 0000 | 0320 |
| 25 | 0000 0001 1001 0000 | 0190 |
| 0.25 | 0000 0000 0000 0100 | 0004 |
| 0.0 | 0000 0000 0000 0000 | 0000 |
| –0.25 | 1111 1111 1111 1100 | FFFC |
| –25 | 1111 1110 0111 0000 | FE70 |
| –55 | 1111 1100 1001 0000 | FC90 |

NOTE: The resolution for the Temp ADC in Internal Temperature Mode is 0.0625°C/count.

For positive temperatures (for example, 50°C):

$(50^{\circ}\text{C}) / (0.0625^{\circ}\text{C/count}) = 800 \rightarrow 320\text{h} \rightarrow 0011\ 0010\ 0000$

50°C will be read by the Temp ADC as 0000 0011 0010 0000 \rightarrow 0320h

For negative temperatures (for example, –25°C):

$(|[-25]|) / (0.0625^{\circ}\text{C/count}) = 400 \rightarrow 190\text{h} \rightarrow 0001\ 1001\ 0000$

Convert to Two's Complement notation.

–25°C will be read by the Temp ADC as 1111 1110 0111 0000 \rightarrow FE70h

Figure 6–2. External Signal Mode; Register 6 = '0000 0100 0011 0000'

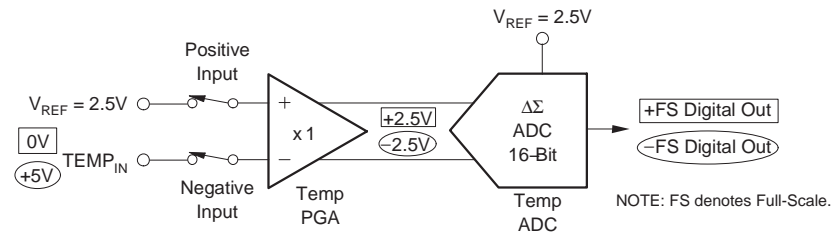


Table 6–3. External Signal Mode—Data Format Example (Register 6 = '0000 0100 0011 0011'), 15-Bit + Sign Resolution. REN = 1, RS = 1

| TEMP _{IN} (V) | Temp ADC Input (V) | Temp ADC Input (Ratio to Full Scale) ⁽¹⁾ | Digital Output AD15.....AD0 (Binary) | Digital Output (Hex) |
|---------------------------|-----------------------|--|--|-------------------------|
| +0.0001 | +2.49992371 | +0.999969 V _{REF} | 0111 1111 1111 1111 | 7FFF |
| +0.625 | +1.875 | +0.75 V _{REF} | 0110 0000 0000 0000 | 6000 |
| +1.25 | +1.25 | +0.5 V _{REF} | 0100 0000 0000 0000 | 4000 |
| +1.925 | +0.575 | +0.23 V _{REF} | 0001 1101 0111 0001 | 1D71 |
| +2.4999 | +0.00007629 | +(1/32768) V _{REF} | 0000 0000 0000 0001 | 0001 |
| +2.5 | 0 | +0 V _{REF} | 0000 0000 0000 0000 | 0000 |
| +2.50007629 | –0.00007629 | –(1/32768) V _{REF} | 1111 1111 1111 1111 | FFFF |
| +3.075 | –0.575 | –0.23 V _{REF} | 1110 0010 1000 1111 | E28F |
| +3.75 | –1.25 | –0.5 V _{REF} | 1100 0000 0000 0000 | C000 |
| +4.375 | –1.875 | –0.75 V _{REF} | 1010 0000 0000 0000 | A000 |
| +5 | –2.5 | –1 V _{REF} | 1000 0000 0000 0000 | 8000 |

(1) V_{REF} can be V_{SA}, V_{EXC}, or V_{REF}.

6.2.2 Register 1: Fine Offset Adjust (Zero DAC) Register (Read/Write, Address Pointer = 00001)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit Name | ZD15 | ZD14 | ZD13 | ZD12 | ZD11 | ZD10 | ZD9 | ZD8 | ZD7 | ZD6 | ZD5 | ZD4 | ZD3 | ZD2 | ZD1 | ZD0 |
| POR Value | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:

ZD[15:0]: Zero DAC control, 16-bit unsigned data format

Table 6–4. Zero DAC—Data Format Example ($V_{REF} = +5V$)

| Digital Input (Hex) | Digital Input ZD15.....ZD0 (Binary) | Zero DAC Output (V) | Zero DAC Output |
|------------------------|---|------------------------|----------------------|
| 0000 | 0000 0000 0000 0000 | 0 | 0 V_{REF} |
| 0001 | 0000 0000 0000 0001 | 0.00007629 | (1/65536) V_{REF} |
| 051F | 0000 0101 0001 1111 | 0.100021362 | 0.02 $V_{REF}^{(1)}$ |
| 4000 | 0100 0000 0000 0000 | 1.25 | 0.25 V_{REF} |
| 8000 | 1000 0000 0000 0000 | 2.5 | 0.50 V_{REF} |
| C000 | 1100 0000 0000 0000 | 3.75 | 0.75 V_{REF} |
| FAE1 | 1111 1010 1110 0001 | 4.899978638 | 0.98 $V_{REF}^{(1)}$ |
| FFFF | 1111 1111 1111 1111 | 4.999923706 | 0.9999847 V_{REF} |

(1) Ensured by design Zero DAC Range of Adjustment (0.02 V_{REF} to 0.98 V_{REF})

Zero DAC Equation:

$$\text{Decimal \# Counts} = (V_{\text{ZERO DAC}}/V_{\text{REF}})(65536)$$

$$0.1V \leq \text{Zero DAC Analog Range} \leq V_{SA} - 0.1V$$

$$0 \leq \text{Zero DAC Programming Range} \leq V_{REF}$$

Zero DAC Example:

$$\text{Want: } V_{\text{ZERO DAC}} = 0.5V$$

$$\text{Given: } V_{REF} = 5V$$

$$\text{Decimal \# Counts} = 0.5 / (5/65536) = 6553.6$$

$$\text{Use 6554 counts} \rightarrow 199Ah \rightarrow 0001\ 1001\ 1001\ 1010$$

6.2.3 Register 2: Fine Gain Adjust (Gain DAC) Register (Read/Write, Address Pointer = 00010)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit Name | GD15 | GD14 | GD13 | GD12 | GD11 | GD10 | GD9 | GD8 | GD7 | GD6 | GD5 | GD4 | GD3 | GD2 | GD1 | GD0 |
| POR Value | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:**GD[15:0]: Gain DAC control, 16-bit unsigned data format***Table 6–5. Gain DAC—Data Format*

| Digital Input (Hex) | Digital Input ZD15.....ZD0 (Binary) | Gain Adjust |
|------------------------|---|-------------|
| 0000 | 0000 0000 0000 0000 | 0.333333333 |
| 0001 | 0000 0000 0000 0001 | 0.333343505 |
| 32F2 | 0011 0010 1111 0010 | 0.466003417 |
| 4000 | 0100 0000 0000 0000 | 0.500000000 |
| 6604 | 0110 0110 0000 0100 | 0.598999023 |
| 9979 | 1001 1001 0111 1001 | 0.733001708 |
| CC86 | 1100 1100 1000 0110 | 0.865997314 |
| FFFF | 1111 1111 1111 1111 | 1.000000000 |

Gain DAC Equation:

$$1 \text{ LSB} = (1.000000000 - 0.333333333) / 65536 = (2/3)/65536$$

$$\text{Decimal \# Counts} = (\text{Desired Gain} - 1/3)/(3/2)(65.536)$$

$$0.3333333 \leq \text{Gain DAC} \leq 0.9999898$$

$$0 \leq \text{Gain DAC Counts} \leq 65535$$

Gain DAC Example:

Want: Fine Gain = 0.68

$$\text{Decimal \# Counts} = (0.68 - 1/3)(3/2)(65536) = 34078.72$$

Use 34079 counts → 851Fh → 1000 0101 0001 1111

6.2.4 Register 3: Reference Control and Linearization Register (Read/Write, Address Pointer = 00011)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|-----|-----|-----|-----|-----|------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit Name | RFB | RFB | RFB | RFB | EXS | EXEN | RS | REN | LD7 | LD6 | LD5 | LD4 | LD3 | LD2 | LD1 | LD0 |
| POR Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:

RFB: Reserved Factory Bit: Set to zero for proper operation

EXS: Linearization Adjust and Excitation Voltage (V_{EXC}) Gain Select (Range1 or Range2)
 0 = Range 1 ($-0.166V_{FB} < \text{Linearization DAC Range} < +0.166V_{FB}$, V_{EXC} Gain = $0.83V_{REF}$)
 1 = Range 2 ($-0.124V_{FB} < \text{Linearization DAC Range} < +0.124V_{FB}$, V_{EXC} Gain = $0.52V_{REF}$)

EXEN: V_{EXC} Enable
 1 = Enable V_{EXC}
 0 = Disable V_{EXC}

RS: Internal V_{REF} Select (2.5V or 4.096V)
 0 = 4.096V
 1 = 2.5V

REN: Enable/Disable Internal V_{REF} (disable for external V_{REF} —connect external V_{REF} to REF_{IN}/REF_{OUT} pin)
 0 = External Reference (disable internal reference)
 1 = Internal Reference (enable internal reference)

LD[7:0]: Linearization DAC setting, 7-bit + sign

Table 6–6. Linearization DAC—Data Format Example

(Range 1: $-0.166V_{FB} < \text{Linearization DAC Range} < +0.166V_{FB}$)

| Digital Input (Hex) | Digital Input LD7.....LD0 | Linearization Adjust |
|---------------------|---------------------------|----------------------|
| FF | 1111 1111 | $-0.166 V_{FB}$ |
| E0 | 1110 0000 | $-0.12548 V_{FB}$ |
| C0 | 1100 0000 | $-0.08365 V_{FB}$ |
| A0 | 1010 0000 | $-0.04183 V_{FB}$ |
| 81 | 1000 0001 | $-0.00131 V_{FB}$ |
| 80 | 1000 0000 | $0 V_{FB}$ |
| 00 | 0000 0000 | $0 V_{FB}$ |
| 01 | 0000 0001 | $+0.00131 V_{FB}$ |
| 20 | 0010 0000 | $+0.04183 V_{FB}$ |
| 40 | 0100 0000 | $+0.08365 V_{FB}$ |
| 60 | 0110 0000 | $+0.12548 V_{FB}$ |
| 7F | 0111 1111 | $+0.166 V_{FB}$ |

Linearization DAC Equation:

$$\text{Decimal \# Counts} = |\text{Desired } V_{FB} \text{ Ratio}| / (\text{Full-Scale Ratio}/127)$$

Linearization DAC Example:

Given: (Range 1: $-0.166V_{FB} < \text{Linearization DAC Range} < +0.166V_{FB}$)

Want: V_{FB} Ratio = -0.082

Decimal # Counts = $0.082/(0.166/127) = 62.7349$

Use 63 counts $\rightarrow 0x3F \rightarrow 0011 1111$

Add a '1' in the Sign Bit (MSB, bit 7) to denote the negative ratio:

Final Linearization DAC Setting: $1011 1111 \rightarrow BFh$

6.2.5 Register 4: PGA Coarse Offset Adjust and Gain Select/Output Amplifier Gain Select Register (Read/Write, Address Pointer = 00100)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit Name | OWD | GO2 | GO1 | GO0 | GI3 | GI2 | GI1 | GI0 | RFB | RFB | RFB | OS4 | OS3 | OS2 | OS1 | OS0 |
| POR Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:

OWD: One-Wire Disable (only valid while V_{OUT} is enabled, for use when PRG is connected to V_{OUT})
 1 = Disable
 0 = Enable

GO[2:0]: Output Amplifier Gain Select, 1-of-7 plus internal feedback disable

GI[3:0]: Front-End PGA Gain Select, 1-of-8, and Input Mux Control

GI[3] = Input Mux Control

GI[2:0] = Gain Select

RFB: Reserved Factory Bit: Set to zero for proper operation

OS[4:0]: Coarse Offset Adjust on Front-End PGA, 4-bit + sign

1LSB = $(V_{REF})(0.85E - 3)$

Table 6–7. Output Amplifier—Gain Select

| GO2 [14] | GO1 [13] | GO0 [12] | Output Amplifier Gain |
|-------------|-------------|-------------|---------------------------|
| 0 | 0 | 0 | 2 |
| 0 | 0 | 1 | 2.4 |
| 0 | 1 | 0 | 3 |
| 0 | 1 | 1 | 3.6 |
| 1 | 0 | 0 | 4.5 |
| 1 | 0 | 1 | 6 |
| 1 | 1 | 0 | 9 |
| 1 | 1 | 1 | Disable Internal Feedback |

Table 6–8. Front End PGA—Gain Select

| GI3 MUX CNTL [11] | GI2 GAIN SEL2 [10] | GI1 GAIN SEL1 [9] | GI0 GAIN SEL0 [8] | Input MUX State ⁽¹⁾ | Front-End PGA Gain |
|-------------------------|--------------------------|-------------------------|-------------------------|--|-----------------------|
| 0 | 0 | 0 | 0 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 4 |
| 0 | 0 | 0 | 1 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 8 |
| 0 | 0 | 1 | 0 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 16 |
| 0 | 0 | 1 | 1 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 23.27 |
| 0 | 1 | 0 | 0 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 32 |
| 0 | 1 | 0 | 1 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 42.67 |
| 0 | 1 | 1 | 0 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 64 |
| 0 | 1 | 1 | 1 | $V_{IN1} = V_{INP}, V_{IN2} = V_{INN}$ | 128 |
| 1 | 0 | 0 | 0 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –4 |
| 1 | 0 | 0 | 1 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –8 |
| 1 | 0 | 1 | 0 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –16 |
| 1 | 0 | 1 | 1 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –23.27 |
| 1 | 1 | 0 | 0 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –32 |
| 1 | 1 | 0 | 1 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –42.67 |
| 1 | 1 | 1 | 0 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –64 |
| 1 | 1 | 1 | 1 | $V_{IN1} = V_{INN}, V_{IN2} = V_{INP}$ | –128 |

⁽²⁾ V_{IN1} = Pin 4, V_{IN2} = Pin 5, V_{INP} = positive input to Front-End PGA, V_{INN} = negative input to Front-End PGA; see detailed block diagram (Figure B–1 on page B-2).

Table 6–9. Coarse Offset Adjust on Front-End PGA—Data Format Example ($V_{REF} = +5V$)

| OS4 [4] | OS3 [3] | OS2 [2] | OS1 [1] | OS0 [0] | Coarse Offset (mV) | Coarse Offset |
|------------|------------|------------|------------|------------|-----------------------|---------------------------|
| 1 | 1 | 1 | 1 | 1 | –59.5 | $-14(V_{REF})(0.85E - 3)$ |
| 1 | 1 | 1 | 1 | 0 | –55.25 | $-13(V_{REF})(0.85E - 3)$ |
| 1 | 1 | 1 | 0 | 1 | –51 | $-12(V_{REF})(0.85E - 3)$ |
| 1 | 1 | 1 | 0 | 0 | –46.75 | $-11(V_{REF})(0.85E - 3)$ |
| 1 | 1 | 0 | 1 | 1 | –42.5 | $-10(V_{REF})(0.85E - 3)$ |
| 1 | 1 | 0 | 1 | 0 | –38.25 | $-9(V_{REF})(0.85E - 3)$ |
| 1 | 1 | 0 | 0 | 1 | –34 | $-8(V_{REF})(0.85E - 3)$ |
| 1 | 1 | 0 | 0 | 0 | –29.75 | $-7(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 1 | 1 | 1 | –29.75 | $-7(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 1 | 1 | 0 | –25.5 | $-6(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 1 | 0 | 1 | –21.25 | $-5(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 1 | 0 | 0 | –17 | $-4(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 1 | 0 | 1 | –12.75 | $-3(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 0 | 1 | 0 | –8.5 | $-2(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 0 | 0 | 1 | –4.25 | $-1(V_{REF})(0.85E - 3)$ |
| 1 | 0 | 0 | 0 | 0 | 0 | $0V_{REF}$ |
| 0 | 0 | 0 | 0 | 0 | 0 | $0V_{REF}$ |
| 0 | 0 | 0 | 0 | 1 | +4.25 | $+1(V_{REF})(0.85E - 3)$ |
| 0 | 0 | 0 | 1 | 0 | +8.5 | $+2(V_{REF})(0.85E - 3)$ |
| 0 | 0 | 0 | 1 | 1 | +12.75 | $+3(V_{REF})(0.85E - 3)$ |
| 0 | 0 | 1 | 0 | 0 | +17 | $+4(V_{REF})(0.85E - 3)$ |
| 0 | 0 | 1 | 0 | 1 | +21.25 | $+5(V_{REF})(0.85E - 3)$ |
| 0 | 0 | 1 | 1 | 0 | +25.5 | $+6(V_{REF})(0.85E - 3)$ |
| 0 | 0 | 1 | 1 | 1 | +29.75 | $+7(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 0 | 0 | 0 | +29.75 | $+7(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 0 | 0 | 1 | +34 | $+8(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 0 | 1 | 0 | +38.25 | $+9(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 0 | 1 | 1 | +42.5 | $+10(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 1 | 0 | 0 | +46.75 | $+11(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 1 | 0 | 1 | +51 | $+12(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 1 | 1 | 0 | +55.25 | $+13(V_{REF})(0.85E - 3)$ |
| 0 | 1 | 1 | 1 | 1 | +59.5 | $+14(V_{REF})(0.85E - 3)$ |

6.2.6 Register 5: PGA Configuration and Over/Under-Scale Limit Register (Read/Write, Address Pointer = 00101)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|-----|-----|----------|----------|--------|--------|---------|---------|-----|-------|-----|-----|-----|-----|-----|-----|
| Bit Name | RFB | RFB | CLK_CFG1 | CLK_CFG0 | EXT_EN | INT_EN | EXT_POL | INT_POL | RFB | OU_EN | HL2 | HL1 | HL0 | LL2 | LL1 | LL0 |
| POR Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:

RFB: (Reserved Factory Bit): Set to zero for proper operation

CLK_CFG[1:0]: Clocking scheme for Front-End PGA auto-zero and Coarse Offset DAC Chopping

EXTEN: Enable External Fault Comparator Group (INP_HI, INP_LO, INN_LO, INN_HI)

1 = Enable External Fault Comparator Group
0 = Disable External Fault Comparator Group

INTEN: Enable Internal Fault Comparator Group (A2SAT_LO, A2SAT_HI, A1SAT_LO, A1SAT_HI, A3_VCM)

1 = Enable Internal Fault Comparator Group
0 = Disable Internal Fault Comparator Group

EXTPOL: Selects V_{OUT} output polarity when External Fault Comparator Group detects a fault, if **EXTEN** = 1

1 = Force V_{OUT} high when any comparator in the External Fault Comparator Group detects a fault
0 = Force V_{OUT} low when any comparator in the External Fault Comparator Group detects a fault

INTPOL: Selects V_{OUT} output polarity when Internal Fault Comparator Group detects a fault, if **INTEN** = 1

1 = Force V_{OUT} high when any comparator in the Internal Fault Comparator Group detects a fault
0 = Force V_{OUT} low when any comparator in the Internal Fault Comparator Group detects a fault

OUEN: Over/Under-Scale Limit Enable.

1 = Enable Over/Under-Scale limits
0 = Disable Over/Under-Scale limits

HL[2:0]: Over-Scale Threshold Select

LL[2:0]: Under-Scale Threshold Select

Table 6–10. Clock Configuration (Front End PGA Auto-Zero and Coarse Adjust DAC Chopping)

| CIK_CFG1 [13] | CLK_CFG0 [12] | PGA Front End Auto-Zero | Coarse Adjust DAC Chopping |
|---------------|---------------|-------------------------------|---------------------------------|
| 0 | 0 | 7kHz typical | 3.5kHz typical |
| 0 | 1 | 7kHz typical | Off (none) |
| 1 | 0 | 7kHz typical, Random Clocking | 3.5kHz typical, Random Clocking |
| 1 | 1 | 7kHz typical | 3.5kHz typical, Random Clocking |

Table 6–11. Over-Scale Threshold Select ($V_{REF} = +5V$)

| HL2 [5] | HL1 [4] | HL0 [3] | Over-Scale Threshold (V) | Over-Scale Threshold |
|------------|------------|------------|-----------------------------|----------------------|
| 0 | 0 | 0 | 4.854 | $0.9708 V_{REF}$ |
| 0 | 0 | 1 | 4.805 | $0.9610 V_{REF}$ |
| 0 | 1 | 0 | 4.698 | $0.9394 V_{REF}$ |
| 0 | 1 | 1 | 4.580 | $0.9160 V_{REF}$ |
| 1 | 0 | 0 | 4.551 | $0.9102 V_{REF}$ |
| 1 | 0 | 1 | 3.662 | $0.7324 V_{REF}$ |
| 1 | 1 | 0 | 2.764 | $0.5528 V_{REF}$ |
| 1 | 1 | 1 | Reserved | — |

Table 6–12. Under-Scale Threshold Select ($V_{REF} = +5V$)

| LL2 [2] | LL1 [1] | LL0 [0] | Under-Scale Threshold (V) | Under-Scale Threshold |
|------------|------------|------------|------------------------------|-----------------------|
| 0 | 0 | 0 | 0.127 | $0.02540 V_{REF}$ |
| 0 | 0 | 1 | 0.147 | $0.02930 V_{REF}$ |
| 0 | 1 | 0 | 0.176 | $0.03516 V_{REF}$ |
| 0 | 1 | 1 | 0.196 | $0.03906 V_{REF}$ |
| 1 | 0 | 0 | 0.225 | $0.04492 V_{REF}$ |
| 1 | 0 | 1 | 0.254 | $0.05078 V_{REF}$ |
| 1 | 1 | 0 | 0.274 | $0.05468 V_{REF}$ |
| 1 | 1 | 1 | 0.303 | $0.06054 V_{REF}$ |

6.2.7 Register 6: Temp ADC Control Register (Read/Write, Address Pointer = 00110)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|-----|-----|-------|------|------|-----|-----|------|-----|-----|----|----|----|----|----|----|
| Bit Name | RFB | RFB | ADC2X | ADCS | ISEN | CEN | TEN | AREN | RV1 | RV0 | M1 | M0 | G1 | G0 | R1 | R0 |
| POR Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:

RFB: **Reserved Factory Bit: Set to zero for proper operation**

ADC2X: **Temp ADC runs 2x faster (not for internal Temp Sense Mode)**

0 = 1x conversion speed (6ms typical, R1, R0 = '00', TEN = '0', AREN = '0')

1 = 2x conversion speed (3ms typical, R1, R0 = '00', TEN = '0', AREN = '0')

ADCS: **Start (restart) the Temp ADC (single conversion control if CEN = 0)**

0 = No Start/Restart Temp ADC

1 = Start/Restart Temp ADC (each write of a '1' causes single conversion; when conversion is completed ADCS = '0')

ISEN: **TEMP_{IN} Current source (I_{TEMP}) Enable**

1 = Enable 7μA current source, I_{TEMP}

0 = Disable 7μA current source, I_{TEMP}

CEN: **Enable Temp ADC Continuous Conversion Mode**

1 = Continuous Conversion mode

0 = Noncontinuous Conversion mode

TEN: **Internal Temperature Mode Enable**

1 = Enable Internal Temperature Mode

0 = External Signal Mode

For TEN = 1, set the following bits as shown:

ADC2X = 0

ADCS = set as desired

CEN = set as desired

AREN = 0

RV[1:0] = 00

M[1:0] = 00

G[1:0] = 00

R[1:0] = Set for desired Temp ADC resolution.

AREN: **Temp ADC internal reference enable**

1 = Enable Temp ADC internal reference (internal reference is 2.048V typical)

0 = Disable Temp ADC internal reference (use external ADC reference; see RV[1:0])

RV[1:0]: **Temp ADC External Reference Select (V_{SA}, V_{EXC}, V_{REF})**

M[1:0]: **Temp ADC Input Mux Select**

G[1:0]: **Temp ADC PGA Gain Select (x1, 2, 4, or 8)**

R[1:0]: **Temp ADC Resolution (Conversion time) Select**

Table 6–13. Temp ADC Reference Select

| AREN [8] | RV1 [7] | RV0 [6] | Temp ADC Reference (V_{REFT}) |
|-------------|------------|------------|--------------------------------------|
| 0 | 0 | 0 | V_{REF} |
| 0 | 0 | 1 | V_{EXC} |
| 0 | 1 | 0 | V_{SA} |
| 0 | 1 | 1 | Factory Reserved |
| 1 | X | X | Temp ADC Internal REF (2.048V) |

NOTE: X = don't care.

Table 6–14. Temp ADC Input Mux Select

| M1 [5] | M0 [4] | Temp ADC PGA +Input | Temp ADC PGA –Input |
|-----------|-----------|---------------------|---------------------|
| 0 | 0 | $TEMP_{IN}$ | GND_A |
| 0 | 1 | V_{EXC} | $TEMP_{IN}$ |
| 1 | 0 | V_{OUT} | GND_A |
| 1 | 1 | V_{REF} | $TEMP_{IN}$ |

Table 6–15. Temp ADC PGA Gain Select

| G1 [3] | G0 [2] | Temp ADC PGA Gain |
|-----------|-----------|-------------------|
| 0 | 0 | 1 |
| 0 | 1 | 2 |
| 1 | 0 | 4 |
| 1 | 1 | 8 |

Figure 6–3. Internal Temperature Mode (Register 6 [9] = '1')

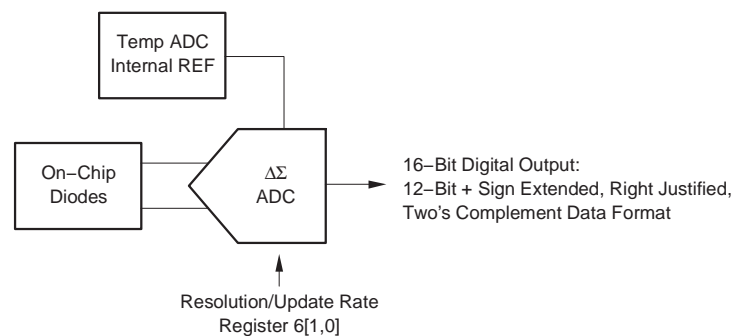


Figure 6–4. External Signal Mode (Register 6 [9], TEN = '0')

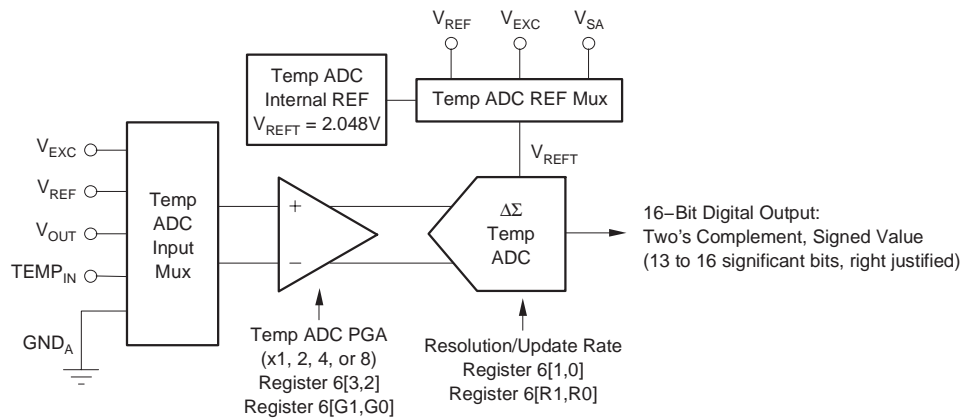


Figure 6–5. Temp ADC Mux Configurations

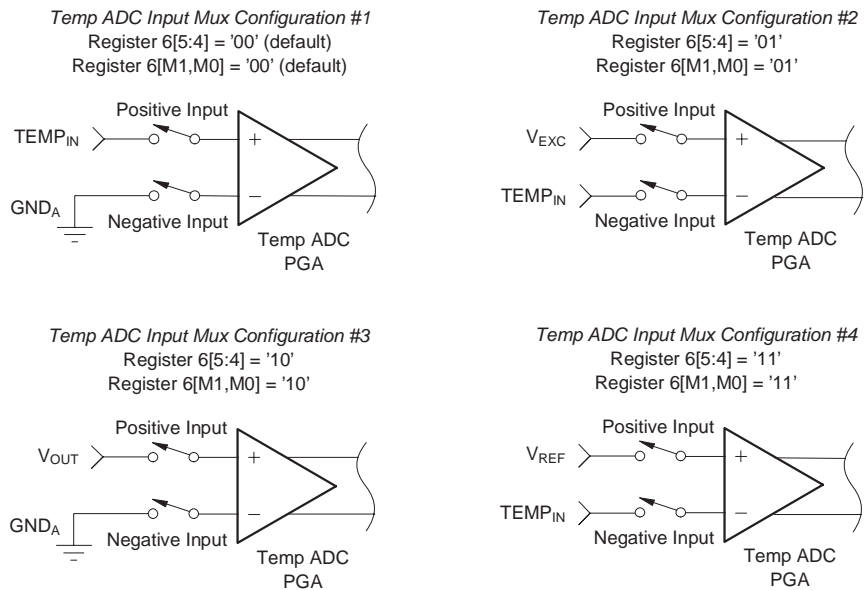


Table 6–16. Temp ADC—Resolution (Conversion Time) Select

| R1 [1] | R0 [0] | Internal Temperature Mode [TEN = 1] | External Signal Mode [TEN = 0], External Reference [AREN = 0] | External Signal Mode [TEN = 0], Internal Reference [2.048V, AREN = 1] |
|-----------|-----------|---|--|--|
| 0 | 0 | 9-Bit + Sign, 0.5°C, (3ms) | 11-Bit + Sign (6ms) | 11-Bit + Sign (8 ms) |
| 0 | 1 | 10-Bit + Sign, 0.25°C, (6ms) | 13-Bit + Sign (24ms) | 13-Bit + Sign (32ms) |
| 1 | 0 | 11-Bit + Sign, 0.125°C, (12ms) | 14-Bit + Sign (50 ms) | 14-Bit + Sign (64 ms) |
| 1 | 1 | 12-Bit + Sign, 0.0625°C, (24ms) | 15-Bit + Sign (100 ms) | 15-Bit + Sign (128 ms) |

6.2.8 Register 7: Output Enable Counter Control Register (Read/Write, Address Pointer = 00111)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|
| Bit Name | RFB | RFB | RFB | RFB | DLY3 | DLY2 | DLY1 | DLY0 | OEN7 | OEN6 | OEN5 | OEN4 | OEN3 | OEN2 | OEN1 | OEN0 |
| POR Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit Descriptions:

RFB: Reserved Factory Bit: Set to zero for proper operation

DLY[3:0]: Temp ADC Delay

Temp ADC begins conversion after DLY[3:0] x 10ms after valid WRITE to this register. Initial count, DLY[3:0] is decremented every 10ms to zero count and then Temp ADC is enabled. This allows for linearization and excitation analog circuitry to settle before applying temperature compensation.

OEN[7:0]: Output Enable Counter for One-Wire Interface/ V_{OUT} Multiplexed Mode.

V_{OUT} is enabled after a valid WRITE to this register. Any non-zero value = V_{OUT} Enable initial count, decremented every 10ms to zero count, and then V_{OUT} is disabled. After V_{OUT} is disabled, a one-second internal timer is set. If serial communication takes place from an outside controller on either the One-Wire interface (PRG pin) or Two-Wire interface, then V_{OUT} will remain disabled as long as the PGA309 is addressed at least once per second.

Table 6–17. Temp ADC—Delay After V_{OUT} Enable

| DLY3 [11] | DLY2 [10] | DLY1 [9] | DLY0 [8] | Decimal Equivalent (Initial Counter Value) | Temp ADC Delay ⁽¹⁾ (ms) |
|--------------|--------------|-------------|-------------|---|---------------------------------------|
| 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 1 | 10 |
| 0 | 0 | 1 | 0 | 2 | 20 |
| 0 | 0 | 1 | 1 | 3 | 30 |
| 0 | 1 | 0 | 0 | 4 | 40 |
| 0 | 1 | 0 | 1 | 5 | 50 |
| 0 | 1 | 1 | 0 | 6 | 60 |
| 0 | 1 | 1 | 1 | 7 | 70 |
| 1 | 0 | 0 | 0 | 8 | 80 |
| 1 | 0 | 0 | 1 | 9 | 90 |
| 1 | 0 | 1 | 0 | 10 | 100 |
| 1 | 0 | 1 | 1 | 11 | 110 |
| 1 | 1 | 0 | 0 | 12 | 120 |
| 1 | 1 | 0 | 1 | 13 | 130 |
| 1 | 1 | 1 | 0 | 14 | 140 |
| 1 | 1 | 1 | 1 | 15 | 150 |

⁽¹⁾ Temp ADC Delay = Initial Counter Value x 10ms

Table 6–18. Output Enable Counter for One-Wire Interface/ V_{OUT} Multiplexed Mode

| Digital Input OEN7.....OEN0 [7.....0] (Binary) | Decimal Equivalent (Initial Counter Value) | V_{OUT} Enable Timeout ⁽¹⁾ (ms) |
|--|---|---|
| 0000 0000 | 0 | 0 (V_{OUT} disabled) |
| 0010 0000 | 32 | 320 |
| 0100 0000 | 64 | 640 |
| 0110 0000 | 96 | 960 |
| 1000 0000 | 128 | 1280 |
| 1010 0000 | 160 | 1600 |
| 1100 0000 | 192 | 1920 |
| 1110 0000 | 224 | 2240 |
| 1111 1111 | 255 | 2550 |

⁽¹⁾ V_{OUT} Enable Timeout = Initial Counter Value x 10ms

6.2.9 Register 8: Alarm Status Register (Read Only, Address Pointer = 01000)

| Bit # | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----------|-----|-----|-----|-----|-----|-----|----|------|------|------|------|------|------|------|------|------|
| Bit Name | X | X | X | X | X | X | X | ALM8 | ALM7 | ALM6 | ALM5 | ALM4 | ALM3 | ALM2 | ALM1 | ALM0 |
| POR Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | X | X | X | X | X | X | X | X | X |

Bit Descriptions:**ALM[8:0]: Fault Monitor Comparator Outputs (1 = Fault Condition)**

See Section 2.8, *Fault Monitor*.

ALM8 — A1SAT_HI

ALM7 — A1SAT_LO

ALM6 — A2SAT_HI

ALM5 — A2SAT_LO

ALM4 — A3_VCM

ALM3 — INN_HI

ALM2 — INN_LO

ALM1 — INP_HI

ALM0 — INP_LO

External EEPROM Example

This appendix uses an example to illustrate the mapping of PGA309 internal registers to external EEPROM register Configuration Data and Lookup Table coefficients.

| Topic | Page |
|--|------|
| A.1 PGA309 External EEPROM Example | A-2 |

A.1 PGA309 External EEPROM Example

The PGA309 circuit configuration in Figure A–1 is used in the PGA309EVM (Evaluation Module) to check proper functionality of the PGA309. Table A–1 details the desired configuration for the PGA309. The Gain and Offset Scaling are shown in Example A–1. Figure A–2 shows how the internal PGA309 16-bit data is mapped into the external EEPROM 8-bit address locations. The external EEPROM values are displayed in Table A–2, which also details how Checksum1 and Checksum2 are computed for this example.

Figure A–1. PGA309 Circuit for External EEPROM Example

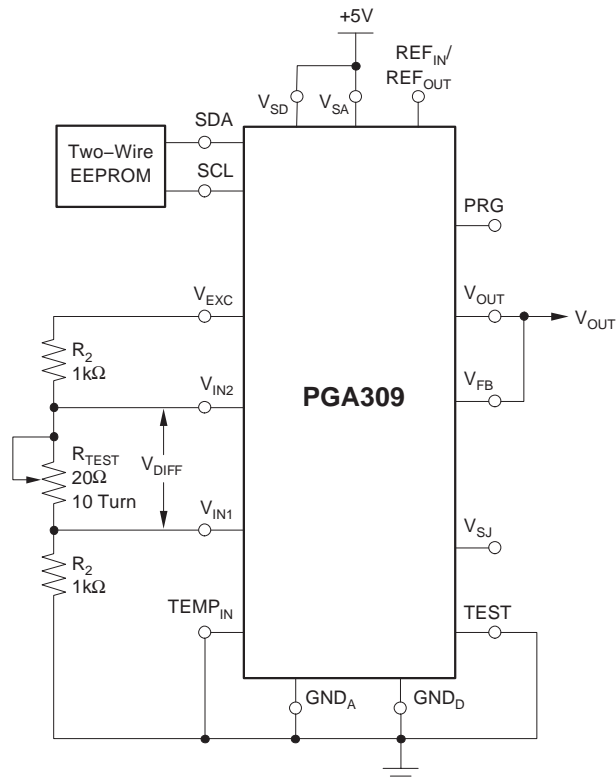


Table A–1. PGA309 Configuration for External EEPROM Example

| Parameter | Desired Setting | Comments |
|---------------------------------|-----------------------|--|
| V _{DIFF} | 0V to 33.67mV | Adjust R _{TEST} from 0Ω to 20Ω |
| V _{REF} | 4.096V | Use Internal PGA309 Reference |
| V _{EXC} | 3.4V | Use Linearization Circuit, Range 0 (K _{EXC} = 0.83), Lin DAC = 0 |
| Coarse Offset | –3.277mV | |
| Front-End PGA Gain | 64 | |
| Gain DAC | 1 | |
| Output Amplifier Gain | 2.4 | |
| Zero DAC | 100mV | |
| Over-Scale | 3.876V | |
| Under-Scale | 0.245V | |
| V _{OUT} Ideal | –0.263V to +4.908V | With Over-Scale and Under-Scale Disabled |
| V _{OUT} Final | 0.245V to 3.876V | With Over-Scale and Under-Scale Enabled |
| Fault Detection | External Comparators | Enable |
| | Fault Detect Polarity | Positive |
| | Internal Comparators | Disable |
| Temperature ADC | Internal Mode | |
| Output Enable Counter | Set To All Zeroes | |
| EEPROM Temperature Coefficients | | Set so all temperatures ≤ +128°C use same Gain DAC and Zero DAC settings |

Example A–1. Gain and Offset Scaling for External EEPROM

$$V_{OUT} = V_{DIFF} (\text{Front-End PGA Gain})(\text{Gain DAC})(\text{Output Amplifier Gain}) + \text{Coarse Offset (Front-End PGA Gain)(Gain DAC)(Output Amplifier Gain)} + \text{Zero DAC (Gain DAC)(Output Amplifier Gain)}$$

$$V_{OUT} = V_{DIFF} (64)(1)(2.4) + -3.277\text{mV} (64)(1)(2.4) + 100\text{mV} (1)(2.4)$$

$$V_{OUT} = V_{DIFF} (153.6) - 0.2633\text{V}$$

Figure A–2. Gain and Offset Scaling for External EEPROM Example

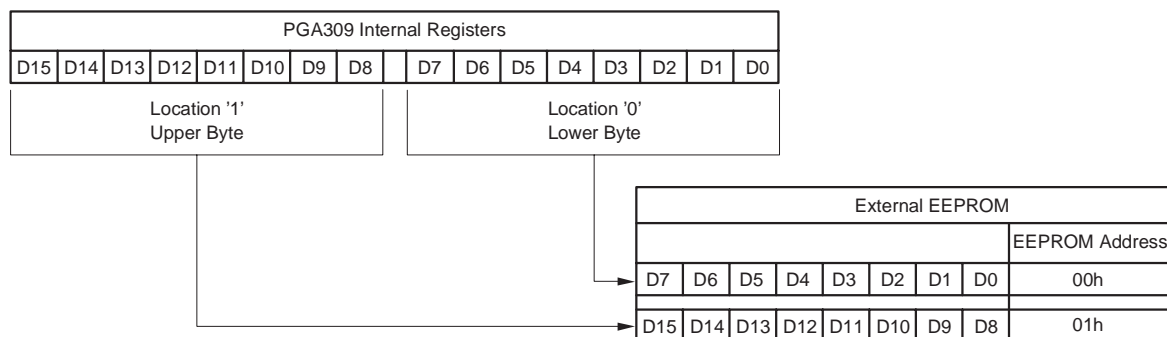


Table A-2.Final Values for External EEPROM Example

| 8-Bit EEPROM Load | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|--------------|-----|--------------|--------------|-------|-------|--------|--------|--------------|-------|-----|-----|-----|-----|-----|------|--------------|------|------|
| PGA309 External EEPROM First Part (Configuration Data) | | | | | | | | | | | | | | | | | | | | | | |
| External EEPROM Address (Decimal) | PGA309 Internal Register Address | PGA309 Internal Address Description | Data | Location '1' | | | | | | | | Location '0' | | | | | | | | Hex Equiv | | |
| | | | | 8 | 4 | 2 | 1 | 8 | 4 | 2 | 1 | 8 | 4 | 2 | 1 | 8 | 4 | 2 | 1 | | | |
| | | | | Upper Byte | | | | | | | | Lower Byte | | | | | | | | | | |
| | | | | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| 1/0 MSB/LSB | | | Programmed flag value must be as shown | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 5449 | | | |
| 3/2 MSB/LSB | | | Unused; set to zero | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0000 | | | |
| 5/4 MSB/LSB | | | Unused; set to zero | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0000 | | | |
| 7/6 MSB/LSB | 00011 (Register 3) | Reference Control and Linearization | | RFB | RFB | RFB | GO0 | GI3 | EXS | EXEN | RS | REN | LD7 | LD6 | LD5 | LD4 | LD3 | LD2 | LD1 | LD0 | | |
| 7/6 | | | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0500 | |
| 9/8 MSB/LSB | 00100 (Register 4) | PGA Coarse Offset and Gain/Output Amplifier Gain | | OWD | GO2 | GO1 | GO0 | GI3 | GI2 | GI1 | GI0 | RFB | RFB | RFB | RFB | RFB | OS4 | OS3 | OS2 | OS1 | OS0 | |
| 9/8 | | | | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1611 |
| 11/10 MSB/LSB | 00101 (Register 5) | PGA Configuration and Over/Under Scale Limit | | RFB | RFB | CLK_ CFG1 | CLK_ CFG0 | EXTEN | INTEN | EXTPOL | INTPOL | RFB | OU EN | HL2 | HL1 | HL0 | LL2 | LL1 | LL0 | | | |
| 11/10 | | | | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | | 0A47 | |
| 13/12 MSB/LSB | 00110 (Register 6) | Temperature ADC Control | | RFB | RFB | ADC2X | ADCS | ISEN | CEN | TEN | AREN | RV1 | RV0 | M1 | M0 | G1 | G0 | R1 | R0 | | | |
| 13/12 | | | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | | 1603 | |
| SUM = 8FA4h | | | | | | | | | | | | | | | | | | | | | | |
| 15/14 MSB/LSB | | FFFF – sum(hex equiv of each location – 1/0 thru 13/12) truncated above 16 bits | Checksum1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 705B | |

Table A-2. Final Values for External EEPROM Example (continued)

| 8-Bit EEPROM Load | | | Location '1' | | | | | | | | Location '0' | | | | | | | | Hex Equiv |
|--|---|---|---|-----|-----|-----|-----|-----|----|----|--------------|----|----|----|----|----|--------------|----|--------------|
| PGA309 External EEPROM Second Part (Temperature Coefficients) | | | Upper Byte | | | | | | | | Lower Byte | | | | | | | | |
| | | | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
| External EEPROM Address (Decimal) | PGA309 Internal Register Address | PGA309 Internal Address Description | Data | | | | | | | | | | | | | | | | |
| 17/16 MSB/LSB | | | T0 (Temperature Index value for Temp ≤ T0) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| 19/18 MSB/LSB | | | Z0 (Zero DAC value for Temp ≤ T0) | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| 21/20 MSB/LSB | | | G0 (Gain DAC value for Temp ≤ T0) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 23/22 MSB/LSB | | | TEND (end of Lookup Table) | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |
| 25/24 MSB/LSB | | | ZMEND (end of Lookup Table) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | SUM = 18E3Eh | | |
| 27/26 MSB/LSB | | FFFF – sum(hex equiv of each location – 17/16 thru 25/24) truncated above 16 bits | GMEND (Checksum2) | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | | |
| | | | | | | | | | | | | | | | | | | | |

Detailed Block Diagram

Appendix B shows a detailed block diagram of the PGA309.

| Topic | Page |
|----------------------------------|------|
| B.1 Detailed Block Diagram | B-2 |

Glossary

A

ADC: Analog-to-digital converter.

B

B_V: Bridge nonlinearity with applied pressure.

$$B_V = (V_{OUT\ MAX} - V_{OUT\ MIN}) / [(4 \cdot V_{REF} \cdot K_{EXC} / K_{LIN}) + 2(V_{OUT\ MAX} + V_{OUT\ MIN})].$$

B_{V MAX}: Maximum compensable nonlinearity.

$$B_{V\ -MAX}: B_{V\ -MAX} = (V_{OUT\ MAX} - V_{OUT\ MIN}) / [(4 \cdot V_{REF} \cdot K_{EXC} / K_{LIN\ -MAX}) + 2(V_{OUT\ MAX} + V_{OUT\ MIN})].$$

$$B_{V\ +MAX}: B_{V\ +MAX} = (V_{OUT\ MAX} - V_{OUT\ MIN}) / [(4 \cdot V_{REF} \cdot K_{EXC} / K_{LIN\ +MAX}) + 2(V_{OUT\ MAX} + V_{OUT\ MIN})].$$

C

C_F: External feedback capacitor connected between V_{SJ} and V_{OUT}, for stability.

CMR: Common-mode rejection.

D

DAC: Digital-to-analog converter.

E

EMI: Electromagnetic interference.

F

FSR: Full-scale range of PGA309 output. $FSR = V_{OUT\ MAX} - V_{OUT\ MIN}$.

FSS: Full-scale bridge sensitivity for sensor at P_{MAX} (for example, 2mV/V).

G

G_T : Total gain produced by the PGA309 of V_{OUT}/V_{IN} gain.
 $G_T = (\text{Front-End PGA Gain})(\text{Gain DAC})(\text{Output Amplifier Gain})$.

G_L : Gain of the PGA309 when using the Linearization circuit.
 $G_L = (V_{OUTMAX} - V_{OUTMIN}) / [(V_{REF} \cdot K_{EXC} \cdot FSS) + (K_{LIN} \cdot V_{OUTMAX} \cdot FSS)]$.

G_{IDEAL} : Ideal gain. $G_{IDEAL} = (V_{OUT\ MAX} - V_{OUT\ MIN}) / (V_{REF} \cdot FSS)$.

GND_A : Analog ground.

GND_D : Digital ground.

I

IVR: Input voltage range of the PGA309.

K

K_{LIN} : PGA linearization coefficient.
 $K_{LIN} = (4 \cdot B_V \cdot V_{REF} \cdot K_{EXC}) / [(V_{OUTMAX} - V_{OUTMIN}) - 2 \cdot B_V \cdot (V_{OUTMAX} + V_{OUTMIN})]$.

$K_{LIN\ -MAX}$: Most negative linearization coefficient. Its value is determined by the selected range of bridge sensor nonlinearity compensation.

$K_{LIN\ +MAX}$: Most positive linearization coefficient. Its value is determined by the selected range of bridge sensor nonlinearity compensation.

K_{EXC} : PGA excitation coefficient. Scale factor on V_{REF} .

K_P : Pressure constant. Converts linear input pressure to nonlinear pressure detected by sensor; referenced to full-scale input pressure.

L

LSB: Least significant bit.

M

MSB: Most significant bit.

P

P: Pressure input.

P_{MIN}: Minimum sensor input pressure.

P_{MAX}: Maximum sensor input pressure.

PNL: Nonlinear pressure output of bridge with linear pressure input P.

POR: Power-on reset function.

PRG: Single-wire interface program pin.

R

R_{BRG}: Bridge resistor value.

R_{FB}: External feedback resistor connected to V_{FB} .

R_{FO}: Internal feedback resistor for the Output Amplifier.

R_{FO EXT}: Additional external feedback resistor for the Output Amplifier.

R_{GO}: Internal gain resistor for the Output Amplifier.

R_{GO EXT}: Additional external gain resistor for the Output Amplifier.

R_{ISO}: External isolation resistor connected to V_{OUT} .

REF_{IN}/REF_{OUT}: Voltage reference input/output pin.

RFI Radio Frequency Interference.

RTO: Referred to output.

S

SCL: Clock input/output for Two-Wire serial interface.

SDA: Data input/output for Two-Wire serial interface.

T

TEMP_{IN}: External temperature signal input.

TEST: Test/external controller mode pin.

V

- V_{BRMAX}**: Maximum bridge sensor output.
- V_{CM}**: Common-mode voltage applied to the PGA309 input. $V_{CM} = (V_{INP} + V_{INN})/2$.
- V_{COS}**: Coarse offset voltage output of the coarse offset adjust DAC.
- V_{DIFF}**: Differential voltage applied to the PGA309 inputs. $V_{DIFF} = V_{INP} - V_{INN}$.
- V_{EXC}**: Bridge sensor excitation voltage. $V_{EXC} = V_{REF} \cdot K_{EXC} + K_{LIN} \cdot V_{OUT}$.
- V_{EXC MAX}**: Maximum Bridge sensor excitation voltage.
 $V_{EXC MAX} = V_{REF} \cdot K_{EXC} + K_{LIN} \cdot V_{OUT MAX}$.
- V_{EXC MIN}**: Minimum Bridge sensor excitation voltage.
 $V_{EXC MIN} = V_{REF} \cdot K_{EXC} + K_{LIN} \cdot V_{OUT MIN}$.
- V_{FB}**: V_{OUT} feedback pin.
- V_{FRONT}**: The output of difference amplifier A3, of the Front-End PGA309.
- V_{IN1}**: Signal input voltage 1.
- V_{IN2}**: Signal input voltage 2.
- V_{INN}**: The positive input of internal auto-zero amplifier A1, of the Front-End PGA.
- V_{INP}**: The positive input of internal auto-zero amplifier A2, of the Front-End PGA.
- V_N**: Output voltage of one branch of the bridge.
- V_{OA1}**: Output voltage of internal auto-zero amplifier A1. $V_{OA1} = V_{CM} - G(V_{DIFF}/2)$.
- V_{OA2}**: Output voltage of internal auto-zero amplifier A2. $V_{OA2} = V_{CM} + G(V_{DIFF}/2)$.
- V_{OS}**: Sensor offset voltage.
- V_{OUT}**: Analog output voltage of conditioned sensor.
- V_{OUT ERR FSR}**: Error in %FSR of V_{OUT} .
- V_{OUT FILT}**: Filtered V_{OUT} .
- V_{OUT IDEAL}**: Ideal output for a given pressure, P.
 $V_{OUT IDEAL} = FSS \cdot G_{IDEAL}(P/P_{MAX})V_{REF} + V_{OS}$.
- V_{OUT MAX}**: V_{OUT} for maximum bridge sensor output.
- V_{OUT MIN}**: V_{OUT} for minimum bridge sensor output.
- V_P**: Output voltage of one branch of the bridge.
- V_{REF}**: Reference voltage used by the PGA309 (internal or external).
- V_{REFT}**: Temperature V_{REF} .
- V_S**: Supply voltage.
- V_{SA}**: Analog supply voltage.
- V_{SD}**: Digital supply voltage.
- V_{SJ}**: Output Amplifier summing junction.
- V_{TEST}**: Test signal.
- V_{ZERO DAC}**: Output voltage of the Zero DAC.