



Product Specification

XBLW UC2844


Current Mode Pulse-width Controller

WEB | www.xinboleic.com



Descriptions

The UC2844 is a pulse width integrated circuit with current control mode for switching power supply. Compared with the voltage control mode, it has many advantages in load response and linear adjustment. This device is available in SOP8 package and DIP8 package.

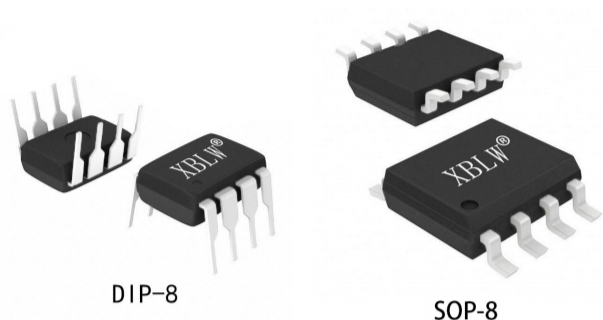

Feature

- Internally Undervoltage Lockout Circuit
- Low Startup and Operating Current (0.26mA at typical)
- Maximum Duty Cycle Control
- High current totem pole output (driving current up to 1A)
- Operating Frequency: 500kHz
- Automatic Feed Forward Compensation
- Double-pulse Suppression
- Enhanced Load-response Characteristics


Applications

- Switching regulators of any polarity
- Transformer-coupled DC-DC converters

Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW UC2844AN	DIP-8	UC2844AN	Tube	2000Pcs/Box
XBLW UC2844BDTR	SOP-8	UC2844B	Tape	2500Pcs/Reel


Pins Description

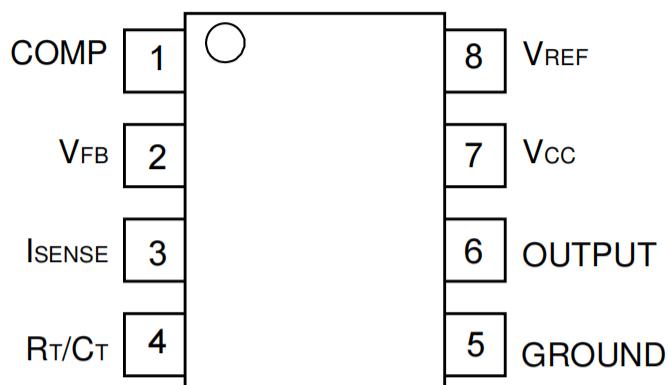

(Top view)

No.	Symbol	Function	No.	Symbol	Function
1	COMP	Compensation	5	GND	Ground
2	V _{FB}	Voltage Feedback	6	OUTPUT	Output
3	I _{SENSE}	Input Current Sense	7	V _{CC}	Power Supply
4	R _T /C _T	Oscillator	8	V _{REF}	Reference Voltage

Function Diagram

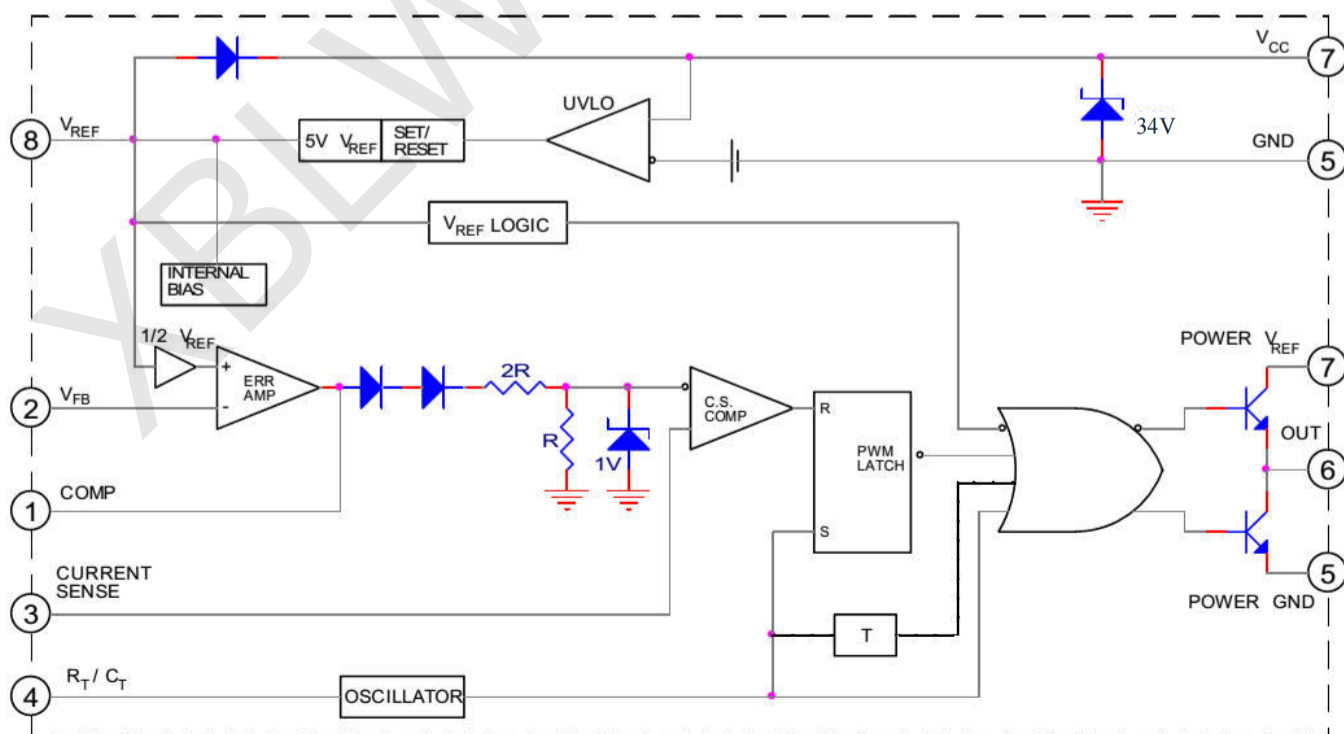

Maximum Ratings

$T_{amb} = 25^{\circ}C$, unless otherwise noted

Rating	Symbol	Value	Unit
Power voltage	V_{CC}	30	V
Output Current	I_o	± 1	A
Error Amp Sink Current	$I_{sink} (EA)$	10	mA
Error Amp. Input Voltage	$V_{in} (EA)$	-0.3~+6.3	V
Power Dissipation	PD(DIP)	1	W
Operating Ambient Temperature	T_{amb}	-40~+85	$^{\circ}C$
Storage Temperature Range	T_{stg}	-55~150	$^{\circ}C$


Electrical Characteristics

($V_{CC} = 15V$, $T_a = -40^{\circ}C \sim 85^{\circ}C$, $R_T = 10K\Omega$, $C_T = 3.3nF$, unless otherwise noted)

Characteristic	Test conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
Reference Section						
Reference Output Voltage	Tj=25°C IREF=1mA	Vref	4.9	5	5.1	V
Line Regulation rate	12V≤VCC≤25V	ΔVref		6	20	mV
Load Regulation	1mA≤IREF≤20mA	ΔVref		6	25	mV
Output Short Circuit Current	Tamb=25°C	Isc	-30	-80	-180	mA
Oscillator Section						
Frequency	Ta=25°C	fosc	47	52	57	kHz
Frequency Change with Voltage	12V≤VCC≤25V	Δf/ΔVCC		0.05	1	%
Oscillator Voltage Swing	PIN 4 peak to peak	V(OSC)		1.6		Vpp



Error Amplifier Section						
Input Bias Current		I _{BIAS}		-0.1	-2	μA
Input voltage	V _{COMP} =2.5V	V _{in (EA)}	2.42	2.5	2.58	V
Open Loop Voltage Gain	2V≤V _O ≤4V	G _{VO}	60	90		dB
Power Supply Rejection Ratio	12V≤V _{CC} ≤25V	PSRR	60	70		dB
Output Current – Sink	V _{FB} =2.7V, V _{COMP} =1.1V	I _{SINK}	2	6.5		mA
Output Current –Source	V _{FB} =2.3V, V _{COMP} =5V	I _{SOURCE}	-0.5	-0.9		mA
Output Voltage Swing (High State)	V _{FB} =2.3V, R _L =15kΩ to GND	V _{OH}	5	6.4		V
Output Voltage Swing (Low State)	V _{FB} =2.7V, R _L =15kΩ to Pin 8	V _{OL}		0.87	1.1	V
Current Sense Section						
Current Sense Input Voltage Gain		G _v	2.85	3	3.15	V/V
Maximum Current Sense Input Threshold	V _{COMP} =5V	V _{I(MAX)}	0.9	1	1.1	V
Power Supply Rejection Ratio	12V≤V _{CC} ≤25V	PSRR		70		dB
Input Bias Current		I _{BIAS}		-2	-10	μA
Output Section						
Output Voltage Low State	I _{sink} =20mA	V _{OL}		0.1	0.4	V
	I _{sink} =200mA			1.5	2.2	V
Output Voltage High State	I _{source} =20mA	V _{OH}	13	13.5		V
	I _{source} =200mA		12	13		V
Output Voltage Rise Time	C _L =1nF	t _r		50	150	ns
Output Voltage Fall Time	C _L =1nF	t _f		50	150	ns
Undervoltage Lockout Section						
Startup Threshold		V _{TH(ST)}	14.5	15.5	17.5	V
Minimum Operating Voltage After Turn-On		V _{OPR(MIN)}	8.5	9.8	11.5	V
PWM Section						
Duty Cycle Maximum		D _{max}	45	48	50	%
Duty Cycle Minimum		D _{min}			0	%
Total Device						
Power Supply Current (Startup)		I _{ST}		0.26	0.5	mA
Power Supply Current(Operating)	V _{SENSE} =V _{FB} =0V	I _{CC(OPR)}		11	17	mA
Power Supply Zener Voltage	I _{CC} =25mA	V _Z		34		V

Basic Test Circuit Diagram

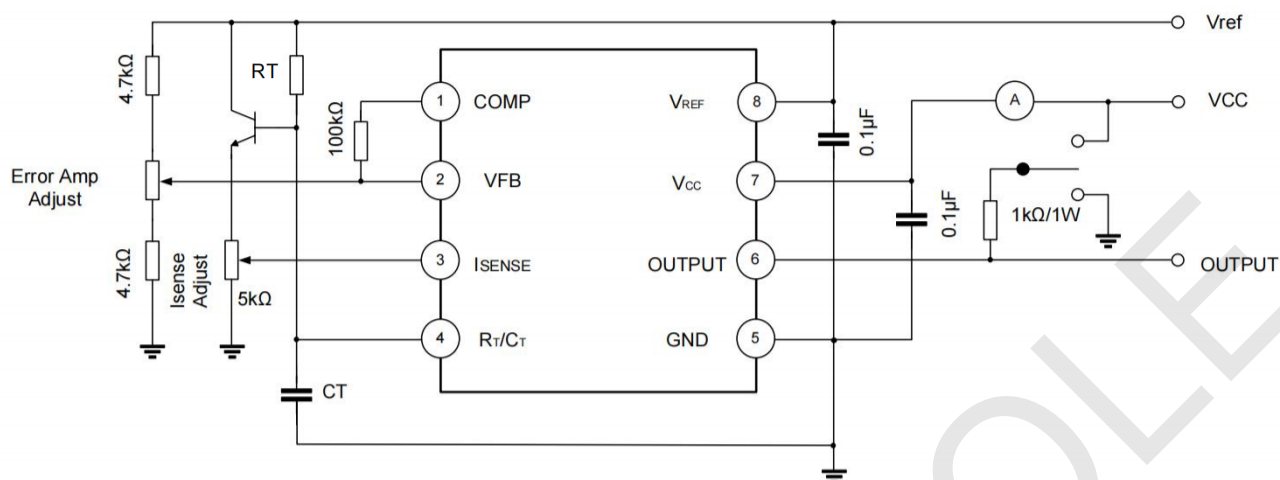


Grounding techniques should be carefully considered when there are high peak currents associated with capacitive loads. The timing and bypass capacitors must be installed next to the PIN5 and single-point grounded. Transistors and 5k Ω potentiometers are used to sample waveforms and send waveforms with adjustable slopes to PIN3.

Undervoltage off (UVLO)

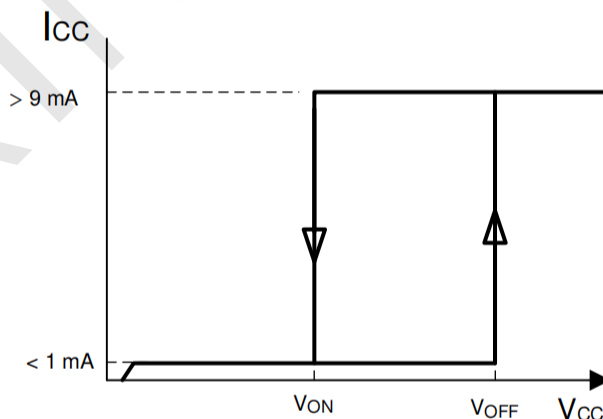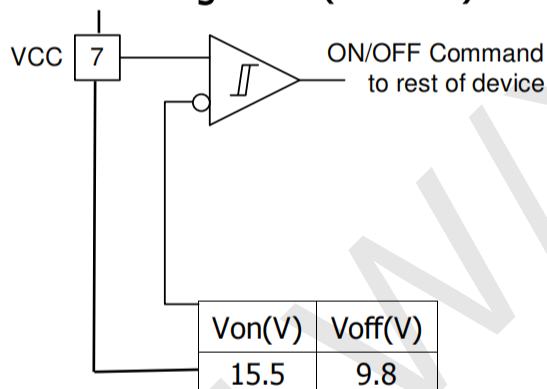


The output driver is placed in a high impedance state when entering an undervoltage shutdown. The sixth pin must be grounded with a leakage resistance to prevent leakage current from pushing the power switch

Error amplifier connection

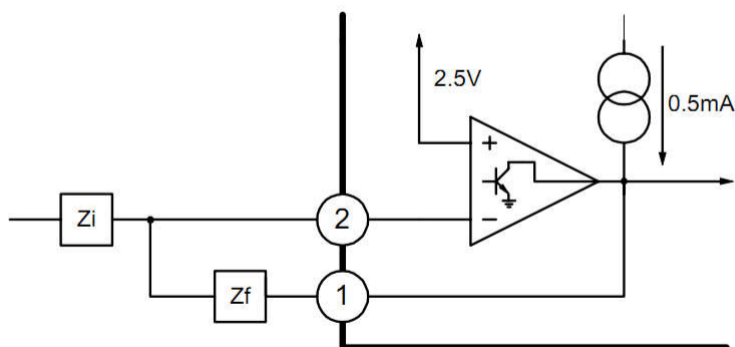


Error amplifier can push-pull output 0.5 ma current

Current detection circuit

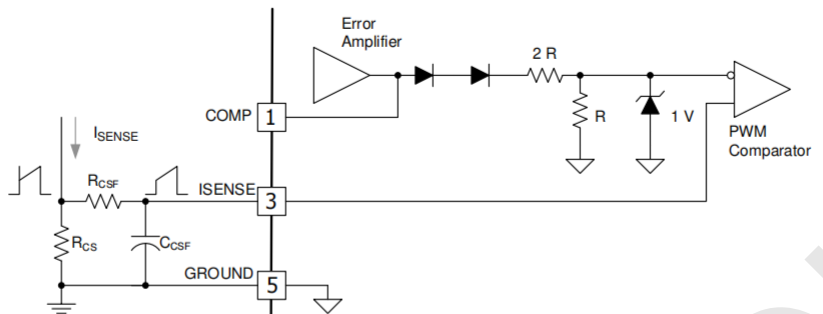

Peak current (I_S) is defined as: $I_{S(MAX)} \approx 1.0 V/R_s$ requires a small RC filter network to suppress the transient response of the switch.

Oscillator waveform and maximum duty cycle, period

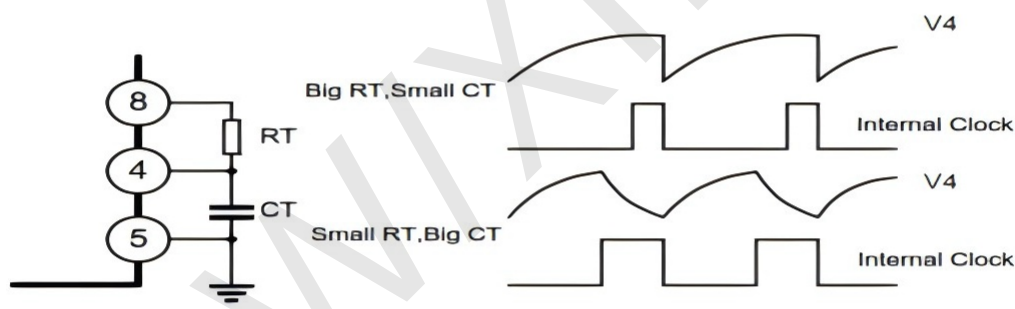


The oscillating time capacitor C_T is charged by V_{REF} via R_T and discharged by an internal current source. The internal clock signal drives the output to a low level during discharge. The oscillation period and the maximum duty cycle can be determined by selecting R_T and C_T simultaneously. The time of charge and discharge is determined by the following formula:

$$t_c \approx 0.55 R_T * C_T$$

$$t_d \approx R_T * C_T * \ln\left(\frac{0.063 R_T - 2.7}{0.063 R_T - 4}\right)$$


$$\text{The frequency is: } f = (t_c + t_d)^{-1}$$

$$\text{When: } R_T > 5K\Omega, \quad f \approx \frac{1.8}{R_T * C_T}$$

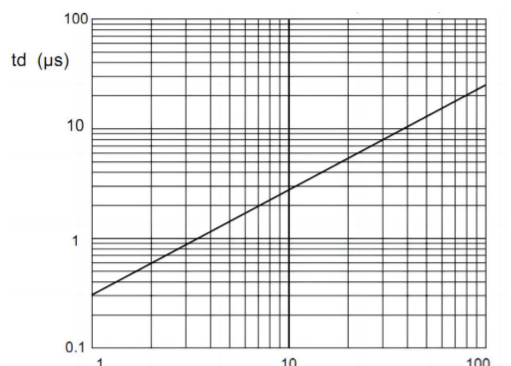

Electrical time capacitance (nF)


Relationship between oscillation dead time and capacitance CT

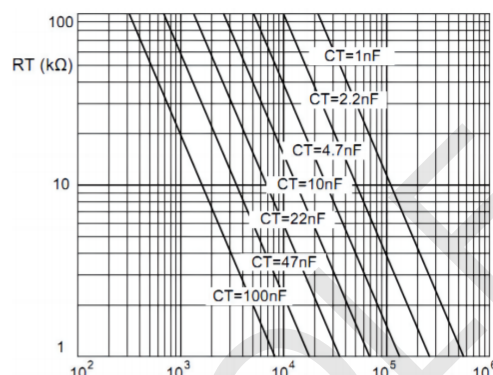

Frequency (Hz)


Relationship between frequency and timing resistance

Off technology

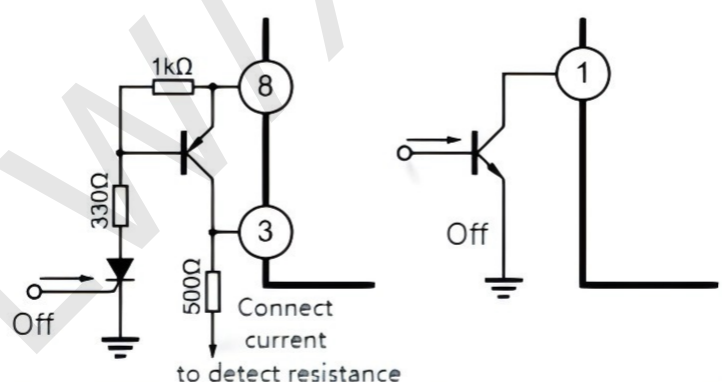


The shutdown of UC2844 can be accomplished in two ways: by raising the No. 3 pin voltage above 1V or by lowering the No. 1 pin voltage to within the forward voltage drop of the two diodes at the ground level, both methods make the output of the PWM comparator high (see internal block diagram). The PWM latch trigger is preferentially reset so that the output is kept at a low level until the next clock cycle after the off signal of Pin 1 or Pin 3 is removed. An example of an external latch-off is achieved by adding a one-way SCR, which resets when the supply voltage VCC is below the UVLO threshold. At this point, the SCR is allowed to reset when the reference voltage is turned off.


Slope Compensation

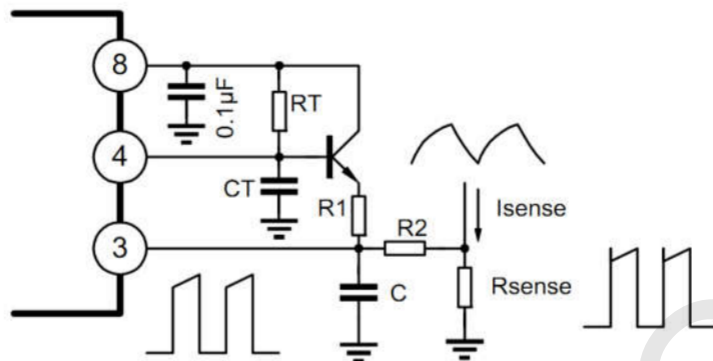


A fraction of the oscillator ramp can be summed resistively with the current-sense signal to provide slope compensation for converters requiring duty cycles over 50%. Note that capacitor CCSF forms a filter with RCSF to suppress the leading-edge switch spikes.

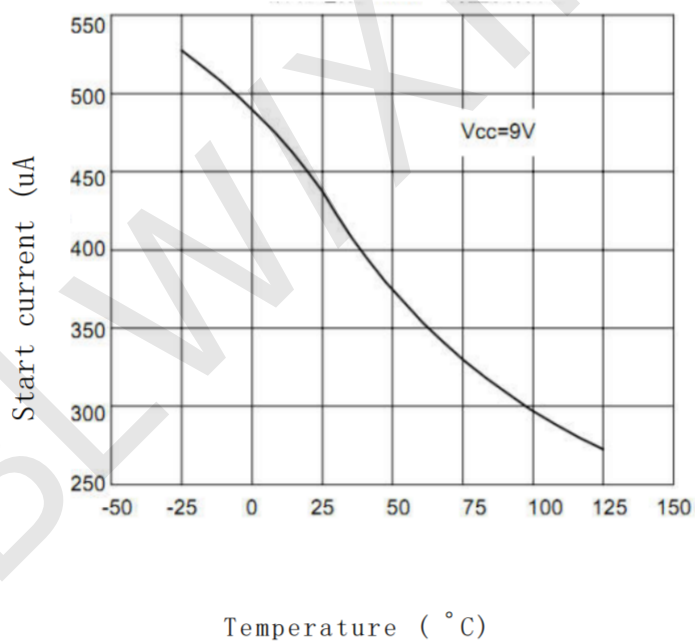

Start current IST temperature characteristics

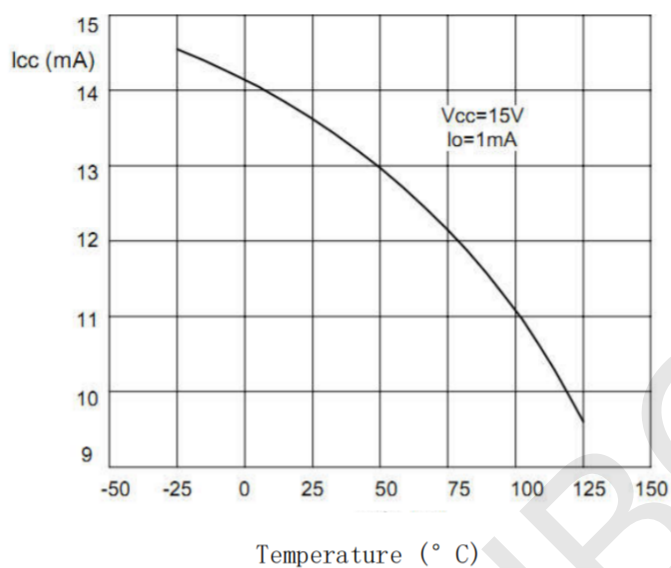

Temperature characteristics of power dissipation current ICC

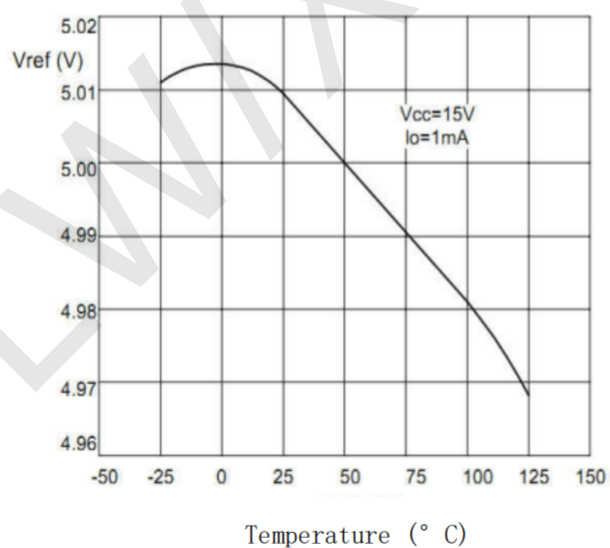


Refer to the temperature characteristics of the voltage source Vref

Package Information


• DIP-8

Symbol	Size	Dimensions In Millimeters		Symbol	Size	Dimensions In Inches	
		Min (mm)	Max (mm)			Min (in)	Max (in)
A		3.710	4.310	A		0.146	0.170
A1		0.510		A1		0.020	
A2		3.200	3.600	A2		0.126	0.142
B		0.380	0.570	B		0.015	0.022
B1		1.524 (BSC)		B1		0.060 (BSC)	
C		0.204	0.360	C		0.008	0.014
D		9.000	9.400	D		0.354	0.370
E		6.200	6.600	E		0.244	0.260
E1		7.320	7.920	E1		0.288	0.312
e		2.540 (BSC)		e		0.100 (BSC)	
L		3.000	3.600	L		0.118	0.142
E2		8.400	9.000	E2		0.331	0.354

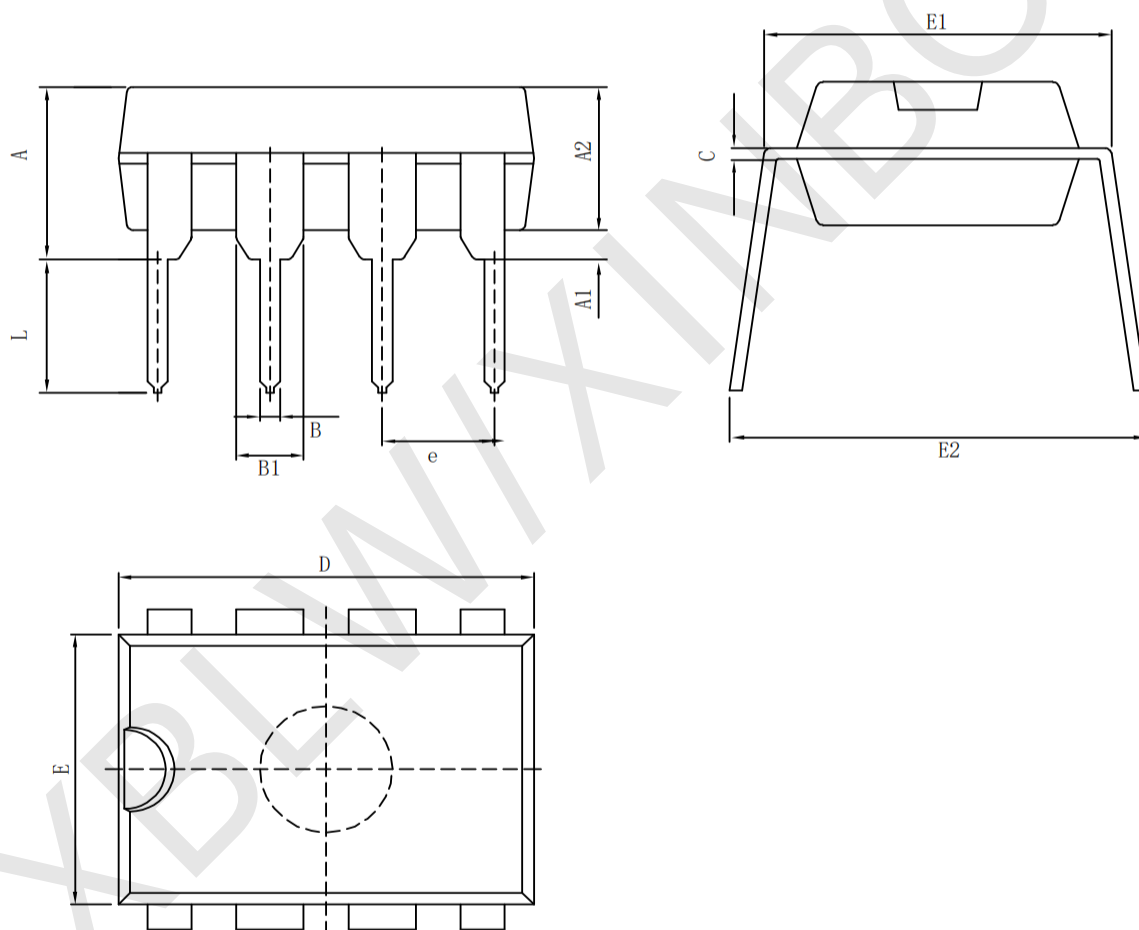

• SOP-8

Size Symbol	Dimensions In Millimeters		Size Symbol	Dimensions In Inches	
	Min (mm)	Max (mm)		Min (in)	Max (in)
A	1.350	1.750	A	0.053	0.069
A1	0.100	0.250	A1	0.004	0.010
A2	1.350	1.550	A2	0.053	0.061
b	0.330	0.510	b	0.013	0.020
c	0.170	0.250	c	0.006	0.010
D	4.700	5.100	D	0.185	0.200
E	3.800	4.000	E	0.150	0.157
E1	5.800	6.200	E1	0.228	0.224
e	1.270 (BSC)		e	0.050 (BSC)	
L	0.400	1.270	L	0.016	0.050
θ	0°	8°	θ	0°	8°

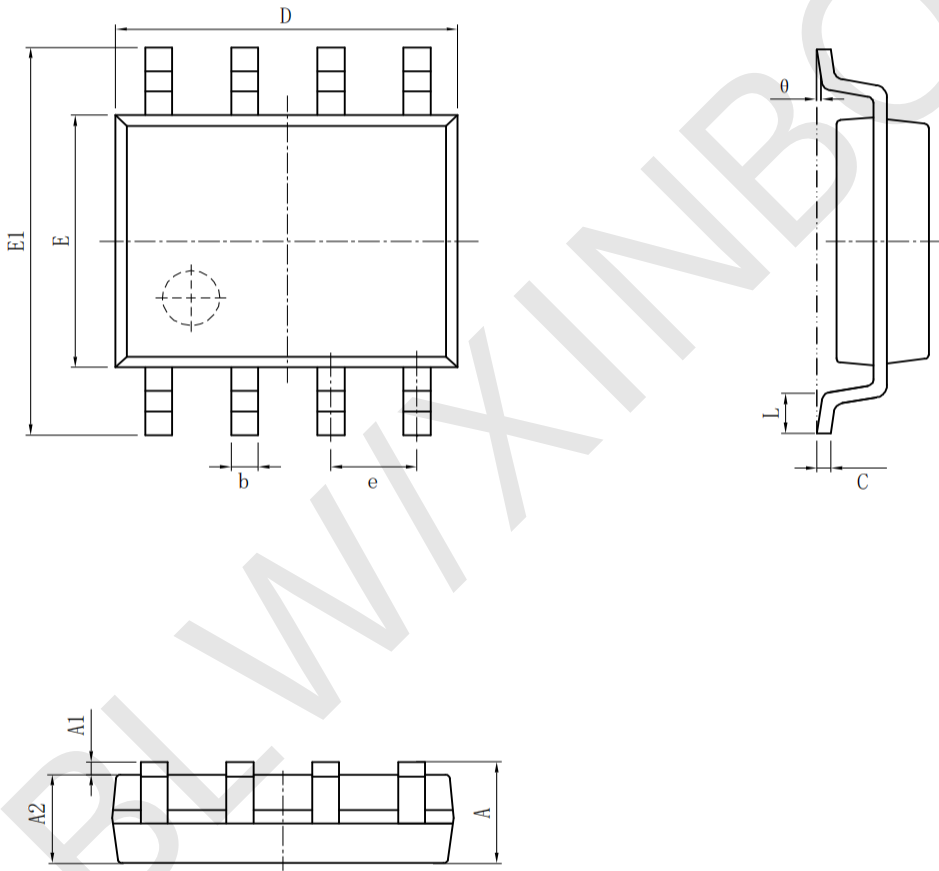

Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.