
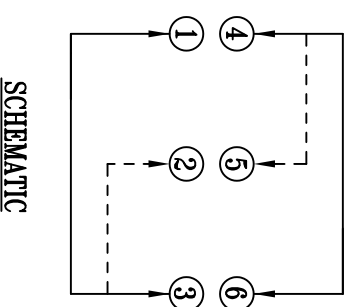
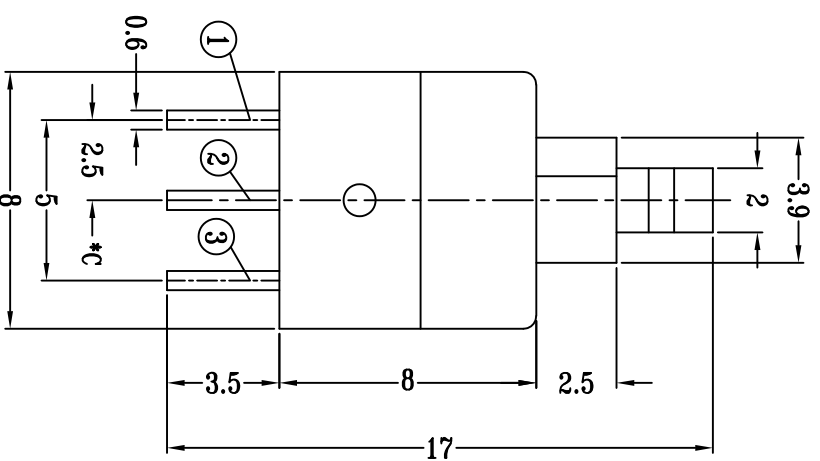


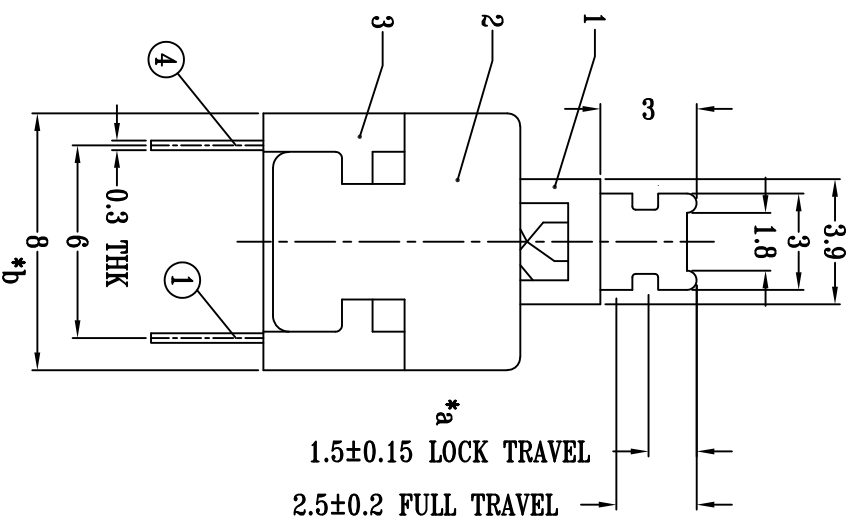


SCHEMATIC

PB-22E08-6PX

X=NO LOCK
L=LOCK

G-Switch Specification:

Electrical Specifications: 0.5A 30VDC
Contact Resistance : $\leq 100\text{m}\Omega$
Insulation Resistance: $\geq 100\text{M}\Omega$ DC125V
Withstand Voltage: AC125V 1 minute
Operating Temperature: -25°C ~ $+65^{\circ}\text{C}$
Storage Humidity: $\leq 85\%\text{RH}$
Electrical Life: 10,000
Mechanical Life: 100,000

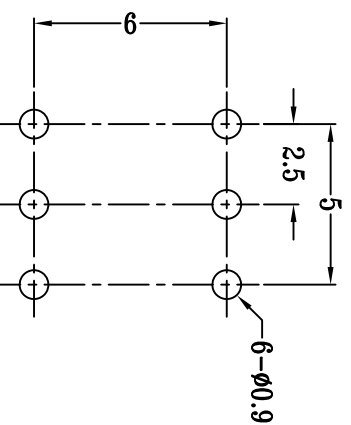

注：“*”表示关键尺寸(3个).



G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance: X. X.x X.xx X.xxx Angles 0/10 ±.3 ±.7	DESIGN	Bright Lee	DATE	2016.05.29	Molde code: PB-22E08-6PX
	CHECKED		DATE		
	APPROVED		DATE		
	http://www.dg-switch.com				
	TEL:0769-82388879				
	REV.: X1	SCALE: 4:1	UNIT: mm		

P.C.B LAYOUT
BOTTOM VIEW

