


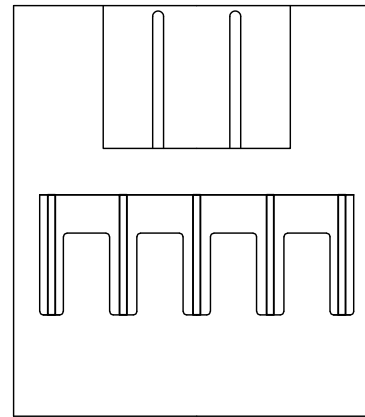
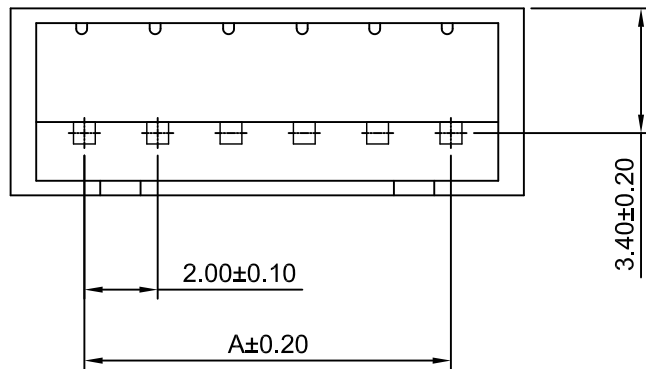


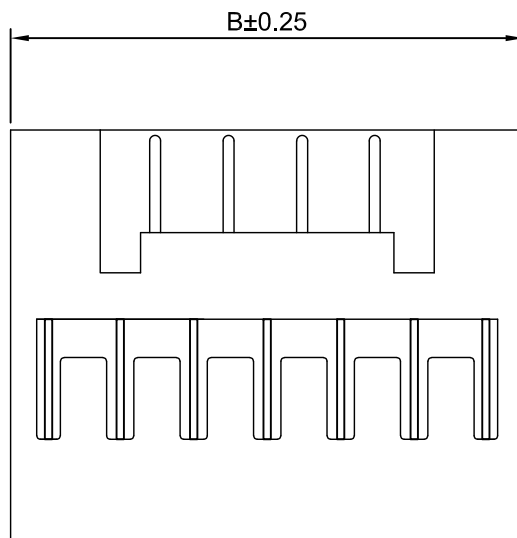

2P~4P

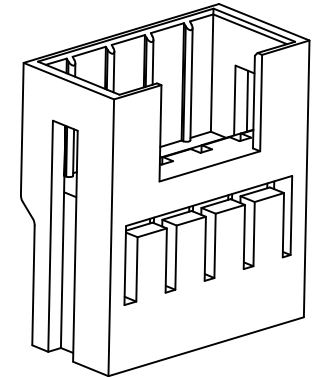

5P~15P

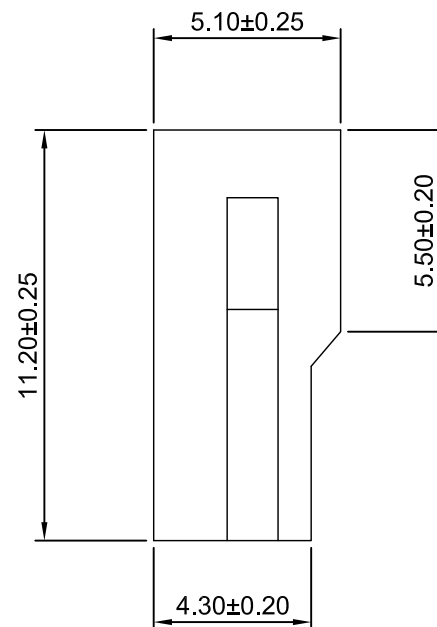

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $1000\text{M}\Omega$ Min.
Withstanding Voltage: 650V AC/minute
Material: Nylon 66, UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	9P	16.00	20.00
3P	4.00	8.00	10P	18.00	22.00
4P	6.00	10.00	11P	20.00	24.00
5P	8.00	12.00	12P	22.00	26.00
6P	10.00	14.00	13P	24.00	28.00
7P	12.00	16.00	14P	26.00	30.00
8P	14.00	18.00	15P	28.00	32.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 2.00mm PITCH HOUSING	
mm		5:1		1 of 1			
DRAWN		CHK'D		APPR			
WenMin Luo		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A2011HM-XP	
x.x±0.25							
x.x±0.20							
x.x±0.15							
ANGLES ±1°						REV A1	

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°



REV
A1