
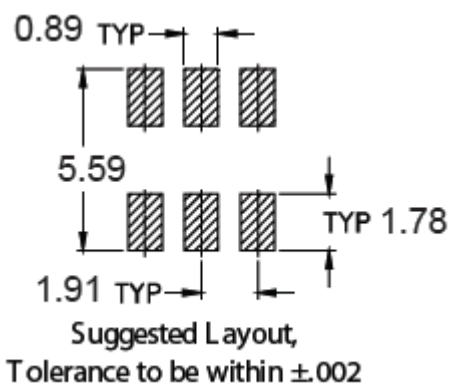
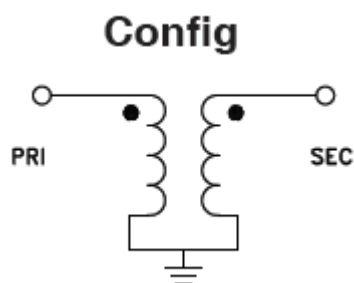






1:2 Auto Transformer 4-2500MHZ.

Feature:

- .1:2 RF transformer.
- .SMT part.
- .Packaging 1300pcs per reel.
- .used in 50ohm systems.
- .Weld connect.

ROHS COMPLIANT

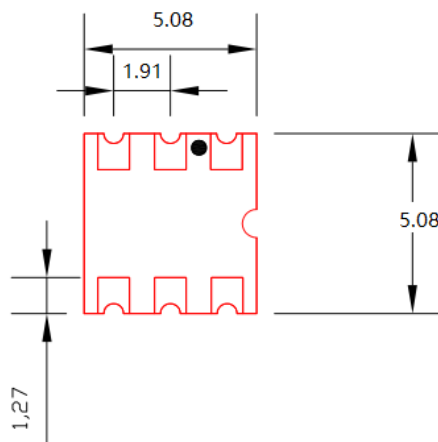




JY-TRS2-252+ 4-2500MHZ 1 :2 Auto Transformer


PIN CONFIGURATION

PIN	FUNCTION
1	Primary Dot
2	Common
3	Secondary Dot
4	Not used
6	Not used

Electrical Specifications: TA=25°C, Zo=50Ω					
Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	30-1500MHz	dB	---	---	1.0
	8-2000MHz	dB	---	---	2.0
	4-2500MHz	dB	---	---	3.0
Input return loss	4-2500MHz	dB	16	20	-
RF Power Rating (max)		350mW			
DC Current (max)		30mA			
Test Impedance (50Ω,75Ω, etc.)		50OHM			
Operating Temperature		-40°C to +85°C			
Storage Temperature		-55°C to +100°C			



Insertion Loss

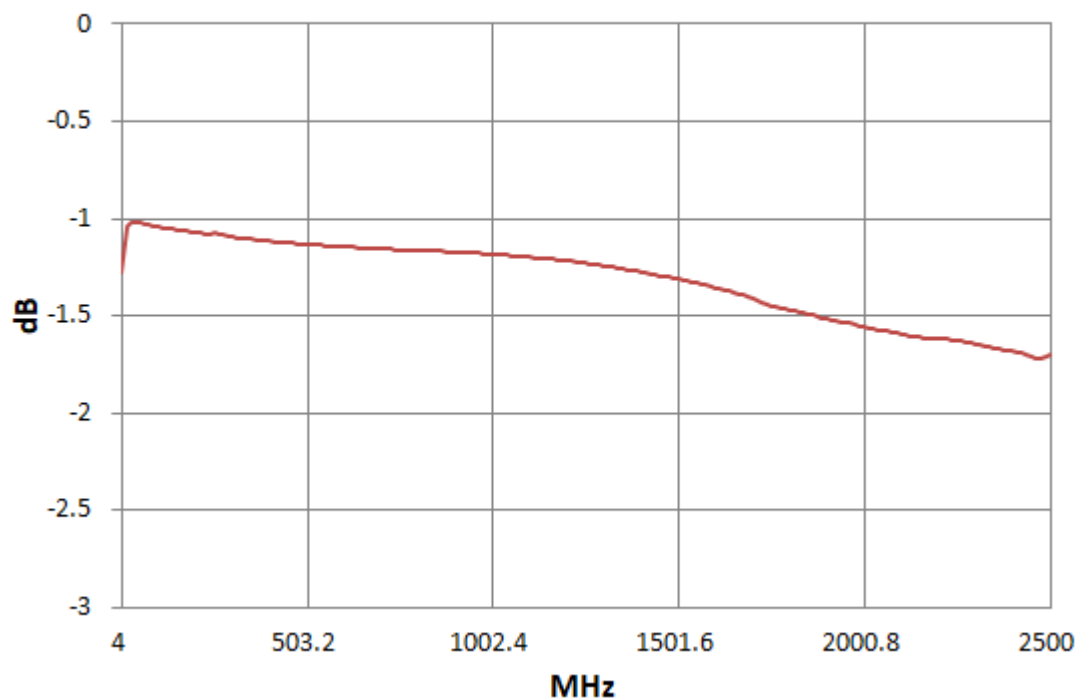

Input Return Loss

