

Banana Jack - Uninsulated Rivet Panel Mount: Turret Terminal



INCHES (MILLIMETERS)
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

SPECIFICATIONS



Jack Body: Brass per QQ-B-626D

Finish: Nickel

RATINGS

Current: 15 amps

Contact Resistance: 0.010 ohms maximum

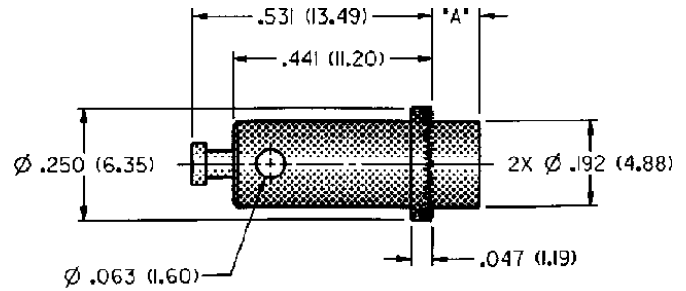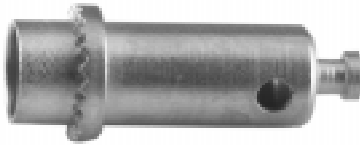

NICKEL PLATING		
PART NO.	PANEL THICKNESS	"A"
108-2300-501	.063 (1.6)	.105 (2.67)

For Standard Banana Plug: .175 (4.44) Across Flats

FEATURES:

- Nickel plated brass body with cross hole
- Low cost, easy mounting banana jack