

Features

- low insertion loss
- excellent insertion loss flatness
- excellent amplitude unbalance

Applications

- VHF receivers/transmitters
- instrumentation

JY-JPS-2-1+



2 Way-0° 50Ω 1 to 500 MHz

electrical schematic




Transformer Electrical Specifications

Freq. range (MHz)	Isolation(dB)		Insertion Loss (dB) Above 3.0 dB.		Phase Unbalance (Degrees) Max.	Amplitude Unbalance (dB) Max.
	min	max	min	max		
1-500	18	38	0.16	0.9	3.0	0.3

Typical Performance Data(TEST CONDITIONS: INPUT POWER = 0dBm @Temperature = +25°C)

Frequency. (MHz)	Total Loss (dB)		Amp. Unbal. (dB)	Isolation (dB)	PhaseUnbal. (deg.)	VSWRS		
	S-1	S-2				S	1	2
1	3.36	3.29	0.06	29.23	0.10	1.07	1.30	1.30
5	3.82	3.83	0.01	21.94	0.09	1.91	1.88	1.87
30	3.16	3.16	0.00	37.53	0.05	1.03	1.03	1.03
50	3.16	3.16	0.00	43.18	0.17	1.03	1.03	1.03
70	3.16	3.16	0.00	43.92	0.09	1.04	1.03	1.03
100	3.17	3.17	0.00	39.18	0.02	1.04	1.04	1.04
230	3.21	3.24	0.03	29.50	0.09	1.08	1.07	1.07
300	3.26	3.29	0.03	26.94	0.02	1.11	1.09	1.09
400	3.29	3.36	0.13	24.22	0.07	1.15	1.13	1.13
500	3.37	3.47	0.10	22.07	0.11	1.20	1.18	1.18

Outline Drawing

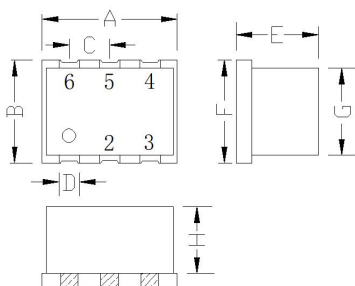


Suggested Layout,
Tolerance to be within ± 0.2

Outline Dimensions: Unit (mm)

A	8.70	G	5.50
B	6.50	H	4.30
C	2.54	L	2.54
D	1.30	J	8.00
E	5.40	K	1.50
F	6.54	M	2.00
WT	0.5g		

PCB Land Pattern



Pin Connections

SUM PORT	1
PORT 1	3
PORT 2	4
GROUND	6
NOT USED	2,5

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1 W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

