



Ambient 2 Click



PID: MIKROE-1903

Ambient 2 Click is a compact add-on board that measures only the visible part of the light spectrum from any source (mimicking how humans see the light). This board features the [OPT3001](#), a digital output ambient light sensor with an I2C interface and interrupt from [Texas Instruments](#). The sensor's spectral response tightly matches the human eye's photopic response and includes significant (99%) infrared rejection. It has a flexible and wide operating range for the ambient light sensor with a resolution of 0.01lux and full detectable illumination of 83865.6lux over a 23-bit effective dynamic range. This Click board™ is the most suitable for obtaining ambient light data in applications such as automatic residential and commercial lighting management.

How does it work?

Ambient 2 Click is based on the OPT3001, a digital ambient light sensor with a high-precision human-eye response and excellent infrared rejection from Texas Instruments. The OPT3001 has a flexible and wide operating range for the ambient light sensor with a resolution of 0.01lux and full detectable illumination of 83865.6lux over a 23-bit effective dynamic range. Matching the sensor's spectral response to the human eye response is vital because ambient light sensors are used to measure and help create ideal human lighting experiences. This feature makes this Click board™ especially suitable for operation underneath visibly dark but infrared windows transmissive.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

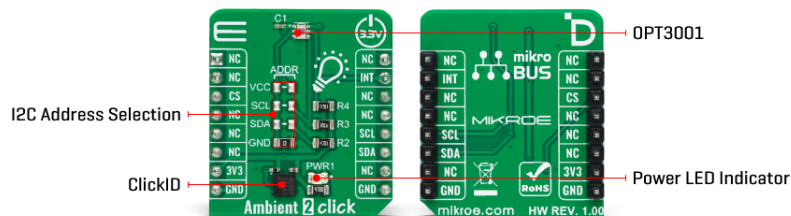

The OPT3001 optical filtering system is not overly sensitive to non-ideal particles and micro-shadows on the optical surface, which results in the relatively minor device dependency on uniform density optical illumination of the sensor area for infrared rejection. Proper optical surface cleanliness is always recommended for the best results on all optical devices.

Ambient 2 Click communicates with MCU using the standard I2C 2-Wire interface with a maximum clock frequency of 2.6MHz, fully adjustable through software registers. The OPT3001 can be commanded to operate continuously or in single-shot measurement modes. Also, it can be configured into an automatic full-scale, range-setting mode that always selects the optimal full-scale range setting for the lighting conditions. This mode frees the user from having to program their software for potential iterative measurement cycles and readjustment of the full-scale range until optimal for any given measurement.

Besides, the OPT3001 allows choosing its I2C slave address by positioning the onboard SMD jumper labeled ADD to an appropriate position marked as GND, SCL, SDA, and VCC. Depending on the position of the jumper, four different slave addresses are available to the users. It also possesses an additional interrupt signal, routed on the INT pin of the mikroBUS™ socket labeled as INT, indicating when a specific interrupt event occurs, such as detecting a meaningful change in light intensity.

This Click board™ can be operated only with a 3.3V logic voltage level. The board must perform appropriate logic voltage level conversion before using MCUs with different logic levels. However, the Click board™ comes equipped with a library containing functions and an example code that can be used as a reference for further development.

Specifications

Type	Optical
Applications	Can be used for obtaining ambient light data in applications such as automatic residential and commercial lighting management
On-board modules	OPT3001 - digital ambient light sensor from Texas Instruments
Key Features	Low power consumption, high-precision, human-eye response, excellent infrared rejection, automatic full-scale setting, I2C

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

	interface with selectable slave address, wide operational range, stable performance over temperature, and more
Interface	I2C
Feature	ClickID Manifest, No ClickID
Compatibility	mikroBUS™
Click board size	S (28.6 x 25.4 mm)
Input Voltage	3.3V

Pinout diagram

This table shows how the pinout on Ambient 2 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	INT	Interrupt
ID COMM	CS	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	SCL	I2C Clock
	NC	6	MOSI	SDA	11	SDA	I2C Data
Power Supply	3.3V	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
J1-J4	ADD	Populated	I2C Address Selection

Ambient 2 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	-	3.3	-	V
Measurement Range	-30	-	83	kLux
Peak Wavelength	-	540	-	nm

Software Support

We provide a library for the Ambient 2 Click as well as a demo application (example), developed using Mikroe [compilers](#). The demo can run on all the main Mikroe [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager(recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Library Description

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

This library contains API for Ambient 2 Click driver.

Key functions

- Generic Write function.
- Generic Read function.
- Sensor Results Read function.

Example Description

This is a example which demonstrates the use of Ambient 2 Click board. This example measures and calculates ambient light from OPT3001 sensor.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager(recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.Ambient2

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all Mikroe [compilers](#).

mikroSDK

This Click board™ is supported with [mikroSDK](#) - Mikroe Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click Boards™](#)

Downloads

[Ambient 2 click example on Libstock](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[Ambient 2 Click User Manual](#)

[OPT3001 datasheet](#)

[Ambient 2 click 2D and 3D files v100](#)

[Ambient 2 click schematic v100](#)

[Ambient 2 click schematic v100ID](#)

[Ambient 2 click 2D and 3D files v100ID](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).