




- Intel Xeon D-1500 (Broadwell DE)
- Up to 16 cores
- Up to 32 GB DDR4 DRAM soldered, ECC
- 2 × 10 Gb Ethernet, 1 × Gb Ethernet, 1 × USB 3.2 Gen 1x1, 1 × RS232 for configuration
- 4 HP system master and peripheral slots
- PICMG CPCI-S.0 CompactPCI Serial
- microSD card slot
- Standard rear I/O: 28 PCIe lanes, 2 × USB 3.2 Gen 1x1, 6 × SATA, 4 × Gb Ethernet
- VGA, RS232, RS422/RS485 and USB 3.2 Gen 1x1 available on special I/O board
- Built-in Intel VT hardware virtualization

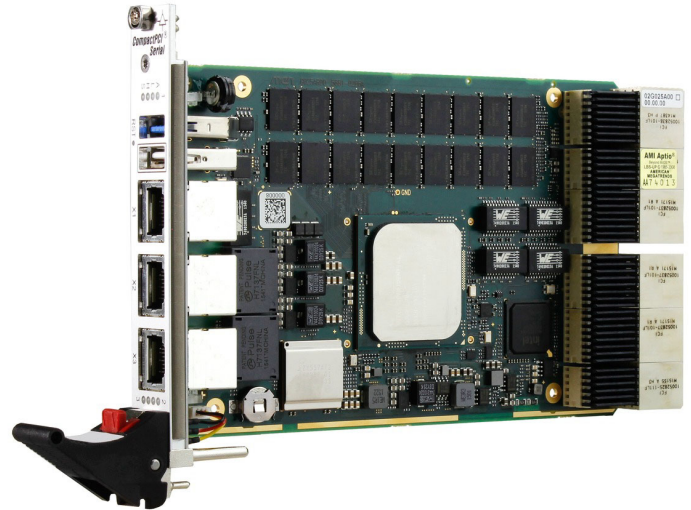

HIGH PERFORMANCE FOR VIRTUALIZATION

The G25A is a high-performance multicore CPU platform based on Intel's Xeon D-1500 System-on-a-Chip (SoC). Paired with I/O cards, the G25A can be ideally used for transferring data from and to storage media, the Internet via LTE, wireless, copper or optical Ethernet. Its up to 16 processor cores and built in Intel® VT-d and VT-x support make the board ideally suited for virtualization applications.

The G25A offers high data bandwidth on both the front and the rear I/O interfaces. Two 10 Gigabit Ethernet interfaces are available on RJ45 or M12 connectors at the front, for example.

USB 3.2 Gen 1x1, SATA revision 3.x, PCI Express 3.0 and Gigabit Ethernet interfaces on front and rear complement the I/O possibilities of the board.

RUGGEDIZED MEMORY AND MASS STORAGE

The memory configuration of the G25A includes fast DDR4 DRAM with ECC which is soldered to the board to guarantee optimum shock and vibration resistance. A microSD card device offers space for user applications or as a local boot medium.

SYSTEM SECURITY AND BOARD MANAGEMENT

For system security, a Trusted Platform Module is assembled on the board. A board management controller provides thermal

supervision of the processor and a watchdog for the operating system.

PERFECT FOR EMBEDDED AND HARSH ENVIRONMENTS

The G25A operates in Windows and Linux environments as well as under real-time operating systems that support Intel's multi-core architecture.

The G25A comes with a tailored heat sink within 4 HP height. All components are soldered for protection against shock and vibration according to applicable DIN, EN or IEC industry standards. The board is also ready for coating so that it can be used in humid and dusty environments. It is available until 2023.

G229 I/O EXTENSION BOARD


The G229 offers one M.2 slot, three USB 3.2 Gen 1x1 interfaces, one RS232 interface, one RS422/RS485 interface, one VGA via PCI Express Mini card and up to three flexible slots for two additional RS232 or RS422/RS485 interfaces. It is combined with the G25A to form a space-saving solution with a bigger heat sink.



www.duagon.com/products/g25a/

DATA SHEET

G25A | DIAGRAM

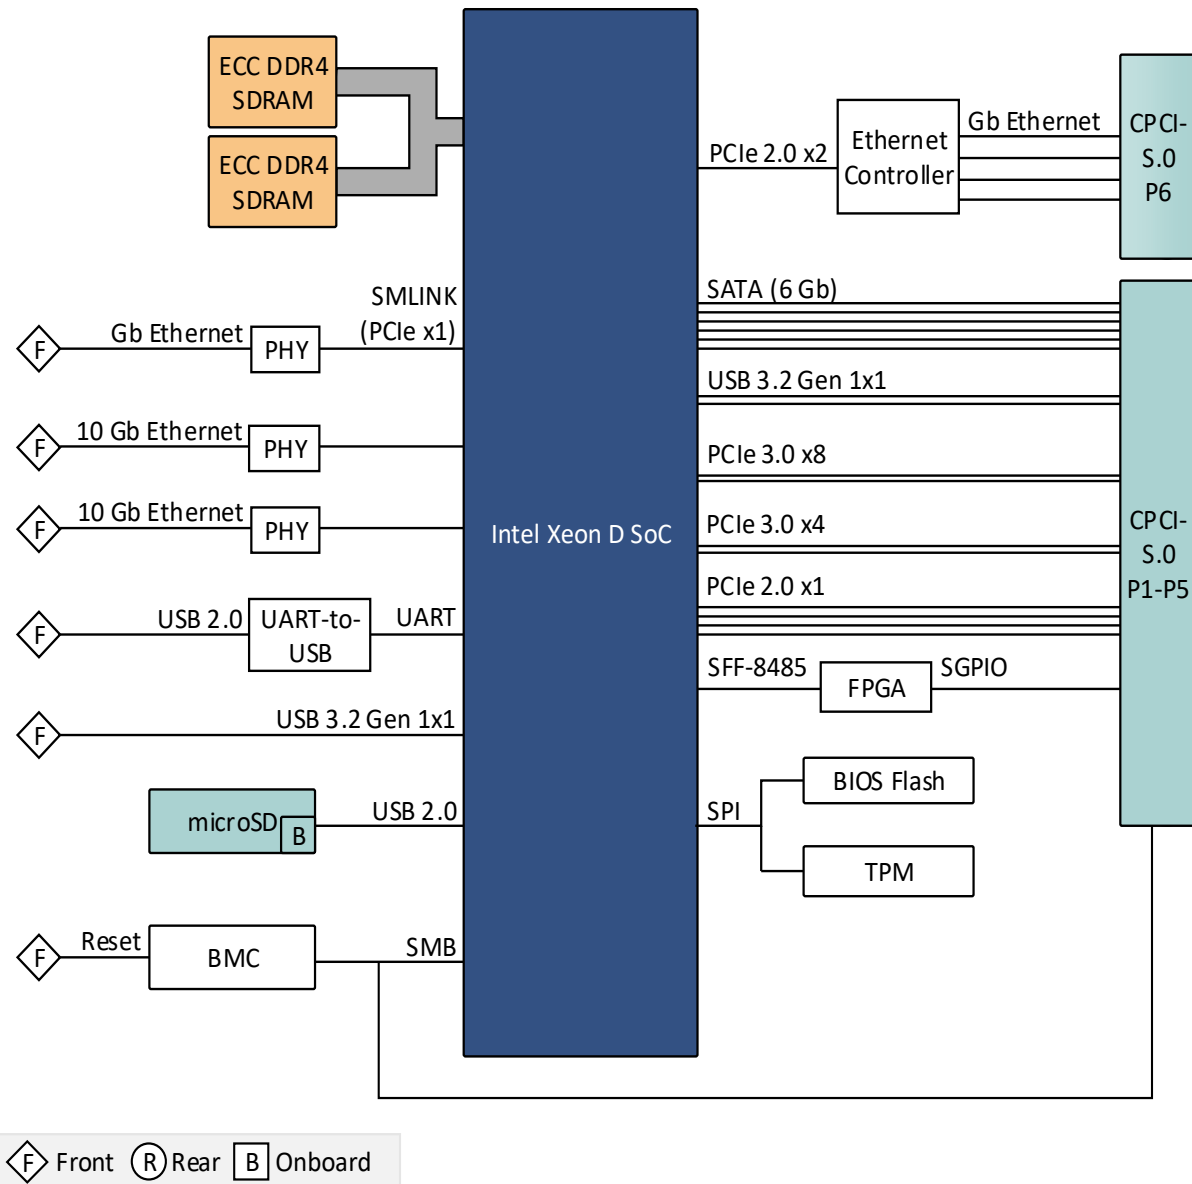

G25A | TECHNICAL DATA

CPU

- The following CPU types are supported:
 - Intel Xeon D-1508, 2 cores, 4 threads, 2.2 GHz, 2.6 GHz Turbo Boost, 25 W, 3 MB cache
 - Intel Xeon D-1509, 2 cores, 2 threads, 1.5 GHz, 19 W, 3 MB cache
 - Intel Pentium D1519, 4 cores, 8 threads, 1.5 GHz, 2.1 GHz Turbo Boost, 25 W, 6 MB cache
 - Intel Xeon D-1527, 4 cores, 8 threads, 2.2 GHz, 2.7 GHz Turbo Boost, 35 W, 6 MB cache
 - Intel Xeon D-1529, 4 cores, 8 threads, 1.3 GHz, 1.3 GHz Turbo Boost, 20 W, 6 MB cache
 - Intel Xeon D-1539, 8 cores, 16 threads, 1.6 GHz, 2.2 GHz Turbo Boost, 35 W, 12 MB cache
 - Intel Xeon D-1548, 8 cores, 16 threads, 2 GHz, 2.6 GHz Turbo Boost, 45 W, 12 MB cache
 - Intel Xeon D-1559, 12 cores, 24 threads, 1.5 GHz, 2.1 GHz Turbo Boost, 45 W, 18 MB cache
 - Intel Xeon D-1577, 16 cores, 32 threads, 1.3 GHz, 2.1 GHz Turbo Boost, 45 W, 24 MB cache

MEMORY

- System RAM
 - Soldered DDR4, ECC
 - 32 GB max.

SECURITY

- Trusted Platform Module 2.0

MASS STORAGE

- The following mass storage devices can be assembled:
 - microSD card

INTERFACES

- This product includes interface options
 - Different front connectors
 - I/O expansion via add-on board
- SATA
 - 6 × SATA Revision 3.x, backplane

- USB
 - 1 × USB 3.2 Gen 1x1, Type A
 - 2 × USB 3.2 Gen 1x1, backplane
- Ethernet
 - 2 × 1000BASE-T/10GBASE-T, M12, X-coded, receptacle
 - 1 × 10/100/1000BASE-T, M12, X-coded, receptacle
 - 2 × 1000BASE-T/10GBASE-T, RJ45
 - 1 × 10/100/1000BASE-T, RJ45
 - 4 × 10/100/1000BASE-T, backplane
- Serial
 - 1 × USB-to-UART, USB Type A
- PCI Express
 - 4 × PCIe 2.0, x1, backplane
 - 2 × PCIe 3.0, x4, backplane
 - 2 × PCIe 3.0, x8, backplane
- Reset
 - Reset button
- LED
 - Status: board status (BMC)
 - Ethernet: activity, link
 - Hot-swap LED

SUPERVISION AND CONTROL

- Board management controller
- Temperature measurement
- Watchdog timer
- Real-time clock, buffered by battery (1 year) or supercapacitor (3 days)

PRODUCT STANDARD

- CompactPCI Serial: CompactPCI Serial PICMG CPCI-S.0 Specification
- Peripheral slot
- System slot

ELECTRICAL SPECIFICATIONS

- Supply voltage: +12 V (9.5 V to 15.5 V)
- Power consumption: 72 W max.



MECHANICAL SPECIFICATIONS

- Dimensions
 - 3U, 4 HP
 - 3U, 8 HP
 - 3U, 12 HP (with G229 peripheral board)
- Weight: 228 g (model 02G025A00 without heat sink)
- Cooling
 - Air cooling, forced convection, required airflow depending on CPU
 - Conduction cooling

PRODUCT COMPLIANCE: RAIL - ROLLING STOCK

- Operating temperature
 - -25 °C to +70 °C (EN 50155:2007, class T1, board)
 - -25 °C to +85 °C (EN 50155:2007, class T3, board)
 - -40 °C to +70 °C (EN 50155:2007, class T2, board)
 - -40 °C to +85 °C (EN 50155:2007, class TX, board)
 - Depending on system configuration (CPU, hard disk, heat sink,...)
- Storage temperature: -40 °C (EN 60068-2-1:2007, Ab) to +85 °C (EN 60068-2-2:2007, Bb)
- Altitude: -300 m to +2000 m
- Shock: 50 m/s² / 30 ms (EN 61373:2010, vehicle body, cat. 1, class B)
- Vibration: 10 min @ 1.01 m/s² and 5 h @ 5.72 m/s² (EN 61373:2010, vehicle body, cat. 1, class B)
- EMC emission: EN 50121-3-2:2015
- EMC immunity: EN 50121-3-2:2015

PRODUCT COMPLIANCE: INFORMATION TECHNOLOGY EQUIPMENT

- Humidity: +55 °C and +25 °C, 90 % to 100 % RH (EN 60068-2-30:2005, Db)
- Electrical safety: EN 62368-1:2014 + AC:2015
- Flammability (PCBs): UL 94 V-0
- EMC emission: EN 55022 class B (information technology equipment)
- EMC immunity: EN 55024:2010 + A1:2015 (information technology equipment)

RELIABILITY

- MTBF: 311 585 h predicted @ 40 °C according to IEC/TR 62380 (RDF 2000)

BIOS/BOOT LOADER

- AMI Aptio UEFI Firmware

SOFTWARE SUPPORT

- Linux
 - Supported kernel: 4.14 or higher
 - Yocto BSP
 - Tested with: Yocto BSP (Sumo 2.5, Linux kernel 4.15)
- Windows
- Further Resources
 - See the product User Manual for details on software support: www.duagon.com/products/g25a/#doc
 - See section Software on the product web page for available packages: www.duagon.com/products/g25a/#downl
 - See also Application Note *Recommendations for a Robust Software Setup*




G25A | ORDERING INFORMATION

STANDARD MODELS

02G025A00	Intel Xeon D-1539, 8 cores, 16 GB DDR4 DRAM with ECC, 3U/4HP, 2x 10 Gb Ethernet on RJ45, 1x 1 Gb Ethernet on RJ45, 1x USB 2.0, 1x RS232 on Type A USB for service, 0 °C to +40 °C @ 2.5 m/s airflow
02G025A01	Intel Xeon D-1577, 16 cores, 32 GB DDR4 DRAM with ECC, 3U/8HP, 2x 10 Gb Ethernet on RJ45, 1x 1 Gb Ethernet on RJ45, 1x USB 2.0, 1x RS232 on Type A USB for service, 0 °C to +60 °C @ 2.5 m/s airflow
02G025A02	Intel Pentium D-1519, 4 cores, 8 GB DDR4 DRAM with ECC, 3U/8HP, 2x 10 Gb Ethernet on M12 X-coded, 1x 1 Gb Ethernet on M12 X-coded, 1x USB 2.0, 1x RS232 on Type A USB for service, -40 °C to +70 °C @ 1.5 m/s airflow, conformal coating



LEADING THE EMBEDDED FUTURE

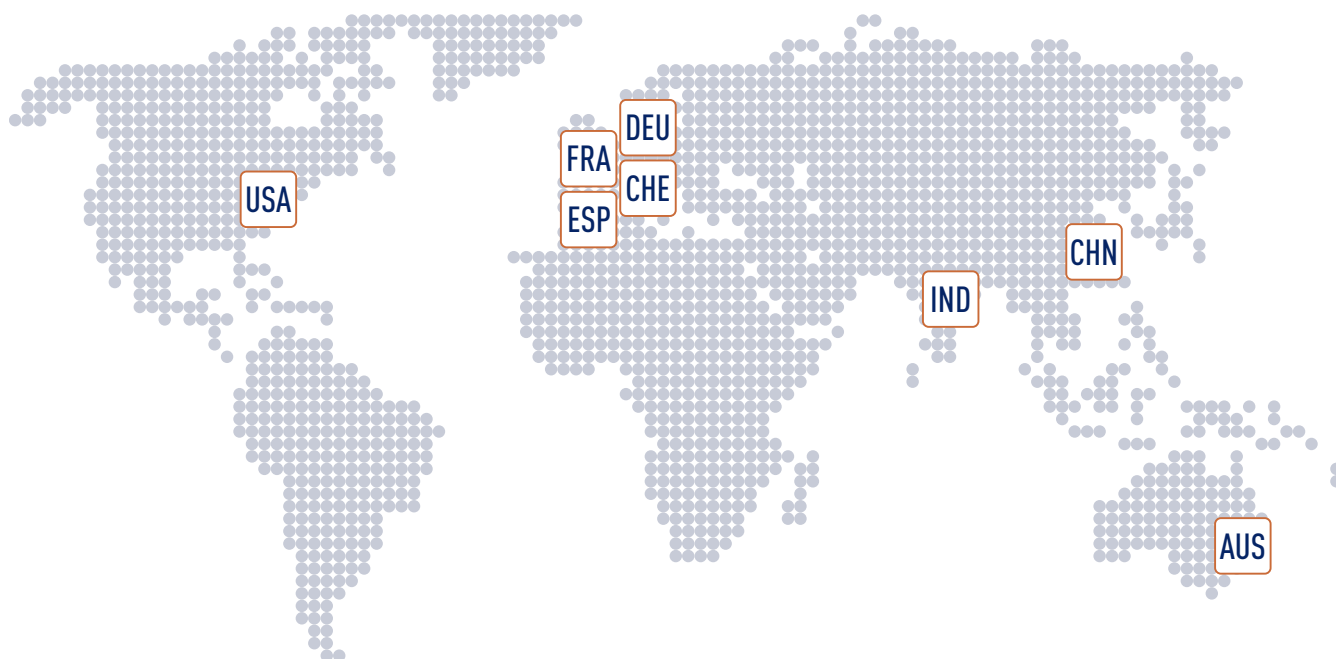

duagon | WORLDWIDE

duagon has a global presence with support and sales representatives across 8 countries. With three decentralized engineering and production sites, our customers take advantage of the added competence and flexibility.

www.duagon.com

SWITZERLAND (HQ)

Dietikon
Phone +41 44 743 73 00
sales@duagon.com

AUSTRALIA

Artarmon
Phone +61 2 9966 9424
sales-aus@duagon.com

CHINA

Shanghai
Phone +86 159 0077 2985
sales-chn@duagon.com

FRANCE

Gaillard
Phone +33 450 955 312
sales-fra@duagon.com

GERMANY

Nuremberg
Phone +49 911 99 335 0
sales-deu@duagon.com

INDIA

New Delhi
Phone +91 11 41 61 12 48
sales-ind@duagon.com

SPAIN

Madrid
Phone +34 917 880 610
sales-esp@duagon.com

USA

Blue Bell
Phone +1 215 542 9575
sales-usa@duagon.com