




Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

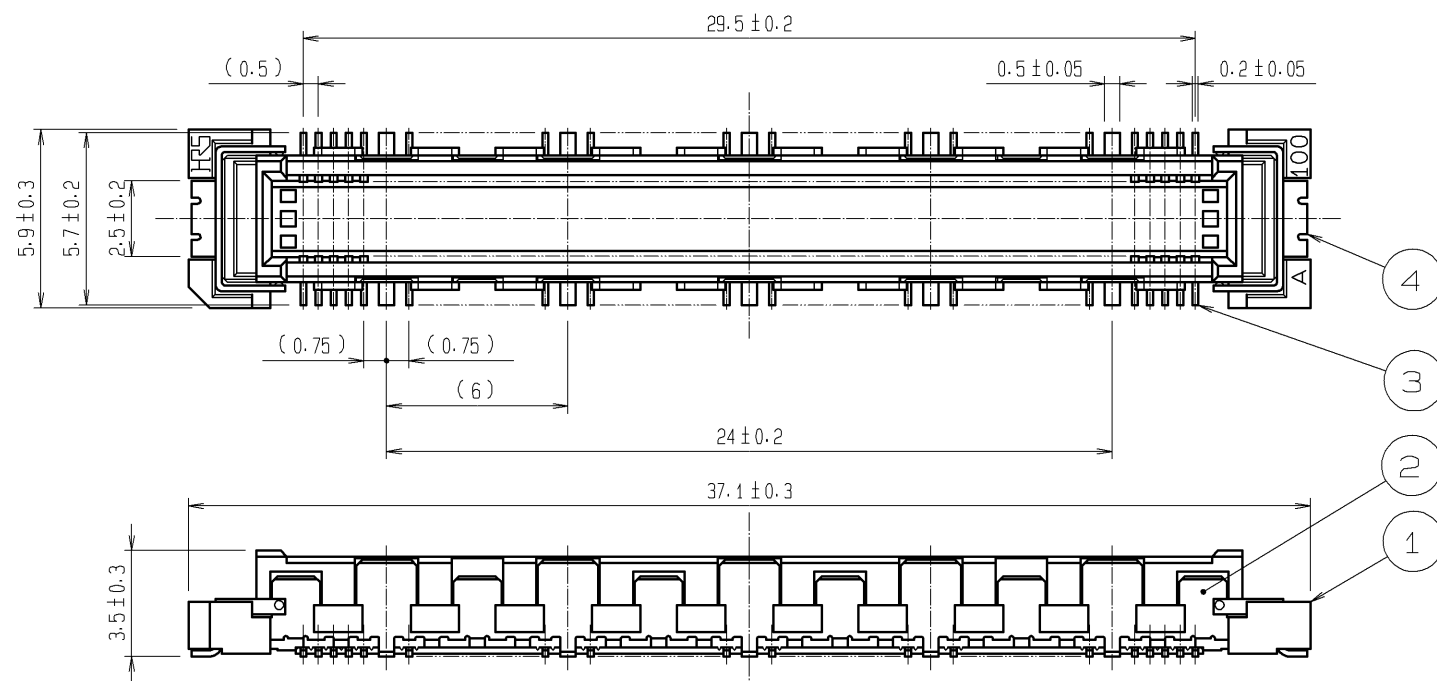


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

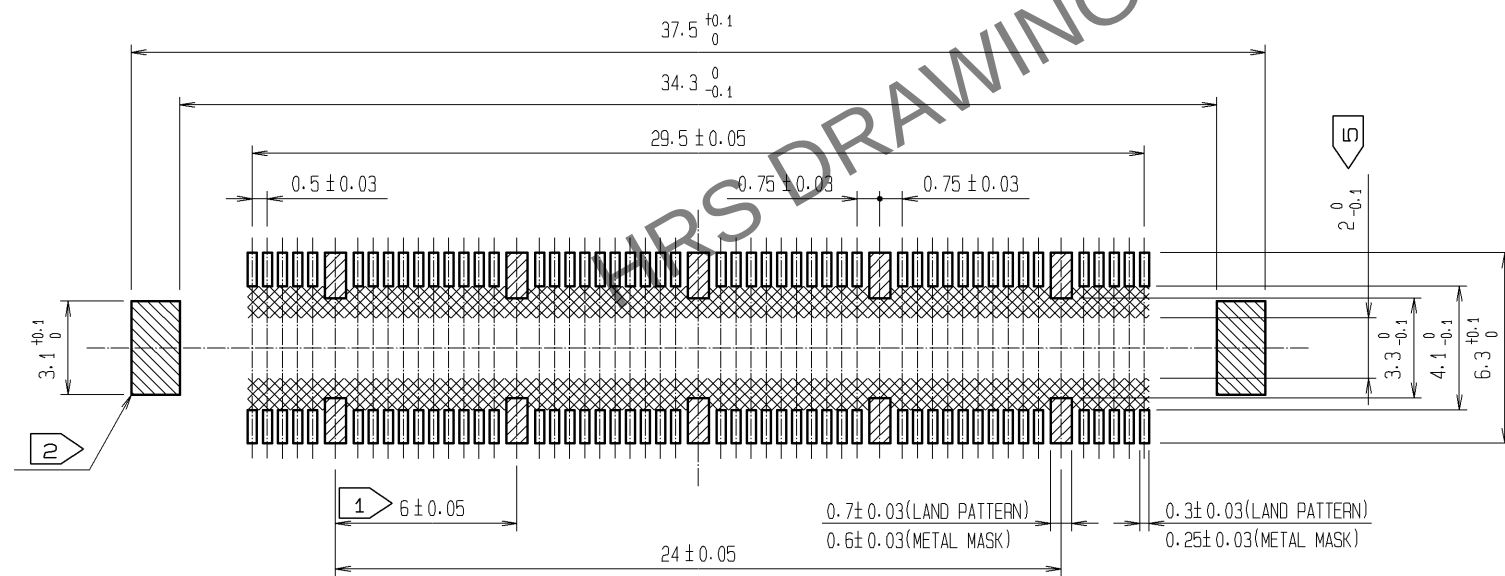



CROSS CUT SECTION - SIGNAL(5:1)

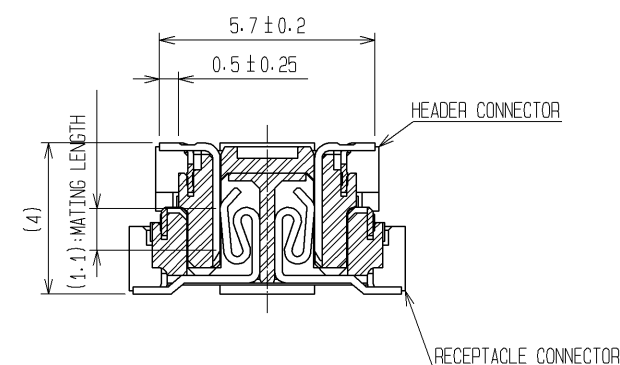

CROSS CUT SECTION - GROUND(5:1)

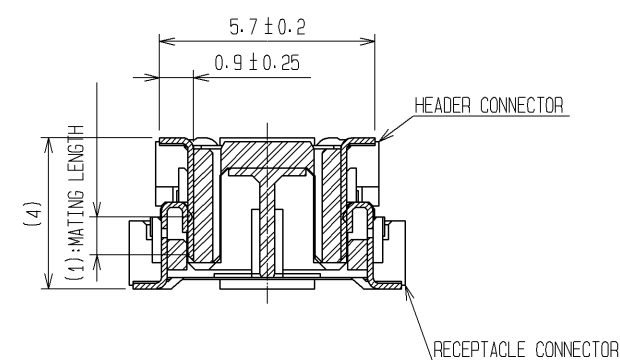

- NOTES
- 1 10 HATCHED  PARTS:GROUND CIRCUIT.
 - 2 2 HATCHED  PARTS:GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY:0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	TIN-PLATING	3	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.					
1	LCP	BEIGE UL94V-0			LEAD AREA : TIN-PLATING 1μm min.					
					UNDER PLATING : NICKEL 1μm min.					
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS				
UNITS mm			SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		08.06.26		DRAWING NO.		EDC3-151949-25		
		CHECED : HT. YAMAGUCHI		08.06.25		PART NO.		FX10B-100P/10-SV<71>		
		DESIGNED : SY. KAMIGA		08.06.23		CODE NO.		CL570-0022-5-71		
		DRAWN : HK. SUNADORI		08.06.17				 1/1		