

Open Type Trimmer

Model 39



Features:

- 15 mm single turn
- Dust proof
- Carbon element
- RoHS compliant



Model Styles Available

Top Adjust	39P
Side Adjust	39W

Electrical

Resistance Range	100 to 1,000,000 Ohms
Standard Resistance Tolerance	$\pm 30\%$, ($\pm 20\%$ and $\pm 10\%$ available)
Input Voltage, Maximum	250 Vdc
Power rating, Watts	Linear :0.25W, others : 0.15W, at 50°C
End Resistance, Maximum	$< 500K - 2 \text{ ohms}$ and $\geq 500K - 1\%$
Actual Electrical Travel	$250^\circ \pm 20^\circ$
Insulation Resistance, Minimum	100 Megohms
Resolution	Essentially infinite
Contact Resistance Variation	5% Max.

Mechanical

Torque, Maximum	2 in. oz.
Weight, Approx.	0.01 oz.
Wiper Position	Approx. 50%

Environmental

Operating Temperature Range	-25°C to $+70^\circ\text{C}$
Rotational Life, 500 Cycles	$\pm 3\% \Delta R$
Load Life, 0.25W, 1000 Hours, 50°C	$\pm 5\% \Delta R$
Resistance to Solder Heat	260°C for 3 sec.
Aqueous cleaning not recommended	

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA USA 92835-1053 | Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com

Open Type Trimmer


Model 39






Ordering Information

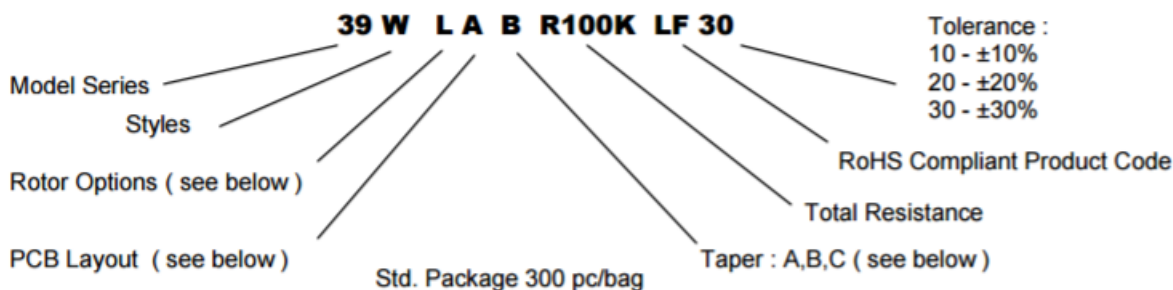

Rotor Options

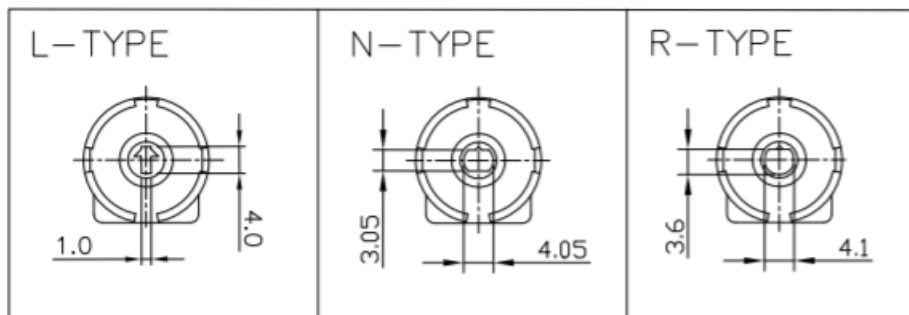

PCB Layout Options (39P)

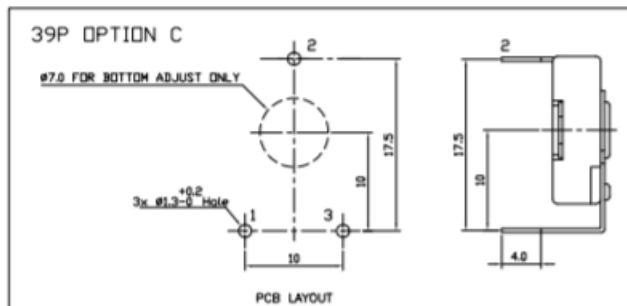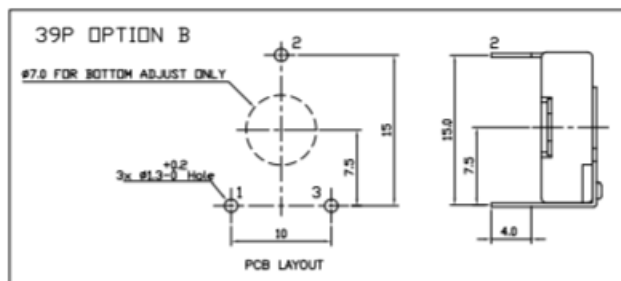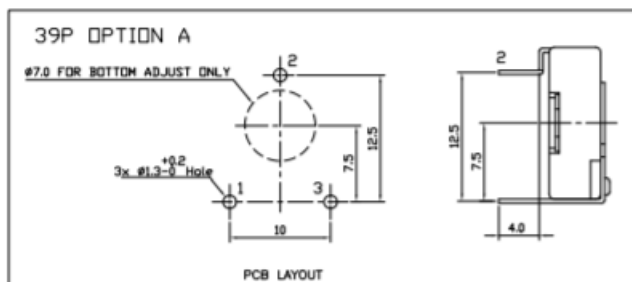

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies


4200 Bonita Place, Fullerton, CA USA 92835-1053 | Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com

Open Type Trimmer


Model 39




PCB Layout Options (39W)

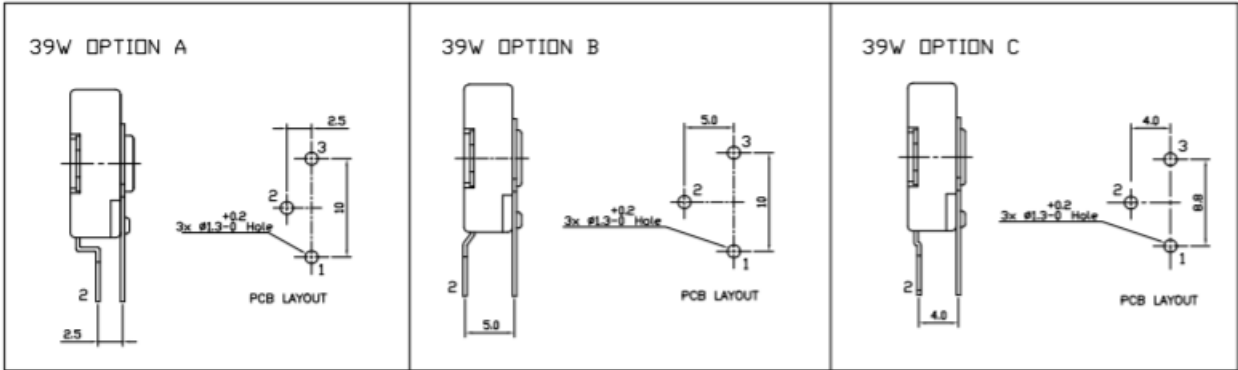

Taper Options

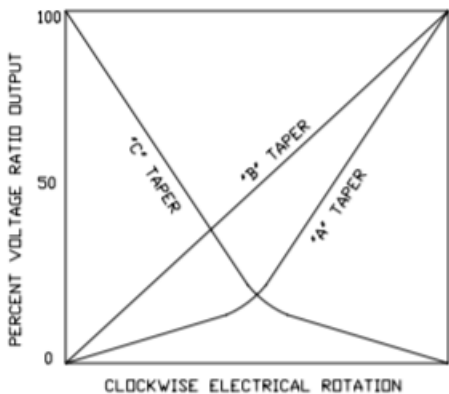

Circuit Diagram



Standard Resistance Values, Ohms

100	500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1MEG
-----	-----	----	----	----	-----	-----	-----	------	------	------	------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[39PLABR10KLF30](#) [39WLCBR10KLF30](#) [39PBR5KLF](#) [39WBR5KLF](#) [39PBR200LF](#) [39WBR200LF](#) [39PBR20KLF](#)
[39WBR20KLF](#) [39PBR100KLF](#) [39WBR10KLF](#) [39PBR10KLF](#) [39PBR100LF](#) [39WBR500KLF](#) [39WBR100LF](#)
[39PBR1MEGLF](#) [39WBR2KLF](#) [39PBR2KLF](#) [39WBR1KLF](#) [39PBR1KLF](#) [39PBR200LFTR](#) [39WBR100KLF](#)
[39WBR500LF](#) [39PBR500LF](#) [39PBR50KLF](#) [39WBR1MEGLF](#) [39PBR200KLF](#) [39PBR500KLF](#) [39WBR50KLF](#)
[39WBR200KLF](#) [39PGABR10KLF30](#) [39PGBBR10KLF30](#) [39PGCBR10KLF30](#) [39PLABR20KLF30](#) [39PLBBR10KLF30](#)
[39PLCBR10KLF30](#) [39PNABR10KLF30](#) [39PNBBR10KLF30](#) [39PNBBR50KLF20](#) [39PNCBR100KLF20](#)
[39PNCBR10KLF30](#) [39PNCBR50KLF20](#) [39PRABR10KLF30](#) [39PRBBR10KLF30](#) [39PRCBR10KLF30](#)
[39WLABR10KLF30](#) [39WLBBR10KLF30](#) [39WLCCR10KLF20](#) [39WNABR10KLF30](#) [39WNBBR10KLF30](#)
[39WNBBR20KLF30](#) [39WNCBR10KLF30](#) [39WRABR10KLF30](#) [39WRBBR10KLF30](#) [39WRCBR10KLF30](#)
[39WNBBR1KLF20](#) [39PNABR20KLF20](#) [39PNAAR100KLF10](#) [39PNAAR2KLF30](#) [39WLABR1KLF10](#)
[39WLACR200KLF10](#) [39PNAAR1MEGLF20](#) [39PNABR500LF20](#) [39PNABR100LF20](#) [39PNACR2KLF30](#)
[39PRABR1KLF10](#) [39PLBCR100KLF10](#) [39PRBBR1MEGLF30](#) [39PRBCR100KLF20](#) [39PNBBR500LF30](#)
[39PRBBR1KLF20](#) [39PNBBR100LF30](#) [39PLCBR500LF20](#) [39PNCCR100LF10](#) [39PRCAR100LF30](#)
[39PRCAR10KLF20](#) [39PLBBR1MEGLF30](#) [39PLCBR100LF20](#) [39PNCCR500LF10](#) [39PRCAR500LF30](#)
[39PRCAR50KLF20](#) [39PLAAR200KLF10](#) [39PRCAR20KLF20](#) [39PNBCR1MEGLF10](#) [39PNCAR200KLF30](#)
[39PRAAR500LF10](#) [39PRAAR100LF10](#) [39PLBCR1KLF10](#) [39PNCBR5KLF10](#) [39PRBCR500KLF20](#) [39WLABR5KLF20](#)
[39PNCCR2KLF30](#) [39PLBCR500KLF10](#) [39PNBBR1KLF30](#) [39PRBAR20KLF10](#) [39PLACR500KLF20](#)
[39PLACR100KLF20](#) [39PNBAR500LF30](#) [39PNBBR5KLF10](#) [39PLCBR500KLF30](#) [39PNBAR100LF30](#)