

# CAT1640, CAT1641

## Supervisory Circuits with I<sup>2</sup>C Serial 64K CMOS EEPROM

### Description

The CAT1640 and CAT1641 are complete memory and supervisory solutions for microcontroller-based systems. A 64 kbit serial EEPROM memory and a system power supervisor with brown-out protection are integrated together in low power CMOS technology. Memory interface is via a 400 kHz I<sup>2</sup>C bus.

The CAT1640 provides a precision V<sub>CC</sub> sense circuit and drives an open drain output,  $\overline{\text{RESET}}$  low whenever V<sub>CC</sub> falls below the reset threshold voltage.

The CAT1641 provides a precision V<sub>CC</sub> sense circuit that drives an open drain output, RESET high whenever V<sub>CC</sub> falls below the reset threshold voltage.

The power supply monitor and reset circuit protect memory and system controllers during power up/down and against brownout conditions. Five reset threshold voltages support 5 V, 3.3 V and 3 V systems. If power supply voltages are out of tolerance reset signals become active, preventing the system microcontroller, ASIC or peripherals from operating. Reset signals become inactive typically 200 ms after the supply voltage exceeds the reset threshold level. With both active high and low reset options, interface to microcontrollers and other ICs is simple. In addition, the  $\overline{\text{RESET}}$  (CAT1640) pin can be used as an input for push-button manual reset capability.

The CAT1640/41 memory features a 64-byte page. In addition, hardware data protection is provided by a V<sub>CC</sub> sense circuit that prevents writes to memory whenever V<sub>CC</sub> falls below the reset threshold or until V<sub>CC</sub> reaches the reset threshold during power up.

Available packages include an 8-pin DIP, SOIC, TSSOP and 4.9 x 3 mm TDFN.

### Features

- Precision Power Supply Voltage Monitor
  - ◆ 5 V, 3.3 V and 3 V Systems
    - +5.0 V (±5%, ±10%)
    - +3.3 V (±5%, ±10%)
    - +3.0 V (±10%)
- Active Low Reset, CAT1640
- Active High Reset, CAT1641
- Valid Reset Guaranteed at V<sub>CC</sub> = 1 V
- 400 kHz I<sup>2</sup>C Bus
- 3.0 V to 5.5 V Operation
- Low Power CMOS Technology
- 64-Byte Page Write Buffer
- 1,000,000 Program/Erase Cycles
- 100 Year Data Retention
- 8-pin DIP, SOIC, TSSOP and TDFN Packages
- Industrial Temperature Range
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant



**ON Semiconductor®**


<http://onsemi.com>



**PDIP-8  
CASE 646AA**



**TSSOP-8  
CASE 948S**



**SOIC-8  
CASE 751BD**



**TDFN-8  
CASE 511AM**

### ORDERING INFORMATION

For Ordering Information details, see page 13.

# CAT1640, CAT1641

**Table 1. THRESHOLD VOLTAGE OPTION**



| Part Dash Number | Minimum Threshold | Maximum Threshold |
|------------------|-------------------|-------------------|
| -45              | 4.50              | 4.75              |
| -42              | 4.25              | 4.50              |
| -30              | 3.00              | 3.15              |
| -28              | 2.85              | 3.00              |
| -25              | 2.55              | 2.70              |

## BLOCK DIAGRAM







# CAT1640, CAT1641

## PIN CONFIGURATION

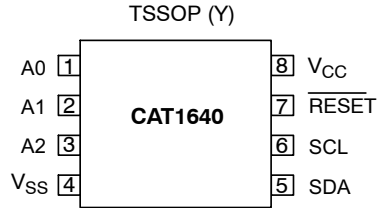

TDFN Package: 4.9 mm x 3 mm  
(ZD2)

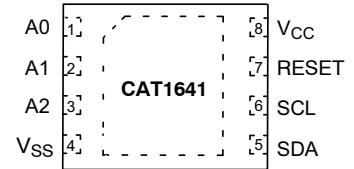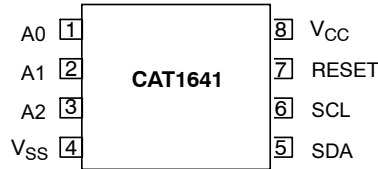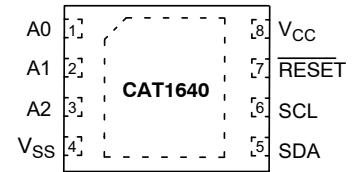

## PIN DESCRIPTION

### **RESET/ $\overline{\text{RESET}}$ : RESET OUTPUTS**

These are open drain pins and  $\overline{\text{RESET}}$  can be used as a manual reset trigger input. By forcing a reset condition on the pin the device will initiate and maintain a reset condition. The RESET pin must be connected through a pull-down resistor, and the  $\overline{\text{RESET}}$  pin must be connected through a pull-up resistor.

### **SDA: SERIAL DATA ADDRESS**

The bidirectional serial data/address pin is used to transfer all data into and out of the device. The SDA pin is an open drain output and can be wire-ORed with other open drain or open collector outputs.

### **SCL: SERIAL CLOCK**

Serial clock input.

### **A0, A1, A2: DEVICE ADDRESS INPUTs**

When hardwired, up to eight CAT1640/41 devices may be addressed on a single bus system (refer to Device Addressing). When the pins are left unconnected, the default values are zeros.

**Table 2. PIN FUNCTION**

| Pin Name        | Function                                |
|-----------------|-----------------------------------------|
| RESET           | Active Low Reset Input/Output (CAT1640) |
| V <sub>SS</sub> | Ground                                  |
| SDA             | Serial Data/Address                     |
| SCL             | Clock Input                             |
| RESET           | Active High Reset Output (CAT1641)      |
| V <sub>CC</sub> | Power Supply                            |

**Table 3. OPERATING TEMPERATURE RANGE**

|            |               |
|------------|---------------|
| Industrial | -40°C to 85°C |
|------------|---------------|

# CAT1640, CAT1641

## SPECIFICATIONS

**Table 4. ABSOLUTE MAXIMUM RATINGS**

| Parameters                                                          | Ratings                | Units |
|---------------------------------------------------------------------|------------------------|-------|
| Temperature Under Bias                                              | −40 to +85             | °C    |
| Storage Temperature                                                 | −65 to +105            | °C    |
| Voltage on any Pin with Respect to Ground (Note 1)                  | −0.5 to $V_{CC} + 2.0$ | V     |
| $V_{CC}$ with Respect to Ground                                     | −0.5 to +7.0           | V     |
| Package Power Dissipation Capability ( $T_A = 25^{\circ}\text{C}$ ) | 1.0                    | W     |
| Lead Soldering Temperature (10 seconds)                             | 300                    | °C    |
| Output Short Circuit Current (Note 1)                               | 100                    | mA    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Output shorted for no more than one second. No more than one output shorted at a time.

**Table 5. D.C. OPERATING CHARACTERISTICS**

$V_{CC} = +3.0\text{ V}$  to  $+5.5\text{ V}$  and over the recommended temperature conditions unless otherwise specified.

| Symbol                | Parameter                           | Test Conditions                                             | Min                 | Typ | Max                 | Units         |
|-----------------------|-------------------------------------|-------------------------------------------------------------|---------------------|-----|---------------------|---------------|
| $I_{LI}$              | Input Leakage Current               | $V_{IN} = \text{GND to } V_{CC}$                            | −2                  |     | 10                  | $\mu\text{A}$ |
| $I_{LO}$              | Output Leakage Current              | $V_{IN} = \text{GND to } V_{CC}$                            | −10                 |     | 10                  | $\mu\text{A}$ |
| $I_{CC1}$             | Power Supply Current (Write)        | $f_{SCL} = 400\text{ kHz}$<br>$V_{CC} = 5.5\text{ V}$       |                     |     | 3                   | mA            |
| $I_{CC2}$             | Power Supply Current (Read)         | $f_{SCL} = 400\text{ kHz}$<br>$V_{CC} = 5.5\text{ V}$       |                     |     | 1                   | mA            |
| $I_{SB}$              | Standby Current                     | $V_{CC} = 5.5\text{ V}$<br>$V_{IN} = \text{GND or } V_{CC}$ |                     |     | 40                  | $\mu\text{A}$ |
| $V_{IL}$ (Note 3)     | Input Low Voltage                   |                                                             | −0.5                |     | $0.3 \times V_{CC}$ | V             |
| $V_{IH}$ (Note 3)     | Input High Voltage                  |                                                             | $0.7 \times V_{CC}$ |     | $V_{CC} + 0.5$      | V             |
| $V_{OL}$              | Output Low Voltage (SDA, RESET)     | $I_{OL} = 3\text{ mA}$<br>$V_{CC} = 3.0\text{ V}$           |                     |     | 0.4                 | V             |
| $V_{OH}$              | Output High Voltage (RESET)         | $I_{OH} = -0.4\text{ mA}$<br>$V_{CC} = 3.0\text{ V}$        | $V_{CC} - 0.75$     |     |                     | V             |
| $V_{TH}$              | Reset Threshold                     | CAT164x−45<br>( $V_{CC} = 5.0\text{ V}$ )                   | 4.50                |     | 4.75                | V             |
|                       |                                     | CAT164x−42<br>( $V_{CC} = 5.0\text{ V}$ )                   | 4.25                |     | 4.50                |               |
|                       |                                     | CAT164x−30<br>( $V_{CC} = 3.3\text{ V}$ )                   | 3.00                |     | 3.15                |               |
|                       |                                     | CAT164x−28<br>( $V_{CC} = 3.3\text{ V}$ )                   | 2.85                |     | 3.00                |               |
|                       |                                     | CAT164x−25<br>( $V_{CC} = 3.0\text{ V}$ )                   | 2.55                |     | 2.70                |               |
| $V_{RVALID}$ (Note 2) | Reset Output Valid $V_{CC}$ Voltage |                                                             | 1.00                |     |                     | V             |
| $V_{RT}$ (Note 2)     | Reset Threshold Hysteresis          |                                                             | 15                  |     |                     | mV            |

2. This parameter is tested initially and after a design or process change that affects the parameter. Not 100% tested.

3.  $V_{IL}$  min and  $V_{IH}$  max are reference values only and are not tested.

# CAT1640, CAT1641

**Table 6. CAPACITANCE**

$T_A = 25^\circ\text{C}$ ,  $f = 1.0\text{ MHz}$ ,  $V_{CC} = 5\text{ V}$

| Symbol             | Test               | Test Conditions        | Max | Units |
|--------------------|--------------------|------------------------|-----|-------|
| $C_{OUT}$ (Note 1) | Output Capacitance | $V_{OUT} = 0\text{ V}$ | 8   | pF    |
| $C_{IN}$ (Note 1)  | Input Capacitance  | $V_{IN} = 0\text{ V}$  | 6   | pF    |

**Table 7. AC CHARACTERISTICS**

$V_{CC} = 3.0\text{ V}$  to  $5.5\text{ V}$  and over the recommended temperature conditions, unless otherwise specified.

**Memory Read & Write Cycle (Note 2)**

| Symbol             | Parameter                                                     | Min | Max | Units         |
|--------------------|---------------------------------------------------------------|-----|-----|---------------|
| $f_{SCL}$          | Clock Frequency                                               |     | 400 | kHz           |
| $t_{SP}$           | Input Filter Spike Suppression (SDA, SCL)                     |     | 100 | ns            |
| $t_{LOW}$          | Clock Low Period                                              | 1.3 |     | $\mu\text{s}$ |
| $t_{HIGH}$         | Clock High Period                                             | 0.6 |     | $\mu\text{s}$ |
| $t_R$ (Note 1)     | SDA and SCL Rise Time                                         |     | 300 | ns            |
| $t_F$ (Note 1)     | SDA and SCL Fall Time                                         |     | 300 | ns            |
| $t_{HD; STA}$      | Start Condition Hold Time                                     | 0.6 |     | $\mu\text{s}$ |
| $t_{SU; STA}$      | Start Condition Setup Time (for a Repeated Start)             | 0.6 |     | $\mu\text{s}$ |
| $t_{HD; DAT}$      | Data Input Hold Time                                          | 0   |     | ns            |
| $t_{SU; DAT}$      | Data Input Setup Time                                         | 100 |     | ns            |
| $t_{SU; STO}$      | Stop Condition Setup Time                                     | 0.6 |     | $\mu\text{s}$ |
| $t_{AA}$           | SCL Low to Data Out Valid                                     |     | 900 | ns            |
| $t_{DH}$           | Data Out Hold Time                                            | 50  |     | ns            |
| $t_{BUF}$ (Note 1) | Time the Bus must be Free Before a New Transmission Can Start | 1.3 |     | $\mu\text{s}$ |
| $t_{WC}$ (Note 3)  | Write Cycle Time (Byte or Page)                               |     | 5   | ms            |

1. This parameter is characterized initially and after a design or process change that affects the parameter. Not 100% tested.
2. Test Conditions according to "AC Test Conditions" table.
3. The write cycle time is the time from a valid stop condition of a write sequence to the end of the internal program/erase cycle. During the write cycle, the bus interface circuits are disabled, SDA is allowed to remain high and the device does not respond to its slave address.

# CAT1640, CAT1641

**Table 8. RESET CIRCUIT AC CHARACTERISTICS**

| Symbol       | Parameter                          | Test Conditions | Min | Typ | Max | Units   |
|--------------|------------------------------------|-----------------|-----|-----|-----|---------|
| $t_{PURST}$  | Reset Timeout                      | Note 2          | 130 | 200 | 270 | ms      |
| $t_{RDP}$    | $V_{TH}$ to RESET output Delay     | Note 3          |     |     | 5   | $\mu s$ |
| $t_{GLITCH}$ | $V_{CC}$ Glitch Reject Pulse Width | Notes 4 and 5   |     |     | 30  | ns      |
| MR Glitch    | Manual Reset Glitch Immunity       | Note 5          |     |     | 100 | ns      |
| $t_{MRW}$    | MR Pulse Width                     | Note 5          | 5   |     |     | $\mu s$ |

**Table 9. POWER-UP TIMING** (Notes 5 and 6)

| Symbol    | Parameter                   | Test Conditions | Min | Typ | Max | Units |
|-----------|-----------------------------|-----------------|-----|-----|-----|-------|
| $t_{PUR}$ | Power-Up to Read Operation  |                 |     |     | 270 | ms    |
| $t_{PUW}$ | Power-Up to Write Operation |                 |     |     | 270 | ms    |

**Table 10. AC TEST CONDITIONS**

| Parameter                 | Test Conditions                                                  |
|---------------------------|------------------------------------------------------------------|
| Input Pulse Voltages      | $0.2 V_{CC}$ to $0.8 V_{CC}$                                     |
| Input Rise and Fall Times | 10 ns                                                            |
| Input Reference Voltages  | $0.3 V_{CC}$ , $0.7 V_{CC}$                                      |
| Output Reference Voltages | $0.5 V_{CC}$                                                     |
| Output Load               | Current Source: $I_{OL} = 3 \text{ mA}$ ; $C_L = 100 \text{ pF}$ |

**Table 11. RELIABILITY CHARACTERISTICS**

| Symbol                  | Parameter          | Reference Test Method         | Min       | Max | Units       |
|-------------------------|--------------------|-------------------------------|-----------|-----|-------------|
| $N_{END}$ (Note 5)      | Endurance          | MIL-STD-883, Test Method 1033 | 1,000,000 |     | Cycles/Byte |
| $T_{DR}$ (Note 5)       | Data Retention     | MIL-STD-883, Test Method 1008 | 100       |     | Years       |
| $V_{ZAP}$ (Note 5)      | ESD Susceptibility | MIL-STD-883, Test Method 3015 | 2000      |     | Volts       |
| $I_{LTH}$ (Notes 5 & 7) | Latch-Up           | JEDEC Standard 17             | 100       |     | mA          |

1. Test Conditions according to "AC Test Conditions" table.
2. Power-up, Input Reference Voltage  $V_{CC} = V_{TH}$ , Reset Output Reference Voltage and Load according to "AC Test Conditions" Table
3. Power-Down, Input Reference Voltage  $V_{CC} = V_{TH}$ , Reset Output Reference Voltage and Load according to "AC Test Conditions" Table
4.  $V_{CC}$  Glitch Reference Voltage =  $V_{THmin}$ ; Based on characterization data
5. This parameter is characterized initially and after a design or process change that affects the parameter. Not 100% tested.
6.  $t_{PUR}$  and  $t_{PUW}$  are the delays required from the time  $V_{CC}$  is stable until the specified memory operation can be initiated.
7. Latch-up protection is provided for stresses up to 100 mA on input and output pins from  $-1 \text{ V}$  to  $V_{CC} + 1 \text{ V}$ .

## DEVICE OPERATION

**Reset Controller Description**

The CAT1640/41 precision Reset controllers ensure correct system operation during brownout and power up/down conditions. They are configured with opendrain  $\overline{\text{RESET}}$ /RESET outputs.

During power-up, the  $\overline{\text{RESET}}$ /RESET output remains active until  $V_{CC}$  reaches the  $V_{TH}$  threshold and will continue driving the outputs for approximately 200 ms ( $t_{PURST}$ ) after reaching  $V_{TH}$ . After the  $t_{PURST}$  timeout interval, the device will cease to drive the reset output. At this point the reset output will be pulled up or down by their respective pull up/down resistors.

During power-down, the  $\overline{\text{RESET}}$ /RESET outputs will be active when  $V_{CC}$  falls below  $V_{TH}$ . The  $\overline{\text{RESET}}$ /RESET output will be valid so long as  $V_{CC}$  is  $> 1.0\text{ V}$  ( $V_{RVALID}$ ). The device is designed to ignore the fast negative going  $V_{CC}$  transient pulses (glitches).

Reset output timing is shown in Figure 1.

**Manual Reset Operation**

The  $\overline{\text{RESET}}$  pin can operate as reset output and manual reset input. The input is edge triggered; that is, the  $\overline{\text{RESET}}$  input will initiate a reset timeout after detecting a high to low transition.

When  $\overline{\text{RESET}}$  I/O is driven to the active state, the 200 ms timer will begin to time the reset interval. If external reset is shorter than 200 ms, Reset outputs will remain active at least 200 ms.

Glitches shorter than 100 ns on  $\overline{\text{RESET}}$  input will not generate a reset pulse.

**Hardware Data Protection**

The CAT1640/41 family has been designed to solve many of the data corruption issues that have long been associated with serial EEPROMs. Data corruption occurs when incorrect data is stored in a memory location which is assumed to hold correct data.

Whenever the device is in a Reset condition, the embedded EEPROM is disabled for all operations, including write operations. If the Reset output is active, in progress communications to the EEPROM are aborted and no new communications are allowed. In this condition an internal write cycle to the memory can not be started, but an in progress internal non-volatile memory write cycle can not be aborted. An internal write cycle initiated before the Reset condition can be successfully finished if there is enough time (5 ms) before  $V_{CC}$  reaches the minimum value of 2 V.

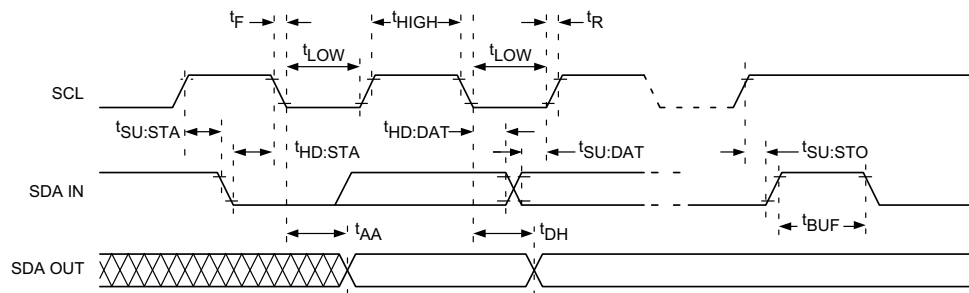


Figure 1.  $\overline{\text{RESET}}$ /RESET Output Timing

## CAT1640, CAT1641



**Figure 2.  $\overline{\text{RESET}}$  as Manual Reset Input Operation and Timing**



**Figure 3. Bus Timing**

## EMBEDDED EEPROM OPERATON

The CAT1640 and CAT1641 feature a 64 kbit embedded serial EEPROM that supports the I<sup>2</sup>C Bus data transmission protocol. This Inter-Integrated Circuit Bus protocol defines any device that sends data to the bus to be a transmitter and any device receiving data to be a receiver. The transfer is controlled by the Master device which generates the serial clock and all START and STOP conditions for bus access. Both the Master device and Slave device can operate as either transmitter or receiver, but the Master device controls which mode is activated.

### I<sup>2</sup>C Bus Protocol

The features of the I<sup>2</sup>C bus protocol are defined as follows:

1. Data transfer may be initiated only when the bus is not busy.

2. During a data transfer, the data line must remain stable whenever the clock line is high. Any changes in the data line while the clock line is high will be interpreted as a START or STOP condition.

### Start Condition

The START Condition precedes all commands to the device, and is defined as a HIGH to LOW transition of SDA when SCL is HIGH. The CAT1640/41 monitors the SDA and SCL lines and will not respond until this condition is met.

### Stop Condition

A LOW to HIGH transition of SDA when SCL is HIGH determines the STOP condition. All operations must end with a STOP condition.

## DEVICE ADDRESSING

The Master begins a transmission by sending a START condition. The Master sends the address of the particular slave device it is requesting. The four most significant bits of the 8-bit slave address are programmable in metal and the default is 1010.

The last bit of the slave address specifies whether a Read or Write operation is to be performed. When this bit is set to 1, a Read operation is selected, and when set to 0, a Write operation is selected.

After the Master sends a START condition and the slave address byte, the CAT1640/41 monitors the bus and responds with an acknowledge (on the SDA line) when its address matches the transmitted slave address. The CAT1640/41 then perform a Read or Write operation depending on the R/W bit.



Figure 4. Write Cycle Timing

## ACKNOWLEDGE

After a successful data transfer, each receiving device is required to generate an acknowledge. The acknowledging device pulls down the SDA line during the ninth clock cycle, signaling that it received the 8 bits of data.

The CAT1640/41 responds with an acknowledge after receiving a START condition and its slave address. If the device has been selected along with a write operation, it responds with an acknowledge after receiving each 8-bit byte.

When the CAT1640/41 begins a READ mode it transmits 8 bits of data, releases the SDA line and monitors the line for an acknowledge. Once it receives this acknowledge, the CAT1640/41 will continue to transmit data. If no acknowledge is sent by the Master, the device terminates data transmission and waits for a STOP condition.

## WRITE OPERATIONS

### Byte Write

In the Byte Write mode, the Master device sends the START condition and the slave address information (with the  $\overline{R/\overline{W}}$  bit set to zero) to the Slave device. After the Slave generates an acknowledge, the Master sends two 8-bit address bytes that are to be written into the address pointers of the device. After receiving another acknowledge from the

Slave, the Master device transmits the data to be written into the addressed memory location. The CAT1640/41 acknowledges once more and the Master generates the STOP condition. At this time, the device begins an internal programming cycle to non-volatile memory. While the cycle is in progress, the device will not respond to any request from the Master device.



Figure 5. Start/Stop Timing

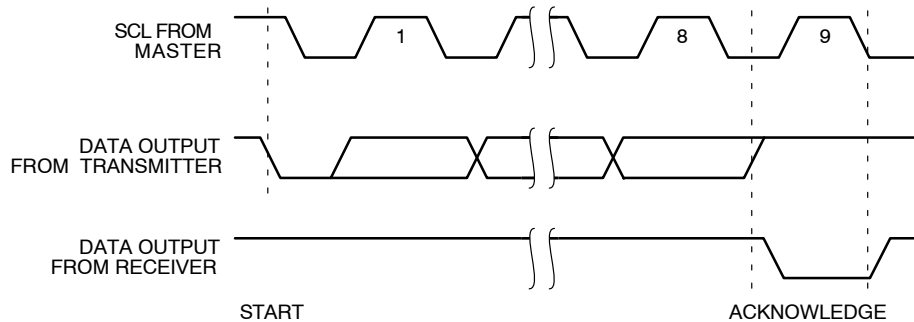


Figure 6. Acknowledge Timing

|                       |   |   |   |   |    |    |    |                             |
|-----------------------|---|---|---|---|----|----|----|-----------------------------|
| Default Configuration | 1 | 0 | 1 | 0 | A2 | A1 | A0 | $\overline{R/\overline{W}}$ |
|-----------------------|---|---|---|---|----|----|----|-----------------------------|

Figure 7. Slave Address Bits

### Page Write

The CAT1640/41 writes up to 64 bytes of data in a single write cycle, using the Page Write operation. The page write operation is initiated in the same manner as the byte write operation, however instead of terminating after the initial byte is transmitted, the Master is allowed to send up to additional 63 bytes. After each byte has been transmitted, the CAT1640/41 will respond with an acknowledge and internally increment the lower order address bits by one. The high order bits remain unchanged.

If the Master transmits more than 64 bytes before sending the STOP condition, the address counter 'wraps around', and previously transmitted data will be overwritten.

When all 64 bytes are received, and the STOP condition has been sent by the Master, the internal programming cycle begins. At this point, all received data is written to the CAT1640/41 in a single write cycle.

## CAT1640, CAT1641

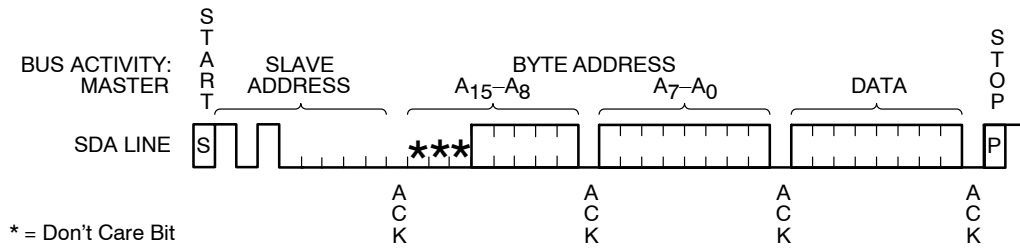


Figure 8. Byte Write Timing



Figure 9. Page Write Timing

### Acknowledge Polling

Disabling of the inputs can be used to take advantage of the typical write cycle time. Once the stop condition is issued to indicate the end of the host's write operation, the CAT1640/41 initiates the internal write cycle. ACK polling can be initiated immediately. This involves issuing the start condition followed by the slave address for a write operation. If the device is still busy with the write operation, no ACK will be returned. If a write operation has completed, an ACK will be returned and the host can then proceed with the next read or write operation.

### Read Operations

The READ operation for the CAT1640/41 is initiated in the same manner as the write operation with one exception, that R/W bit is set to one. Three different READ operations are possible: Immediate/Current Address READ, Selective/Random READ and Sequential READ.



Figure 10. Immediate Address Read Timing

## Immediate/Current Address Read

The CAT1640 and CAT1641 address counter contains the address of the last byte accessed, incremented by one. In other words, if the last READ or WRITE access was to address N, the READ immediately following would access data from address N+1. For all devices,  $N = E = 4,095$ . The counter will wrap around to Zero and continue to clock out valid data. After the CAT1640 and CAT1641 receives its slave address information (with the  $R/\overline{W}$  bit set to one), it issues an acknowledge, then transmits the 8-bit byte requested. The master device does not send an acknowledge, but will generate a STOP condition.

## Selective/Random Read

Selective/Random READ operations allow the Master device to select at random any memory location for a READ operation. The Master device first performs a 'dummy' write operation by sending the START condition, slave address and byte addresses of the location it wishes to read. After the CAT1640 and CAT1641 acknowledges, the Master device sends the START condition and the slave address

again, this time with the  $R/\overline{W}$  bit set to one. The CAT1640 and CAT1641 then responds with its acknowledge and sends the 8-bit byte requested. The master device does not send an acknowledge but will generate a STOP condition.

## Sequential Read

The Sequential READ operation can be initiated by either the Immediate Address READ or Selective READ operations. After the CAT1640 and CAT1641 sends the initial 8-bit byte requested, the Master will respond with an acknowledge which tells the device it requires more data. The CAT1640 and CAT1641 will continue to output an 8-bit byte for each acknowledge, thus sending the STOP condition.

The data being transmitted from the CAT1640 and CAT1641 is sent sequentially with the data from address N followed by data from address N+1. The READ operation address counter increments all of the CAT1640 and CAT1641 address bits so that the entire memory array can be read during one operation.



Figure 11. Selective Read Timing



Figure 12. Sequential Read Timing

# CAT1640, CAT1641

## ORDERING INFORMATION

| Orderable Part Numbers – CAT1640 Series<br>(See Notes 1 – 5) |                 |         |                  |
|--------------------------------------------------------------|-----------------|---------|------------------|
| Device                                                       | Reset Threshold | Package | Shipping         |
| CAT1640LI-45-G                                               | 4.50 V – 4.75 V | PDIP    | 3000 Tape & Reel |
| CAT1640LI-42-G                                               | 4.25 V – 4.50 V |         |                  |
| CAT1640LI-30-G                                               | 3.00 V – 3.15 V |         |                  |
| CAT1640LI-28-G                                               | 2.85 V – 3.00 V |         |                  |
| CAT1640LI-25-G                                               | 2.55 V – 2.70 V |         |                  |
| CAT1640WI-45-GT3                                             | 4.50 V – 4.75 V | SOIC    |                  |
| CAT1640WI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1640WI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1640WI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1640WI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1640YI-45-GT3                                             | 4.50 V – 4.75 V | TSSOP   |                  |
| CAT1640YI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1640YI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1640YI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1640YI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1640ZD2I45GT3                                             | 4.50 V – 4.75 V | TDFN    |                  |
| CAT1640ZD2I42GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1640ZD2I30GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1640ZD2I28GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1640ZD2I25GT3                                             | 2.55 V – 2.70 V |         |                  |

1. All packages are RoHS-compliant (Lead-free, Halogen-free).
2. The standard lead finish is NiPdAu.
3. For additional package and temperature options, please contact your nearest ON Semiconductor Sales office.
4. TDFN not available in NiPdAu (-G) version.
5. For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

## CAT1640, CAT1641

| Orderable Part Numbers – CAT1641 Series<br>(See Notes 1 – 5) |                 |         |                  |
|--------------------------------------------------------------|-----------------|---------|------------------|
| Device                                                       | Reset Threshold | Package | Shipping         |
| CAT1641LI-45-G                                               | 4.50 V – 4.75 V | PDIP    | 3000 Tape & Reel |
| CAT1641LI-42-G                                               | 4.25 V – 4.50 V |         |                  |
| CAT1641LI-30-G                                               | 3.00 V – 3.15 V |         |                  |
| CAT1641LI-28-G                                               | 2.85 V – 3.00 V |         |                  |
| CAT1641LI-25-G                                               | 2.55 V – 2.70 V |         |                  |
| CAT1641WI-45-GT3                                             | 4.50 V – 4.75 V | SOIC    |                  |
| CAT1641WI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1641WI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1641WI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1641WI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1641YI-45-GT3                                             | 4.50 V – 4.75 V | TSSOP   |                  |
| CAT1641YI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1641YI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1641YI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1641YI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1641ZD2I45GT3                                             | 4.50 V – 4.75 V | TDFN    |                  |
| CAT1641ZD2I42GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1641ZD2I30GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1641ZD2I28GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1641ZD2I25GT3                                             | 2.55 V – 2.70 V |         |                  |

1. All packages are RoHS-compliant (Lead-free, Halogen-free).
2. The standard lead finish is NiPdAu.
3. For additional package and temperature options, please contact your nearest ON Semiconductor Sales office.
4. TDFN not available in NiPdAu (-G) version.
5. For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

# CAT1640, CAT1641

## PACKAGE DIMENSIONS

SOIC 8, 150 mils  
CASE 751BD-01  
ISSUE O



TOP VIEW

| SYMBOL   | MIN      | NOM | MAX  |
|----------|----------|-----|------|
| A        | 1.35     |     | 1.75 |
| A1       | 0.10     |     | 0.25 |
| b        | 0.33     |     | 0.51 |
| c        | 0.19     |     | 0.25 |
| D        | 4.80     |     | 5.00 |
| E        | 5.80     |     | 6.20 |
| E1       | 3.80     |     | 4.00 |
| e        | 1.27 BSC |     |      |
| h        | 0.25     |     | 0.50 |
| L        | 0.40     |     | 1.27 |
| $\theta$ | 0°       |     | 8°   |



SIDE VIEW



END VIEW

### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MS-012.

# CAT1640, CAT1641

PDIP-8, 300 mils  
CASE 646AA-01  
ISSUE A



TOP VIEW

| SYMBOL | MIN      | NOM  | MAX   |
|--------|----------|------|-------|
| A      |          |      | 5.33  |
| A1     | 0.38     |      |       |
| A2     | 2.92     | 3.30 | 4.95  |
| b      | 0.36     | 0.46 | 0.56  |
| b2     | 1.14     | 1.52 | 1.78  |
| c      | 0.20     | 0.25 | 0.36  |
| D      | 9.02     | 9.27 | 10.16 |
| E      | 7.62     | 7.87 | 8.25  |
| E1     | 6.10     | 6.35 | 7.11  |
| e      | 2.54 BSC |      |       |
| eB     | 7.87     |      | 10.92 |
| L      | 2.92     | 3.30 | 3.80  |



SIDE VIEW



END VIEW

## Notes:

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MS-001.

# CAT1640, CAT1641


TDFN8, 3x4.9  
CASE 511AM-01  
ISSUE A



| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      | 0.70     | 0.75 | 0.80 |
| A1     | 0.00     | 0.02 | 0.05 |
| A2     | 0.45     | 0.55 | 0.65 |
| A3     | 0.20 REF |      |      |
| b      | 0.25     | 0.30 | 0.35 |
| D      | 2.90     | 3.00 | 3.10 |
| D2     | 0.90     | 1.00 | 1.10 |
| E      | 4.80     | 4.90 | 5.00 |
| E2     | 0.90     | 1.00 | 1.10 |
| e      | 0.65 TYP |      |      |
| L      | 0.50     | 0.60 | 0.70 |

## Notes:

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MO-229.

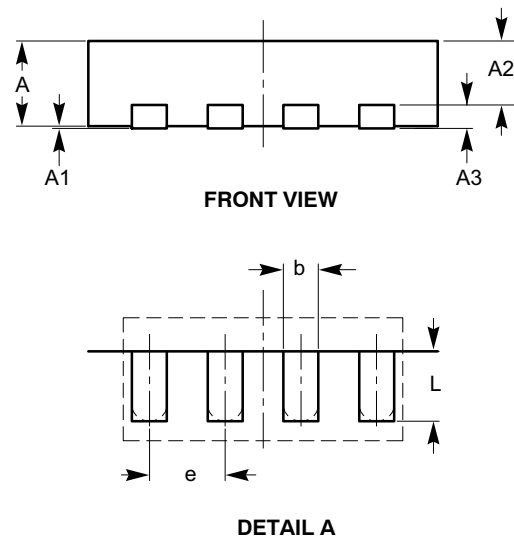

# CAT1640, CAT1641

TSSOP-8  
CASE 948S-01  
ISSUE C



## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
6. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 2.90        | 3.10 | 0.114     | 0.122 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.10 | ---       | 0.043 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.70 | 0.020     | 0.028 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ON Semiconductor:

[CAT1640LI-42-G](#) [CAT1641WI-28-G](#) [CAT1640WI-42-G](#) [CAT1640WI-28-G](#) [CAT1641LI-42-G](#) [CAT1641LI-45-G](#)  
[CAT1640WI-25-G](#) [CAT1641WI-42-G](#) [CAT1641LI-30-G](#) [CAT1641WI-45-G](#) [CAT1640LI-45-G](#) [CAT1641LI-28-G](#)  
[CAT1641WI-25-G](#) [CAT1640LI-25-G](#) [CAT1641WI-30-G](#) [CAT1640LI-28-G](#) [CAT1640WI-25-GT3](#) [CAT1640WI-28-GT3](#)  
[CAT1640WI-30-GT3](#) [CAT1640WI-42-GT3](#) [CAT1640WI-45-GT3](#) [CAT1640YI-25-GT3](#) [CAT1640YI-28-GT3](#)  
[CAT1640YI-30-GT3](#) [CAT1640YI-42-GT3](#) [CAT1640YI-45-GT3](#) [CAT1641WI-25-GT3](#) [CAT1641WI-28-GT3](#)  
[CAT1641WI-30-GT3](#) [CAT1641WI-42-GT3](#) [CAT1641WI-45-GT3](#) [CAT1641YI-25-GT3](#) [CAT1641YI-28-GT3](#)  
[CAT1641YI-30-GT3](#) [CAT1641YI-42-GT3](#) [CAT1641YI-45-GT3](#) [CAT1640WI-45-G](#) [CAT1640LI-30-G](#) [CAT1640WI-30-G](#)