





RoHS

MAPX

MODIFICATION

DRW

DATE

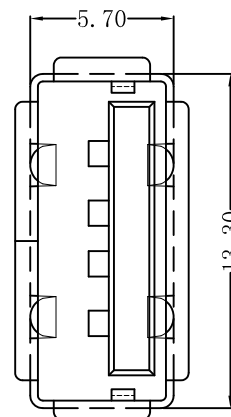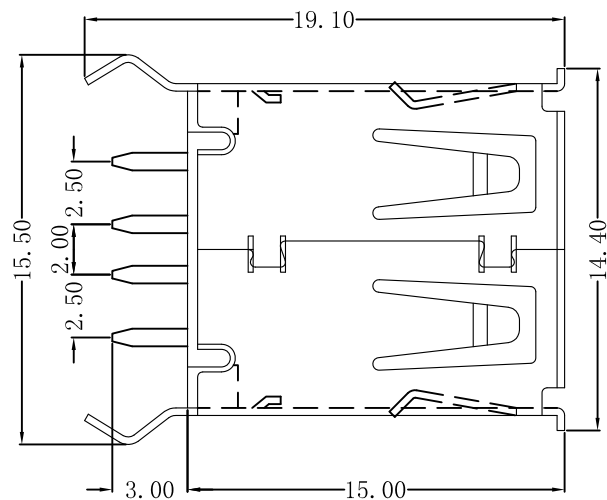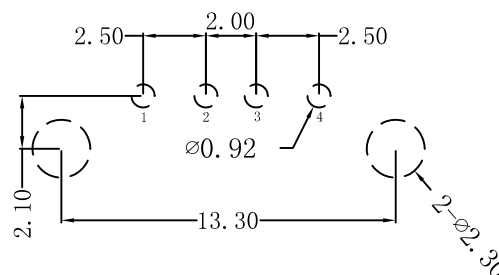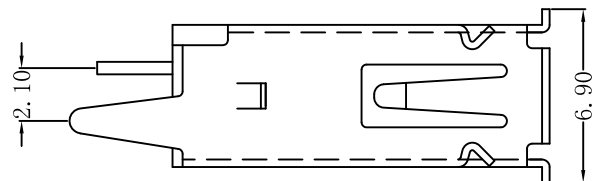

特性 Specifications;

电器 Electyical:

接触电阻 Contact Resistance

30 millionms MAX

耐电压 Dielectyic Withstanding Voltage:

500v AC AT Sea Level

绝缘电阻 Insulation Resistance:

1000 MEGA ohms MLN

机构 Machanical:

接合力 Mating Force;

4.0 KG MAX 最大4 Kg

拔出力 Unmating Force;

0.7 KG MIN.最小0.7 KG

材料 Material:

塑胶 Housing: Hlgh Temperatuye Thermoplastics

UL 94V-V1 PBT

端子 Contact: Copper Alloy 铜合金

铁壳 Shell: Copper Alloy 铜合金

电镀 Finish:

端子 Contact: Plated Gold in Mating Area;

Tin/On Solder Tails

接触点镀金; 脚镀锡

铁壳 Shell:

nickel Plating 镀镍

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

|      |       |      |       |
|------|-------|------|-------|
| X.   | ±0.25 | X.   | ±5.°  |
| .X   | ±0.20 | .X   | ±2.°  |
| .XX  | ±0.15 | .XX  | ±1.°  |
| .XXX | ±0.10 | .XXX | ±0.5° |

深圳市精拓金电子有限公司  
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

|             |            |               |     |                          |                           |
|-------------|------------|---------------|-----|--------------------------|---------------------------|
| 单位<br>UNITS | MM         | 制图<br>DRAWING | 尹先华 | 制图料号<br>PRODUCT PART NO. | 916-151A1028Y10201        |
| 比例<br>SCALE | 1:1        | 审核<br>CHKD    | 郭治富 | 产品名称<br>PRODUCT NAME     | AF180度15.0弯脚有边铁壳PBT黑胶不带后塞 |
| 日期<br>DATE  | 2021-04-14 | 核准<br>APPD    | 黄国荣 | 角法<br>VIEW               | 版本<br>VER                 |
|             |            |               |     |                          | A0                        |