SIEMENS

Data sheet 3RV2011-0DA25



Circuit breaker size S00 for motor protection, CLASS 10 A-release 0.22...0.32 A N-release 4.2 A Spring-type terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
• at AC in hot operating state	5.5 W
 at AC in hot operating state per pole 	1.8 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	0.22 0.32 A
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	0.32 A
operational current	

operating power * if AC-3 - at 239 V rated value - at 600 V rated value - at 500 V rated value - at 600 V rated	• at AC-3 at 400 V rated value	0.32 A
	• at AC-3e at 400 V rated value	0.32 A
	operating power	
	• at AC-3	
	— at 230 V rated value	0 kW
e at AG-3e — at 230 V rated value — at 300 V rated value — at 500 V rated value operating frequency • at AC-3 maximum • at AC-4 maximin vortices • at 24 v • at 120 v • at 120 v • at 120 v • at 120 v • at 125 v • at 120 v • perational current of auxiliary contacts at DC-13 • at 24 v • at 100 v • protective and monitoring functions product function • ground fault detection • ground fault detec		
at 200 V rated value		U. I KVV
- at 500 V rated value		
operating frequency at AC3-a maximum at AC3-a maximum at AC3-a maximum at AC3-a maximum design of the auxiliary switch number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts 2 1 number of CO contacts for auxiliary contacts 3 1 number of CO contacts for auxiliary contacts 4 2 2 2 3 12 2 3 12 2 3 12 3 12 3 12 3	— at 400 V rated value	0.09 kW
operating frequency at AC-3-maximum at AC-3-maximum to the auxiliary secution design of the auxiliary switch number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts at AC-15 at 24 V at 120 V at 120 V at 125 V beta 124 V at 120 V coperational current of auxiliary contacts at DC-13 at 124 V at 160 V perational current of auxiliary contacts at DC-13 at 24 V at 160 V product function ground fault detection product function approach for auxiliary contacts at DC-13 at 24 V at 160 V product function approach functions product function approach function at AC at 240 V rated value at AC at 240 V rated value at AC at 550 V rated value at AC at 650 V rated value at AC at 650 V rated value at AC at 450 V rated value at 400 V rated value at 600 V rated value at	— at 500 V rated value	0.1 kW
at AC-3 maximum at AC-3 maximum at AC-3 maximum design of the auxiliary switch number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 at 24 V at 120 V 0.5 A at 125 V 0.5 A at 125 V 0.5 A 0.5 A 0.5 A 0.5 A 0.15 A	— at 690 V rated value	0.1 kW
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts at AC-15 at 120 V at 120 V at 120 V at 125 V beta 125 V at 20 V at 20 V at 20 V at 20 V coperational current of auxiliary contacts at DC-13 at 24 V at 80 V coperational current of auxiliary contacts at DC-13 beta 160 V coperational current of auxiliary contacts at DC-13 beta 160 V coperational current of auxiliary contacts at DC-13 coperational current of auxiliary contacts at DC-13 beta 160 V coperational current of auxiliary contacts at DC-13 coperational current of auxiliary contact according to UL coperational current of auxiliary contacts according to UL contact rating of auxiliary contacts according to UL contact r	operating frequency	
design of the auxiliary switch number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 * at 24 V 2 A * at 120 V 0.5 A * at 125 V 0.5 A * at 125 V 0.5 A * at 230 V operational current of auxiliary contacts at DC-13 * at 24 V 1A * at 160 V operational current of auxiliary contacts at DC-13 * at 24 V 1A * at 160 V other and monitoring functions product function * ground fault detection Yes maximum short-circuit current breaking capacity (feu) * at AC at 240 V rated value * at AC at 400 V rated value * at 400 V rated	• at AC-3 maximum	15 1/h
design of the auxiliary awitch number of NC contacts for auxiliary contacts 1 number of CC contacts for auxiliary contacts 1 number of CC contacts for auxiliary contacts 0 operational current of auxiliary contacts 4 at 2 4 V 2 2 A 4 at 120 V 0.5 A 5 at 230 V 0.5 A 6 at 230 V 0.5 A 7 at 230 V 0.5 A 7 at 250 V 0.5 A 7 at 260 V 0.	• at AC-3e maximum	15 1/h
design of the auxiliary switch number of NC contacts for auxiliary contacts 1 number of CC contacts for auxiliary contacts 1 number of CC contacts for auxiliary contacts 0 operational current of auxiliary contacts 4 at 24 V 4 at 120 V 5 0.5 A 5 0.5 A 6 at 230 V 0 operational current of auxiliary contacts at DC-13 4 at 24 V 5 at 125 V 6 0.5 A 7 at 230 V 0 operational current of auxiliary contacts at DC-13 4 at 24 V 7 at 0 V 0 0.5 A 7 at 250 V 0 operational current of auxiliary contacts at DC-13 5 at 24 V 7 at 0 V 0 0.15 A Protective and monitoring functions Product function 9 ground fault detection 10 kB 11 kB 10 kB 10 kB 11 kB 10 kB 11 kB 10 kB 10 kB 11 kB 10 kB 11	Auxiliary circuit	
number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 at 24 V at 120 V at 120 V billion of NC contacts for auxiliary contacts at AC-15 at 24 V at 120 V billion of NC contacts for auxiliary contacts at AC-15 at 24 V at 125 V coperational current of auxiliary contacts at DC-13 at 24 V at 60 V poperational current of auxiliary contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 billion of NC contacts at DC-13 billion of NC contacts at DC-13 at 24 V at 60 V billion of NC contacts at DC-13 billion of NC contact at DC-13 billi		transverse
number of NO contacts for auxillary contacts number of CO contacts for auxillary contacts operational current of auxillary contacts at AC-15 * at 24 V * at 125 V * at 125 V * at 125 V * at 125 V * at 230 V operational current of auxillary contacts at DC-13 * at 24 V * at 60		
number of CO contacts for auxiliary contacts at AC-15 operational current of auxiliary contacts at AC-15 a at 124 V at 120 V b at 125 V c at 1230 V operational current of auxiliary contacts at DC-13 at 24 V at 230 V operational current of auxiliary contacts at DC-13 at 24 V at 160 V Protective and monitoring functions product function ground fault detection has a failure detection trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) at AC at 240 V rated value at AC at 240 V rated value at AC at 400 V rated value at 600 V rated		
operational current of auxiliary contacts at AC-15 * at 120 V * at 120 V * at 125 V * at 125 V * at 230 V operational current of auxiliary contacts at DC-13 * at 24 Y * at 60 V operational current of auxiliary contacts at DC-13 * at 60 V operational current of auxiliary contacts at DC-13 * at 60 V operational current of auxiliary contacts at DC-13 * at 60 V operational current of auxiliary contacts at DC-13 * at 60 V operational current of contacts at DC-13 * at 60 V operational current of contacts at DC-13 * at 60 V operational current of contacts at DC-13 * at 60 V operational current of contacts at DC-13 * at 60 V operational current of contacts at DC-13 * at 60 V operational current of contacts at DC-13 * at 60 V operation of the contact of contacts at CC * at 240 V rated value operating short-circuit current breaking capacity (Ics) at AC * at 40 V rated value * at 600		
e at 126 V e. at 128 V e. at 230 V experitional current of auxiliary contacts at DC-13 e. at 24 V e. at 60		0
at 120 V at 125 V 0.5 A 0.5 A 0.5 A 0.5 A 0.5 A operational current of auxiliary contacts at DC-13 at 230 V 0.5 A operational current of auxiliary contacts at DC-13 at 60 V 0.15 A Protective and monitoring functions product function ground fault detection A phase failure detection Yes trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) at AC at 240 V rated value 100 kA at AC at 400 V rated value 100 kA at AC at 500 V rated value 100 kA at AC at 500 V rated value 100 kA at AC at 500 V rated value 100 kA at 400 V rated value 100 kA at 400 V rated value 100 kA at 500 V rated value 100 kA at 500 V rated value 100 kA at 500 V rated value 100 kA at 480 V rated value 100 kA at 480 V rated value 100 kA at 480 V rated value 100 kA at 500 V rated value 100 kA at 480 V rated value 100 kA at 500 V rated value 100 kA at 500 V rated value 100 kA at 600 V rated value at	•	
at 125 V at 230 V operational current of auxiliary contacts at DC-13 at 24 V at 60 V other interest of auxiliary contacts at DC-13 at 24 V at 60 V other interest of auxiliary contacts at DC-13 at 25 V other interest of auxiliary contacts at DC-13 before interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 before interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts at DC-13 at 26 V other interest of auxiliary contacts according to UL contact rating of auxiliary contacts accordin	• at 24 V	
operational current of auxillary contacts at DC-13 • at 24 V • at 66 DV • 0.15 A Protective and monitoring functions product function • ground fault detection • phase failure detection • properational current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at 400 V rated value • at 400 V rated value • at 500 V rated value • at 600 V ra	• at 120 V	0.5 A
operational current of auxiliary contacts at DC-13 • at 24 V • at 80 V Protective and monitoring functions product function • ground fault detection • phase failure detection • phase failure detection trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V vated value • at AC at 500 V vated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 400 V rated value • at 400 V rated value • at 240 V rated value • at 400 V rated value • at 500 V rated value • at 600 V rated value • at 800 V rated value • at 800 V rated value • at 800 V rated value • at 600 V rated value • at 600 V rated value • at 400 V rated value • at 600 V rated value • at 600 V rated value • at 400 V rated value • at 600 V r	• at 125 V	0.5 A
at 24 V at 60 V bote citive and monitoring functions product function ground fault detection phase failure detection Yes trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 500 V rated value bote At AC at 690 V rated value at AC at 500 V rated value at AC at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value at 500 V rated value bote At 500 V rated value	• at 230 V	0.5 A
at 24 V at 80 V bota control functions product function ground fault detection phase failure detection Yes trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) at AC at 240 V rated value at AC at 400 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at AC at 690 V rated value at 690 V rated value at 500 V rated value at 690 V rated value at 500 V rated value at	operational current of auxiliary contacts at DC-13	
e at 60 V Protective and monitoring functions product function ground fault detection product function ground fault detection product function ground fault detection Pres trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) at AC at 240 V rated value at AC at 4500 V rated value at AC at 5500 V rated value at AC at 590 V rated value at 400 V rated value at 500 V rated value at 600 V rated		1A
protective and monitoring functions product function • ground fault detection • phase failure detection trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 400 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at 400 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 400 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value • at 480 V rated value • at 690 V rated		
product function • ground fault detection • phase failure detection Yes trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at AC at 400 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 500 V rated value • at 240 V rated value • at 240 V rated value • at 500 V rated value • at 500 V rated value • at 500 V rated value • at 600 V rated value • at 60		
ground fault detection phase failure detection Yes trip class CLASS 10 design of the overload release maximum short-circuit current breaking capacity (Icu) at AC at 240 V rated value at AC at 400 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 400 V rated value at AC at 400 V rated value at AC at 400 V rated value at AC at 690 V rated value at 40 V rated value at 40 V rated value at 40 V rated value at 400 V rated value at 690 V ra		
e phase failure detection trip class design of the overload release maximum short-circuit current breaking capacity (Icu) e at AC at 240 V rated value 100 kA e at AC at 500 V rated value 100 kA e at AC at 500 V rated value 100 kA operating short-circuit current breaking capacity (Ics) at AC e at 240 V rated value 100 kA e at 400 V rated value 100 kA operating short-circuit current breaking capacity (Ics) at AC e at 240 V rated value 100 kA e at 400 V rated value 100 kA e at 500 V rated value 100 kA e at 500 V rated value 100 kA e at 690 V rated value 100 kA response value current of instantaneous short-circuit trip unit UI/CSA ratings full-load current (FLA) for 3-phase AC motor e at 480 V rated value 0.32 A contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for short-circuit protection of the auxiliary switch required A) Installation/ mounting/ dimensions mounting position any	•	
trip class design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 500 V rated value • at AC at 690 V rated value • at 400 V rated value • at 240 V rated value • at 400 V rated value • at 500 V rated value • at 500 V rated value • at 690 V rated value • at 600 V rated value • a	· ·	
design of the overload release maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 400 V rated value • at AC at 690 V rated value • at AC at 690 V rated value • at AC at 690 V rated value • at 400 V rated value • at 400 V rated value • at 400 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	phase failure detection	
maximum short-circuit current breaking capacity (Icu) • at AC at 240 V rated value • at AC at 400 V rated value • at AC at 4500 V rated value • at AC at 6500 V rated value operating short-circuit current breaking capacity (Ics) at AC • at 240 V rated value • at 600 V rated value Into kA • at 600 V rated value • at 600 V rated value response value current of instantaneous short-circuit trip unit ULCSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value Source of the fuse of the fuse of the short-circuit protection product function short circuit protection yes design of the fuse link • for short-circuit protection of the auxiliary switch required fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions mounting position any	trip class	CLASS 10
at AC at 240 V rated value at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value at AC at 690 V rated value beautiful current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 400 V rated value at 500 V rated value at 500 V rated value at 690 V rated value correct (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value beat 600 V rated value at 600 V rated value at 600 V rated value beat 600 V rated value at 600 V rated value beat 600 V rated value at 600 V rated value at 600 V rated value beat 600 V rated value at 600 V rated value at 600 V rated value beat 600 V rated value at 600 V rated value at 600 V rated value beat 600 V rated value at 600 V rated value beat 600 V rated value at 600 V rated value	design of the overload release	thermal
at AC at 400 V rated value at AC at 500 V rated value at AC at 690 V rated value at AC at 690 V rated value beauting short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 400 V rated value at 690 V rated value at 690 V rated value beauting short-circuit trip unit beauting short-circuit short-circuit trip unit beauting short-circuit short	maximum short-circuit current breaking capacity (Icu)	
at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 240 V rated value at 240 V rated value at 500 V rated value at 500 V rated value at 500 V rated value at 600 V rated value at 600 V rated value full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bright full-toad current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bright full-toad current of instantaneous short-circuit trip on the fusual full-toad current of instantaneous short circuit protection product function short circuit protection design of the short-circuit protection design of the fuse link at 600 V rated value at 600 V rated	• at AC at 240 V rated value	100 kA
at AC at 500 V rated value at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 240 V rated value at 240 V rated value at 500 V rated value at 500 V rated value at 500 V rated value at 600 V rated value at 600 V rated value full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bright full-toad current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value bright full-toad current of instantaneous short-circuit trip on the fusual full-toad current of instantaneous short circuit protection product function short circuit protection design of the short-circuit protection design of the fuse link at 600 V rated value at 600 V rated	• at AC at 400 V rated value	100 kA
at AC at 690 V rated value operating short-circuit current breaking capacity (Ics) at AC at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value but 700 KA Tesponse value current of instantaneous short-circuit trip unit at 42 A UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link after 600 V rated value fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions mounting position any		
operating short-circuit current breaking capacity (Ics) at AC • at 240 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required A) Installation/ mounting/ dimensions mounting position any		
 at 240 V rated value at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit 4.2 A UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value contact rating of auxiliary contacts according to UL C300 / R300 Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for short-circuit protection of the auxiliary switch required Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions any 		100 10 1
 at 400 V rated value at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit 4.2 A UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 700 KA 		400 kA
 at 500 V rated value at 690 V rated value response value current of instantaneous short-circuit trip unit 4.2 A UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V ra		
at 690 V rated value response value current of instantaneous short-circuit trip unit 4.2 A UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value be at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link after for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position at 4.2 A 0.32 A 0.32 A 0.32 A C300 / R300 Short-circuit protection Yes design of the short-circuit protection Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions mounting position any		
response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position 4.2 A 4.2	 at 500 V rated value 	100 kA
## District of the short-circuit protection of the auxiliary switch required for short-circuit protection of the auxiliary switch required any short-circuit protection of the auxiliary switch required any short-circuit protection of the short-circuit protection of the auxiliary switch required any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit current lk < 400 any short-circuit protection of the short-circuit pro	at 690 V rated value	100 kA
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value 0.32 A contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position 0.32 A C300 / R300 Yes magnetic Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)	response value current of instantaneous short-circuit trip unit	4.2 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value C300 / R300 Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position 0.32 A C300 / R300 Yes magnetic Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions any	UL/CSA ratings	
 at 480 V rated value at 600 V rated value 0.32 A contact rating of auxiliary contacts according to UL C300 / R300 Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for short-circuit protection of the auxiliary switch required Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions any 		
 at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link for short-circuit protection of the auxiliary switch required Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions any 		0.32 A
contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position C300 / R300 Yes magnetic magnetic Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)		
Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position Yes magnetic Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)		
product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position Yes magnetic Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) any		C300 / K300
design of the short-circuit trip design of the fuse link ● for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position magnetic Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) any		
design of the fuse link • for short-circuit protection of the auxiliary switch required Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions mounting position any	product function short circuit protection	Yes
• for short-circuit protection of the auxiliary switch required Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) Installation/ mounting/ dimensions mounting position any	design of the short-circuit trip	magnetic
Installation/ mounting/ dimensions mounting position any	design of the fuse link	
Installation/ mounting/ dimensions mounting position any	 for short-circuit protection of the auxiliary switch required 	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400
mounting position any		
	Installation/ mounting/ dimensions	
	mounting position	any
		·
height 106 mm		screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715

	AE area
width	45 mm
depth required spacing	97 mm
with side-by-side mounting at the side	0 mm
• for grounded parts at 400 V	OTHILL
— downwards	30 mm
	30 mm
— upwards — at the side	9 mm
• for live parts at 400 V	9 111111
— downwards	30 mm
— upwards	30 mm
— upwards — at the side	9 mm
• for grounded parts at 500 V	3 111111
— downwards	30 mm
— upwards	30 mm
— upwards — at the side	9 mm
• for live parts at 500 V	3 111111
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
for grounded parts at 690 V	V 11111
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
— forwards Connections/ Terminals	
— forwards	0 mm
— forwards Connections/ Terminals type of electrical connection • for main current circuit	
— forwards Connections/ Terminals type of electrical connection	0 mm spring-loaded terminals
— forwards Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	0 mm spring-loaded terminals spring-loaded terminals
— forwards Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	0 mm spring-loaded terminals spring-loaded terminals
— forwards Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	0 mm spring-loaded terminals spring-loaded terminals
— forwards Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	o mm spring-loaded terminals spring-loaded terminals Top and bottom
— forwards Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	o mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²)
— forwards Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing	o mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts type of connectable conductor cross-sections	o mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts	o mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts type of connectable conductor cross-sections	o mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts type of connectable conductor cross-sections • for auxiliary contacts	spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12)
— forwards type of electrical connection	o mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts type of connectable conductor cross-sections • for auxiliary contacts — solid or stranded — finely stranded with core end processing — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for auxiliary contacts	o mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts type of connectable conductor cross-sections • for auxiliary contacts — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts for auxiliary contacts — finely stranded without core end processing — finely stranded without core end processing — finely stranded without core end processing • for AWG cables for auxiliary contacts design of screwdriver shaft	9 mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts type of connectable conductor cross-sections • for auxiliary contacts — solid or stranded — finely stranded with core end processing — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for auxiliary contacts design of screwdriver shaft size of the screwdriver tip	9 mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (20 12)
— forwards type of electrical connection	9 mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)
— forwards type of electrical connection	spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)
— forwards type of electrical connection	9 mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)
— forwards type of electrical connection	spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)
— forwards type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts type of connectable conductor cross-sections • for auxiliary contacts — solid or stranded — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing — finely stranded without core end processing • for AWG cables for auxiliary contacts design of screwdriver shaft size of the screwdriver tip Safety related data B10 value • with high demand rate according to SN 31920 proportion of dangerous failures • with low demand rate according to SN 31920	spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)
— forwards type of electrical connection	spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)
Torwards type of electrical connection	spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 1.5 mm²) 5 000 50 % 50 %
— forwards type of electrical connection	9 mm spring-loaded terminals spring-loaded terminals Top and bottom 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 2x (0.5 2.5 mm²) 2x (0.5 1.5 mm²)

protection class IP on the front according to IEC 60529 IP20
touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front display version for switching status Handle

Certificates/ approvals

General Product Approval

For use in hazardous locations

Confirmation





<u>KC</u>





For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping







Type Test Certificates/Test Report

Special Test Certificate



Marine / Shipping











Confirmation

other

other

Railway



Vibration and Shock

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-0DA25

Cax online generator

 $\underline{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2011-0DA25.pdf.automation.siemens.com/WW/CAXorder/default.aspx.aut$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-0DA25

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-0DA25&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-0DA25/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-0DA25&objecttype=14&gridview=view1

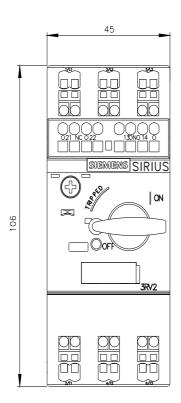

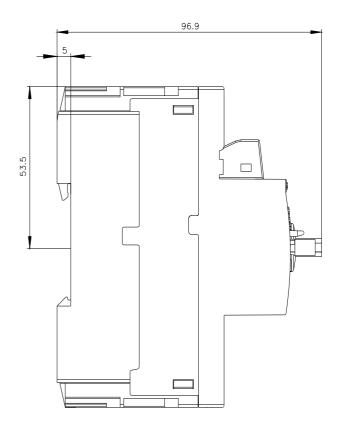

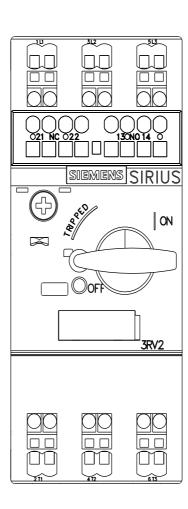

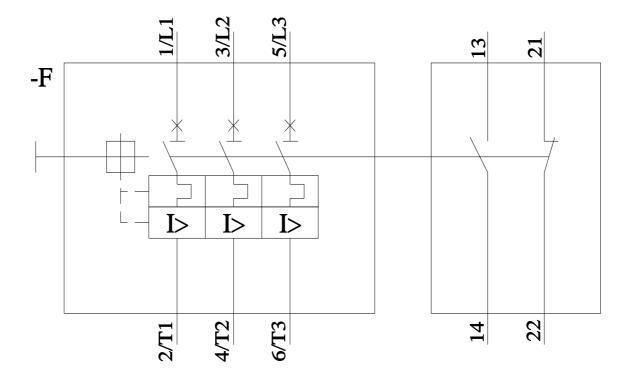

last modified: 11/21/2022 🖸