


HC Low Impedance
series




- Lower impedance than HD series.
- Compliant to the RoHS directive (2002/95/EC).

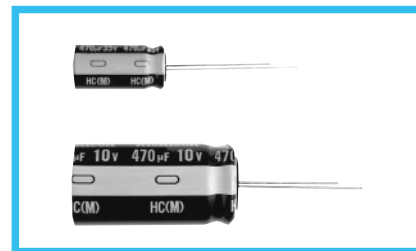

Specifications

Item	Performance Characteristics											
Category Temperature Range	-40 to +105°C											
Rated Voltage Range	6.3 to 35V											
Rated Capacitance Range	4.7 to 1000μF											
Capacitance Tolerance	±20% at 120Hz, 20°C											
Leakage Current	After 2 minutes' application of rated voltage, leakage current is less than 0.01CV or 3 (μA), whichever is greater.											
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25	35	120Hz 20°C					
	tan δ (MAX.)	0.15	0.13	0.12	0.10	0.10						
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	120Hz					
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	2	2	2	2						
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours (1000 hours for φD=4, 5 and 6.3) at 105°C, the peak voltage shall not exceed the rated voltage.											
								Capacitance change		Within ± 20% of the initial capacitance value		
								tan δ		200% or less than the initial specified value		
Marking	Printed with white color letter on black sleeve.											
								Leakage current		Less than or equal to the initial specified value		

Radial Lead Type

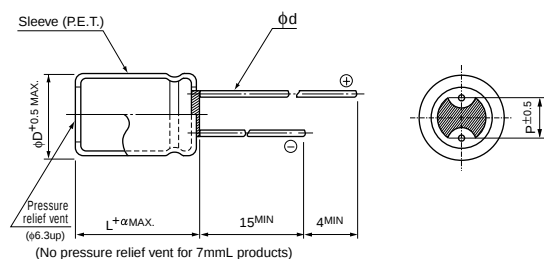


α	(L = 7) 1.0 (L ≥ 11) 1.5
---	-----------------------------

	(mm)				
φD	4	5	6.3	8	10
P	1.5	2.0	2.5	3.5	5.0
φd	0.45	0.45	0.5 (0.45)	0.6	0.6

() : Applied to 7mmL products

Type numbering system (Example : 10V 470µF)

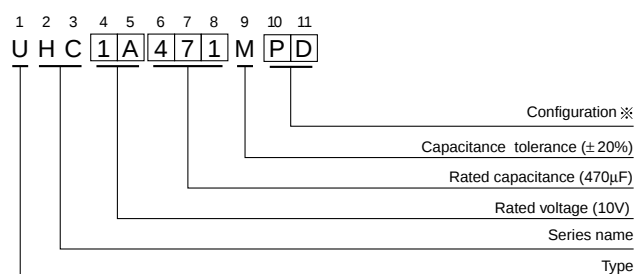

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
4	DD
5	
6.3 (7L)	ED
6.3 (11L)	
8 · 10	PD

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

■ Standard Ratings

V (Code)		6.3 (0J)			10 (1A)			16 (1C)		
Cap. (μF)	Item Code	Case size φ D × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz	Case size φ D × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz	Case size φ D × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz
22	220				4 × 7	0.49	230	5 × 7	0.26	350
33	330	4 × 7	0.48	230	5 × 7	0.26	350	5 × 7	0.26	350
47	470	5 × 7	0.26	350	5 × 7	0.26	350	6.3 × 7	0.15	480
100	101	6.3 × 7	0.15	480	6.3 × 7	0.15	480	6.3 × 11	0.078	640
220	221	6.3 × 11	0.077	640	8 × 11.5	0.044	910	8 × 11.5	0.044	910
330	331	8 × 11.5	0.043	910	8 × 11.5	0.043	910	10 × 12.5	0.030	1230
470	471	8 × 11.5	0.043	910	10 × 12.5	0.030	1230	10 × 16	0.025	1650
1000	102	10 × 16	0.024	1650						

V (Code)		25 (1E)			35 (1V)		
Cap. (μF)	Item Code	Case size φ D × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz	Case size φ D × L (mm)	Impedance (Ω) MAX. 20°C / 100kHz	Rated ripple (mA rms) 105°C / 100kHz
4.7	4R7				4 × 7	0.64	230
10	100	4 × 7	0.52	230	5 × 7	0.33	350
22	220	5 × 7	0.27	350	6.3 × 7	0.17	480
33	330	6.3 × 7	0.16	480	6.3 × 7	0.16	480
47	470	6.3 × 7	0.15	480	6.3 × 11	0.089	640
100	101	6.3 × 11	0.078	640	8 × 11.5	0.048	910
220	221	10 × 12.5	0.031	1230	10 × 16	0.026	1650
330	331	10 × 16	0.026	1650			

● Frequency coefficient of rated ripple current

Cap. (μF)	Frequency	120Hz	1kHz	10kHz	100kHz
4.7 to 33		0.40	0.68	0.90	1.00
47 to 330		0.47	0.75	0.95	1.00
470 to 1000		0.55	0.85	0.98	1.00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

<u>UHC0J101MDD</u>	<u>UHC0J102MPD</u>	<u>UHC1A221MPD</u>	<u>UHC1A330MDD</u>	<u>UHC0J470MDD</u>	<u>UHC0J471MPD</u>
<u>UHC0J221MED</u>	<u>UHC0J330MDD</u>	<u>UHC0J331MPD</u>	<u>UHC1A331MPD</u>	<u>UHC1A470MDD</u>	<u>UHC1C331MPD</u>
<u>UHC1C470MDD</u>	<u>UHC1C471MPD</u>	<u>UHC1V100MDD</u>	<u>UHC1V101MPD</u>	<u>UHC0J471MPR</u>	<u>UHC1A101MDD</u>
<u>UHC1A220MDD</u>	<u>UHC1C221MPD</u>	<u>UHC1C330MDD</u>	<u>UHC1E330MDD</u>	<u>UHC1E331MPD</u>	<u>UHC1E470MDD</u>
<u>UHC1A471MPD</u>	<u>UHC1C101MED</u>	<u>UHC1C220MDD</u>	<u>UHC1E220MDD</u>	<u>UHC1E221MPD</u>	<u>UHC1E221MPD1TD</u>
<u>UHC1V470MED</u>	<u>UHC1V4R7MDD</u>	<u>UHC1E100MDD</u>	<u>UHC1E101MED</u>	<u>UHC1V220MDD</u>	<u>UHC1V221MPD</u>
<u>UHC1V330MDD</u>	<u>UHC1V221MPR</u>	<u>UHC1C331MPR</u>	<u>UHC1E470MED</u>		