




Connectors > Contacts > Connector Contacts

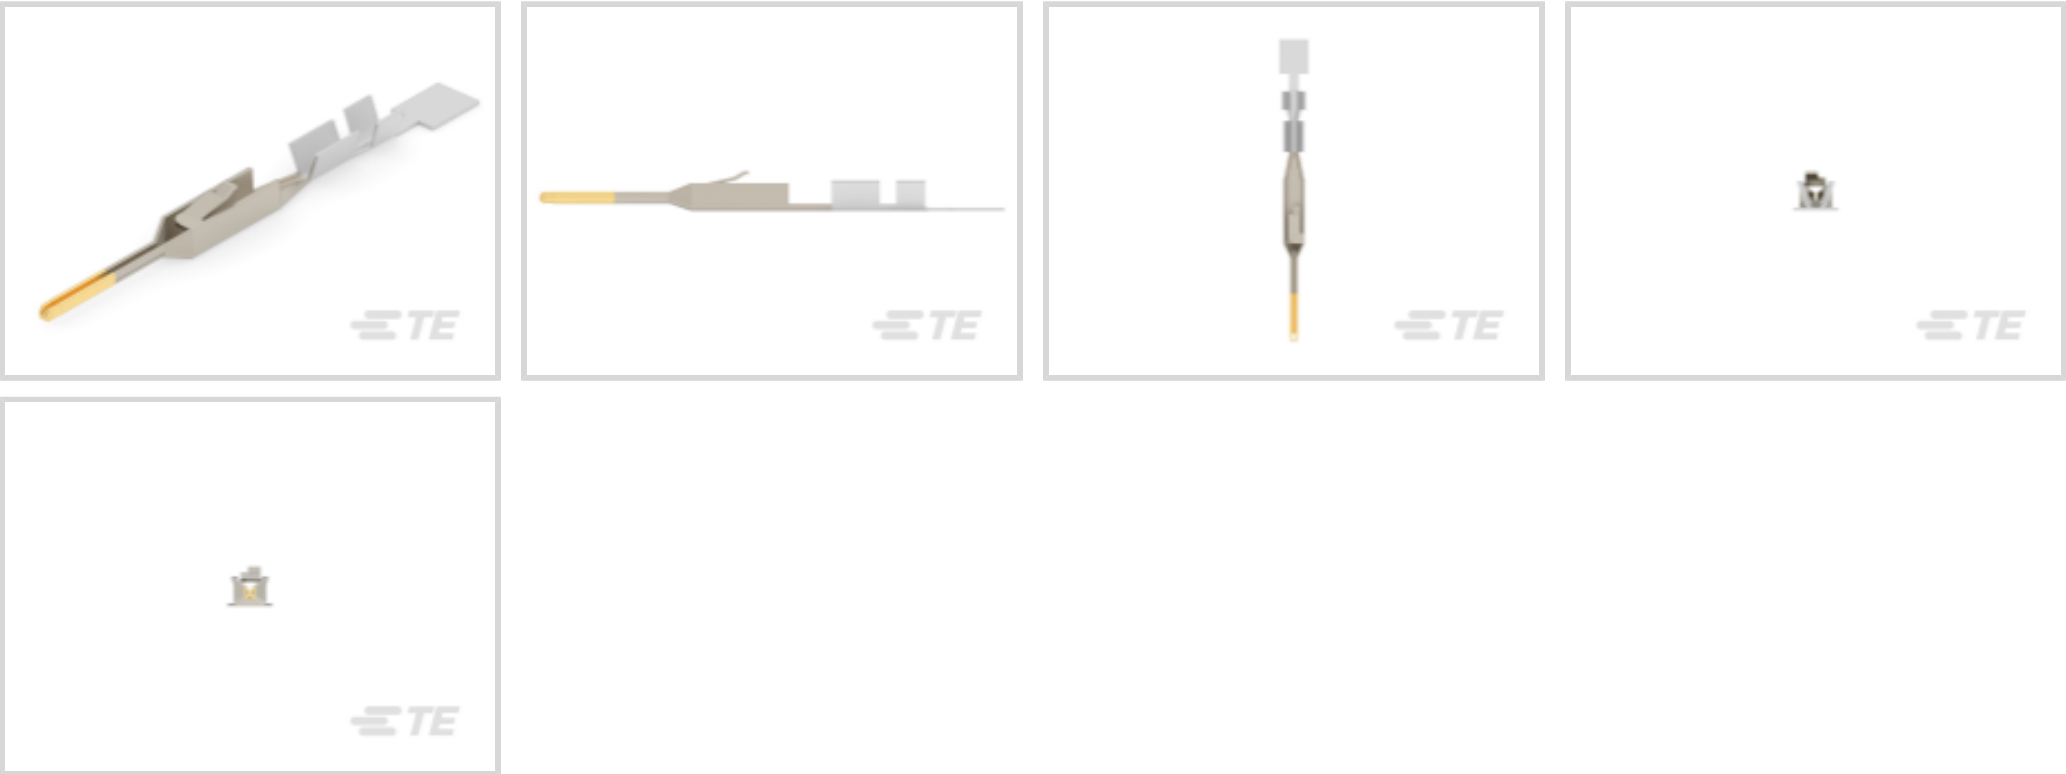

Contact Type: **Pin**
Contact Mating Area Plating Material: **Gold**
Wire Contact Termination Area Plating Material: **Tin**
Operating Voltage: **300 VAC**
Contact Retention Within Housing: **With**

Features

Product Type Features

Discrete Wire Type	Solid or Stranded
Applied Pressure	Standard

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Termination Resistance	12 mΩ
Insulation Resistance	5000 MΩ
Dielectric Withstanding Voltage (Max)	750 V
Operating Voltage	300 VAC

Contact Features

Mating Square Post Dimension	.64 mm[.025 in]
Contact Underplating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Thickness	1.27 – 2.54 μm[50 – 100 μin]
Wire Contact Termination Area Plating Material Finish	Matte



Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Length	20.47 mm[.806 in]
Contact Orientation	Straight
Contact Underplating Material	Nickel
Barrel Type	Open
Contact Type	Pin
Contact Mating Area Plating Material	Gold
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Locking Lance

Dimensions

Compatible Insulation Diameter Range	.91 – 1.37 mm[.035 – .054 in]
Wire Size	254 – 642 CMA

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Approved Standards Products	CSA LR7189, UL E28476
---	-----------------------

Packaging Features

Packaging Quantity	12500
Packaging Method	Reel & Box

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 91531-1
CCII MTE AMPMODU MTE PIN REC 26-22 ASSY

TE Part # 843477-1
TOOL, EXTRACTION RESET

TE Part # 2151236-1
OCEAN_2.0_Applicator-S-042F055O-RSM


TE Part # 2151236-2
OCEAN_2.0_Applicator-S-042F055O-RSA

TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp


TE Part # 7-2151236-7
OCEAN_2.0_SPARE_PART_KIT-042F055O



Also in the Series | AMPMODU MTE

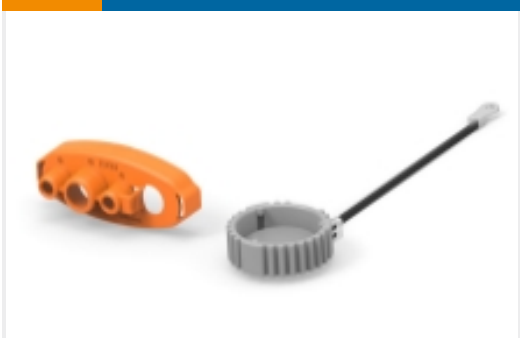

Connector Caps & Covers(20)

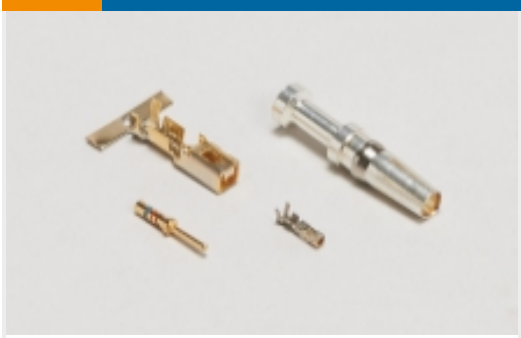


Connector Contacts(32)



Connector Hardware(1)



Insertion & Extraction Tools(1)

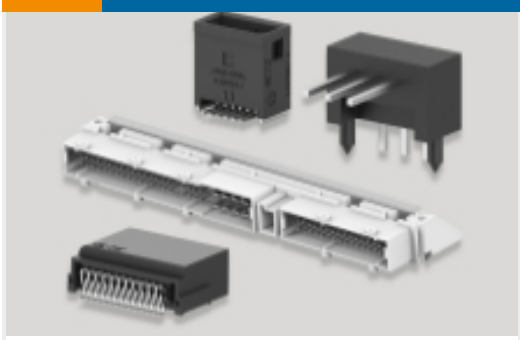

PCB Headers & Receptacles(456)



Wire-to-Board Connector Assemblies
& Housings(364)

Customers Also Bought




TE Part #2-31887-1
PIDG R 22-16 COMM 22-18 MIL 10



TE Part #103653-5
06 MTE SHRD PIN HSG SR LATCH



TE Part #103653-1
02 MTE SHRD PIN HSG SR LATCH

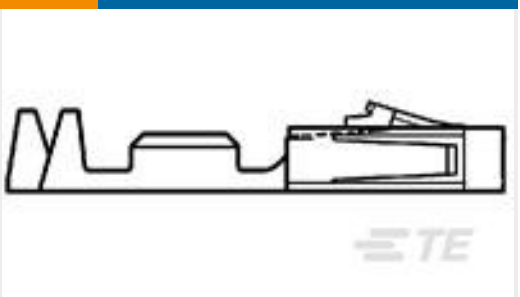


TE Part #1-104480-3
SHORT POINT CONT 30 DPLX
STMPD LF



TE Part #CV4186-000
RNF-100-1/4-BK-SP-SH




TE Part #1-745266-1
D-Sub Connector Contacts: Pin,
Phosphor Bronze, Signal, Size 20

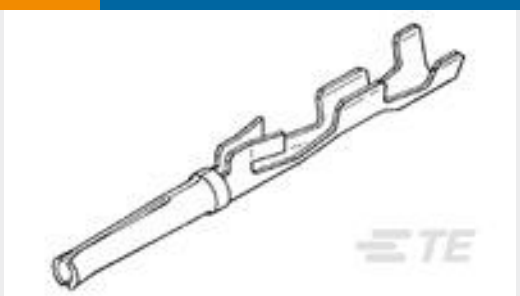

TE Part #1-745269-1
CONT, SOCKET, HDE, #22-26



TE Part #103653-3
04 MTE SHRD PIN HSG SR LATCH

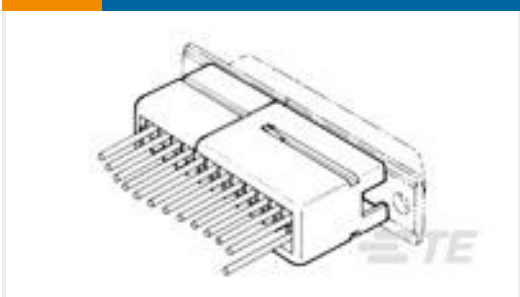

TE Part #745530-4
37 POS COVER KIT



Documents

Product Drawings

MTE PIN 22-26 AWG PLTD

English

CAD Files

Customer View Model

ENG_CVM_CVM_5-104505-6_V.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-104505-6_V.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-104505-6_V.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION5_CONT

English

AMPMODU MTE INTERCONNECT SYSTEM

English

Product Specifications

Application Specification

English