



MR10L-30-LE

GLASS PASSIVATED FAST BRIDGE RECTIFIERS

Voltage

1000 V

Current

3 A

Features

- Glass Passivated Chip Junction
- For surface mounted applications
- Thin profile package for space constrain utilization
- Fast reverse recovery time
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: MSBL Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.008 ounces, 0.236 grams

MSBL



Maximum Ratings and Thermal Characteristics (T_A = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	1000	V
Maximum Rms Voltage	V _{RMS}	700	V
Maximum Dc Blocking Voltage	V _{DC}	1000	V
Maximum Average Forward Current Per Diode	I _{F(AV)}	3	A
Peak Forward Surge Current : 8.3ms Single Half Sine-Wave Superimposed On Rated Load Per Diode	I _{FSM}	90	A
Peak Forward Surge Current : 1ms Single Half Sine-Wave Superimposed On Rated Load Per Diode	I _{FSM}	200	A
Typical Junction Capacitance Measured at 1 MHz And Applied V _R = 4 V	C _J	55	pF
Rating for fusing (t<8.3ms)	I ² t	33.6	A ² s
Typical Thermal Resistance Per Diode	R _{θJA} ⁽¹⁾	135	°C/W
	R _{θJC} ⁽²⁾	20	
Operating Junction Temperature Range	T _J	-55~150	°C
Storage Temperature Range	T _{STG}	-55~150	°C



MR10L-30-LE

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Forward Voltage Per Diode	V_F	$I_F = 1\text{ A}, T_J = 25^\circ\text{C}$	-	0.97	-	V
		$I_F = 3\text{ A}, T_J = 25^\circ\text{C}$	-	1.12	1.30	
		$I_F = 1\text{ A}, T_J = 125^\circ\text{C}$	-	0.77	-	
		$I_F = 3\text{ A}, T_J = 125^\circ\text{C}$	-	0.94	-	
Reverse Current Per Diode	I_R	$V_R = 1000\text{ V}, T_J = 25^\circ\text{C}$	-	-	5	uA
		$V_R = 1000\text{ V}, T_J = 125^\circ\text{C}$	-	7	500	
Reverse Recovery Time	T_{RR}	$I_F = 0.5\text{ A}, I_R = 1\text{ A},$ $I_{RR} = 0.25\text{ A}, T_J = 25^\circ\text{C}$	-	-	250	ns

NOTES:

1. Mounted on a FR4 PCB, single-sided copper, mini pad.
2. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area.



MR10L-30-LE

TYPICAL CHARACTERISTIC CURVES

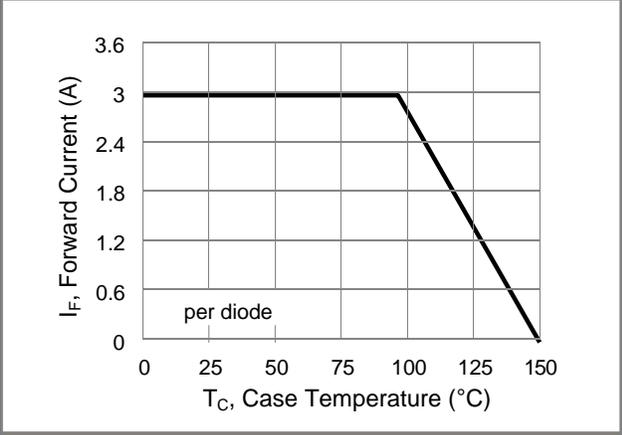


Fig.1 Forward Current Derating Curve

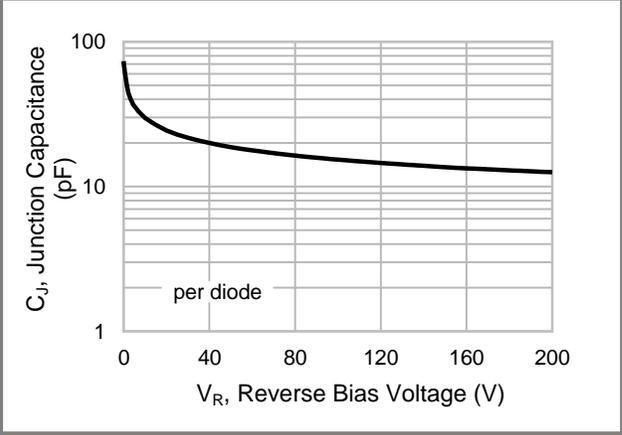


Fig.2 Typical Junction Capacitance

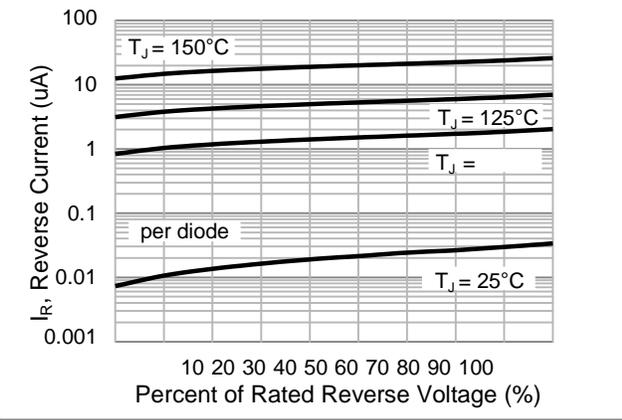


Fig.3 Typical Reverse Characteristics

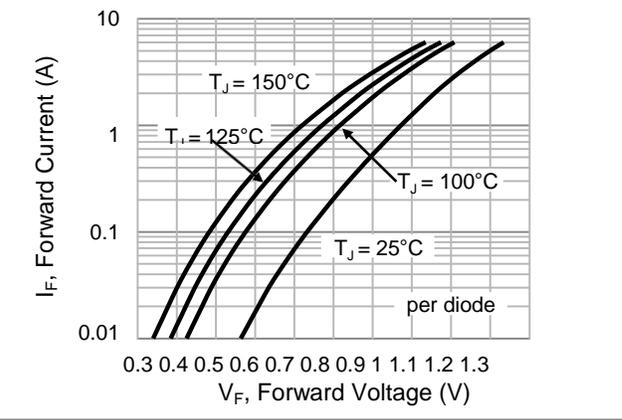


Fig.4 Typical Forward Characteristics





MR10L-30-LE

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
MR10L-30-LE_R2_00001	MSBL	3K / 13" Reel	LMR10L30	Halogen free

Packaging Information & Mounting Pad Layout

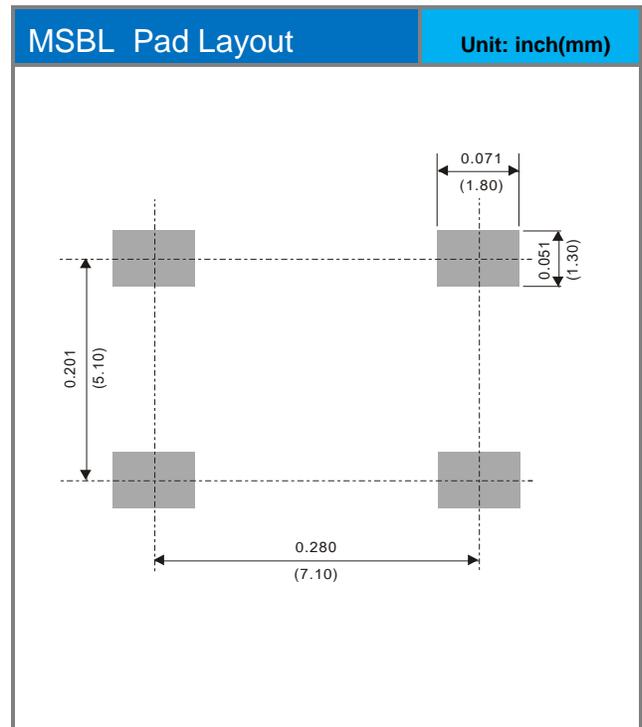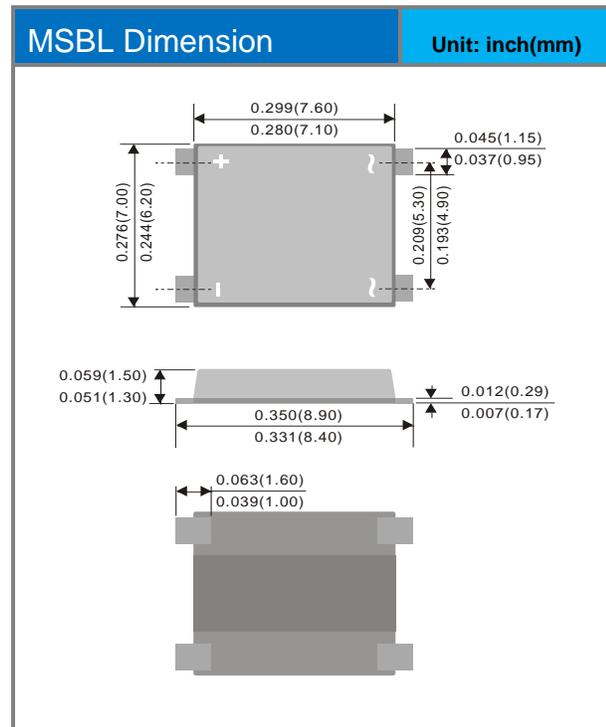



MR10L-30-LE

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.