

RAFIX FS switching element emergency stop PCB, silver, for THT LED, 2 NC



fields of application

- Measurement-control-regulation
- Electrical engineering
- Mechanical and system engineering
- Signalling systems
- Vehicle construction
- Agricultural and forestry machinery
- Construction machinery
- Handheld terminals
- Industrial robots



description

These switching elements have internal plungers and therefore can only be combined with emergency stop and mushroom pushbuttons.

The PCB switching elements are positioned on a PCB shared with other components. These can subsequently be mounted behind the front panel together with the actuators and signal indicators. The switching elements "float" directly underneath the actuators on the PCB behind the front panel and leave plenty of space for other components.

In the center channel of the switching element, there are either light conductors for the use of SMT-LEDs, or 3 mm THT LEDs can be installed for illumination.

PCB mounting depths

- 9.2 mm for RAFIX 22 FS+ and RAFIX 22 FSR
- 15.7 mm for RAFIX 30 FS+:

The NC contacts of these switching elements are forcibly separated according to IEC 60947-5-1.

- PCB contact block for RAFIX 22 FS+, RAFIX FSR and RAFIX 30 FS
- Only suitable for emergency stop and mushroom pushbutton
- Silver contacts (= black housing)
- Mounting: Soldering on printed circuit board
- Version with light guide for SMT LED, without light guide for THT LED
- marking:
 - normally closed contacts = red plungers
 - normally open contacts = green plungers
 - N/C and N/O contacts = yellow plungers

technical data

> general

Disassembly possible	no
Color	black
Operating temperature, min.	-40 °C
Storage temperature, min.	-40 °C
Operating temperature, max.	85 °C
Storage temperature, max.	85 °C
illuminated	Yes
Luminous elements	LED
Lamp socket	THT LED
Soldering	Manual / wave
Solder heat resistance according to standard	DIN EN 60068-2-20
Packaging unit	30 pcs.
net weight	2.2 g
Operating life electrical	1,000,000 (1A / 250V AC) cycles 100,000 (2A / 250V AC) cycles 30,000 (4A / 250V AC) cycles
B10 electrical	1.300.000 (1A / 250V AC) cycles 200.000 (2A / 250V AC) cycles 70.000 (4A / 250V AC) cycles
B10d	140,000 cycles
Environment resistance	IEC 60068-2-14 IEC 60068-2-30 IEC 60068-2-33 IEC 60068-2-78
Shock resistance according to standard IEC 60068-2-27	50 g at 11 ms amplitude semi-sinusoidal
Vibration-resistance according to standard IEC 60068-2-6	5 g at 10 - 500 Hz
MOQ order	30 pcs.
RoHS compliant	Yes
REACH compliant	Yes

> mounting diameters

Mounting depth	9.2 mm
Outside dimension, width	17.75 mm
Outside dimension, height	17.35 mm

> mechanical data

Contact function	2 NC
Contact system	Bridge contact
Contact material	Silver
Fixing	Soldering
Terminal on the rear	THT
Solderability	Yes

> electrical data

Rated insulation voltage	250 V
--------------------------	-------


direct links

> [RAFI eCatalog](#)

Rated surge voltage	2,500 V
Rated voltage, min.	10 V
Rated current, min.	0.01 A
Rated power, min.	0.5 W
Category of use AC-15 / B300	120 V / 3 A (IEC 60947) 240 V / 1,5 A (IEC 60947)
Categories of use	AC-15 / B300 DC-13 / Q300
Category of use DC-13 / Q300	120 V / 0,55 A (IEC 60947) 240 V / 0,27 A (IEC 60947)
Conditional short circuit current	1,000 A

drawings

System drawing

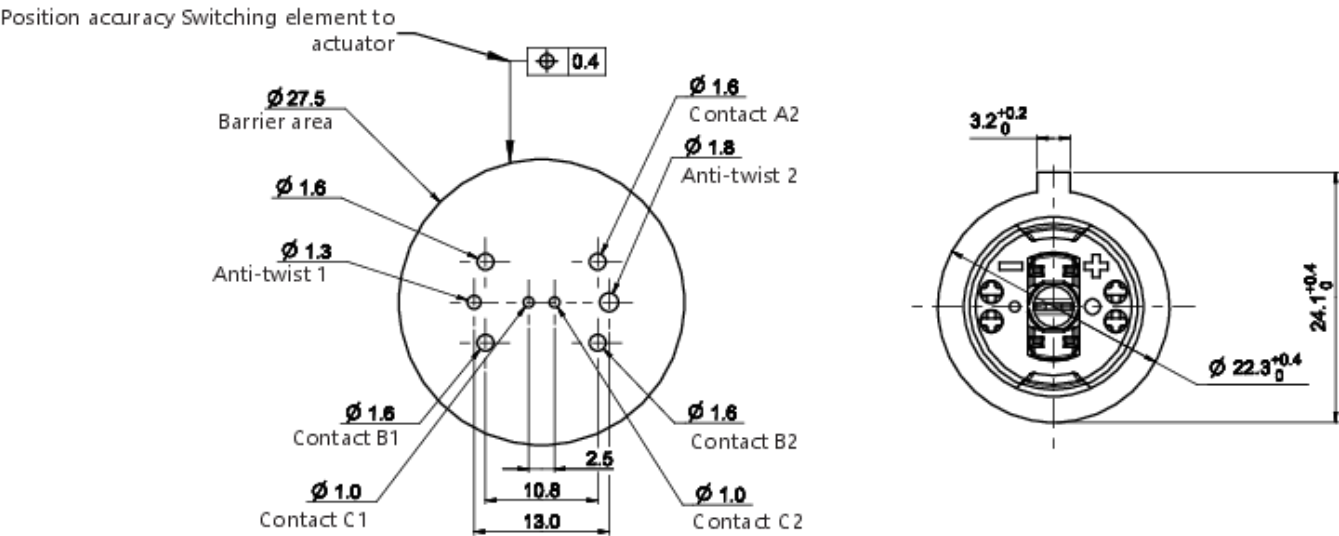

System drawing

Variant	1NO	1NC	2NO	2NC	1NO + 1NC	Plus 1
Contact A1/A2 Connection designation 1x	1NO 13 - 14	-	1NO 13 - 14	1NC 11 - 12	1NO 13 - 14	1NC 11 - 12
Connection designation 2x Contact B1/B2	-	1NC 21 - 22	1NO 23 - 24	1NC 21 - 22	1NC 21 - 22	1NC 21 - 22
Contact C1/C2 Connection designation	LED* X1-X2	LED* X1-X2	LED* X1-X2	LED* X1-X2	LED* X1-X2	1NO 33 - 34
LED assignment when the actuator is illuminated						

The contacts are connected according to the following scheme:

