



DIMENSIONS:	
A	4.050" ± 0.063
B	3.250" ± 0.125
C	3.500" ± 0.063
D	3.500" ± 0.063
E	2.000" ± 0.063
F	2.510" ± 0.063
G	0.187" x 0.300" ± 0.015

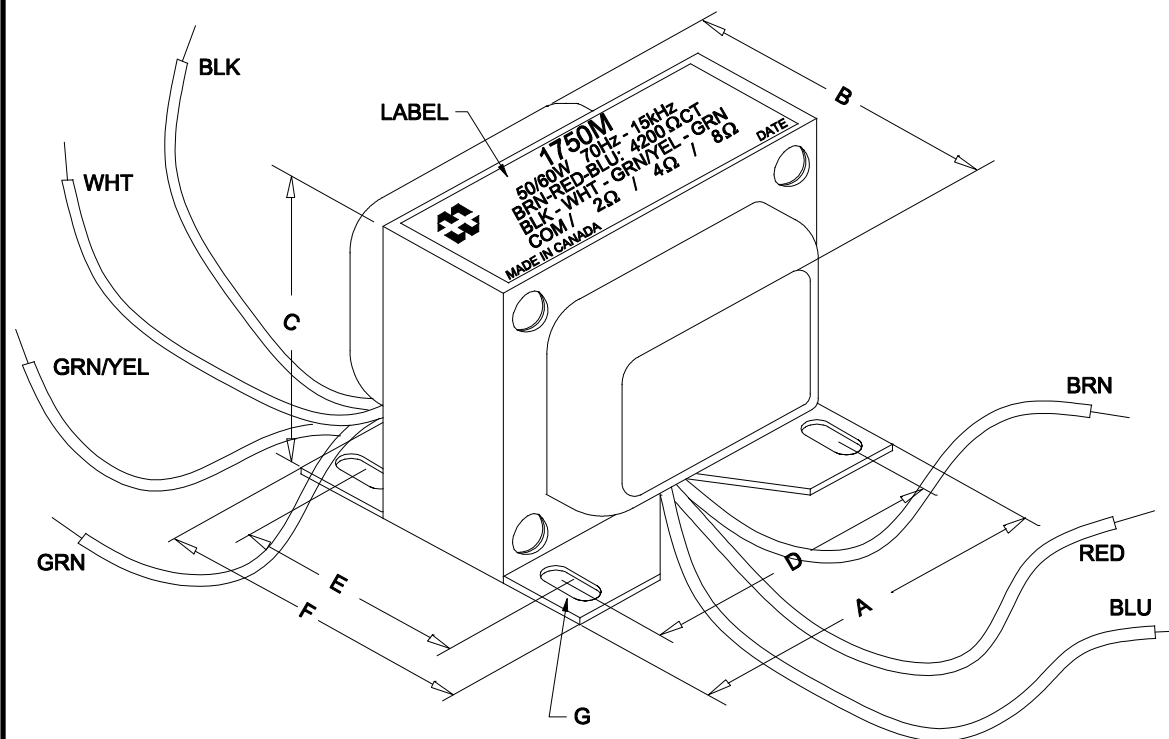

NOTE: ALL LEADS 9.0" OUT MIN.

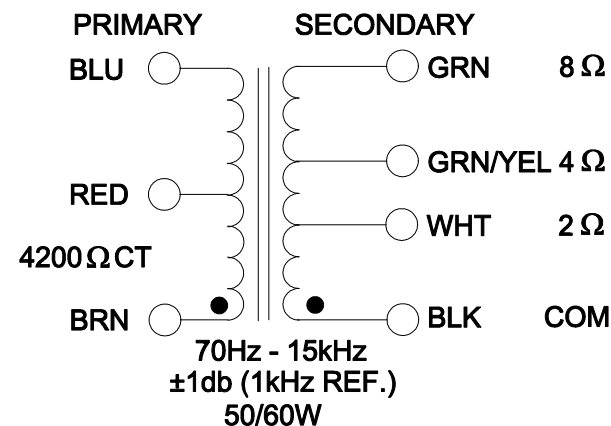

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 240V, 60Hz, BRN - BLU	6mA	Max.
Sec. N.L.V	@ 240V, 60Hz, BRN - BLU		
	BRN - RED = RED - BLU =	120.0V	±2%
	BLK - WHT =	5.234V	±2%
	BLK - GRN/YEL =	7.400V	±2%
	BLK - GRN =	10.47V	±2%
POLARITY	BRN, BLK	ADDITIVE	
DCR	@ 20°C, BRN - BLU =	68.00 Ω	±20%
	@ 20°C, BLK - GRN =	0.160 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™ ELECTRONIC DIVISION			
0	RELEASED.	C.I. 01/23/17	52 RANKIN PLACE,			
1	ADDED 60W RATING.	C.I. 06/18/19	WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: OUTPUT TRANSFORMER	DWG. NO. 1750M
			DATE: 01/23/17	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540