



CY7C0851V/CY7C0851AV

CY7C0852V/CY7C0852AV

CY7C0853V/CY7C0853AV

**FLE<sub>x</sub>36™ 3.3 V,  
32K/64K/128K/256K × 36  
Synchronous Dual-Port RAM**

## Features

- True dual-ported memory cells that allow simultaneous access of the same memory location
- Synchronous pipelined operation
- Organization of 2-Mbit, 4-Mbit, and 9-Mbit devices
- Pipelined output mode allows fast operation
- 0.18-micron Complimentary metal oxide semiconductor (CMOS) for optimum speed and power
- High-speed clock to data access
- 3.3 V low power
  - Active as low as 225 mA (typ)
  - Standby as low as 55 mA (typ)
- Mailbox function for message passing
- Global master reset
- Separate byte enables on both ports
- Commercial and industrial temperature ranges
- IEEE 1149.1-compatible Joint test action group (JTAG) boundary scan
- 172-Ball fine-pitch ball grid array (FBGA) (1 mm pitch) (15 mm × 15 mm)
- 176-Pin thin quad plastic flatpack (TQFP) (24 mm × 24 mm × 1.4 mm)
- Counter wrap around control
  - Internal mask register controls counter wrap-around
  - Counter-interrupt flags to indicate wrap-around
  - Memory block retransmit operation
- Counter readback on address lines
- Mask register readback on address lines
- Dual chip enables on both ports for easy depth expansion

## Functional Description

The FLE<sub>x</sub>36™ family includes 2M, 4M, and 9M pipelined, synchronous, true dual-port static RAMs that are high-speed, low-power 3.3 V CMOS. Two ports are provided, permitting independent, simultaneous access to any location in memory. The result of writing to the same location by more than one port at the same time is undefined. Registers on control, address, and data lines allow for minimal setup and hold time.

During a Read operation, data is registered for decreased cycle time. Each port contains a burst counter on the input address register. After externally loading the counter with the initial address, the counter increments the address internally (more details to follow). The internal Write pulse width is independent of the duration of the R/W input signal. The internal Write pulse is self-timed to allow the shortest possible cycle times.

A HIGH on  $\overline{CE}_0$  or LOW on  $CE_1$  for one clock cycle powers down the internal circuitry to reduce the static power consumption. One cycle with chip enables asserted is required to reactivate the outputs.

Additional features include: readback of burst-counter internal address value on address lines, counter-mask registers to control the counter wrap-around, counter interrupt (CNTINT) flags, readback of mask register value on address lines, retransmit functionality, interrupt flags for message passing, JTAG for boundary scan, and asynchronous Master Reset (MRST).

The CY7C0853V/CY7C0853AV device in this family has limited features. Please see [Address Counter and Mask Register Operations on page 9](#) for details.


For a complete list of related documentation, [click here](#).

## Product Selection Guide

| Density                               | 2-Mbit (64K × 36)           | 4-Mbit (128K × 36)          | 9-Mbit (256K × 36)   |
|---------------------------------------|-----------------------------|-----------------------------|----------------------|
| Part number                           | CY7C0851V/CY7C0851AV        | CY7C0852V/CY7C0852AV        | CY7C0853V/CY7C0853AV |
| Max. speed (MHz)                      | 167                         | 167                         | 133                  |
| Max. access time - clock to data (ns) | 4.0                         | 4.0                         | 4.7                  |
| Typical operating current (mA)        | 225                         | 225                         | 270                  |
| Package                               | 176-pin TQFP, 172-ball FBGA | 176-pin TQFP, 172-ball FBGA | 172-ball FBGA        |

## Logic Block Diagram

The Logic Block Diagram is as follows. [1]

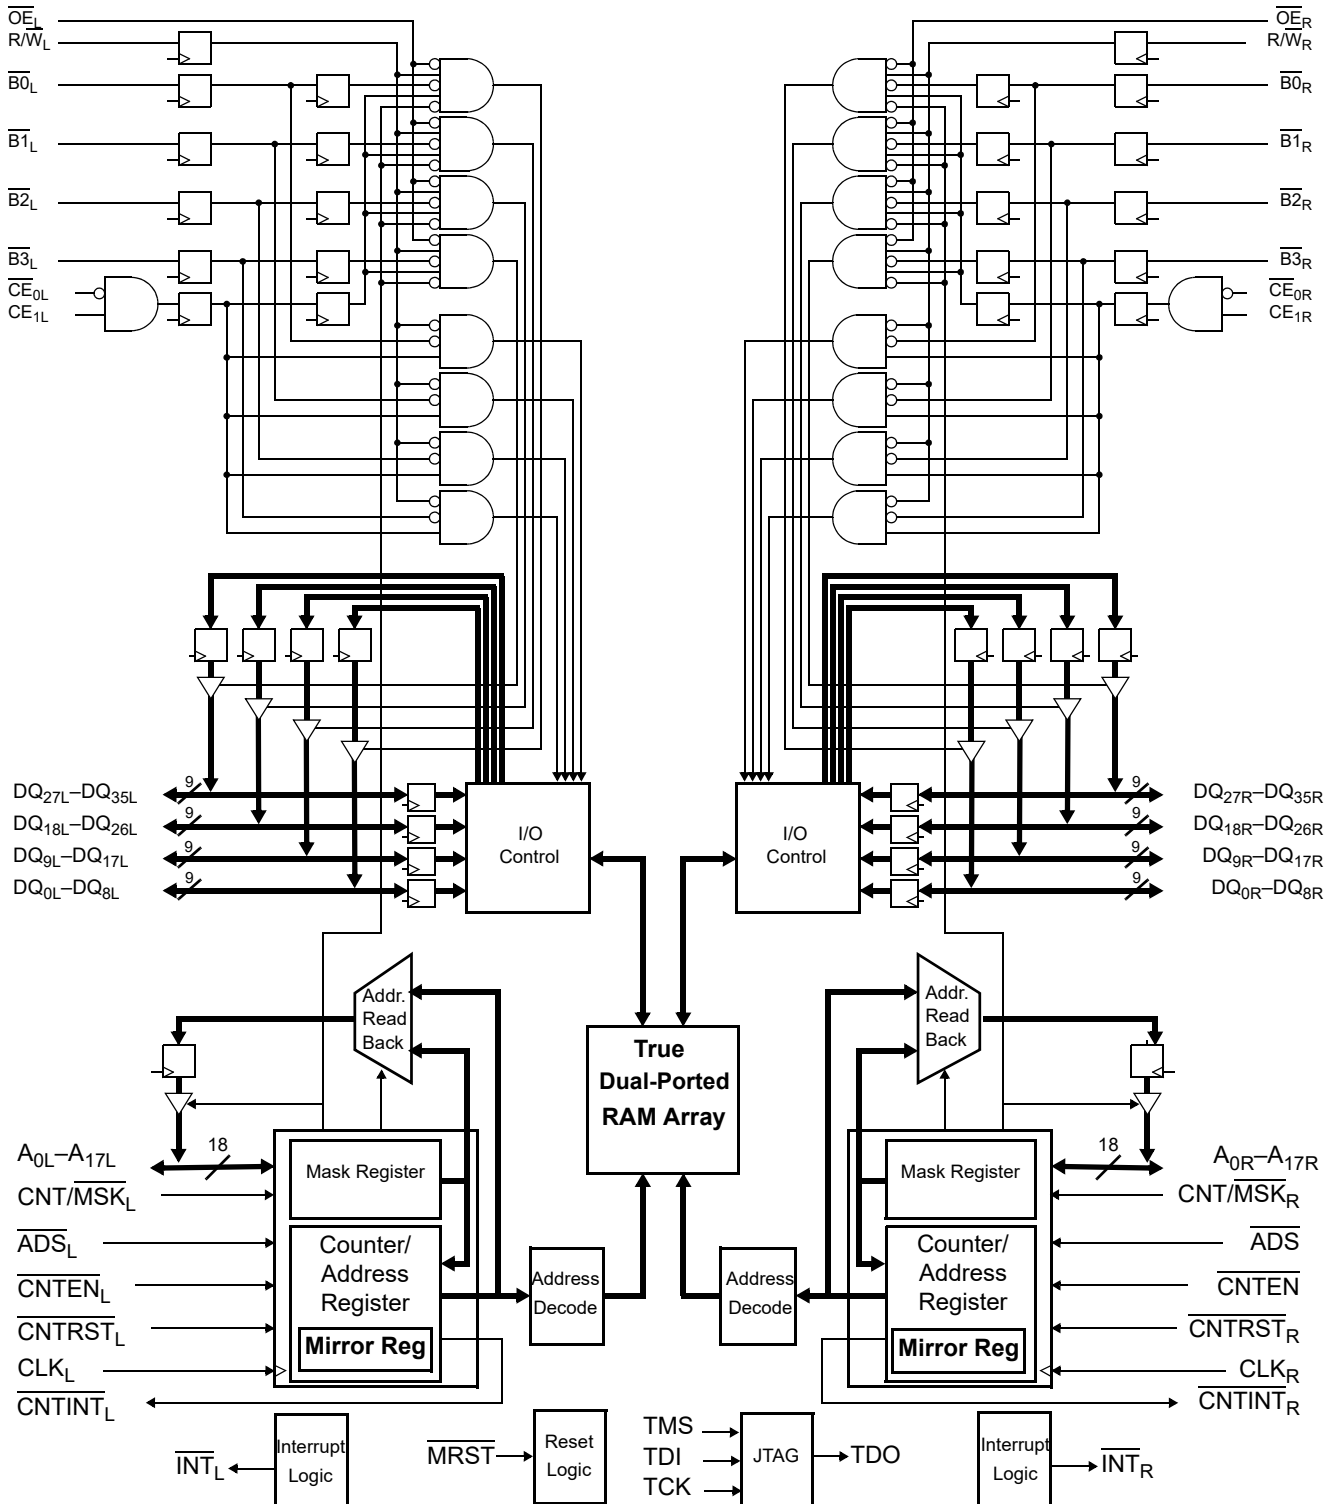

### Note

1. 9M device has 18 address bits, 4M device has 17 address bits, and 2M device has 16 address bits.

## Contents

|                                                      |           |                                                      |           |
|------------------------------------------------------|-----------|------------------------------------------------------|-----------|
| <b>Pin Configurations</b> .....                      | <b>4</b>  | <b>Ordering Information</b> .....                    | <b>30</b> |
| <b>Pin Definitions</b> .....                         | <b>7</b>  | 256K × 36 (9M) 3.3 V Synchronous                     |           |
| <b>Functional Overview</b> .....                     | <b>8</b>  | CY7C0853V/CY7C0853AV Dual-Port SRAM .....            | 30        |
| Master Reset .....                                   | 8         | 128K × 36 (4M) 3.3 V Synchronous                     |           |
| Mailbox Interrupts .....                             | 8         | CY7C0852V/CY7C0852AV Dual-Port SRAM .....            | 30        |
| Read/Write and Enable Operation (Any Port) .....     | 8         | 64K × 36 (2M) 3.3 V Synchronous                      |           |
| Address Counter and Mask Register Operations .....   | 9         | CY7C0851V/CY7C0851AV Dual-Port SRAM .....            | 30        |
| <b>IEEE 1149.1 Serial Boundary Scan (JTAG)</b> ..... | <b>13</b> | Ordering Code Definitions .....                      | 31        |
| Performing a TAP Reset .....                         | 13        | <b>Package Diagrams</b> .....                        | <b>32</b> |
| Performing a Pause/Restart .....                     | 13        | <b>Acronyms</b> .....                                | <b>35</b> |
| <b>Identification Register Definitions</b> .....     | <b>13</b> | <b>Document Conventions</b> .....                    | <b>35</b> |
| <b>Scan Registers Sizes</b> .....                    | <b>13</b> | Units of Measure .....                               | 35        |
| <b>Instruction Identification Codes</b> .....        | <b>13</b> | <b>Document History Page</b> .....                   | <b>36</b> |
| <b>Maximum Ratings</b> .....                         | <b>14</b> | <b>Sales, Solutions, and Legal Information</b> ..... | <b>39</b> |
| <b>Operating Range</b> .....                         | <b>14</b> | Worldwide Sales and Design Support .....             | 39        |
| <b>Electrical Characteristics</b> .....              | <b>14</b> | Products .....                                       | 39        |
| <b>Capacitance</b> .....                             | <b>15</b> | PSoC® Solutions .....                                | 39        |
| <b>AC Test Load and Waveforms</b> .....              | <b>15</b> | Cypress Developer Community .....                    | 39        |
| <b>Switching Characteristics</b> .....               | <b>16</b> | Technical Support .....                              | 39        |
| <b>Switching Waveforms</b> .....                     | <b>18</b> |                                                      |           |
| <b>JTAG Timing</b> .....                             | <b>29</b> |                                                      |           |

## Pin Configurations

Figure 1. 172-ball BGA pinout (Top View)

|   | 1                       | 2                        | 3                           | 4                           | 5                                            | 6     | 7     | 8     | 9     | 10                       | 11                          | 12                          | 13                       | 14                      |
|---|-------------------------|--------------------------|-----------------------------|-----------------------------|----------------------------------------------|-------|-------|-------|-------|--------------------------|-----------------------------|-----------------------------|--------------------------|-------------------------|
| A | DQ32L                   | DQ30L                    | $\overline{\text{CNTINTL}}$ | VSS                         | DQ13L                                        | VDD   | DQ11L | DQ11R | VDD   | DQ13R                    | VSS                         | $\overline{\text{CNTINTR}}$ | DQ30R                    | DQ32R                   |
| B | A0L                     | DQ33L                    | DQ29L                       | DQ17L                       | DQ14L                                        | DQ12L | DQ9L  | DQ9R  | DQ12R | DQ14R                    | DQ17R                       | DQ29R                       | DQ33R                    | A0R                     |
| C | NC                      | A1L                      | DQ31L                       | DQ27L                       | $\overline{\text{INTL}}$                     | DQ15L | DQ10L | DQ10R | DQ15R | $\overline{\text{INTR}}$ | DQ27R                       | DQ31R                       | A1R                      | NC                      |
| D | A2L                     | A3L                      | DQ35L                       | DQ34L                       | DQ28L                                        | DQ16L | VSS   | VSS   | DQ16R | DQ28R                    | DQ34R                       | DQ35R                       | A3R                      | A2R                     |
| E | A4L                     | A5L                      | CE1L                        | $\overline{\text{B0L}}$     | VDD                                          | VSS   |       |       | VDD   | VDD                      | $\overline{\text{B0R}}$     | CE1R                        | A5R                      | A4R                     |
| F | VDD                     | A6L                      | A7L                         | $\overline{\text{B1L}}$     | VDD                                          |       |       |       |       | VSS                      | $\overline{\text{B1R}}$     | A7R                         | A6R                      | VDD                     |
| G | $\overline{\text{OEL}}$ | $\overline{\text{B2L}}$  | $\overline{\text{B3L}}$     | $\overline{\text{CE0L}}$    | CY7C0851V/CY7C0851AV<br>CY7C0852V/CY7C0851AV |       |       |       |       |                          | $\overline{\text{CE0R}}$    | $\overline{\text{B3R}}$     | $\overline{\text{B2R}}$  | $\overline{\text{OER}}$ |
| H | VSS                     | $\overline{\text{R/WL}}$ | A8L                         | CLKL                        |                                              |       |       |       |       |                          | CLKR                        | A8R                         | $\overline{\text{R/WR}}$ | VSS                     |
| J | A9L                     | A10L                     | VSS                         | $\overline{\text{ADSL}}$    | VSS                                          |       |       |       |       | VDD                      | $\overline{\text{ADSR}}$    | $\overline{\text{MRST}}$    | A10R                     | A9R                     |
| K | A11L                    | A12L                     | A15L <sup>[2]</sup>         | $\overline{\text{CNTRSTL}}$ | VDD                                          | VDD   |       |       | VSS   | VDD                      | $\overline{\text{CNTRSTR}}$ | A15R <sup>[2]</sup>         | A12R                     | A11R                    |
| L | $\text{CNT/MSKL}$       | A13L                     | $\overline{\text{CNTENL}}$  | DQ26L                       | DQ25L                                        | DQ19L | VSS   | VSS   | DQ19R | DQ25R                    | DQ26R                       | $\overline{\text{CNTENR}}$  | A13R                     | $\text{CNT/MSKR}$       |
| M | A16L <sup>[2]</sup>     | A14L                     | DQ22L                       | DQ18L                       | TDI                                          | DQ7L  | DQ2L  | DQ2R  | DQ7R  | TCK                      | DQ18R                       | DQ22R                       | A14R                     | A16R <sup>[2]</sup>     |
| N | DQ24L                   | DQ20L                    | DQ8L                        | DQ6L                        | DQ5L                                         | DQ3L  | DQ0L  | DQ0R  | DQ3R  | DQ5R                     | DQ6R                        | DQ8R                        | DQ20R                    | DQ24R                   |
| P | DQ23L                   | DQ21L                    | TDO                         | VSS                         | DQ4L                                         | VDD   | DQ1L  | DQ1R  | VDD   | DQ4R                     | VSS                         | TMS                         | DQ21R                    | DQ23R                   |

**Note**

2. For CY7C0851V/CY7C0851AV, pins M1 and M14 are NC.


## Pin Configurations (continued)

Figure 2. 172-ball BGA pinout (Top View)

|   | 1                       | 2                        | 3                       | 4                       | 5                        | 6     | 7     | 8     | 9     | 10                       | 11                      | 12                       | 13                       | 14                      |
|---|-------------------------|--------------------------|-------------------------|-------------------------|--------------------------|-------|-------|-------|-------|--------------------------|-------------------------|--------------------------|--------------------------|-------------------------|
| A | DQ32L                   | DQ30L                    | NC                      | VSS                     | DQ13L                    | VDD   | DQ11L | DQ11R | VDD   | DQ13R                    | VSS                     | NC                       | DQ30R                    | DQ32R                   |
| B | A0L                     | DQ33L                    | DQ29L                   | DQ17L                   | DQ14L                    | DQ12L | DQ9L  | DQ9R  | DQ12R | DQ14R                    | DQ17R                   | DQ29R                    | DQ33R                    | A0R                     |
| C | A17L                    | A1L                      | DQ31L                   | DQ27L                   | $\overline{\text{INTL}}$ | DQ15L | DQ10L | DQ10R | DQ15R | $\overline{\text{INTR}}$ | DQ27R                   | DQ31R                    | A1R                      | A17R                    |
| D | A2L                     | A3L                      | DQ35L                   | DQ34L                   | DQ28L                    | DQ16L | VSS   | VSS   | DQ16R | DQ28R                    | DQ34R                   | DQ35R                    | A3R                      | A2R                     |
| E | A4L                     | A5L                      | VDD                     | $\overline{\text{B0L}}$ | VDD                      | VSS   |       |       | VDD   | VDD                      | $\overline{\text{B0R}}$ | VDD                      | A5R                      | A4R                     |
| F | VDD                     | A6L                      | A7L                     | $\overline{\text{B1L}}$ | VDD                      |       |       |       |       | VSS                      | $\overline{\text{B1R}}$ | A7R                      | A6R                      | VDD                     |
| G | $\overline{\text{OEL}}$ | $\overline{\text{B2L}}$  | $\overline{\text{B3L}}$ | VSS                     | CY7C0853V/CY7C0853AV     |       |       |       |       |                          | VSS                     | $\overline{\text{B3R}}$  | $\overline{\text{B2R}}$  | $\overline{\text{OER}}$ |
| H | VSS                     | $\overline{\text{R/WL}}$ | A8L                     | CLKL                    |                          |       |       |       |       |                          | CLKR                    | A8R                      | $\overline{\text{R/WR}}$ | VSS                     |
| J | A9L                     | A10L                     | VSS                     | VSS                     | VSS                      |       |       |       |       | VDD                      | VSS                     | $\overline{\text{MRST}}$ | A10R                     | A9R                     |
| K | A11L                    | A12L                     | A15L                    | VDD                     | VDD                      | VDD   |       |       | VSS   | VDD                      | VDD                     | A15R                     | A12R                     | A11R                    |
| L | VDD                     | A13L                     | VSS                     | DQ26L                   | DQ25L                    | DQ19L | VSS   | VSS   | DQ19R | DQ25R                    | DQ26R                   | VSS                      | A13R                     | VDD                     |
| M | A16L                    | A14L                     | DQ22L                   | DQ18L                   | TDI                      | DQ7L  | DQ2L  | DQ2R  | DQ7R  | TCK                      | DQ18R                   | DQ22R                    | A14R                     | A16R                    |
| N | DQ24L                   | DQ20L                    | DQ8L                    | DQ6L                    | DQ5L                     | DQ3L  | DQ0L  | DQ0R  | DQ3R  | DQ5R                     | DQ6R                    | DQ8R                     | DQ20R                    | DQ24R                   |
| P | DQ23L                   | DQ21L                    | TDO                     | VSS                     | DQ4L                     | VDD   | DQ1L  | DQ1R  | VDD   | DQ4R                     | VSS                     | TMS                      | DQ21R                    | DQ23R                   |

## Pin Configurations (continued)

Figure 3. 176-pin TQFP pinout (Top View)

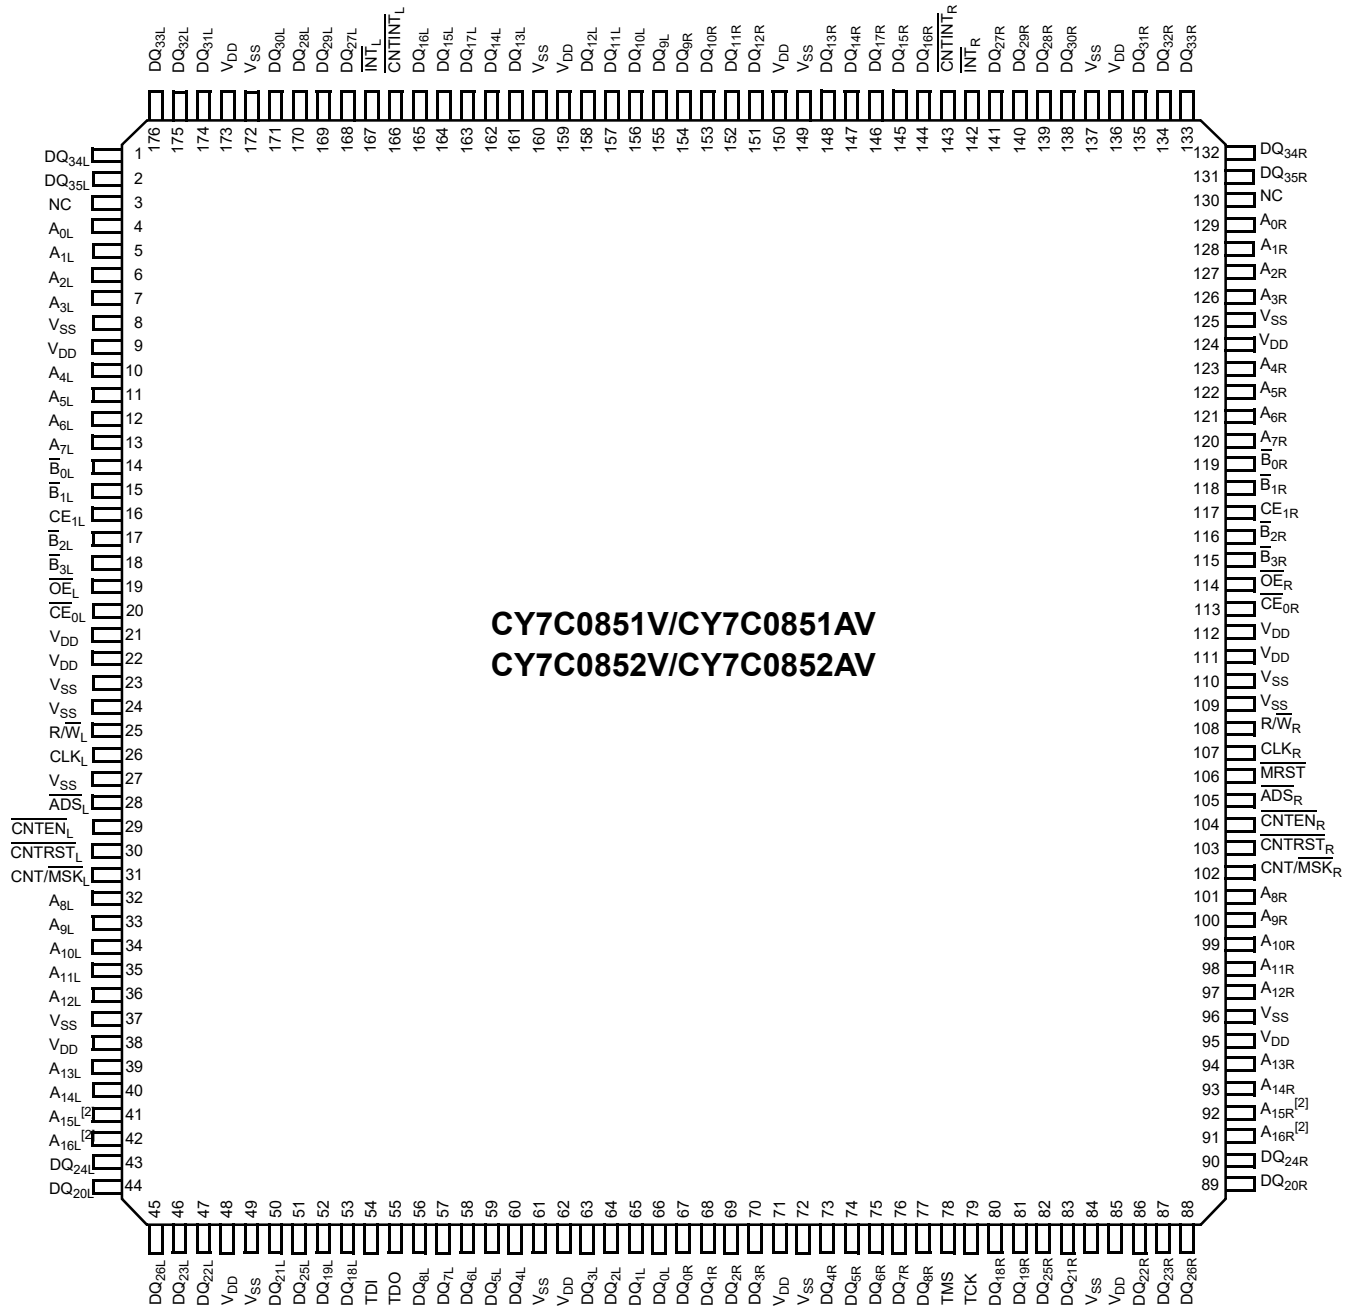

## Pin Definitions

| Left Port                                        | Right Port                                       | Description                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A <sub>0L</sub> –A <sub>17L</sub> <sup>[3]</sup> | A <sub>0R</sub> –A <sub>17R</sub> <sup>[3]</sup> | <b>Address inputs.</b>                                                                                                                                                                                                                                                                                                                                             |
| ADS <sub>L</sub> <sup>[4]</sup>                  | ADS <sub>R</sub> <sup>[4]</sup>                  | <b>Address strobe input.</b> Used as an address qualifier. This signal should be asserted LOW for the part using the externally supplied address on the address pins and for loading this address into the burst address counter.                                                                                                                                  |
| CE <sub>0L</sub> <sup>[4]</sup>                  | CE <sub>0R</sub> <sup>[4]</sup>                  | <b>Active LOW chip enable input.</b>                                                                                                                                                                                                                                                                                                                               |
| CE <sub>1L</sub> <sup>[4]</sup>                  | CE <sub>1R</sub> <sup>[4]</sup>                  | <b>Active HIGH chip enable input.</b>                                                                                                                                                                                                                                                                                                                              |
| CLK <sub>L</sub>                                 | CLK <sub>R</sub>                                 | <b>Clock signal.</b> Maximum clock input rate is f <sub>MAX</sub> .                                                                                                                                                                                                                                                                                                |
| CNTEN <sub>L</sub> <sup>[4]</sup>                | CNTEN <sub>R</sub> <sup>[4]</sup>                | <b>Counter enable input.</b> Asserting this signal LOW increments the burst address counter of its respective port on each rising edge of CLK. The increment is disabled if ADS or CNTRST are asserted LOW.                                                                                                                                                        |
| CNTRST <sub>L</sub> <sup>[4]</sup>               | CNTRST <sub>R</sub> <sup>[4]</sup>               | <b>Counter reset input.</b> Asserting this signal LOW resets to zero the unmasked portion of the burst address counter of its respective port. CNTRST is not disabled by asserting ADS or CNTEN.                                                                                                                                                                   |
| CNT/MSK <sub>L</sub> <sup>[4]</sup>              | CNT/MSK <sub>R</sub> <sup>[4]</sup>              | <b>Address counter mask register enable input.</b> Asserting this signal LOW enables access to the mask register. When tied HIGH, the mask register is not accessible and the address counter operations are enabled based on the status of the counter control signals.                                                                                           |
| DQ <sub>0L</sub> –DQ <sub>35L</sub>              | DQ <sub>0R</sub> –DQ <sub>35R</sub>              | <b>Data bus input/output.</b>                                                                                                                                                                                                                                                                                                                                      |
| OE <sub>L</sub>                                  | OE <sub>R</sub>                                  | <b>Output enable input.</b> This asynchronous signal must be asserted LOW to enable the DQ data pins during Read operations.                                                                                                                                                                                                                                       |
| INT <sub>L</sub>                                 | INT <sub>R</sub>                                 | <b>Mailbox interrupt flag output.</b> The mailbox permits communications between ports. The upper two memory locations can be used for message passing. INT <sub>L</sub> is asserted LOW when the right port writes to the mailbox location of the left port, and vice versa. An interrupt to a port is deasserted HIGH when it reads the contents of its mailbox. |
| CNTINT <sub>L</sub> <sup>[4]</sup>               | CNTINT <sub>R</sub> <sup>[4]</sup>               | <b>Counter interrupt output.</b> This pin is asserted LOW when the unmasked portion of the counter is incremented to all “1s.”                                                                                                                                                                                                                                     |
| R/W <sub>L</sub>                                 | R/W <sub>R</sub>                                 | <b>Read/Write enable input.</b> Assert this pin LOW to write to, or HIGH to Read from the dual port memory array.                                                                                                                                                                                                                                                  |
| B <sub>0L</sub> –B <sub>3L</sub>                 | B <sub>0R</sub> –B <sub>3R</sub>                 | <b>Byte select inputs.</b> Asserting these signals enables Read and Write operations to the corresponding bytes of the memory array.                                                                                                                                                                                                                               |
| MRST                                             |                                                  | <b>Master reset input.</b> MRST is an asynchronous input signal and affects both ports. Asserting MRST LOW performs all of the reset functions as described in the text. A MRST operation is required at power up.                                                                                                                                                 |
| TMS                                              |                                                  | <b>JTAG test mode select input.</b> It controls the advance of JTAG TAP state machine. State machine transitions occur on the rising edge of TCK.                                                                                                                                                                                                                  |
| TDI                                              |                                                  | <b>JTAG test data input.</b> Data on the TDI input is shifted serially into selected registers.                                                                                                                                                                                                                                                                    |
| TCK                                              |                                                  | <b>JTAG test clock input.</b>                                                                                                                                                                                                                                                                                                                                      |
| TDO                                              |                                                  | <b>JTAG test data output.</b> TDO transitions occur on the falling edge of TCK. TDO is normally three-stated except when captured data is shifted out of the JTAG TAP.                                                                                                                                                                                             |
| V <sub>SS</sub>                                  |                                                  | <b>Ground inputs.</b>                                                                                                                                                                                                                                                                                                                                              |
| V <sub>DD</sub>                                  |                                                  | <b>Power inputs.</b>                                                                                                                                                                                                                                                                                                                                               |

### Notes

3. 9M device has 18 address bits, 4M device has 17 address bits, and 2M device has 16 address bits.
4. These pins are not available for CY7C0853V/CY7C0853AV device.

## Functional Overview

### Master Reset

The FLE<sub>x</sub>36 family devices undergo a complete reset by taking its MRST input LOW. The MRST input can switch asynchronously to the clocks. The MRST initializes the internal burst counters to zero, and the counter mask registers to all ones (completely unmasked). The MRST also forces the Mailbox Interrupt (INT) flags and the Counter Interrupt (CNTINT) flags HIGH. The MRST must be performed on the FLE<sub>x</sub>36 family devices after power up.

### Mailbox Interrupts

The upper two memory locations may be used for message passing and permit communications between ports. Table 1 shows the interrupt operation for both ports of CY7C853V/CY7C0853AV. The highest memory location, 3FFFF

is the mailbox for the right port and 3FFFE is the mailbox for the left port. Table 1 shows that in order to set the INT<sub>R</sub> flag, a Write operation by the left port to address 3FFFF asserts INT<sub>R</sub> LOW. At least one byte has to be active for a Write to generate an interrupt. A valid Read of the 3FFFF location by the right port resets INT<sub>R</sub> HIGH. At least one byte has to be active in order for a Read to reset the interrupt. When one port Writes to the other port's mailbox, the INT of the port that the mailbox belongs to is asserted LOW. The INT is reset when the owner (port) of the mailbox Reads the contents of the mailbox. The interrupt flag is set in a flow-thru mode (that is it follows the clock edge of the writing port). Also, the flag is reset in a flow-thru mode (that is it follows the clock edge of the reading port).

Each port can read the other port's mailbox without resetting the interrupt. And each port can write to its own mailbox without setting the interrupt. If an application does not require message passing, INT pins should be left open.

**Table 1. Interrupt Operation Example** [5, 6, 7, 8, 9]

| Function                          | Left Port        |                 |                     |                  | Right Port       |                 |                     |                  |
|-----------------------------------|------------------|-----------------|---------------------|------------------|------------------|-----------------|---------------------|------------------|
|                                   | R/W <sub>L</sub> | CE <sub>L</sub> | A <sub>0L-17L</sub> | INT <sub>L</sub> | R/W <sub>R</sub> | CE <sub>R</sub> | A <sub>0R-17R</sub> | INT <sub>R</sub> |
| Set right INT <sub>R</sub> flag   | L                | L               | 3FFFF               | X                | X                | X               | X                   | L                |
| Reset right INT <sub>R</sub> flag | X                | X               | X                   | X                | H                | L               | 3FFFF               | H                |
| Set left INT <sub>L</sub> flag    | X                | X               | X                   | L                | L                | L               | 3FFFE               | X                |
| Reset left INT <sub>L</sub> flag  | H                | L               | 3FFFE               | H                | X                | X               | X                   | X                |

### Read/Write and Enable Operation (Any Port)

**Table 2. Read/Write and Enable Operation (Any Port)** [12, 13, 10, 11]

| Inputs |                                                                                     |                 |                 |     | Outputs                           | Operation        |
|--------|-------------------------------------------------------------------------------------|-----------------|-----------------|-----|-----------------------------------|------------------|
| OE     | CLK                                                                                 | CE <sub>0</sub> | CE <sub>1</sub> | R/W | DQ <sub>0</sub> -DQ <sub>35</sub> |                  |
| X      |  | H               | X               | X   | High Z                            | Deselected       |
| X      |  | X               | L               | X   | High Z                            | Deselected       |
| X      |  | L               | H               | L   | D <sub>IN</sub>                   | Write            |
| L      |  | L               | H               | H   | D <sub>OUT</sub>                  | Read             |
| H      | X                                                                                   | L               | H               | X   | High Z                            | Outputs disabled |

#### Notes

- 9 M device has 18 address bits, 4M device has 17 address bits, and 2M device has 16 address bits.
- CE is internal signal. CE = LOW if CE<sub>0</sub> = LOW and CE<sub>1</sub> = HIGH. For a single Read operation, CE only needs to be asserted once at the rising edge of the CLK and can be deasserted after that. Data is out after the following CLK edge and is three-stated after the next CLK edge.
- OE is "Don't Care" for mailbox operation.
- At least one of B<sub>0</sub>, B<sub>1</sub>, B<sub>2</sub>, or B<sub>3</sub> must be LOW.
- A16x is a NC for CY7C0851V/CY7C0851AV, therefore the Interrupt Addresses are FFFF and FFEE.
- OE is an asynchronous input signal.
- When CE changes state, deselection and Read happen after one cycle of latency.
- 9 M device has 18 address bits, 4M device has 17 address bits, and 2M device has 16 address bits.
- "X" = "Don't Care", "H" = HIGH, "L" = LOW.



### Address Counter and Mask Register Operations

This section<sup>[14]</sup> describes the features only apply to CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV devices, but not to the CY7C0853V/CY7C0853AV device. Each port of these devices has a programmable burst address counter. The burst counter contains three registers: a counter register, a mask register, and a mirror register.

The **counter register** contains the address used to access the RAM array. It is changed only by the Counter Load, Increment, Counter Reset, and by master reset (MRST) operations.

The **mask register** value affects the Increment and Counter Reset operations by preventing the corresponding bits of the counter register from changing. It also affects the counter interrupt output (CNTINT). The mask register is changed only by the Mask Load and Mask Reset operations, and by the MRST. The mask register defines the counting range of the counter register. It divides the counter register into two regions: zero or more "0s" in the most significant bits define the masked region, one or more "1s" in the least significant bits define the unmasked region. Bit 0 may also be "0", masking the least significant counter bit and causing the counter to increment by two instead of one.

The **mirror register** is used to reload the counter register on increment operations (see "retransmit", below). It always contains the value last loaded into the counter register, and is changed only by the Counter Load operation, and by the MRST.

Table 3 summarizes the operation of these registers and the required input control signals. The MRST control signal is asynchronous. All the other control signals in Table 3 (CNT/MSK, CNTRST, ADS, CNTEN) are synchronized to the port's CLK. All these counter and mask operations are independent of the port's chip enable inputs (CE0 and CE1).

Counter enable (CNTEN) inputs are provided to stall the operation of the address input and utilize the internal address generated by the internal counter for fast, interleaved memory applications. A port's burst counter is loaded when the port's address strobe (ADS) and CNTEN signals are LOW. When the port's CNTEN is asserted and the ADS is deasserted, the address counter increments on each LOW to HIGH transition of that port's clock signal. This will Read/Write one word from/into each successive address location until CNTEN is deasserted. The counter can address the entire memory array, and loops back to the start. Counter reset (CNTRST) is used to reset the unmasked portion of the burst counter to 0s. A counter-mask register is used to control the counter wrap.

**Table 3. Address Counter and Counter-Mask Register Control Operation (Any Port)** <sup>[15, 16]</sup>

| CLK                                                                                 | MRST | CNT/MSK | CNTRST | ADS | CNTEN | Operation         | Description                                                          |
|-------------------------------------------------------------------------------------|------|---------|--------|-----|-------|-------------------|----------------------------------------------------------------------|
| X                                                                                   | L    | X       | X      | X   | X     | Master reset      | Reset address counter to all 0s and mask register to all 1s.         |
|  | H    | H       | L      | X   | X     | Counter reset     | Reset counter unmasked portion to all 0s.                            |
|  | H    | H       | H      | L   | L     | Counter load      | Load counter with external address value presented on address lines. |
|  | H    | H       | H      | L   | H     | Counter readback  | Read out counter internal value on address lines.                    |
|  | H    | H       | H      | H   | L     | Counter increment | Internally increment address counter value.                          |
|  | H    | H       | H      | H   | H     | Counter hold      | Constantly hold the address value for multiple clock cycles.         |
|  | H    | L       | L      | X   | X     | Mask reset        | Reset mask register to all 1s.                                       |
|  | H    | L       | H      | L   | L     | Mask load         | Load mask register with value presented on the address lines.        |
|  | H    | L       | H      | L   | H     | Mask readback     | Read out mask register value on address lines.                       |
|  | H    | L       | H      | H   | X     | Reserved          | Operation undefined                                                  |

#### Notes

14. This section describes the CY7C0852V/CY7C0852AV, which have 17 address bits and a maximum address value of 1FFFF. The CY7C0851V/CY7C0851AV has 16 address bits, register lengths of 16 bits, and a maximum address value of FFFF.
15. "X" = "Don't Care," "H" = HIGH, "L" = LOW.
16. Counter operation and mask register operation is independent of chip enables.

### Counter Reset Operation

All unmasked bits of the counter are reset to "0." All masked bits remain unchanged. The mirror register is loaded with the value of the burst counter. A Mask Reset followed by a Counter Reset will reset the counter and mirror registers to 00000, as will master reset (**MRST**).

### Counter Load Operation

The address counter and mirror registers are both loaded with the address value presented at the address lines.

### Counter Readback Operation

The internal value of the counter register can be read out on the address lines. Readback is pipelined; the address is valid  $t_{CA2}$  after the next rising edge of the port's clock. If address readback occurs while the port is enabled (**CE0** LOW and **CE1** HIGH), the data lines (**DQs**) is three-stated. [Figure 4 on page 11](#) shows a block diagram of the operation.

### Counter Increment Operation

Once the address counter register is initially loaded with an external address, the counter can internally increment the address value, potentially addressing the entire memory array. Only the unmasked bits of the counter register are incremented. The corresponding bit in the mask register must be a "1" for a counter bit to change. The counter register is incremented by 1 if the least significant bit is unmasked, and by 2 if it is masked. If all unmasked bits are "1", the next increment wraps the counter back to the initially loaded value. If an Increment results in all the unmasked bits of the counter being "1s", a counter interrupt flag (**CNTINT**) is asserted. The next Increment returns the counter register to its initial value, which was stored in the mirror register. The counter address can instead be forced to loop to 00000 by externally connecting **CNTINT** to **CNTRST**.<sup>[17]</sup> An increment that results in one or more of the unmasked bits of the counter being "0" deasserts the counter interrupt flag. The example in [Figure 5 on page 12](#) shows the counter mask register loaded with a mask value of 0003Fh unmasking the first 6 bits with bit "0" as the LSB and bit "16" as the MSB. The maximum value the mask register can be loaded with is 1FFFFh. Setting the mask register to this value allows the counter to access the entire memory space. The address counter is then loaded with an initial value of 8h. The base address bits (in this case, the 6th address through the 16th address) are loaded with an address value but do not increment once the counter is configured for increment operation. The counter address starts at address 8h. The counter increments its internal address value till it reaches the mask register value of 3Fh. The counter wraps around the memory block to location 8h at the next count. **CNTINT** is issued when the counter reaches its maximum value.

### Counter Hold Operation

The value of all three registers can be constantly maintained unchanged for an unlimited number of clock cycles. Such operation is useful in applications where wait states are needed, or when address is available a few cycles ahead of data in a shared bus interface.

### Counter Interrupt

The counter interrupt (**CNTINT**) is asserted LOW when an increment operation results in the unmasked portion of the counter register being all "1s." It is deasserted HIGH when an Increment operation results in any other value. It is also de-asserted by Counter Reset, Counter Load, Mask Reset and Mask Load operations, and by **MRST**.

### Retransmit

Retransmit is a feature that allows the Read of a block of memory more than once without the need to reload the initial address. This eliminates the need for external logic to store and route data. It also reduces the complexity of the system design and saves board space. An internal "mirror register" is used to store the initially loaded address counter value. When the counter unmasked portion reaches its maximum value set by the mask register, it wraps back to the initial value stored in this "mirror register". If the counter is continuously configured in increment mode, it increments again to its maximum value and wraps back to the value initially stored into the "mirror register". Thus, the repeated access of the same data is allowed without the need for any external logic.

### Mask Reset Operation

The mask register is reset to all "1s", which unmask every bit of the counter. Master reset (**MRST**) also resets the mask register to all "1s".

### Mask Load Operation

The mask register is loaded with the address value presented at the address lines. Not all values permit correct increment operations. Permitted values are of the form  $2^n - 1$  or  $2^n - 2$ . From the most significant bit to the least significant bit, permitted values have zero or more "0s", one or more "1s", or one "0". Thus 1FFFF, 003FE, and 00001 are permitted values, but 1F0FF, 003FC, and 00000 are not.

### Mask Readback Operation


The internal value of the mask register can be read out on the address lines. Readback is pipelined; the address is valid  $t_{CM2}$  after the next rising edge of the port's clock. If mask readback occurs while the port is enabled (**CE0** LOW and **CE1** HIGH), the data lines (**DQs**) is three-stated. [Figure 4 on page 11](#) shows a block diagram of the operation.

### Counting by Two


When the least significant bit of the mask register is "0," the counter increments by two. This may be used to connect the CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV as a 72-bit single port SRAM in which the counter of one port counts even addresses and the counter of the other port counts odd addresses. This even-odd address scheme stores one half of the 72-bit data in even memory locations, and the other half in odd memory locations.

#### Note

17. **CNTINT** and **CNTRST** specs are guaranteed by design to operate properly at speed grade operating frequency when tied together.

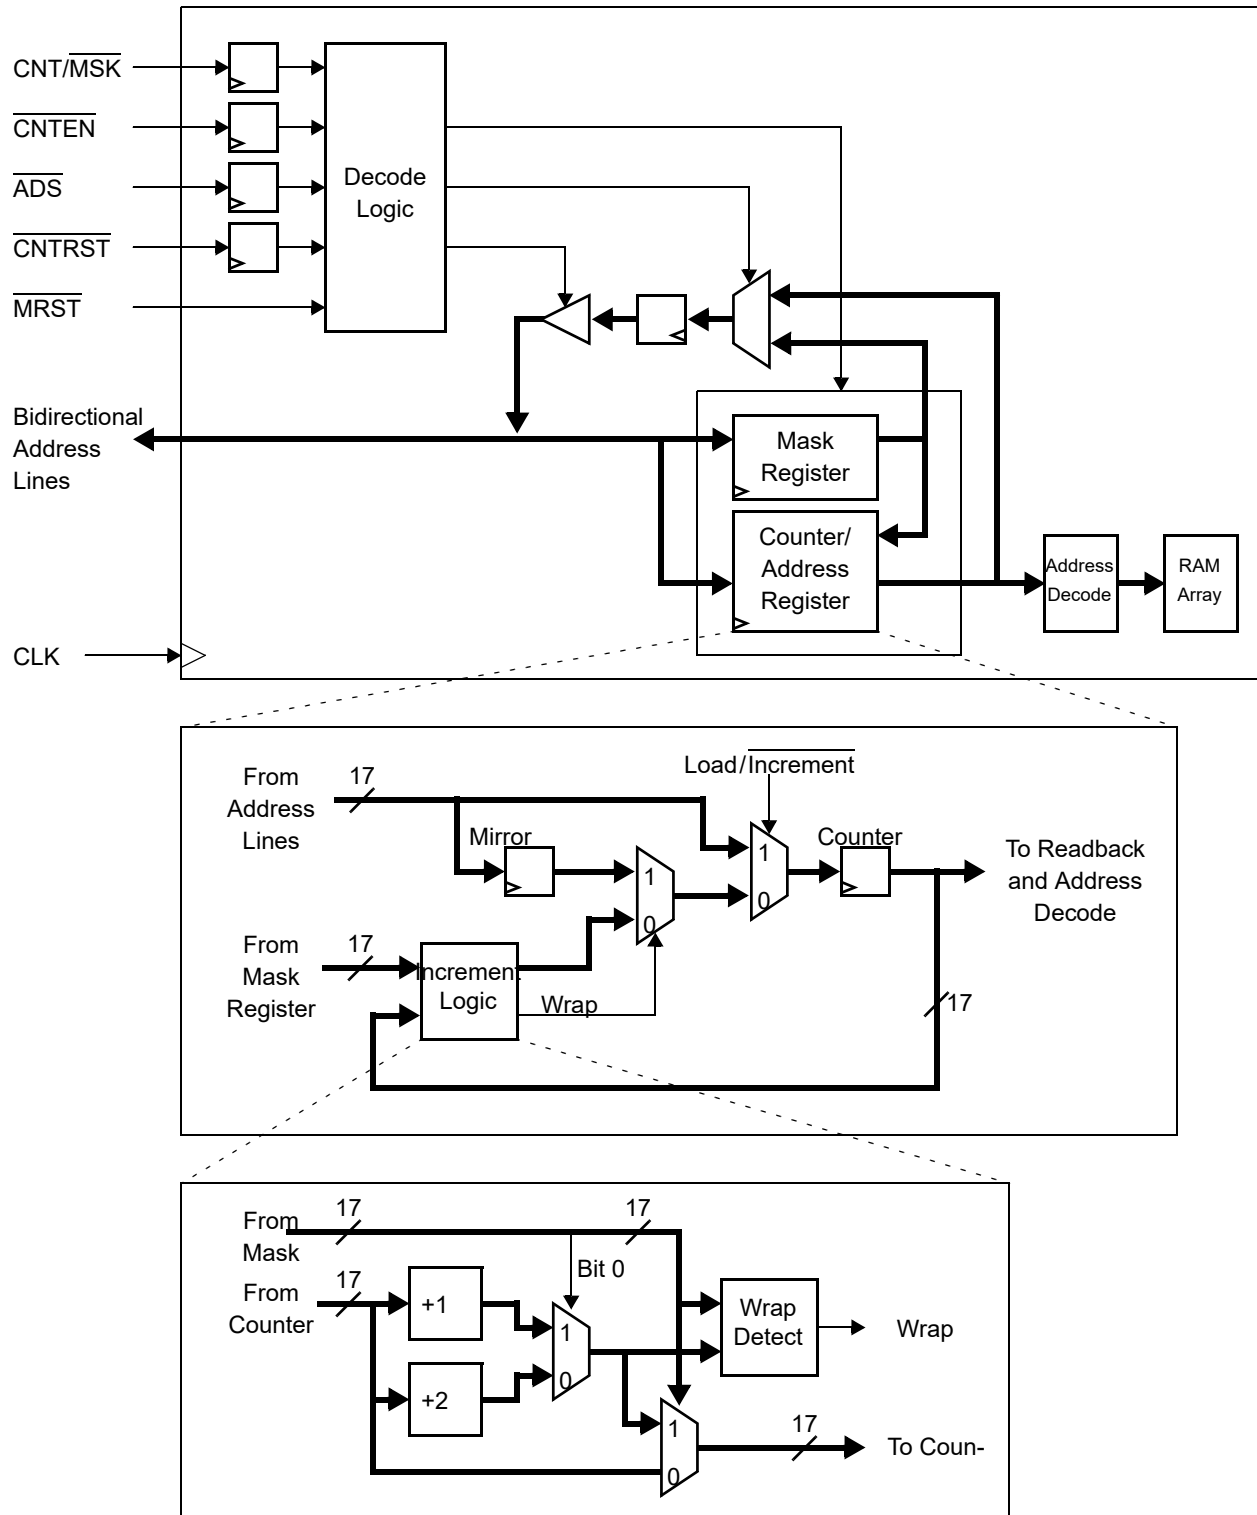**Figure 4. Counter, Mask, and Mirror Logic Block Diagram** <sup>[18]</sup>

**Note**

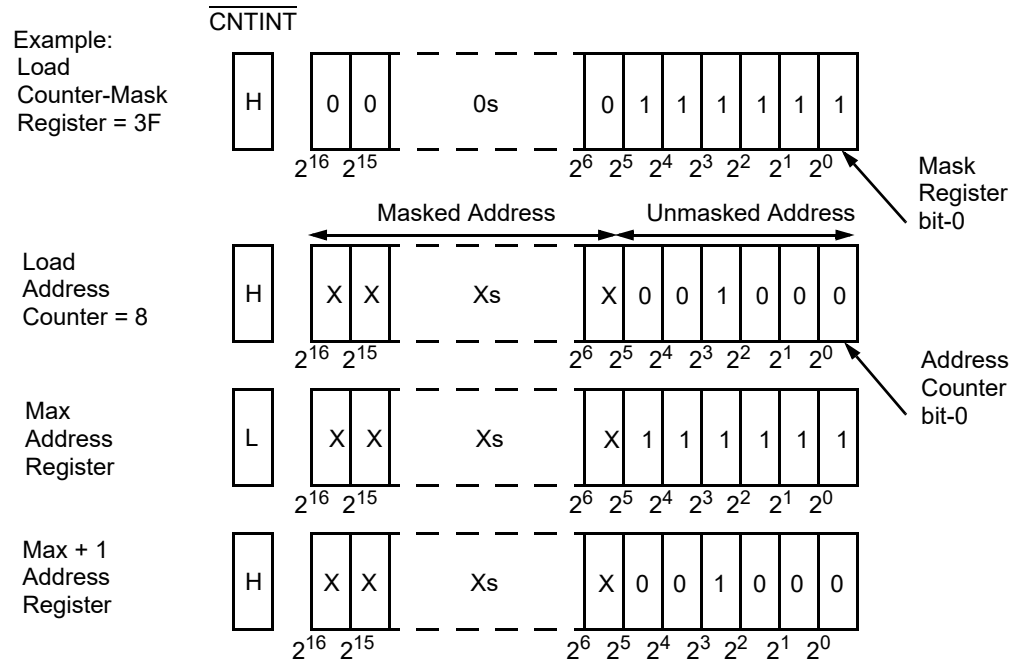18. 9M device has 18 address bits, 4M device has 17 address bits, and 2M device has 16 address bits.

**Figure 5. Programmable Counter-Mask Register Operation** <sup>[19, 20]</sup>

**Notes**

19. 9M device has 18 address bits, 4M device has 17 address bits, and 2M device has 16 address bits.  
 20. The "X" in this diagram represents the counter upper bits.

## IEEE 1149.1 Serial Boundary Scan (JTAG)

The CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV/CY7C0853V/CY7C0853AV incorporates an IEEE 1149.1 serial boundary scan<sup>[21]</sup> test access port (TAP). The TAP controller functions in a manner that does not conflict with the operation of other devices using 1149.1-compliant TAPs. The TAP operates using JEDEC-standard 3.3 V I/O logic levels. It is composed of three input connections and one output connection required by the test logic defined by the standard.

### Performing a TAP Reset

A reset is performed by forcing TMS HIGH ( $V_{DD}$ ) for five rising edges of TCK. This reset does not affect the operation of the devices, and may be performed while the devices are operating. An MRST must be performed on the devices after power-up.

### Performing a Pause/Restart

When a SHIFT-DR PAUSE-DR SHIFT-DR is performed the scan chain outputs the next bit in the chain twice. For example, if the value expected from the chain is 1010101, the device outputs a 11010101. This extra bit causes some testers to report an erroneous failure for the devices in a scan test. Therefore the tester should be configured to never enter the PAUSE-DR state.

## Identification Register Definitions

| Instruction Field         | Value | Description                                                                       |
|---------------------------|-------|-----------------------------------------------------------------------------------|
| Revision number (31:28)   | 0h    | Reserved for version number.                                                      |
| Cypress device ID (27:12) | C001h | Defines Cypress part number for the CY7C0851V/CY7C0851AV                          |
|                           | C002h | Defines Cypress part number for the CY7C0852V/CY7C0852AV and CY7C0853V/CY7C0853AV |
| Cypress JEDEC ID (11:1)   | 034h  | Allows unique identification of the DP family device vendor.                      |
| ID register presence (0)  | 1     | Indicates the presence of an ID register.                                         |

## Scan Registers Sizes

| Register Name  | Bit Size   |
|----------------|------------|
| Instruction    | 4          |
| Bypass         | 1          |
| Identification | 32         |
| Boundary Scan  | $n^{[22]}$ |

## Instruction Identification Codes

| Instruction    | Code            | Description                                                                                                       |
|----------------|-----------------|-------------------------------------------------------------------------------------------------------------------|
| EXTEST         | 0000            | Captures the Input/Output ring contents. Places the BSR between the TDI and TDO.                                  |
| BYPASS         | 1111            | Places the BYR between TDI and TDO.                                                                               |
| IDCODE         | 1011            | Loads the IDR with the vendor ID code and places the register between TDI and TDO.                                |
| HIGHZ          | 0111            | Places BYR between TDI and TDO. Forces all CY7C0851AV / CY7C0852AV / CY7C0853AV output drivers to a High Z state. |
| CLAMP          | 0100            | Controls boundary to 1/0. Places BYR between TDI and TDO.                                                         |
| SAMPLE/PRELOAD | 1000            | Captures the input/output ring contents. Places BSR between TDI and TDO.                                          |
| NBSRST         | 1100            | Resets the non-boundary scan logic. Places BYR between TDI and TDO.                                               |
| RESERVED       | All other codes | Other combinations are reserved. Do not use other than the above.                                                 |

### Notes

21. Boundary scan is IEEE 1149.1-compatible. See "Performing a Pause/Restart" for deviation from strict 1149.1 compliance.  
 22. See details in the device BSDL files.

## Maximum Ratings

Exceeding maximum ratings <sup>[23]</sup> may impair the useful life of the device. These user guidelines are not tested.

Storage temperature ..... -65 °C to + 150 °C

Ambient temperature with

Power applied ..... -55 °C to + 125 °C

Supply voltage to ground potential ..... -0.5 V to + 4.6 V

DC voltage applied to

Outputs in High Z state ..... -0.5 V to  $V_{DD} + 0.5 V$

DC input voltage ..... -0.5 V to  $V_{DD} + 0.5 V$  <sup>[24]</sup>

Output current into outputs (LOW) ..... 20 mA

Static discharge voltage

(JEDEC JESD22-A114-2000B) ..... > 2000 V

Latch-up current ..... > 200 mA

## Operating Range

| Range      | Ambient Temperature | $V_{DD}$       |
|------------|---------------------|----------------|
| Commercial | 0 °C to +70 °C      | 3.3 V ± 165 mV |
| Industrial | -40 °C to +85 °C    | 3.3 V ± 165 mV |

## Electrical Characteristics

Over the Operating Range

| Parameter                 | Description                                                                                           | -167                                            |     |     | -133 |     |     | -100 |     |     | Unit |
|---------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----|-----|------|-----|-----|------|-----|-----|------|
|                           |                                                                                                       | Min                                             | Typ | Max | Min  | Typ | Max | Min  | Typ | Max |      |
| $V_{OH}$                  | Output HIGH voltage ( $V_{DD} = \text{Min.}$ , $I_{OH} = -4.0 \text{ mA}$ )                           | 2.4                                             | —   | —   | 2.4  | —   | —   | 2.4  | —   | —   | V    |
| $V_{OL}$                  | Output LOW voltage ( $V_{DD} = \text{Min.}$ , $I_{OL} = +4.0 \text{ mA}$ )                            | —                                               | —   | 0.4 | —    | —   | 0.4 | —    | —   | 0.4 | V    |
| $V_{IH}$                  | Input HIGH voltage                                                                                    | 2.0                                             | —   | —   | 2.0  | —   | —   | 2.0  | —   | —   | V    |
| $V_{IL}$                  | Input LOW voltage                                                                                     | —                                               | —   | 0.8 | —    | —   | 0.8 | —    | —   | 0.8 | V    |
| $I_{OZ}$                  | Output leakage current                                                                                | -10                                             | —   | 10  | -10  | —   | 10  | -10  | —   | 10  | μA   |
| $I_{IX1}$                 | Input leakage current except TDI, TMS, $\overline{\text{MRST}}$                                       | -10                                             | —   | 10  | -10  | —   | 10  | -10  | —   | 10  | μA   |
| $I_{IX2}$                 | Input leakage current TDI, TMS, $\overline{\text{MRST}}$                                              | -0.1                                            | —   | 1.0 | -0.1 | —   | 1.0 | -0.1 | —   | 1.0 | mA   |
| $I_{CC}$                  | Operating current for ( $V_{DD} = \text{Max.}$ , $I_{OUT} = 0 \text{ mA}$ ), Outputs disabled         | CY7C0851V / CY7C0851AV / CY7C0852V / CY7C0852AV |     |     | —    | 225 | 300 | —    | 225 | 300 | mA   |
|                           |                                                                                                       | CY7C0853V / CY7C0853AV                          |     |     | —    | —   | —   | —    | 270 | 400 |      |
| $I_{SB1}$ <sup>[25]</sup> | Standby current (both ports TTL level)<br>$CE_L$ and $CE_R \geq V_{IH}$ , $f = f_{MAX}$               | —                                               | 90  | 115 | —    | 90  | 115 | —    | 90  | 115 | mA   |
| $I_{SB2}$ <sup>[25]</sup> | Standby current (one port TTL level)<br>$CE_L$   $CE_R \geq V_{IH}$ , $f = f_{MAX}$                   | —                                               | 160 | 210 | —    | 160 | 210 | —    | 160 | 210 | mA   |
| $I_{SB3}$ <sup>[25]</sup> | Standby current (both ports CMOS level)<br>$CE_L$ and $CE_R \geq V_{DD} - 0.2 \text{ V}$ , $f = 0$    | —                                               | 55  | 75  | —    | 55  | 75  | —    | 55  | 75  | mA   |
| $I_{SB4}$ <sup>[25]</sup> | Standby current (one port CMOS level)<br>$CE_L$   $CE_R \geq V_{IH}$ , $f = f_{MAX}$                  | —                                               | 160 | 210 | —    | 160 | 210 | —    | 160 | 210 | mA   |
| $I_{SB5}$                 | Operating current ( $V_{DD} = \text{Max.}$ , $I_{OUT} = 0 \text{ mA}$ , $f = 0$ )<br>Outputs disabled | —                                               | —   | —   | —    | 70  | 100 | —    | 70  | 100 | mA   |

### Notes

23. The voltage on any input or I/O pin can not exceed the power pin during power-up.

24. Pulse width < 20 ns.


25.  $I_{SB1}$ ,  $I_{SB2}$ ,  $I_{SB3}$  and  $I_{SB4}$  are not applicable for CY7C0853V/CY7C0853AV because it can not be powered down by using chip enable pins.

## Capacitance

| Part Number <sup>[26]</sup>                   | Parameter | Description        | Test Conditions                                                            | Max | Unit |
|-----------------------------------------------|-----------|--------------------|----------------------------------------------------------------------------|-----|------|
| CY7C0851V/CY7C0851AV/<br>CY7C0852V/CY7C0852AV | $C_{IN}$  | Input capacitance  | $T_A = 25^\circ\text{C}$ , $f = 1\text{ MHz}$ ,<br>$V_{DD} = 3.3\text{ V}$ | 13  | pF   |
|                                               | $C_{OUT}$ | Output capacitance |                                                                            | 10  | pF   |
| CY7C0853V/CY7C0853AV                          | $C_{IN}$  | Input capacitance  |                                                                            | 22  | pF   |
|                                               | $C_{OUT}$ | Output capacitance |                                                                            | 20  | pF   |

## AC Test Load and Waveforms

Figure 6. AC Test Load and Waveforms

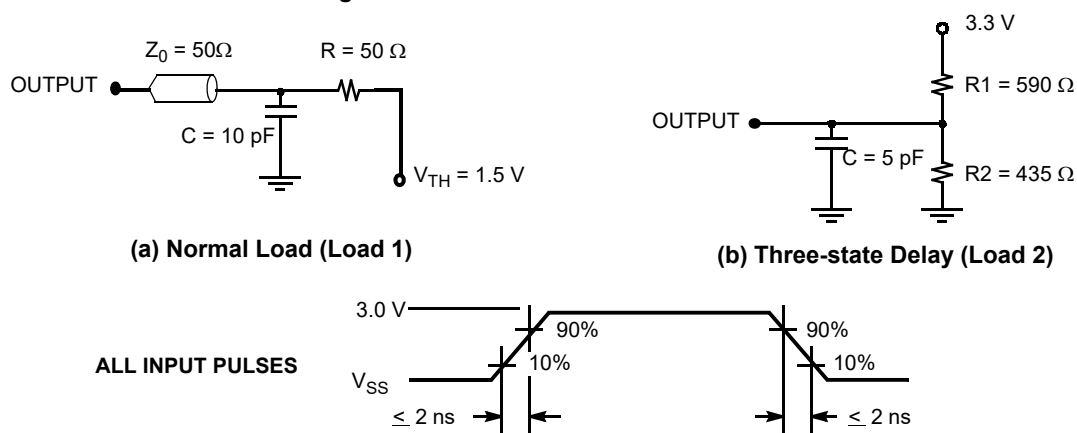

### Note

26.  $C_{OUT}$  also references  $C_{I/O}$ .

## Switching Characteristics

Over the Operating Range

| Parameter                            | Description                           | -167                                                  |     | -133                                                  |     |                          |     | -100                     |     | Unit |
|--------------------------------------|---------------------------------------|-------------------------------------------------------|-----|-------------------------------------------------------|-----|--------------------------|-----|--------------------------|-----|------|
|                                      |                                       | CY7C0851V/<br>CY7C0851AV/<br>CY7C0852V/<br>CY7C0852AV |     | CY7C0851V/<br>CY7C0851AV/<br>CY7C0852V/<br>CY7C0852AV |     | CY7C0853V/<br>CY7C0853AV |     | CY7C0853V/<br>CY7C0853AV |     |      |
|                                      |                                       | Min                                                   | Max | Min                                                   | Max | Min                      | Max | Min                      | Max |      |
| f <sub>MAX2</sub>                    | Maximum operating frequency           | —                                                     | 167 | —                                                     | 133 | —                        | 133 | —                        | 100 | MHz  |
| t <sub>CYC2</sub>                    | Clock cycle time                      | 6.0                                                   | —   | 7.5                                                   | —   | 7.5                      | —   | 10.0                     | —   | ns   |
| t <sub>CH2</sub>                     | Clock HIGH time                       | 2.7                                                   | —   | 3.0                                                   | —   | 3.0                      | —   | 4.0                      | —   | ns   |
| t <sub>CL2</sub>                     | Clock LOW time                        | 2.7                                                   | —   | 3.0                                                   | —   | 3.0                      | —   | 4.0                      | —   | ns   |
| t <sub>R</sub> <sup>[27]</sup>       | Clock rise time                       | —                                                     | 2.0 | —                                                     | 2.0 | —                        | 2.0 | —                        | 3.0 | ns   |
| t <sub>F</sub> <sup>[27]</sup>       | Clock fall time                       | —                                                     | 2.0 | —                                                     | 2.0 | —                        | 2.0 | —                        | 3.0 | ns   |
| t <sub>SA</sub>                      | Address setuptime                     | 2.3                                                   | —   | 2.5                                                   | —   | 2.5                      | —   | 3.0                      | —   | ns   |
| t <sub>HA</sub>                      | Address hold time                     | 0.6                                                   | —   | 0.6                                                   | —   | 0.6                      | —   | 0.6                      | —   | ns   |
| t <sub>SB</sub>                      | Byte select setup time                | 2.3                                                   | —   | 2.5                                                   | —   | 2.5                      | —   | 3.0                      | —   | ns   |
| t <sub>HB</sub>                      | Byte select hold time                 | 0.6                                                   | —   | 0.6                                                   | —   | 0.6                      | —   | 0.6                      | —   | ns   |
| t <sub>SC</sub>                      | Chip enable setup time                | 2.3                                                   | —   | 2.5                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>HC</sub>                      | Chip enable hold time                 | 0.6                                                   | —   | 0.6                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>SW</sub>                      | R/W setup time                        | 2.3                                                   | —   | 2.5                                                   | —   | 2.5                      | —   | 3.0                      | —   | ns   |
| t <sub>HW</sub>                      | R/W hold time                         | 0.6                                                   | —   | 0.6                                                   | —   | 0.6                      | —   | 0.6                      | —   | ns   |
| t <sub>SD</sub>                      | Input data setup time                 | 2.3                                                   | —   | 2.5                                                   | —   | 2.5                      | —   | 3.0                      | —   | ns   |
| t <sub>HD</sub>                      | Input data hold time                  | 0.6                                                   | —   | 0.6                                                   | —   | 0.6                      | —   | 0.6                      | —   | ns   |
| t <sub>SAD</sub>                     | ADS setup time                        | 2.3                                                   | —   | 2.5                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>HAD</sub>                     | ADS hold time                         | 0.6                                                   | —   | 0.6                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>SCN</sub>                     | CNTEN setup time                      | 2.3                                                   | —   | 2.5                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>HCN</sub>                     | CNTEN hold time                       | 0.6                                                   | —   | 0.6                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>SRST</sub>                    | CNTRST setup time                     | 2.3                                                   | —   | 2.5                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>HRST</sub>                    | CNTRST hold time                      | 0.6                                                   | —   | 0.6                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>SCM</sub>                     | CNT/MSK setup time                    | 2.3                                                   | —   | 2.5                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>HCM</sub>                     | CNT/MSK hold time                     | 0.6                                                   | —   | 0.6                                                   | —   | NA                       | —   | NA                       | —   | ns   |
| t <sub>OE</sub>                      | Output enable to data valid           | —                                                     | 4.0 | —                                                     | 4.4 | —                        | 4.7 | —                        | 5.0 | ns   |
| t <sub>OLZ</sub> <sup>[28, 29]</sup> | OE to Low Z                           | 0                                                     | —   | 0                                                     | —   | 0                        | —   | 0                        | —   | ns   |
| t <sub>OHZ</sub> <sup>[28, 29]</sup> | OE to High Z                          | 0                                                     | 4.0 | 0                                                     | 4.4 | 0                        | 4.7 | 0                        | 5.0 | ns   |
| t <sub>CD2</sub>                     | Clock to data valid                   | —                                                     | 4.0 | —                                                     | 4.4 | —                        | 4.7 | —                        | 5.0 | ns   |
| t <sub>CA2</sub>                     | Clock to counter address valid        | —                                                     | 4.0 | —                                                     | 4.4 | —                        | NA  | —                        | NA  | ns   |
| t <sub>CM2</sub>                     | Clock to mask register readback valid | —                                                     | 4.0 | —                                                     | 4.4 | —                        | NA  | —                        | NA  | ns   |
| t <sub>DC</sub>                      | Data output hold after clock HIGH     | 1.0                                                   | —   | 1.0                                                   | —   | 1.0                      | —   | 1.0                      | —   | ns   |

### Notes

27. Except JTAG signals ( $t_r$  and  $t_f < 10$  ns [max.]).  
 28. This parameter is guaranteed by design, but it is not production tested.  
 29. Test conditions used are Load 2.



## Switching Characteristics (continued)

Over the Operating Range

| Parameter                             | Description                                       | -167                                                  |      | -133                                                  |      |                          |      | -100                     |      | Unit |
|---------------------------------------|---------------------------------------------------|-------------------------------------------------------|------|-------------------------------------------------------|------|--------------------------|------|--------------------------|------|------|
|                                       |                                                   | CY7C0851V/<br>CY7C0851AV/<br>CY7C0852V/<br>CY7C0852AV |      | CY7C0851V/<br>CY7C0851AV/<br>CY7C0852V/<br>CY7C0852AV |      | CY7C0853V/<br>CY7C0853AV |      | CY7C0853V/<br>CY7C0853AV |      |      |
|                                       |                                                   | Min                                                   | Max  | Min                                                   | Max  | Min                      | Max  | Min                      | Max  |      |
| t <sub>CKHZ</sub> <sup>[30, 31]</sup> | Clock HIGH to output High Z                       | 0                                                     | 4.0  | 0                                                     | 4.4  | 0                        | 4.7  | 0                        | 5.0  | ns   |
| t <sub>CKLZ</sub> <sup>[30, 31]</sup> | Clock HIGH to output Low Z                        | 1.0                                                   | 4.0  | 1.0                                                   | 4.4  | 1.0                      | 4.7  | 1.0                      | 5.0  | ns   |
| t <sub>SINT</sub>                     | Clock to $\overline{INT}$ set time                | 0.5                                                   | 6.7  | 0.5                                                   | 7.5  | 0.5                      | 7.5  | 0.5                      | 10   | ns   |
| t <sub>RINT</sub>                     | Clock to $\overline{INT}$ reset time              | 0.5                                                   | 6.7  | 0.5                                                   | 7.5  | 0.5                      | 7.5  | 0.5                      | 10   | ns   |
| t <sub>SCINT</sub>                    | Clock to $\overline{CNTINT}$ set time             | 0.5                                                   | 5.0  | 0.5                                                   | 5.7  | NA                       | NA   | NA                       | NA   | ns   |
| t <sub>RCINT</sub>                    | Clock to $\overline{CNTINT}$ reset time           | 0.5                                                   | 5.0  | 0.5                                                   | 5.7  | NA                       | NA   | NA                       | NA   | ns   |
| Port to Port Delays                   |                                                   |                                                       |      |                                                       |      |                          |      |                          |      |      |
| t <sub>CCS</sub>                      | Clock to clock skew                               | 5.2                                                   | –    | 6.0                                                   | –    | 6.0                      | –    | 8.0                      | –    | ns   |
| Master Reset Timing                   |                                                   |                                                       |      |                                                       |      |                          |      |                          |      |      |
| t <sub>RS</sub>                       | Master reset pulse width                          | 7.0                                                   | –    | 7.5                                                   | –    | 7.5                      | –    | 10.0                     | –    | ns   |
| t <sub>RSS</sub>                      | Master reset setup time                           | 6.0                                                   | –    | 6.0                                                   | –    | 6.0                      | –    | 8.5                      | –    | ns   |
| t <sub>RSR</sub>                      | Master reset recovery time                        | 6.0                                                   | –    | 7.5                                                   | –    | 7.5                      | –    | 10.0                     | –    | ns   |
| t <sub>RSF</sub>                      | Master reset to outputs inactive                  | –                                                     | 10.0 | –                                                     | 10.0 | –                        | 10.0 | –                        | 10.0 | ns   |
| t <sub>RSCNTINT</sub>                 | Master reset to counter interrupt flag reset time | –                                                     | 10.0 | –                                                     | 10.0 | –                        | NA   | –                        | NA   | ns   |

### Notes

30. This parameter is guaranteed by design, but it is not production tested.

31. Test conditions used are Load 2.

## Switching Waveforms

Figure 7. Master Reset


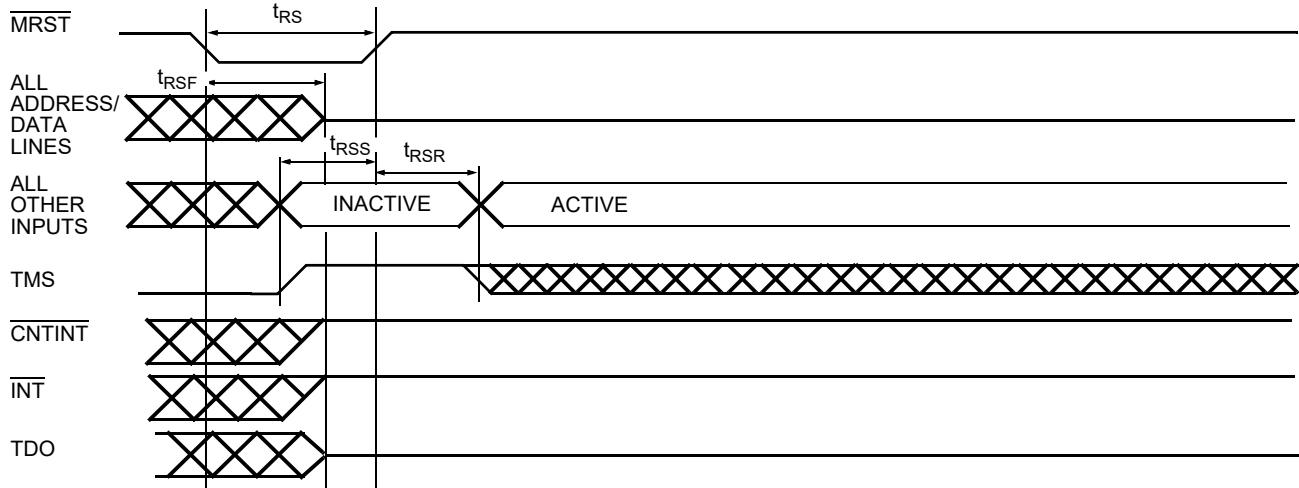


Figure 8. Read Cycle [32, 33, 34, 35, 36]

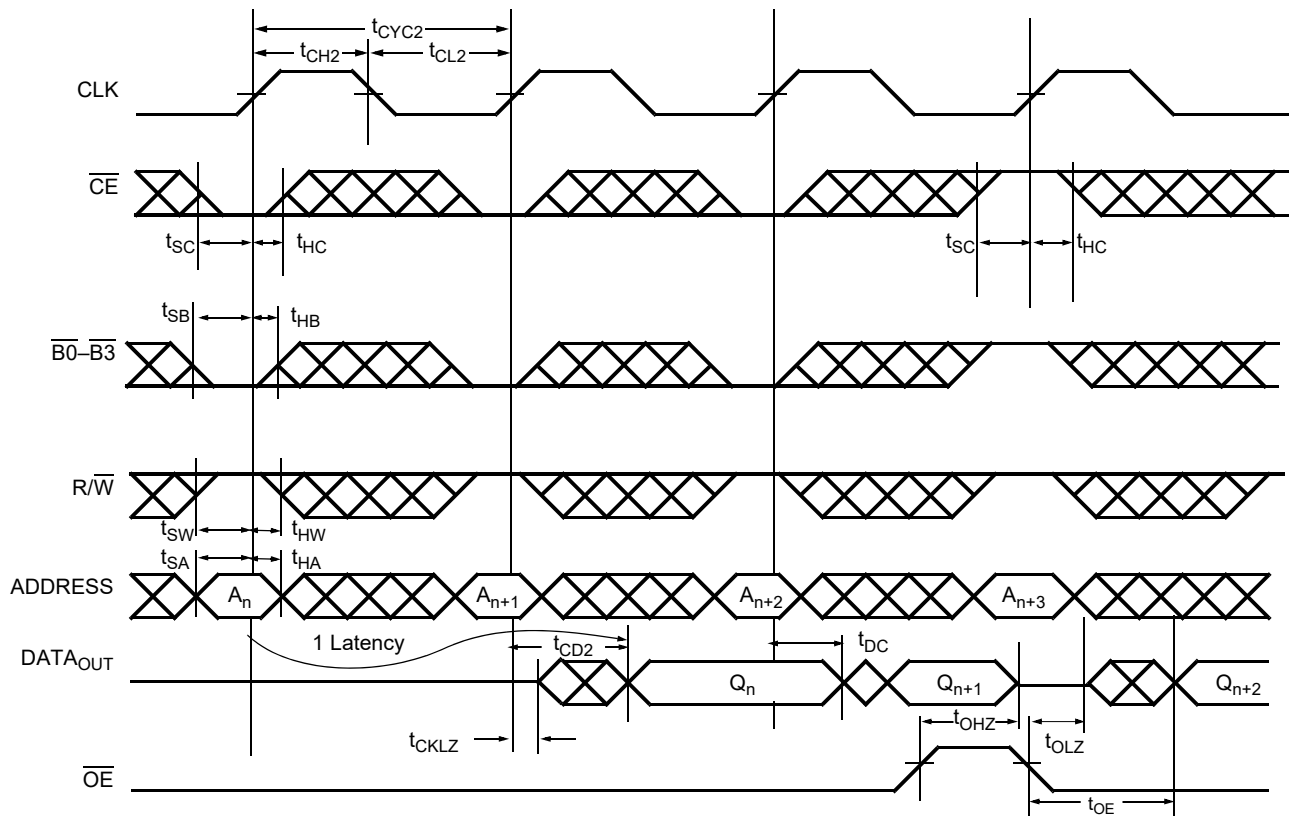


### Notes


32.  $\overline{CE}$  is internal signal.  $\overline{CE} = \text{LOW}$  if  $\overline{CE}_0 = \text{LOW}$  and  $CE_1 = \text{HIGH}$ . For a single Read operation,  $\overline{CE}$  only needs to be asserted once at the rising edge of the CLK and can be deasserted after that. Data is out after the following CLK edge and is three-stated after the next CLK edge.
33.  $\overline{OE}$  is asynchronously controlled; all other inputs (excluding  $\overline{MRST}$  and JTAG) are synchronous to the rising clock edge.
34.  $ADS = CNTEN = \text{LOW}$ , and  $\overline{MRST} = \overline{CNTRST} = CNT/MSK = \text{HIGH}$ .
35. The output is disabled (high-impedance state) by  $\overline{CE} = V_{IH}$  following the next rising edge of the clock.
36. Addresses do not have to be accessed sequentially since  $ADS = CNTEN = V_{IL}$  with  $CNT/MSK = V_{IH}$  constantly loads the address on the rising edge of the CLK. Numbers are for reference only.

## Switching Waveforms (continued)

**Figure 9. Bank Select Read** [37, 38]

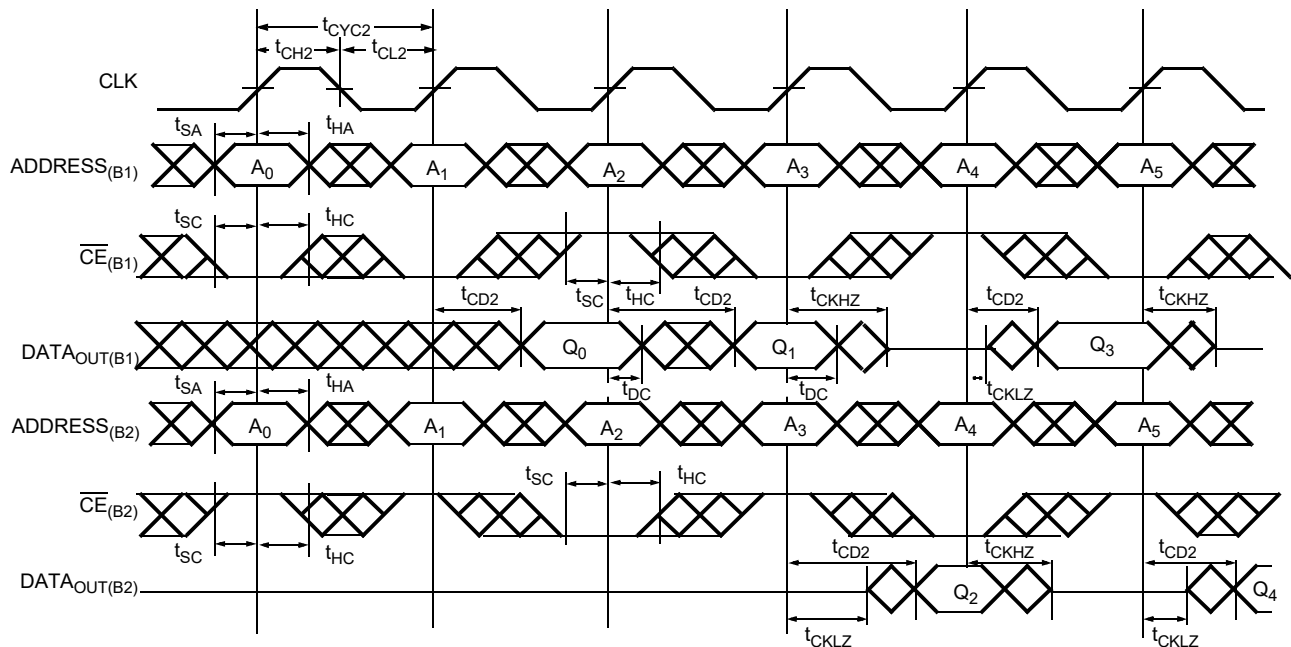

**Figure 10. Read-to-Write-to-Read ( $\overline{OE} = \text{LOW}$ )** [36, 39, 40, 41, 42]

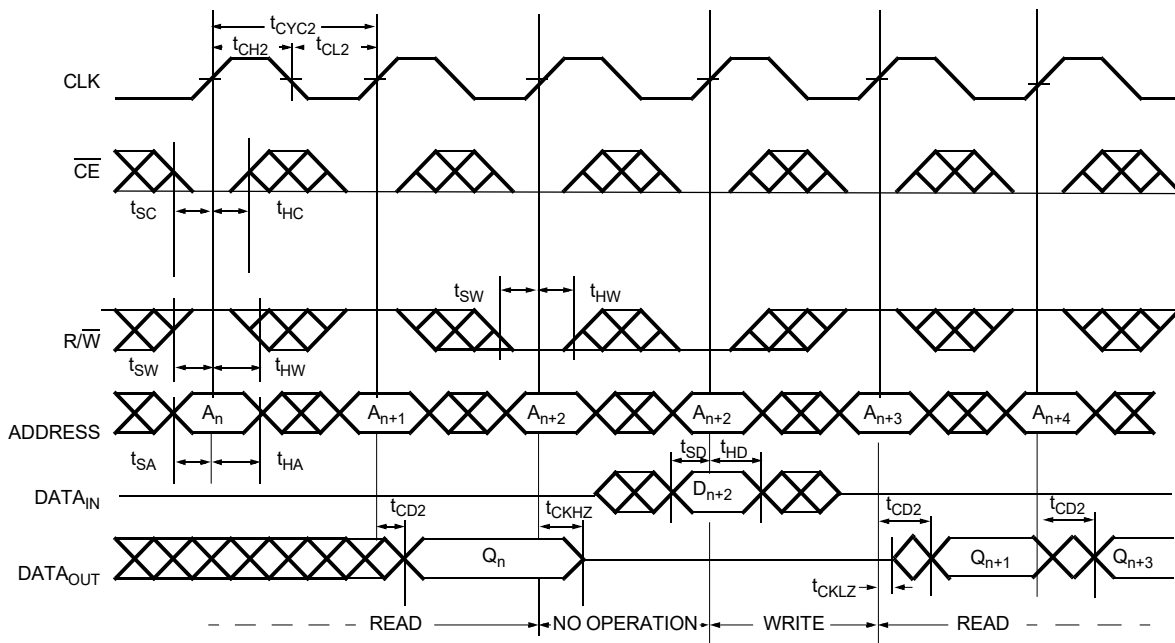


### Notes


37. In this depth-expansion example, B1 represents Bank #1 and B2 is Bank #2; each bank consists of one Cypress CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV device from this data sheet. ADDRESS<sub>(B1)</sub> = ADDRESS<sub>(B2)</sub>.
38.  $\overline{ADS} = \overline{CNTEN} = \overline{B0} - \overline{B3} = \overline{OE} = \text{LOW}$ ;  $\overline{MRST} = \overline{CNTRST} = \overline{CNT/MSK} = \text{HIGH}$ .
39. Output state (HIGH, LOW, or high-impedance) is determined by the previous cycle control signals.
40. During "No Operation," data in memory at the selected address may be corrupted and should be rewritten to ensure data integrity.
41.  $\overline{CE}_0 = \overline{OE} = \overline{B0} - \overline{B3} = \text{LOW}$ ;  $\overline{CE}_1 = \overline{R/W} = \overline{CNTRST} = \overline{MRST} = \text{HIGH}$ .
42.  $\overline{CE}_0 = \overline{B0} - \overline{B3} = \overline{R/W} = \text{LOW}$ ;  $\overline{CE}_1 = \overline{CNTRST} = \overline{MRST} = \overline{CNT/MSK} = \text{HIGH}$ . When  $\overline{R/W}$  first switches low, since  $\overline{OE} = \text{LOW}$ , the Write operation cannot be completed (labelled as no operation). One clock cycle is required to three-state the I/O for the Write operation on the next rising edge of CLK.

## Switching Waveforms (continued)

**Figure 11. Read-to-Write-to-Read ( $\overline{OE}$  Controlled)** [43, 44, 45, 46]

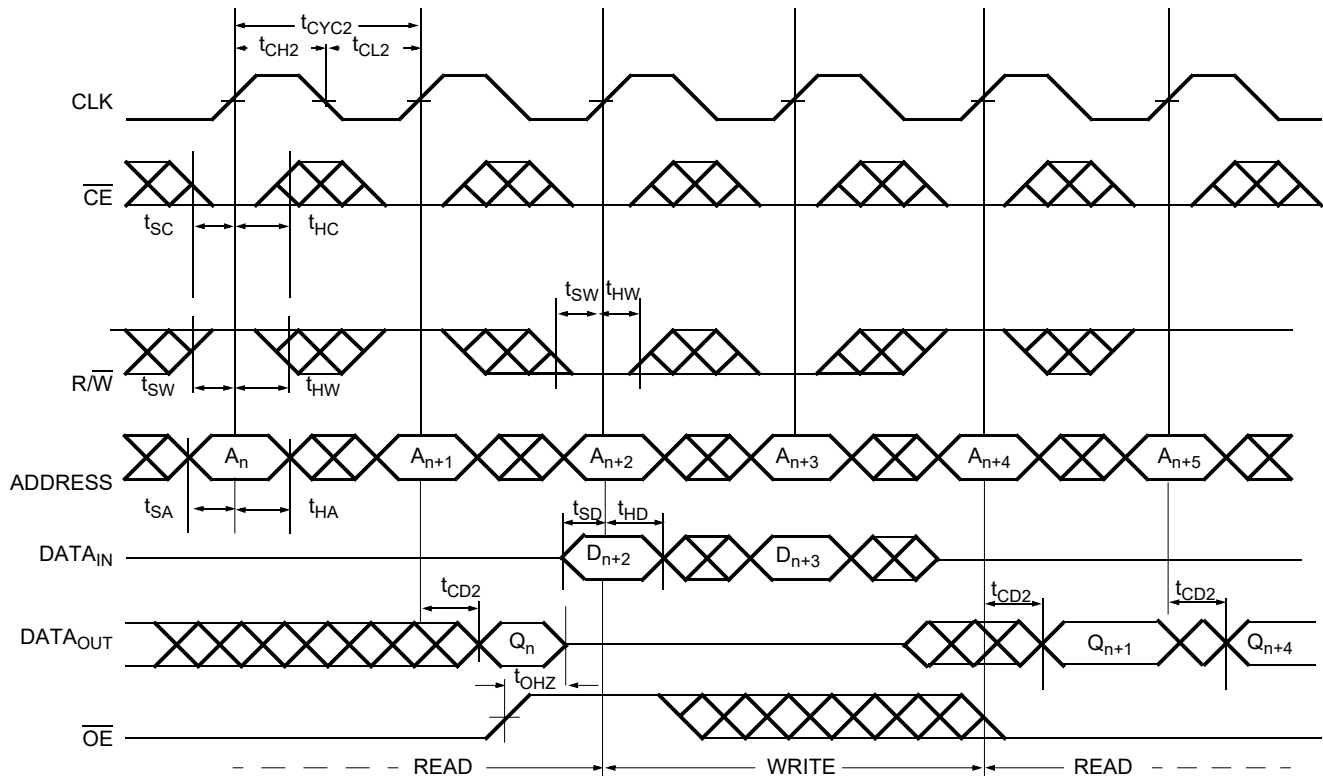

**Figure 12. Read with Address Counter Advance** [45]

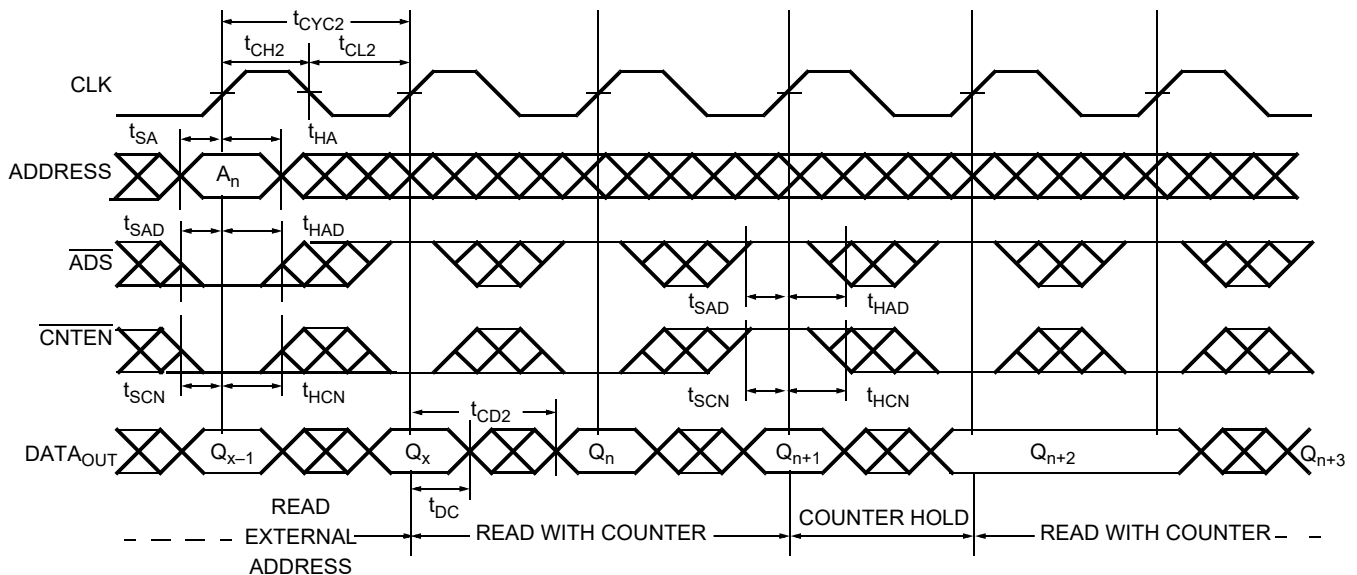

### Notes

43. Addresses do not have to be accessed sequentially since  $\overline{ADS} = \overline{CNTEN} = V_{IL}$  with  $CNT/\overline{MSK} = V_{IH}$  constantly loads the address on the rising edge of the CLK. Numbers are for reference only.


44. Output state (HIGH, LOW, or high-impedance) is determined by the previous cycle control signals.

45.  $\overline{CE}_0 = \overline{OE} = \overline{B0} - \overline{B3} = \text{LOW}$ ;  $\overline{CE}_1 = R/\overline{W} = \overline{CNTRST} = \overline{MRST} = \text{HIGH}$ .


46.  $\overline{CE}_0 = \overline{B0} - \overline{B3} = R/\overline{W} = \text{LOW}$ ;  $\overline{CE}_1 = \overline{CNTRST} = \overline{MRST} = \overline{CNT}/\overline{MSK} = \text{HIGH}$ . When  $R/\overline{W}$  first switches low, since  $\overline{OE} = \text{LOW}$ , the Write operation cannot be completed (labelled as no operation). One clock cycle is required to three-state the I/O for the Write operation on the next rising edge of CLK.

## Switching Waveforms (continued)

**Figure 13. Write with Address Counter Advance** <sup>[47]</sup>

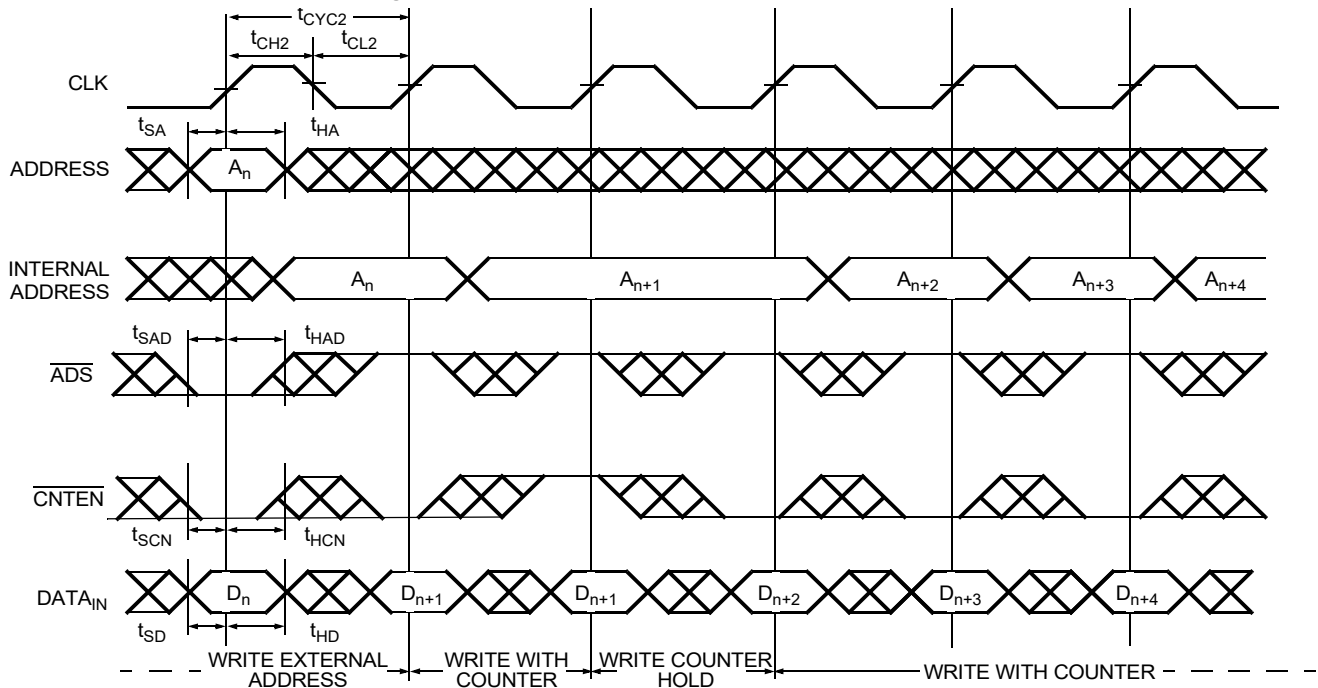

**Figure 14. Disabled to Read-to-Read to Read-to-Write**

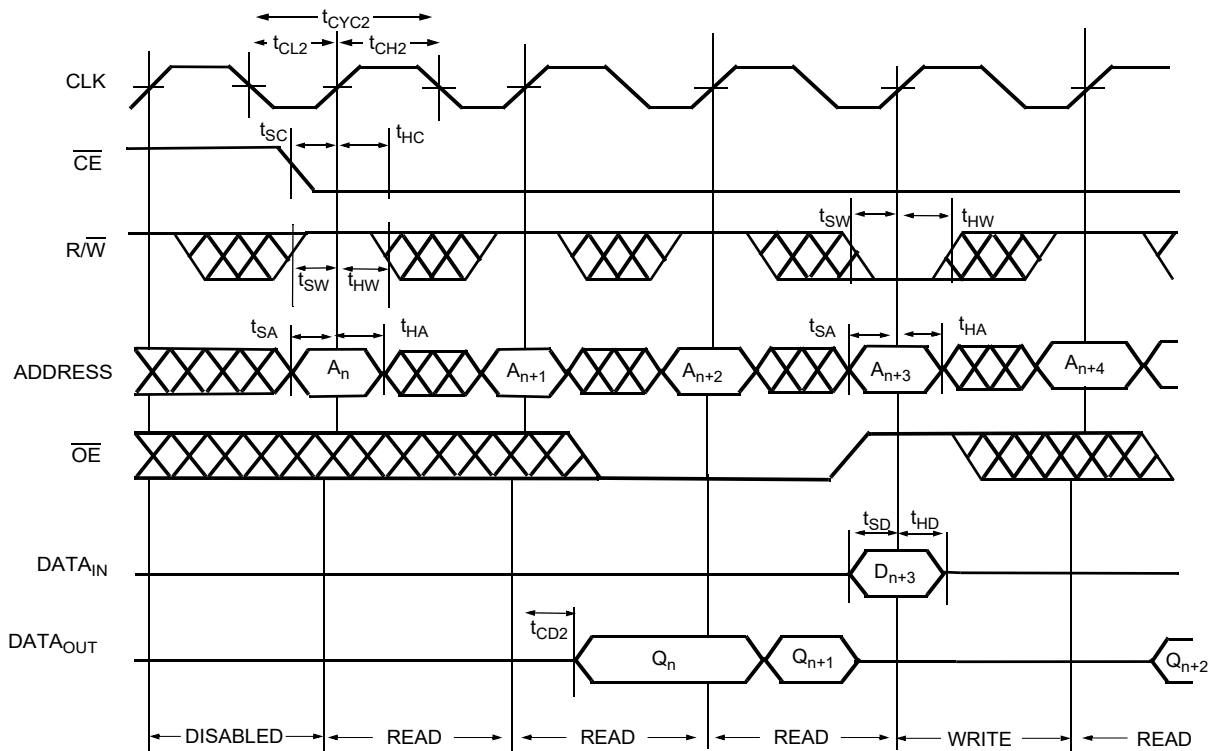


**Note**


47.  $\overline{CE}_0 = \overline{B0} - \overline{B3} = \overline{R/W}$ ;  $\overline{CE}_1 = \overline{CNTRST} = \overline{MRST} = \overline{CNT/MSK}$ ;  $\overline{OE} = \overline{R/W}$ . When  $\overline{R/W}$  first switches low, since  $\overline{OE} = \overline{R/W}$ , the Write operation cannot be completed (labelled as no operation). One clock cycle is required to three-state the I/O for the Write operation on the next rising edge of CLK.

## Switching Waveforms (continued)

**Figure 15. Disabled to Write- to- Read to Write-to-Read**

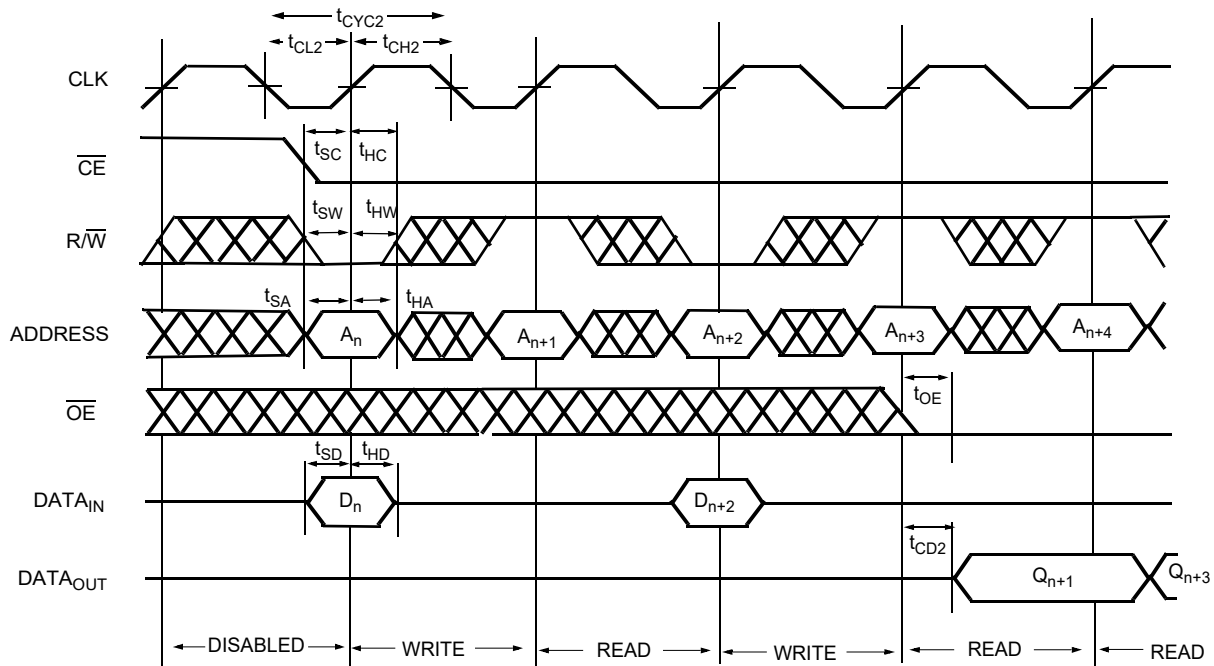


**Figure 16. Disabled-to-Read to Disabled-to-Write**

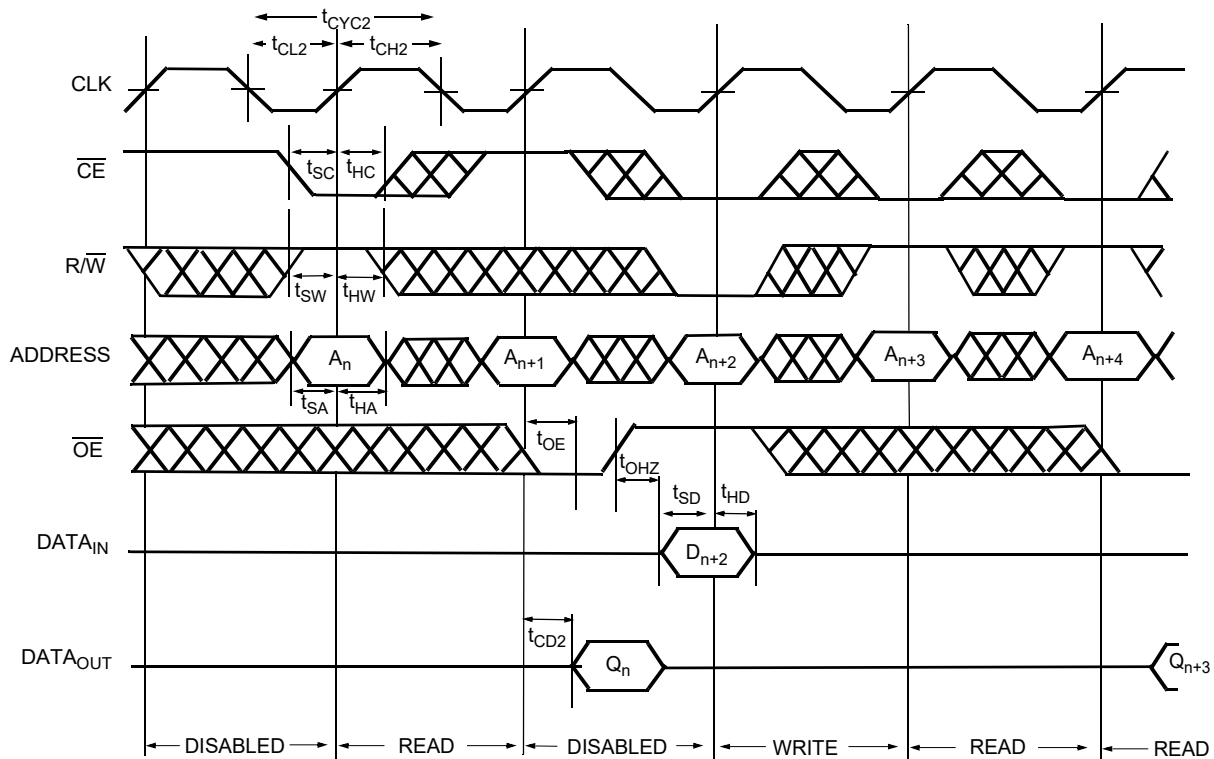


## Switching Waveforms (continued)

**Figure 17. Read-to-Readback to Read-to-Read ( $\overline{R/\overline{W}} = \text{HIGH}$ )**

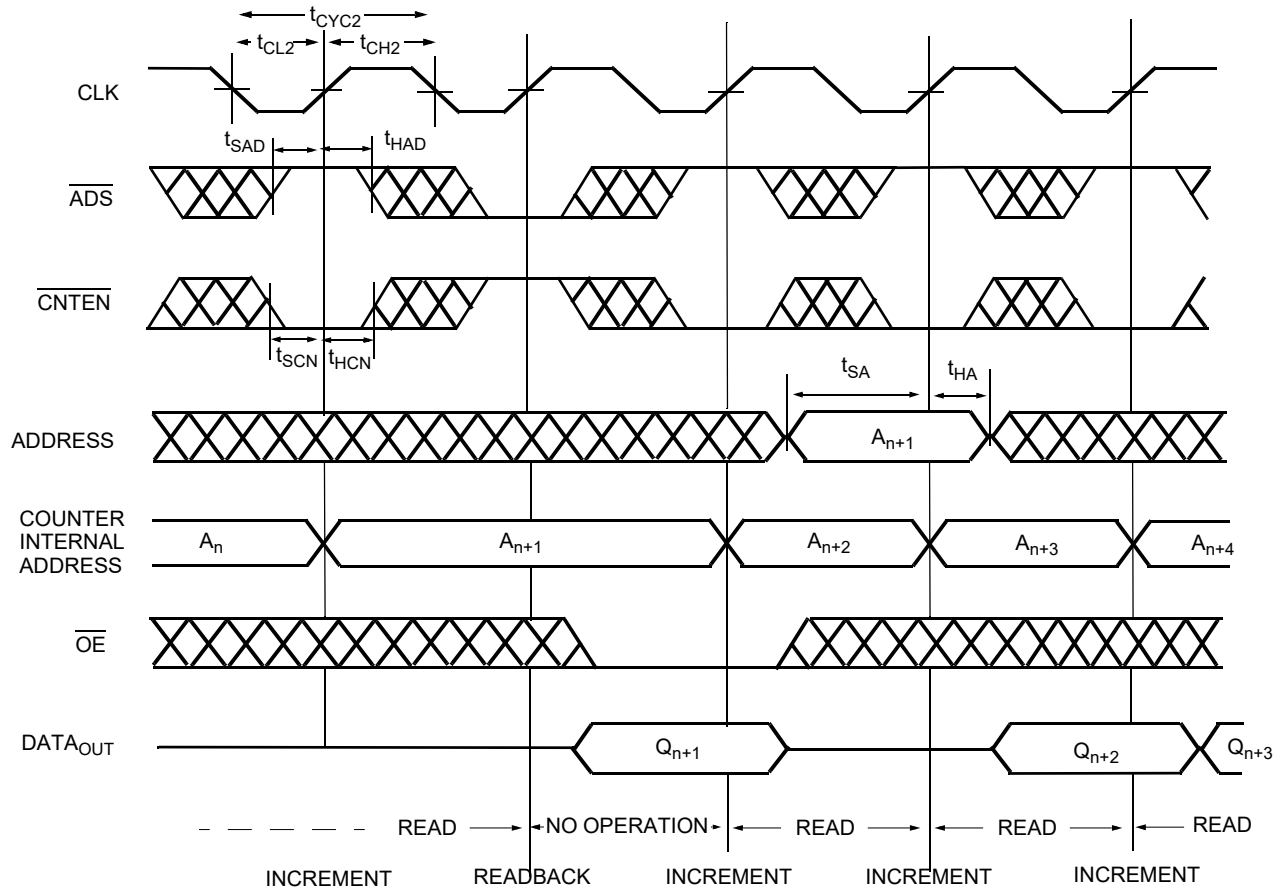

## Switching Waveforms (continued)

Figure 18. Counter Reset [48, 49, 50]

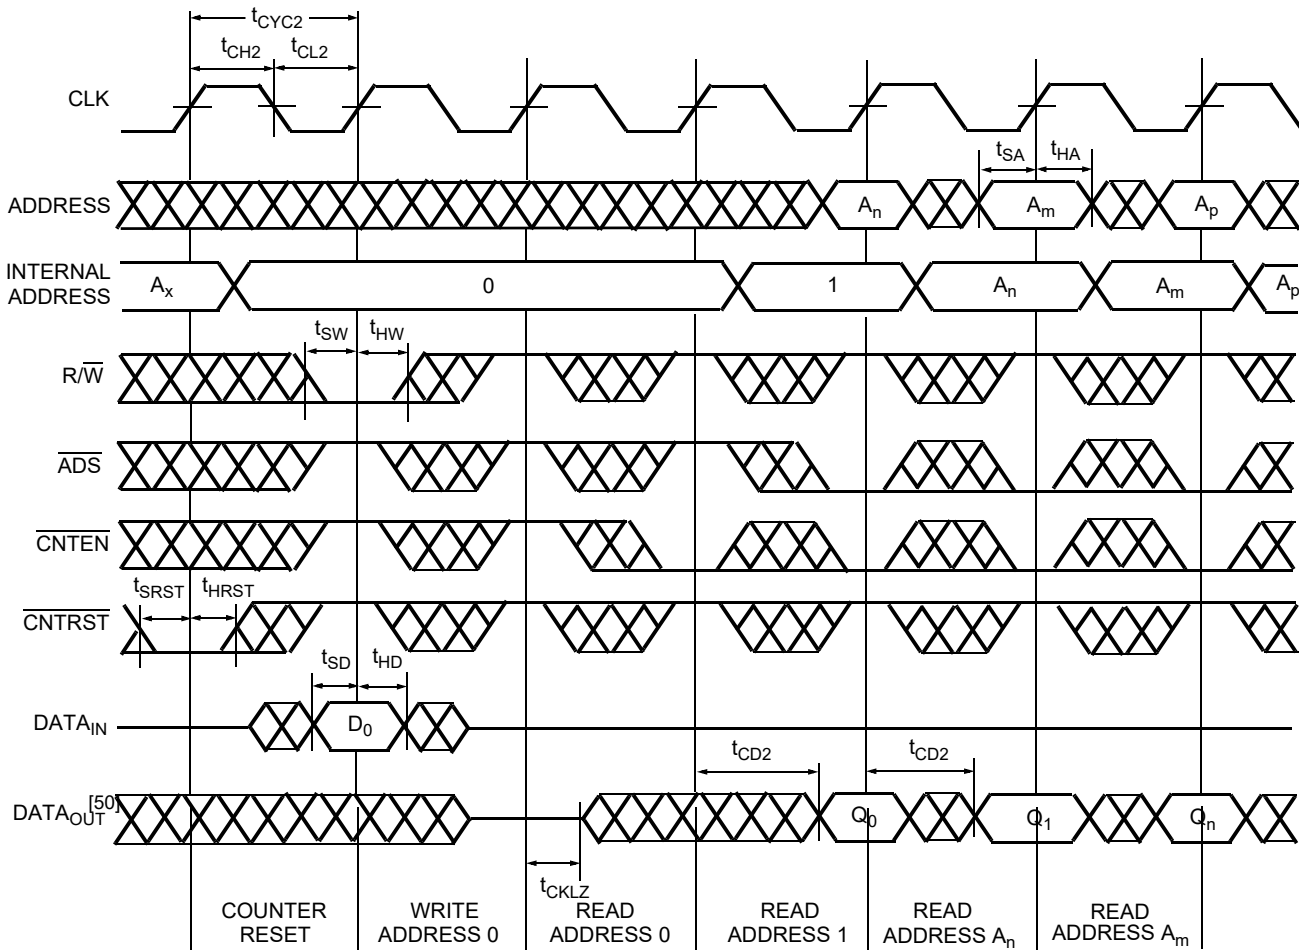

### Notes

48.  $\overline{CE_0} = \overline{B_0-B_3} = \text{LOW}$ ;  $CE_1 = \overline{MRST} = \text{CNT}/\overline{MSK} = \text{HIGH}$ .


49. No dead cycle exists during counter reset. A Read or Write cycle may be coincidental with the counter reset.

50. Retransmit happens if the counter remains in increment mode after it wraps to initially loaded value.



## Switching Waveforms (continued)

**Figure 19. Readback State of Address Counter or Mask Register** [51, 52, 53, 54]

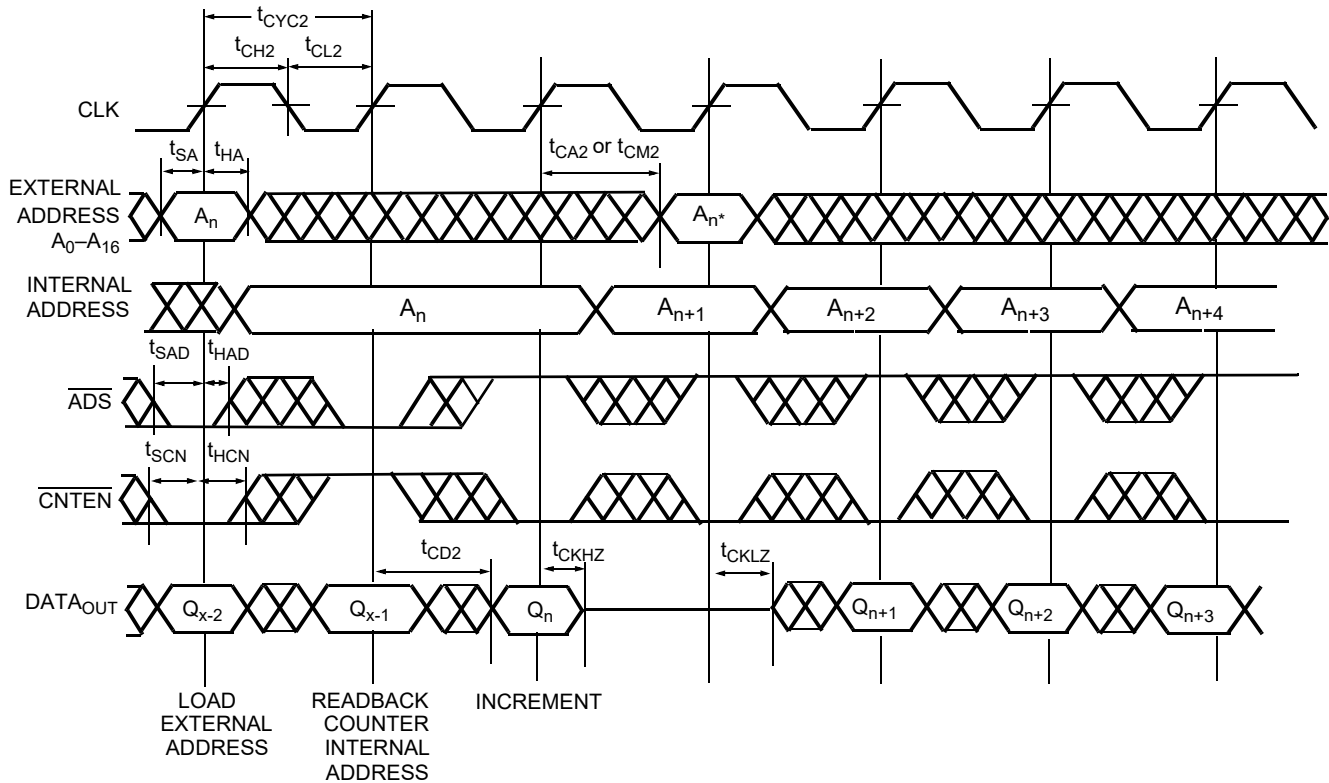


### Notes

51.  $\overline{CE_0} = \overline{OE} = \overline{B_0} - \overline{B_3} = \text{LOW}$ ;  $CE_1 = \overline{R/W} = \overline{CNTRST} = \overline{MRST} = \text{HIGH}$ .
52. Address in output mode. Host must not be driving address bus after  $t_{CKLZ}$  in next clock cycle.
53. Address in input mode. Host can drive address bus after  $t_{CKHZ}$ .
54.  $A_n^*$  is the internal value of the address counter (or the mask register depending on the CNT/MSK level) being Read out on the address lines.

## Switching Waveforms (continued)

**Figure 20. Left\_Port (L\_Port) Write to Right\_Port (R\_Port) Read** [55, 56, 57]

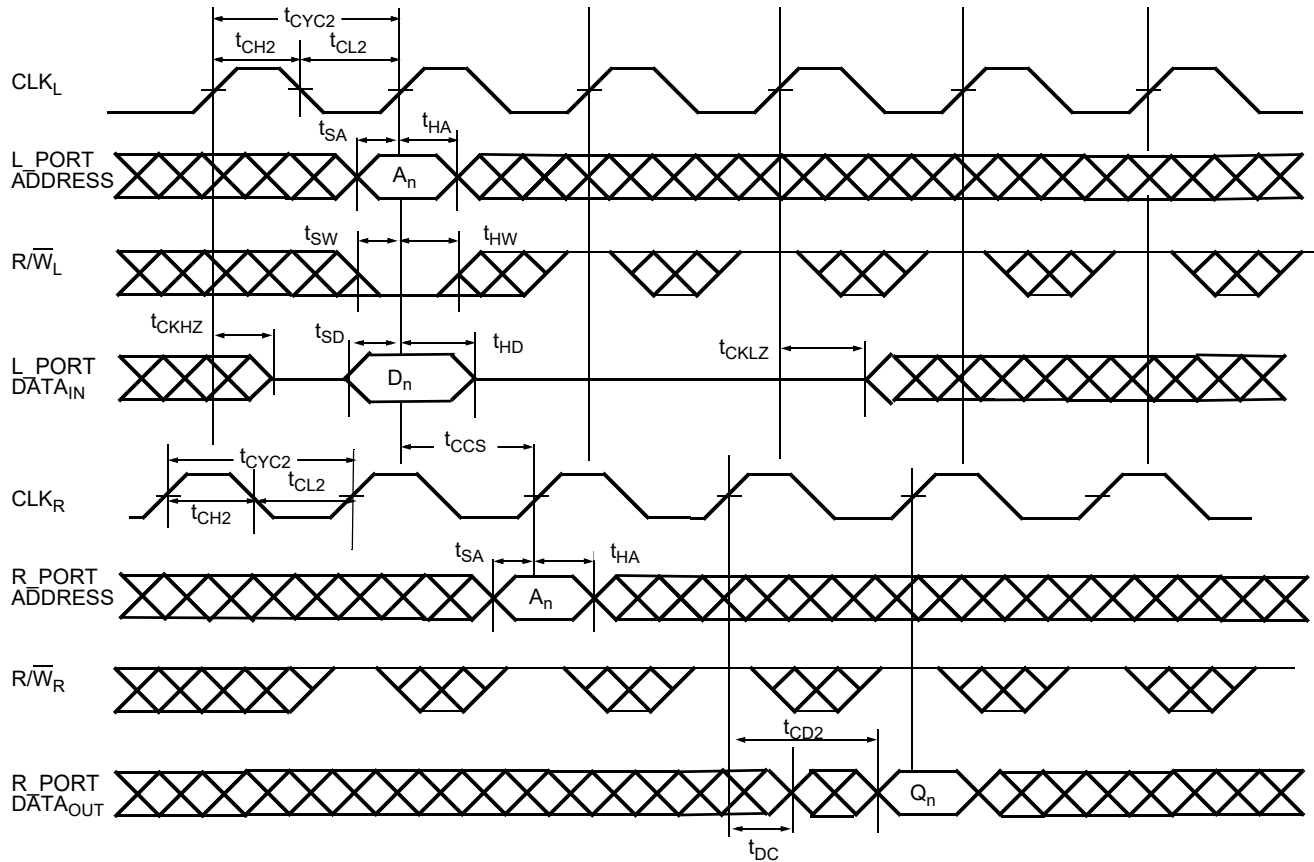

### Notes

55.  $\overline{CE}_0 = \overline{OE} = \overline{ADS} = \overline{CNTEN} = \overline{B0} - \overline{B3} = \text{LOW}$ ;  $CE_1 = \overline{CNTRST} = \overline{MRST} = \overline{CNT/MSK} = \text{HIGH}$ .


56. This timing is valid when one port is writing, and other port is reading the same location at the same time. If  $t_{CCS}$  is violated, indeterminate data is Read out.

57. If  $t_{CCS} < \text{minimum specified value}$ , then R\_Port is Read the most recent data (written by L\_Port) only ( $2 * t_{CYC2} + t_{CD2}$ ) after the rising edge of R\_Port's clock.

If  $t_{CCS} \geq \text{minimum specified value}$ , then R\_Port is Read the most recent data (written by L\_Port) ( $t_{CYC2} + t_{CD2}$ ) after the rising edge of R\_Port's clock.

## Switching Waveforms (continued)

**Figure 21. Counter Interrupt and Retransmit** [58, 59, 60, 61, 62]

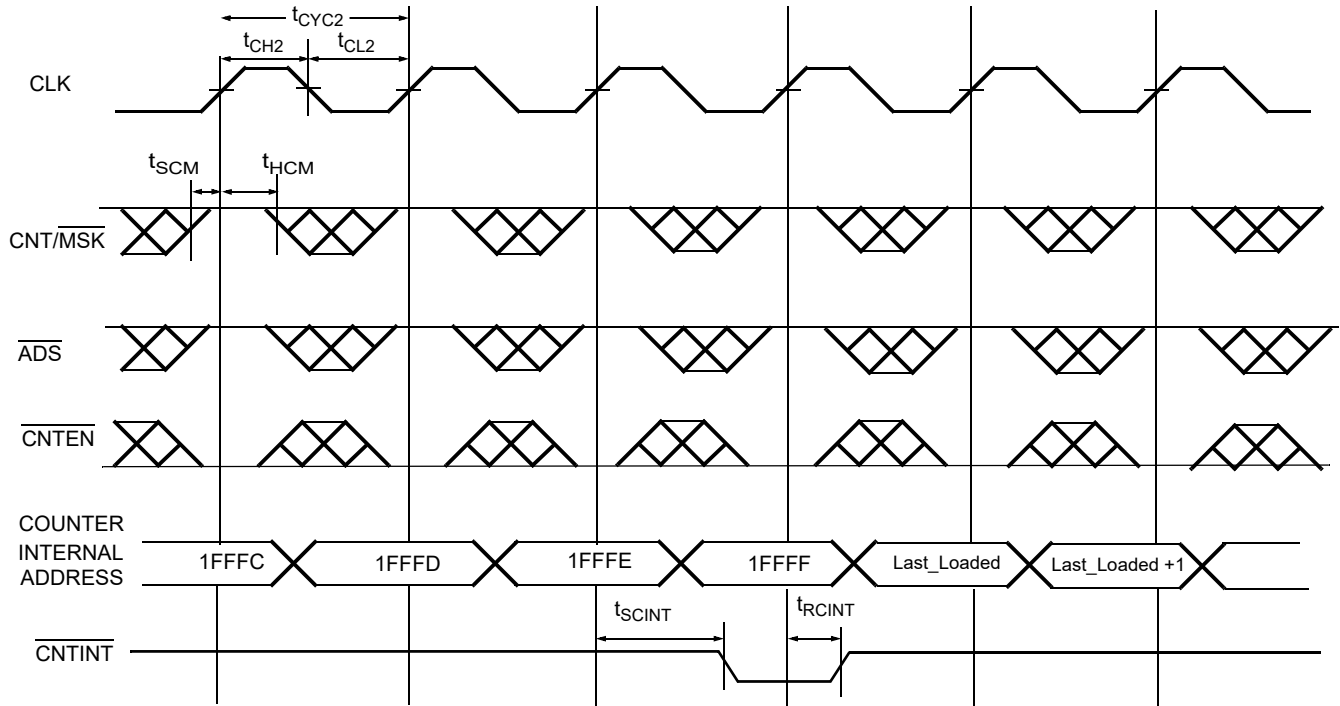


### Notes

- 58. Retransmit happens if the counter remains in increment mode after it wraps to initially loaded value
- 59.  $\overline{CE_0} = \overline{OE} = \overline{B_0-B_3} = \text{LOW}$ ;  $CE_1 = R/\overline{W} = \overline{CNTRST} = \overline{MRST} = \text{HIGH}$ .
- 60.  $\overline{CNTINT}$  is always driven.
- 61.  $\overline{CNTINT}$  goes LOW when the unmasked portion of the address counter is incremented to the maximum value.
- 62. The mask register assumed to have the value of 1FFFFh.

## Switching Waveforms (continued)

**Figure 22. MailBox Interrupt Timing** [63, 64, 65, 66, 67]

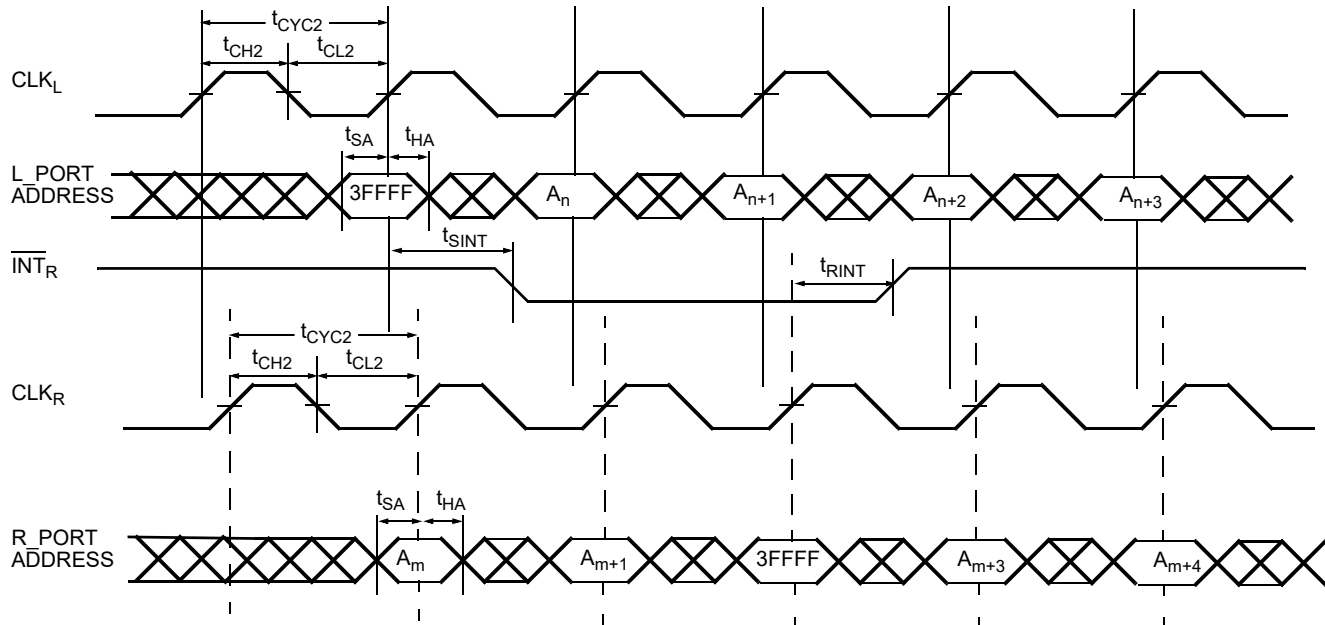

### Notes

63.  $\overline{CE_0} = \overline{OE} = \overline{ADS} = \overline{CNTEN} = \text{LOW}$ ;  $\overline{CE_1} = \overline{CNTRST} = \overline{MRST} = \overline{CNT/MSK} = \text{HIGH}$ .

64. Address "3FFFF" is the mailbox location for R\_Port of a 9M device.

65. L\_Port is configured for Write operation, and R\_Port is configured for Read operation.


66. At least one byte enable (B0 – B3) is required to be active during interrupt operations.

67. Interrupt flag is set with respect to the rising edge of the Write clock, and is reset with respect to the rising edge of the Read clock.

## JTAG Timing

| Parameter         | Description                           | 167/133/100 |     | Unit |
|-------------------|---------------------------------------|-------------|-----|------|
|                   |                                       | Min         | Max |      |
| $f_{\text{JTAG}}$ | Maximum JTAG TAP controller frequency | –           | 10  | MHz  |
| $t_{\text{TCYC}}$ | TCK clock cycle time                  | 100         | –   | ns   |
| $t_{\text{TH}}$   | TCK clock HIGH time                   | 40          | –   | ns   |
| $t_{\text{TL}}$   | TCK clock LOW Time                    | 40          | –   | ns   |
| $t_{\text{TMSS}}$ | TMS setup to TCK clock rise           | 10          | –   | ns   |
| $t_{\text{TMSH}}$ | TMS hold after TCK clock rise         | 10          | –   | ns   |
| $t_{\text{TDIS}}$ | TDI setup to TCK clock rise           | 10          | –   | ns   |
| $t_{\text{TDIH}}$ | TDI hold after TCK clock rise         | 10          | –   | ns   |
| $t_{\text{TDOV}}$ | TCK clock LOW to TDO valid            | –           | 30  | ns   |
| $t_{\text{TDOX}}$ | TCK clock LOW to TDO invalid          | 0           | –   | ns   |

**Figure 23. JTAG Switching Waveform**

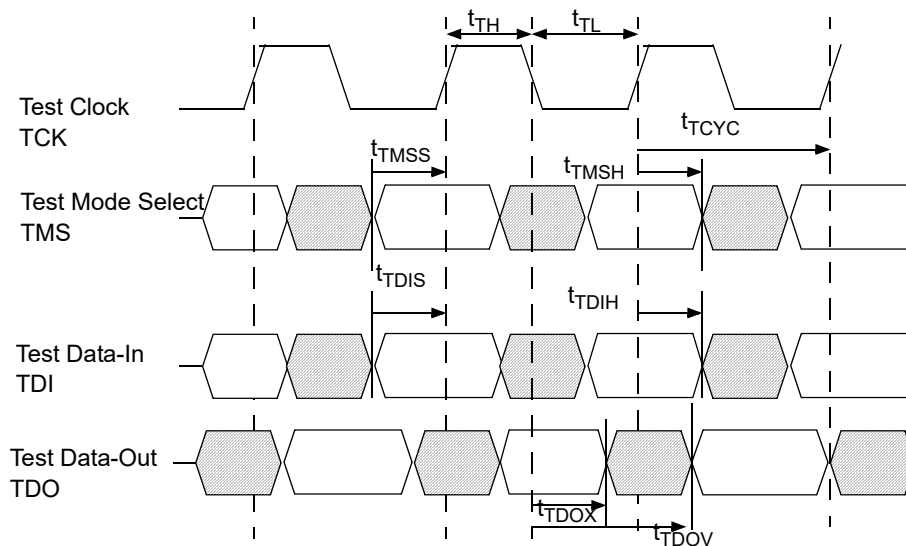

## Ordering Information

Cypress offers other versions of this type of product in many different configurations and features. The following table contains only the list of parts that are currently available. For a complete listing of all options, visit the Cypress website at <http://www.cypress.com> and refer to the product summary page at <http://www.cypress.com/products> or contact your local sales representative.

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives and distributors. To find the office closest to you, visit us at <http://www.cypress.com/go/datasheet/offices>.

### 256K × 36 (9M) 3.3 V Synchronous CY7C0853V/CY7C0853AV Dual-Port SRAM

| Speed (MHz) | Ordering Code     | Package Diagram | Package Type                                              | Operating Range |
|-------------|-------------------|-----------------|-----------------------------------------------------------|-----------------|
| 133         | CY7C0853V-133BBI  | 51-85146        | 172-ball BGA (15 × 15 × 1.6 mm) with 1 mm pitch           | Industrial      |
|             | CY7C0853V-133BBXI |                 | 172-ball BGA (15 × 15 × 1.6 mm) with 1 mm pitch (Pb-free) |                 |
|             | CY7C0853V-133BBC  |                 | 172-ball BGA (15 × 15 × 1.6 mm) with 1 mm pitch           | Commercial      |
| 100         | CY7C0853AV-100BBI | 51-85146        | 172-ball BGA (15 × 15 × 1.6 mm) with 1 mm pitch           | Industrial      |
|             | CY7C0853V-100BBC  |                 | 172-ball BGA (15 × 15 × 1.6 mm) with 1 mm pitch           | Commercial      |

### 128K × 36 (4M) 3.3 V Synchronous CY7C0852V/CY7C0852AV Dual-Port SRAM

| Speed (MHz) | Ordering Code     | Package Diagram | Package Type                                     | Operating Range |
|-------------|-------------------|-----------------|--------------------------------------------------|-----------------|
| 167         | CY7C0852V-167BBC  | 51-85114        | 172-ball BGA (15 × 15 × 1.25 mm) with 1 mm pitch | Commercial      |
|             | CY7C0852AV-167AXC | 51-85132        | 176-pin TQFP (24 × 24 × 1.4 mm) (Pb-free)        |                 |
| 133         | CY7C0852AV-133AXC | 51-85132        | 176-pin TQFP (24 × 24 × 1.4 mm) (Pb-free)        | Industrial      |
|             | CY7C0852AV-133BBI | 51-85114        | 172-ball BGA (15 × 15 × 1.25 mm) with 1 mm pitch |                 |
|             | CY7C0852V-133BBC  | 51-85114        | 172-ball BGA (15 × 15 × 1.25 mm) with 1 mm pitch | Commercial      |
|             | CY7C0852V-133BBI  |                 | 172-ball BGA (15 × 15 × 1.25 mm) with 1 mm pitch | Industrial      |

### 64K × 36 (2M) 3.3 V Synchronous CY7C0851V/CY7C0851AV Dual-Port SRAM


| Speed (MHz) | Ordering Code      | Package Diagram | Package Type                                               | Operating Range |
|-------------|--------------------|-----------------|------------------------------------------------------------|-----------------|
| 167         | CY7C0851V-167BBC   | 51-85114        | 172-ball BGA (15 × 15 × 1.25 mm) with 1 mm pitch           | Commercial      |
|             | CY7C0851AV-167BBXC |                 | 172-ball BGA (15 × 15 × 1.25 mm) with 1 mm pitch (Pb-free) |                 |

## Ordering Code Definitions

| CY | 7 | C | 0 | 8 | 5 | X | X | - | XXX | XX | X | X |                                                                     |
|----|---|---|---|---|---|---|---|---|-----|----|---|---|---------------------------------------------------------------------|
|    |   |   |   |   |   |   |   |   |     |    |   |   | Temperature Range: X = I or C<br>I = Industrial; C = Commercial     |
|    |   |   |   |   |   |   |   |   |     |    |   |   | X = Pb-free (RoHS Compliant)                                        |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Package Type: XX = BB or A<br>BB = 172-ball BGA<br>A = 176-pin TQFP |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Speed Grade: XXX = 100 MHz or 133 MHz or 167 MHz                    |
|    |   |   |   |   |   |   |   |   |     |    |   |   | X = V or AV<br>V or AV = 3.3 V                                      |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Depth: X = 1 or 2 or 3<br>1 = 64K<br>2 = 128K<br>3 = 256K           |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Width: 5 = × 36                                                     |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Family Code: 8 = Synchronous                                        |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Port: 0 = Dual-Port                                                 |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Technology Code: C = CMOS                                           |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Marketing Code: 7 = SRAM                                            |
|    |   |   |   |   |   |   |   |   |     |    |   |   | Company ID: CY = Cypress                                            |

## Package Diagrams

Figure 24. 172-ball FBGA (15 × 15 × 1.6 mm) BB172SD (For Single or Stacked Die) Package Outline, 51-85146

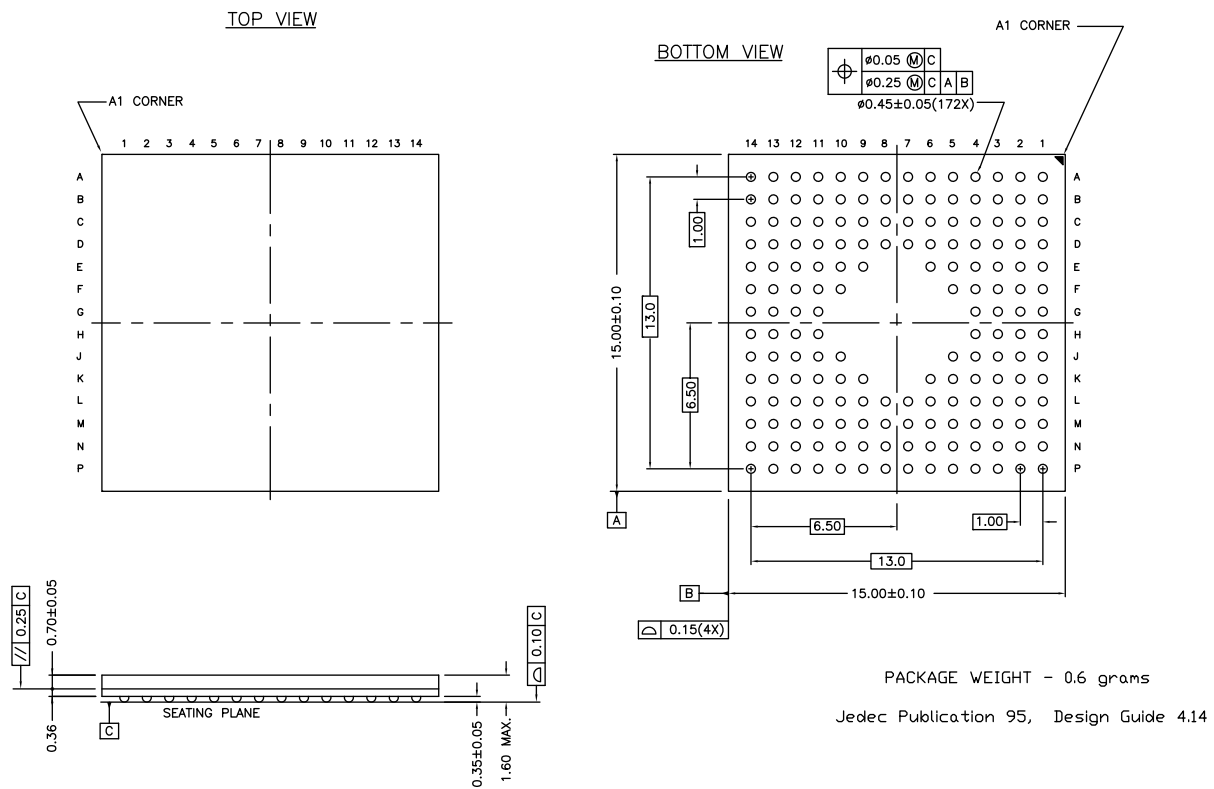


51-85146 \*E



## Package Diagrams (continued)

**Figure 25. 172-ball FBGA (15 × 15 × 1.25 mm) BB172 Package Outline, 51-85114**

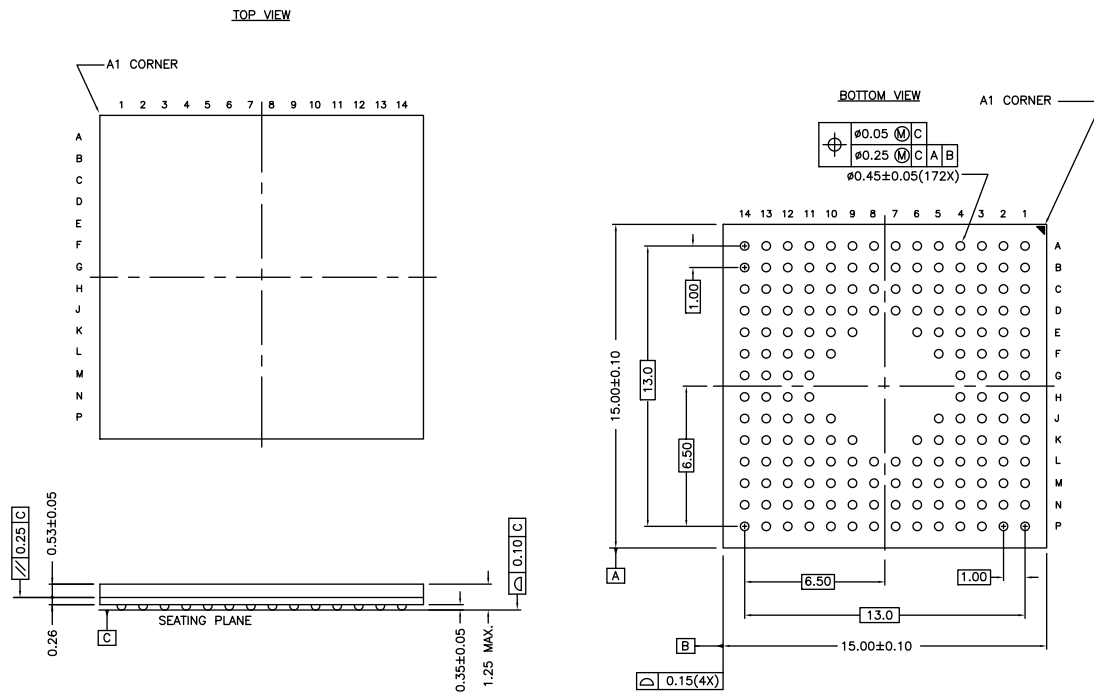


Package Weight — Refer to PMDD spec.

51-85114 \*E

## Package Diagrams (continued)

**Figure 26. 176-pin TQFP (24 × 24 × 1.4 mm) A176S Package Outline, 51-85132**

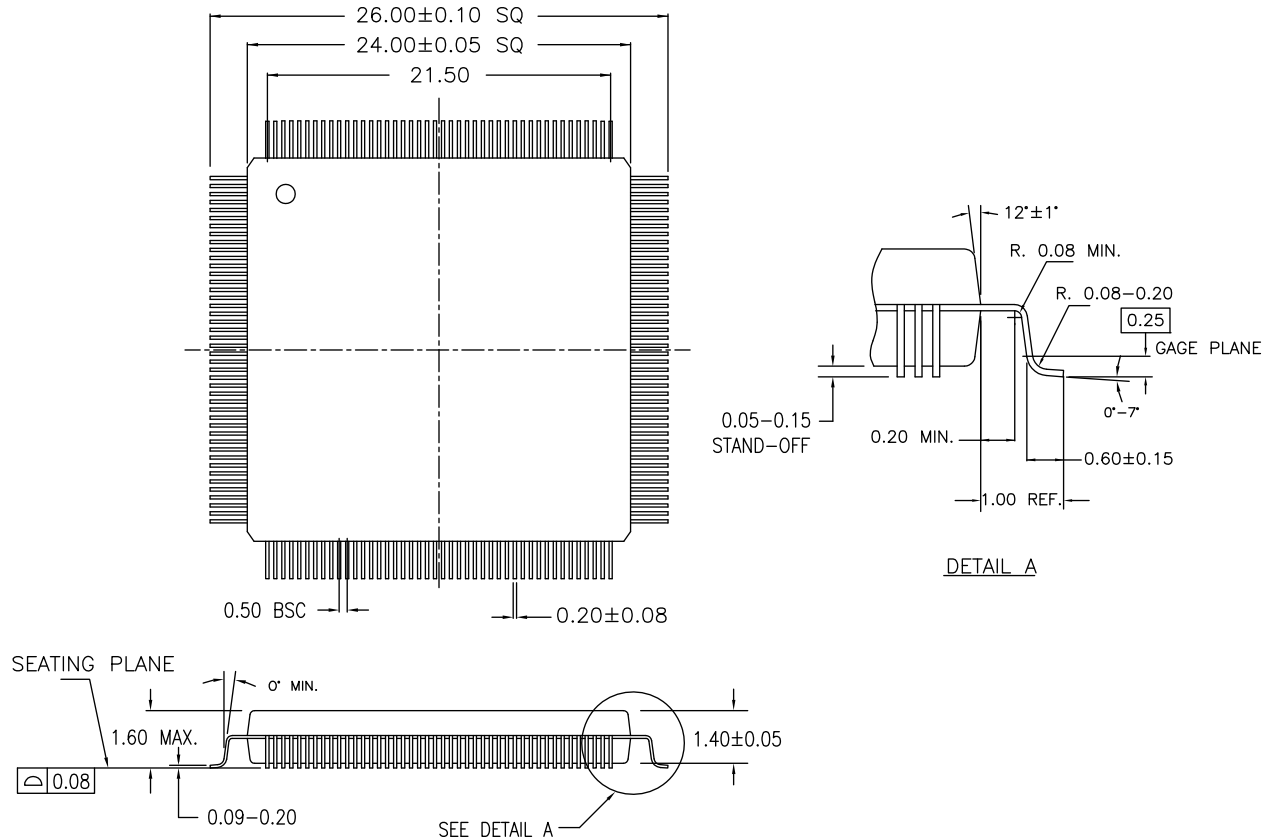

51-85132 \*D

## Acronyms

| Acronym | Description                             |
|---------|-----------------------------------------|
| CMOS    | Complementary Metal Oxide Semiconductor |
| FBGA    | Fine-Pitch Ball Grid Array              |
| I/O     | Input/Output                            |
| JTAG    | Joint Test Action Group                 |
| SRAM    | Static Random Access Memory             |
| TCK     | Test Clock Input                        |
| TDI     | Test Data Input                         |
| TDO     | Test Data Output                        |
| TQFP    | Thin Quad Flat Pack                     |

## Document Conventions

### Units of Measure

| Symbol | Unit of Measure |
|--------|-----------------|
| °C     | degree Celsius  |
| MHz    | megahertz       |
| μA     | microampere     |
| mA     | milliampere     |
| mV     | millivolt       |
| ns     | nanosecond      |
| Ω      | ohm             |
| pF     | picofarad       |
| V      | volt            |
| W      | watt            |

## Document History Page

| Document Title: CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV/CY7C0853V/CY7C0853AV,<br>FLEX36™ 3.3 V, 32K/64K/128K/256K × 36 Synchronous Dual-Port RAM<br>Document Number: 38-06070 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                                                                                                            | ECN No. | Orig. of Change | Submission Date | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| **                                                                                                                                                                              | 127809  | SPN             | 08/04/2003      | <p>This data sheet has been extracted from another data sheet (2M/4M/9M data sheet).</p> <p>The following changes have been made from the original as pertains to this device:</p> <p>Separated out from the 4M data sheet.</p> <p>Updated <a href="#">Product Selection Guide</a>:</p> <p>Updated I<sub>CC</sub> (values).</p> <p>Updated <a href="#">Pin Configurations</a>:</p> <p>Updated <a href="#">Figure 2</a> (Corrected 0853 pins L3 and L12).</p> <p>Updated <a href="#">IEEE 1149.1 Serial Boundary Scan (JTAG)</a>:</p> <p>Added discussion of Pause/Restart for JTAG boundary scan.</p> <p>Updated <a href="#">Maximum Ratings</a>:</p> <p>Added Note 23 and referred the same note in "maximum ratings".</p> <p>Updated details corresponding to "Static Discharge Voltage".</p> <p>Updated <a href="#">Electrical Characteristics</a>:</p> <p>Updated values corresponding to I<sub>CC</sub> parameter.</p> <p>Updated <a href="#">Capacitance</a> (Updated all values).</p> <p>Updated <a href="#">Switching Characteristics</a>:</p> <p>Updated maximum value of t<sub>CD2</sub>, t<sub>OE</sub>, t<sub>OHZ</sub>, t<sub>CKHZ</sub>, t<sub>CKLZ</sub> parameters for the CY7C0853V to 4.7 ns.</p> <p>Updated minimum value of t<sub>HA</sub>, t<sub>HB</sub>, t<sub>HD</sub> parameters for -100 speed bin.</p> <p>Updated <a href="#">Switching Waveforms</a>:</p> <p>Updated <a href="#">Figure 11</a>.</p> <p>Updated <a href="#">Ordering Information</a> (Updated part numbers).</p> |
| *A                                                                                                                                                                              | 210948  | YDT             | 03/15/2004      | <p>Replaced "1FFFE" with "3FFFE" in all instances across the document.</p> <p>Replaced "1FFFF" with "3FFFF" in all instances across the document.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| *B                                                                                                                                                                              | 216190  | YDT / DCON      | 04/05/2004      | Corrected "Description of Change" of Revision *B of Document. CMS does not reflect this rev change.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| *C                                                                                                                                                                              | 231996  | YDT             | 06/07/2004      | Updated <a href="#">Functional Description</a> (Removed "A particular port can write to a certain location while another port is reading that location.").                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| *D                                                                                                                                                                              | 238938  | WWZ             | 06/30/2004      | <p>Updated Document Title to read as "CY7C0850V/CY7C0851V/CY7C0852V/CY7C0853V FLEX36™ 3.3V 32K/64K/128K/256K x 36 Synchronous Dual-Port RAM".</p> <p>Added CY7C0850V, CY7C0851V, CY7C0852V parts related information in all instances across the document.</p> <p>Updated <a href="#">Functional Description</a>:</p> <p>Updated description.</p> <p>Updated <a href="#">Product Selection Guide</a> (almost entire table).</p> <p>Updated <a href="#">Functional Overview</a>:</p> <p>Added <a href="#">Address Counter and Mask Register Operations</a>.</p> <p>Updated <a href="#">Scan Registers Sizes</a> (Added Note 22 and referred the same note in the Bit Size 'n' of Bondary Scan).</p> <p>Updated <a href="#">JTAG Timing</a> (Added 167 MHz frequency range related information).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| *E                                                                                                                                                                              | 329122  | SPN             | 03/07/2005      | Updated <a href="#">Ordering Information</a> (Updated part numbers).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**Document History Page** (continued)

| Document Title: CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV/CY7C0853V/CY7C0853AV,<br>FLEX36™ 3.3 V, 32K/64K/128K/256K × 36 Synchronous Dual-Port RAM<br>Document Number: 38-06070 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                                                                                                            | ECN No. | Orig. of Change | Submission Date | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| *F                                                                                                                                                                              | 389877  | KGH             | 08/01/2005      | Updated <a href="#">Electrical Characteristics</a> :<br>Added I <sub>SB5</sub> parameter and its details.<br>Updated <a href="#">Switching Characteristics</a> :<br>Changed maximum value of t <sub>RSF</sub> parameter to 10 ns for all speed bins.<br>Changed maximum value of t <sub>RSCNTINT</sub> parameter to 10 ns for CY7C0850AV/CY7C0851AV/CY7C0852AV.<br>Updated <a href="#">Switching Waveforms</a> :<br>Updated <a href="#">Figure 10</a> .<br>Updated <a href="#">Figure 11</a> .<br>Added <a href="#">Figure 14</a> .<br>Added <a href="#">Figure 15</a> .<br>Added <a href="#">Figure 16</a> .<br>Added <a href="#">Figure 17</a> .                                                                                                                                                                                                                                                                                                                                                                                                       |
| *G                                                                                                                                                                              | 391597  | SPN             | 08/15/2005      | Updated <a href="#">Functional Overview</a> :<br>Updated <a href="#">Address Counter and Mask Register Operations</a> :<br>Updated <a href="#">Counter Reset Operation</a> (Updated description (to reflect mirror register behavior)).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| *H                                                                                                                                                                              | 2544945 | VKN / AESA      | 07/29/2008      | Updated <a href="#">Ordering Information</a> (Updated part numbers).<br>Updated to new template.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| *I                                                                                                                                                                              | 2897087 | RAME            | 03/22/2010      | Updated <a href="#">Ordering Information</a> (Updated part numbers).<br>Updated <a href="#">Package Diagrams</a><br>spec 51-85114 – Changed revision from *B to *C.<br>spec 51-85132 – Changed revision from ** to *A.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| *J                                                                                                                                                                              | 3093275 | ADMU            | 11/23/2010      | Added CY7C0851V/CY7C0852V/CY7C0853V parts related information in all instances across the document.<br>Added <a href="#">Contents</a> .<br>Updated <a href="#">Ordering Information</a> :<br>Updated part numbers.<br>Added <a href="#">Ordering Code Definitions</a> .<br>Added <a href="#">Acronyms and Units of Measure</a> .<br>Updated to new template.<br>Completing Sunset Review.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| *K                                                                                                                                                                              | 3402163 | ADMU            | 10/12/2011      | Updated <a href="#">Ordering Information</a> (Updated part numbers).<br>Updated <a href="#">Package Diagrams</a> :<br>spec 51-85114 – Changed revision from *C to *D.<br>Completing Sunset Review.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| *L                                                                                                                                                                              | 3698945 | SMCH            | 08/07/2012      | Updated Document Title to read as "CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV/CY7C0853V/CY7C0853AV, FLEX36™ 3.3 V, 32K/64K/128K/256K × 36 Synchronous Dual-Port RAM".<br>Updated <a href="#">Features</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Functional Description</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Product Selection Guide</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Pin Configurations</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Pin Definitions</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Mailbox Interrupts</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Address Counter and Mask Register Operations</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">IEEE 1149.1 Serial Boundary Scan (JTAG)</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Identification Register Definitions</a> (Removed CY7C0850AV related information). |

**Document History Page** (continued)

| Document Title: CY7C0851V/CY7C0851AV/CY7C0852V/CY7C0852AV/CY7C0853V/CY7C0853AV,<br>FLEX36™ 3.3 V, 32K/64K/128K/256K × 36 Synchronous Dual-Port RAM<br>Document Number: 38-06070 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                                                                                                            | ECN No. | Orig. of Change | Submission Date | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| *L (cont.)                                                                                                                                                                      | 3698945 | SMCH            | 08/07/2012      | Updated <a href="#">Electrical Characteristics</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Capacitance</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Switching Characteristics</a> (Removed CY7C0850AV related information).<br>Updated <a href="#">Package Diagrams</a> :<br>Added spec 51-85146 Rev. *D.<br>spec 51-85132 – Changed revision from *A to *B.                                                                                                                                     |
| *M                                                                                                                                                                              | 3829988 | SMCH            | 12/04/2012      | Updated <a href="#">Logic Block Diagram</a> (for better clarity).<br>Updated <a href="#">Functional Overview</a> :<br>Updated <a href="#">Mailbox Interrupts</a> :<br>Updated Note 9 referred in Table 1.<br>Updated <a href="#">Address Counter and Mask Register Operations</a> :<br>Updated <a href="#">Figure 4</a> .<br>Updated <a href="#">Switching Waveforms</a> :<br>Updated Note 32 referred in Figure 8.<br>Updated <a href="#">Package Diagrams</a> :<br>spec 51-85114 – Changed revision from *D to *E.<br>Completing Sunset Review. |
| *N                                                                                                                                                                              | 4581625 | SMCH            | 11/27/2014      | Updated <a href="#">Functional Description</a> :<br>Added “For a complete list of related documentation, <a href="#">click here</a> .” at the end.<br>Updated <a href="#">Ordering Information</a> :<br>Updated part numbers.                                                                                                                                                                                                                                                                                                                     |
| *O                                                                                                                                                                              | 5018928 | NILE            | 11/18/2015      | Updated <a href="#">Package Diagrams</a> :<br>spec 51-85146 – Changed revision from *D to *E.<br>spec 51-85132 – Changed revision from *B to *C.<br>Updated to new template.<br>Completing Sunset Review.                                                                                                                                                                                                                                                                                                                                         |
| *P                                                                                                                                                                              | 6045246 | NILE            | 01/25/2018      | Updated <a href="#">Ordering Information</a> :<br>Updated part numbers.<br>Updated <a href="#">Package Diagrams</a> :<br>spec 51-85132 – Changed revision from *C to *D.<br>Updated to new template.                                                                                                                                                                                                                                                                                                                                              |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

|                               |                                                                    |
|-------------------------------|--------------------------------------------------------------------|
| Arm® Cortex® Microcontrollers | <a href="http://cypress.com/arm">cypress.com/arm</a>               |
| Automotive                    | <a href="http://cypress.com/automotive">cypress.com/automotive</a> |
| Clocks & Buffers              | <a href="http://cypress.com/clocks">cypress.com/clocks</a>         |
| Interface                     | <a href="http://cypress.com/interface">cypress.com/interface</a>   |
| Internet of Things            | <a href="http://cypress.com/iot">cypress.com/iot</a>               |
| Memory                        | <a href="http://cypress.com/memory">cypress.com/memory</a>         |
| Microcontrollers              | <a href="http://cypress.com/mcu">cypress.com/mcu</a>               |
| PSoC                          | <a href="http://cypress.com/psoc">cypress.com/psoc</a>             |
| Power Management ICs          | <a href="http://cypress.com/pmic">cypress.com/pmic</a>             |
| Touch Sensing                 | <a href="http://cypress.com/touch">cypress.com/touch</a>           |
| USB Controllers               | <a href="http://cypress.com/usb">cypress.com/usb</a>               |
| Wireless Connectivity         | <a href="http://cypress.com/wireless">cypress.com/wireless</a>     |

### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

### Cypress Developer Community

[Community](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

### Technical Support

[cypress.com/support](http://cypress.com/support)

© Cypress Semiconductor Corporation, 2003-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Cypress Semiconductor:

[CY7C0851V-167BBC](#) [CY7C0852V-133BBC](#) [CY7C0852V-133BBCT](#) [CY7C0852V-133BBI](#) [CY7C0852V-167BBC](#)  
[CY7C0853V-100BBC](#) [CY7C0853V-133BBC](#) [CY7C0853V-133BBI](#) [CY7C0851AV-133AXI](#) [CY7C0852AV-133AXC](#)  
[CY7C0852AV-133AXI](#) [CY7C0852AV-167AXC](#) [CY7C0851AV-167BBXC](#) [CY7C0852AV-133BBI](#) [CY7C0853AV-100BBI](#)  
[CY7C0853V-133BBXI](#) [CY7C0853AV-100BBC](#) [CY7C0853AV-133BBC](#) [CY7C0851AV-133BBI](#) [CY7C0851AV-167AXC](#)  
[CY7C0851AV-133AXC](#)