



for microwave low noise amplifier at VHF, UHF and CATV band

The transistor is subdivided into three groups, Q, R and S, according to its DC current gain.

Marking : R5

SOT-23

1. BASE
2. EMITTER
3. COLLECTOR

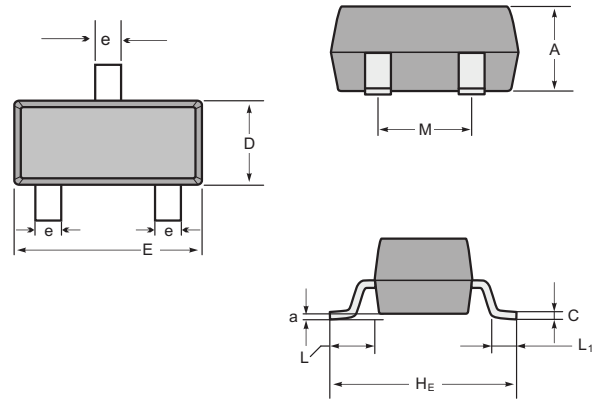

SOT-23 mechanical data

| UNIT |     | A   | C    | D   | E   | H <sub>E</sub> | e   | M    | L             | L <sub>1</sub> | a    |
|------|-----|-----|------|-----|-----|----------------|-----|------|---------------|----------------|------|
| mm   | max | 1.1 | 0.15 | 1.4 | 3.0 | 2.6            | 0.5 | 1.95 | 0.55<br>(ref) | 0.36<br>(ref)  | 0.0  |
|      | min | 0.9 | 0.08 | 1.2 | 2.8 | 2.2            | 0.3 | 1.7  |               |                | 0.15 |
| mil  | max | 43  | 6    | 55  | 118 | 102            | 20  | 77   | 22<br>(ref)   | 14<br>(ref)    | 0.0  |
|      | min | 35  | 3    | 47  | 110 | 87             | 12  | 67   |               |                | 6    |

### Absolute Maximum Ratings (T<sub>a</sub> = 25 °C)

| Parameter                 | Symbol           | Value         | Unit |
|---------------------------|------------------|---------------|------|
| Collector Base Voltage    | V <sub>CBO</sub> | 20            | V    |
| Collector Emitter Voltage | V <sub>CEO</sub> | 12            | V    |
| Emitter Base Voltage      | V <sub>EBO</sub> | 3             | V    |
| Collector Current         | I <sub>C</sub>   | 100           | mA   |
| Power Dissipation         | P <sub>tot</sub> | 200           | mW   |
| Junction Temperature      | T <sub>j</sub>   | 150           | °C   |
| Storage Temperature Range | T <sub>s</sub>   | - 65 to + 150 | °C   |

# 2SC3356

## Characteristics ( $T_a = 25^\circ\text{C}$ )

| Parameter                                                                                               | Symbol        | Min. | Typ. | Max. | Unit          |
|---------------------------------------------------------------------------------------------------------|---------------|------|------|------|---------------|
| DC Current Gain<br>at $V_{CE} = 10\text{ V}$ , $I_C = 20\text{ mA}$ Current Gain Group      Q<br>R<br>S | $h_{FE}$      | 50   | -    | 100  | -             |
|                                                                                                         | $h_{FE}$      | 80   | -    | 160  | -             |
|                                                                                                         | $h_{FE}$      | 125  | -    | 250  | -             |
|                                                                                                         |               |      |      |      |               |
| Collector Cutoff Current<br>at $V_{CB} = 10\text{ V}$                                                   | $I_{CBO}$     | -    | -    | 1    | $\mu\text{A}$ |
| Emitter Cutoff Current<br>at $V_{EB} = 1\text{ V}$                                                      | $I_{EBO}$     | -    | -    | 1    | $\mu\text{A}$ |
| Gain Bandwidth Product<br>at $V_{CE} = 10\text{ V}$ , $I_C = 20\text{ mA}$                              | $f_T$         | -    | 7    | -    | GHz           |
| Feed-Back Capacitance<br>at $V_{CB} = 10\text{ V}$ , $f = 1\text{ MHz}$                                 | $C_{re}^{1)}$ | -    | 0.55 | 1    | pF            |
| Noise Figure<br>at $V_{CE} = 10\text{ V}$ , $I_C = 7\text{ mA}$ , $f = 1\text{ GHz}$                    | NF            | -    | 1.1  | 2    | dB            |

<sup>1)</sup> The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.

# RATING AND CHARACTERISTIC CURVES (2SC3356)

