



1、 General Description

The 74HC165/74HCT165 is 8-bit serial or parallel-in/serial-out shift registers. The device features a serial data input (DS), eight parallel data inputs (D0 to D7) and two complementary serial outputs (Q7 and $\overline{Q7}$). When the parallel load input ($\overline{PL}$) is LOW the data from D0 to D7 is loaded into the shift register asynchronously. When $\overline{PL}$ is HIGH data enters the register serially at DS. When the clock enable input ($\overline{CE}$) is LOW data is shifted on the LOW-to-HIGH transitions of the CP input. A HIGH on $\overline{CE}$ will disable the CP input. Inputs are overvoltage tolerant to 15V. This enables the device to be used in HIGH-to-LOW level shifting applications.

Features:

- Input levels:
For 74HC165: CMOS level
For 74HCT165: TTL level
- Asynchronous 8-bit parallel load
- Synchronous serial input
- Specified from -40°C to +85°C
- Packaging information: DIP16/SOP16(SOIC-16)/TSSOP16

2、 Block Diagram And Pin Description

2.1 、 Block Diagram

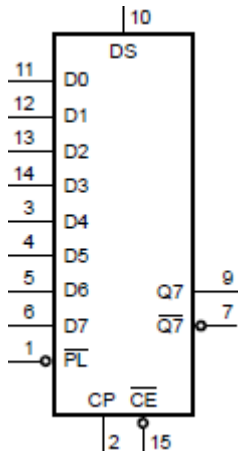


Figure 1. Logic symbol

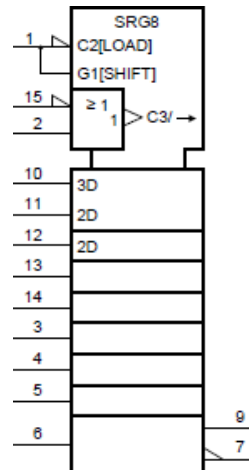


Figure 2. IEC logic symbol

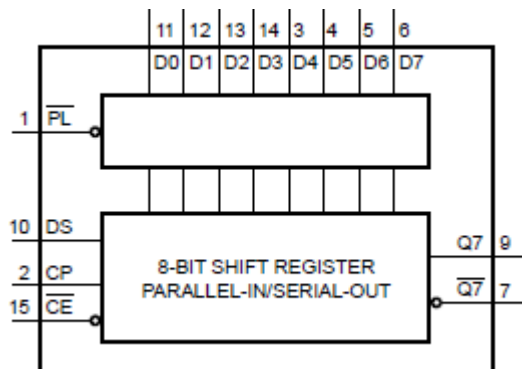


Figure 3. Functional diagram




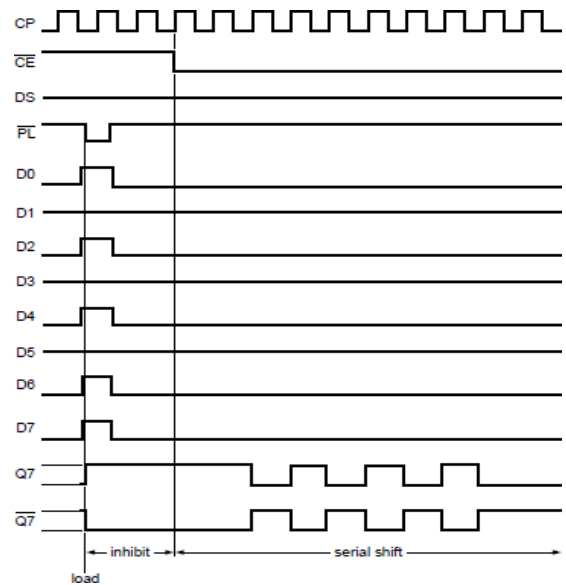


Figure 4. Timing diagram


2.2、Pin Configurations

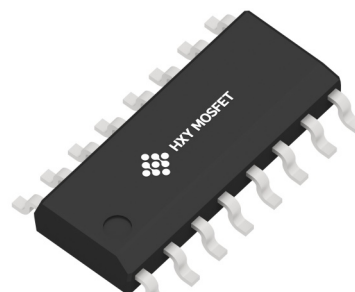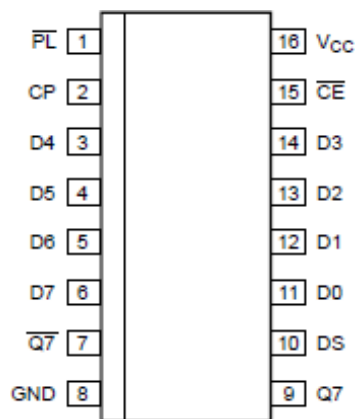

PIN 1
SOP-16(SOIC-16)

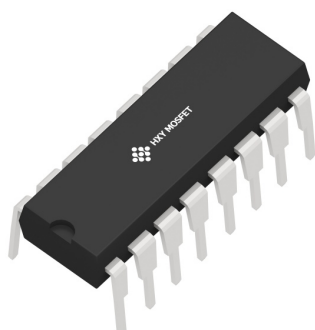

PIN 1
DIP-16

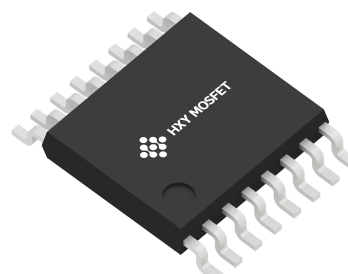

PIN 1
TSSOP-16



2.3、Pin Description

Pin No.	Pin Name	Description
1	$\overline{\text{PL}}$	asynchronous parallel load input (active LOW)
2	CP	clock input (LOW-to-HIGH, edge-triggered)
3	D4	parallel data input (also referred to as Dn)
4	D5	parallel data input (also referred to as Dn)
5	D6	parallel data input (also referred to as Dn)
6	D7	parallel data input (also referred to as Dn)
7	$\overline{\text{Q7}}$	complementary output from the last stage
8	GND	ground (0V)
9	Q7	serial output from the last stage
10	DS	serial data input
11	D0	parallel data input (also referred to as Dn)
12	D1	parallel data input (also referred to as Dn)
13	D2	parallel data input (also referred to as Dn)
14	D3	parallel data input (also referred to as Dn)
15	$\overline{\text{CE}}$	clock enable input (active LOW)
16	V _{CC}	supply voltage

2.4、Function Table

Operating mode	Input					Qn register		Output	
	$\overline{\text{PL}}$	$\overline{\text{CE}}$	CP	DS	D0 to D7	Q0	Q1 to Q6	Q7	$\overline{\text{Q7}}$
parallel load	L	X	X	X	L	L	L to L	L	H
	L	X	X	X	H	H	H to H	H	L
serial shift	H	L	↑	l	X	L	q0 to q5	q6	$\overline{\text{q6}}$
	H	L	↑	h	X	H	q0 to q5	q6	$\overline{\text{q6}}$
	H	↑	L	l	X	L	q0 to q5	q6	$\overline{\text{q6}}$
	H	↑	L	h	X	H	q0 to q5	q6	$\overline{\text{q6}}$
hold "do nothing"	H	H	X	X	X	q0	q1 to q6	q7	$\overline{\text{q7}}$
	H	X	H	X	X	q0	q1 to q6	q7	$\overline{\text{q7}}$

Note: H=HIGH voltage level;

h=HIGH voltage level one set-up time prior to the LOW-to-HIGH clock transition;

L=LOW voltage level; ↑=LOW-to-HIGH clock transition;

l=LOW voltage level one set-up time prior to the LOW-to-HIGH clock transition;

q=state of the referenced output one set-up time prior to the LOW-to-HIGH clock transition;

X=don't care;

↑=LOW-to-HIGH clock transition.



3、Electrical Parameter

3.1、Absolute Maximum Ratings

(Voltages are referenced to GND(ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V_{CC}	-	-0.5	+7	V
input clamping current	I_{IK}	$V_I < -0.5V$ or $V_I > V_{CC}+0.5V$	-	± 20	mA
output clamping current	I_{OK}	$V_O < -0.5V$ or $V_O > V_{CC}+0.5V$	-	± 20	mA
output current	I_O	$-0.5V < V_O < V_{CC}+0.5V$	-	± 25	mA
supply current	I_{CC}	-	-	50	mA
ground current	I_{GND}	-	-50	-	mA
total power dissipation	P_{tot}	-	-	500	mW
storage temperature	T_{stg}	-	-65	+150	°C
soldering temperature	T_L	10s	DIP	245	°C
			SOP	250	°C

Note:

[1] For DIP16 packages: above 70°C the value of P_{tot} derates linearly with 12mW/K.

[2] For SOP16 packages: above 70°C the value of P_{tot} derates linearly with 8mW/K.

[3] For (T)SSOP16 packages: above 60°C the value of P_{tot} derates linearly with 5.5mW/K.

3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
74HC165						
supply voltage	V_{CC}	-	2.0	5.0	6.0	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
input transition rise and fall rate	$\Delta t/\Delta V$	$V_{CC}=2.0V$	-	-	625	ns/V
		$V_{CC}=4.5V$	-	1.67	139	ns/V
		$V_{CC}=6.0V$	-	-	83	ns/V
ambient temperature	T_{amb}	-	-40	-	+85	°C
74HCT165						
supply voltage	V_{CC}	-	4.5	5.0	5.5	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
input transition rise and fall rate	$\Delta t/\Delta V$	$V_{CC}=2.0V$	-	-	-	ns/V
		$V_{CC}=4.5V$	-	1.67	139	ns/V
		$V_{CC}=6.0V$	-	-	-	ns/V
ambient temperature	T_{amb}	-	-40	-	+85	°C



3.3、Electrical Characteristics

3.3.1、DC Characteristics 1

($T_{amb}=25^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
74HC165							
HIGH-level input voltage	V _{IH}	V _{CC} =2.0V		1.5	1.2	-	V
		V _{CC} =4.5V		3.15	2.4	-	V
		V _{CC} =6.0V		4.2	3.2	-	V
LOW-level input voltage	V _{IL}	V _{CC} =2.0V		-	0.8	0.5	V
		V _{CC} =4.5V		-	2.1	1.35	V
		V _{CC} =6.0V		-	2.8	1.8	V
HIGH-level output voltage	V _{OH}	V _I = V _{IH} or V _{IL}	I _O =-20uA; V _{CC} =2.0V	1.9	2.0	-	V
			I _O =-20uA; V _{CC} =4.5V	4.4	4.5	-	V
			I _O =-20uA; V _{CC} =6.0V	5.9	6.0	-	V
			I _O =-4.0mA; V _{CC} =4.5V	3.98	4.32	-	V
			I _O =-5.2mA; V _{CC} =6.0V	5.48	5.81	-	V
LOW-level output voltage	V _{OL}	V _I = V _{IH} or V _{IL}	I _O =20uA; V _{CC} =2.0V	-	0	0.1	V
			I _O =20uA; V _{CC} =4.5V	-	0	0.1	V
			I _O =20uA; V _{CC} =6.0V	-	0	0.1	V
			I _O =4.0mA; V _{CC} =4.5V	-	0.15	0.26	V
			I _O =5.2mA; V _{CC} =6.0V	-	0.16	0.26	V
input leakage current	I _I	V _I = V _{CC} or GND; V _{CC} =6.0V		-	-	±0.1	uA
supply current	I _{CC}	V _I = V _{CC} or GND; I _O =0A; V _{CC} =6.0V		-	-	8	uA
input capacitance	C _I	-		-	3.5	-	pF
74HCT165							
HIGH-level input voltage	V _{IH}	V _{CC} =4.5V to 5.5V		2.0	1.6	-	V
LOW-level input voltage	V _{IL}	V _{CC} =4.5V to 5.5V		-	1.2	0.8	V
HIGH-level output voltage	V _{OH}	V _I = V _{IH} or V _{IL} ; V _{CC} =4.5V	I _O =-20uA	4.4	4.5	-	V
			I _O =-4.0mA	3.98	4.32	-	V
LOW-level output voltage	V _{OL}	V _I = V _{IH} or V _{IL}	I _O =20uA; V _{CC} =4.5V	-	0	0.1	V
			I _O =5.2mA; V _{CC} =6.0V	-	0.16	0.26	V
input leakage current	I _I	V _I =V _{CC} or GND; V _{CC} =6.0V		-	-	±0.1	uA
supply current	I _{CC}	V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V		-	-	8.0	uA
additional supply current	ΔI _{CC}	per input pin; V _I =V _{CC} -2.1V; other inputs at V _{CC} or GND; V _{CC} =4.5V to 5.5V	Dn and DS inputs	-	35	126	uA
			CP, CE, and PL inputs	-	65	234	uA
input capacitance	C _I	-		-	3.5	-	pF



3.3.2 、 DC Characteristics 2

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
74HC165							
HIGH-level input voltage	V _{IH}	V _{CC} =2.0V		1.5	-	-	V
		V _{CC} =4.5V		3.15	-	-	V
		V _{CC} =6.0V		4.2	-	-	V
LOW-level input voltage	V _{IL}	V _{CC} =2.0V		-	-	0.5	V
		V _{CC} =4.5V		-	-	1.35	V
		V _{CC} =6.0V		-	-	1.8	V
HIGH-level output voltage	V _{OH}	V _I = V _{IH} or V _{IL}	I _O =-20uA; V _{CC} =2.0V	1.9	-	-	V
			I _O =-20uA; V _{CC} =4.5V	4.4	-	-	V
			I _O =-20uA; V _{CC} =6.0V	5.9	-	-	V
			I _O =-4.0mA; V _{CC} =4.5V	3.84	-	-	V
			I _O =-5.2mA; V _{CC} =6.0V	5.34	-	-	V
LOW-level output voltage	V _{OL}	V _I = V _{IH} or V _{IL}	I _O =20uA; V _{CC} =2.0V	-	-	0.1	V
			I _O =20uA; V _{CC} =4.5V	-	-	0.1	V
			I _O =20uA; V _{CC} =6.0V	-	-	0.1	V
			I _O =4.0mA; V _{CC} =4.5V	-	-	0.33	V
			I _O =5.2mA; V _{CC} =6.0V	-	-	0.33	V
input leakage current	I _I	V _I =V _{CC} or GND; V _{CC} =6.0V		-	-	±1	uA
supply current	I _{CC}	V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V		-	-	80	uA
74HCT165							
HIGH-level input voltage	V _{IH}	V _{CC} =4.5V to 5.5V		2.0	-	-	V
LOW-level input voltage	V _{IL}	V _{CC} =4.5V to 5.5V		-	-	0.8	V
HIGH-level output voltage	V _{OH}	V _I = V _{IH} or V _{IL} ; V _{CC} =4.5V	I _O =-20uA	4.4	-	-	V
			I _O =-4.0mA	3.84	-	-	V
LOW-level output voltage	V _{OL}	V _I = V _{IH} or V _{IL}	I _O =20uA; V _{CC} =4.5V	-	-	0.1	V
			I _O =5.2mA; V _{CC} =6.0V	-	-	0.33	V
input leakage current	I _I	V _I =V _{CC} or GND; V _{CC} =6.0V		-	-	±1	uA
supply current	I _{CC}	V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V		-	-	80	uA
additional supply current	ΔI _{CC}	per input pin; V _I =V _{CC} -2.1V; other inputs at V _{CC} or GND; V _{CC} =4.5V to 5.5V	Dn and DS inputs	-	-	157.5	uA
			CP, $\overline{\text{CE}}$, and $\overline{\text{PL}}$ inputs	-	-	292.5	uA



3.3.3 、 AC Characteristics

($T_{amb}=25^{\circ}\text{C}$, $GND=0\text{V}$, $C_L=50\text{pF}$, unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
74HC165							
propagation delay	t _{pd}	CP, $\overline{\text{CE}}$ to Q7, $\overline{\text{Q7}}$; see Figure 6	V _{CC} =2.0V	-	52	165	ns
			V _{CC} =4.5V	-	19	33	ns
			V _{CC} =5.0V;C _L =15pF	-	16	-	ns
			V _{CC} =6.0V	-	15	28	ns
		$\overline{\text{PL}}$ to Q7, $\overline{\text{Q7}}$; see Figure 7	V _{CC} =2.0V	-	50	165	ns
			V _{CC} =4.5V	-	18	33	ns
			V _{CC} =5.0V;C _L =15pF	-	15	-	ns
			V _{CC} =6.0V	-	14	28	ns
		D7 to Q7, $\overline{\text{Q7}}$; see Figure 8	V _{CC} =2.0V	-	36	120	ns
			V _{CC} =4.5V	-	13	24	ns
			V _{CC} =5.0V;C _L =15pF	-	11	-	ns
			V _{CC} =6.0V	-	10	20	ns
transition time	t _t	Q7, $\overline{\text{Q7}}$ output; see Figure 6	V _{CC} =2.0V	-	19	75	ns
			V _{CC} =4.5V	-	7	15	ns
			V _{CC} =6.0V	-	6	13	ns
pulse width	t _w	CP input HIGH or LOW; see Figure 6	V _{CC} =2.0V	80	17	-	ns
			V _{CC} =4.5V	16	6	-	ns
			V _{CC} =6.0V	14	5	-	ns
		$\overline{\text{PL}}$ input LOW; see Figure 7	V _{CC} =2.0V	80	14	-	ns
			V _{CC} =4.5V	16	5	-	ns
			V _{CC} =6.0V	14	4	-	ns
recovery time	t _{rec}	$\overline{\text{PL}}$ to CP, $\overline{\text{CE}}$; see Figure 7	V _{CC} =2.0V	100	22	-	ns
			V _{CC} =4.5V	20	8	-	ns
			V _{CC} =6.0V	17	6	-	ns
set-up time	t _{su}	DS to CP, $\overline{\text{CE}}$; see Figure 9	V _{CC} =2.0V	80	11	-	ns
			V _{CC} =4.5V	16	4	-	ns
			V _{CC} =6.0V	14	3	-	ns
		$\overline{\text{CE}}$ to CP and CP to $\overline{\text{CE}}$; see Figure 9	V _{CC} =2.0V	80	17	-	ns
			V _{CC} =4.5V	16	6	-	ns
			V _{CC} =6.0V	14	5	-	ns
		Dn to $\overline{\text{PL}}$; see Figure 10	V _{CC} =2.0V	80	22	-	ns
			V _{CC} =4.5V	16	8	-	ns
			V _{CC} =6.0V	14	6	-	ns
hold time	t _h	DS to CP, $\overline{\text{CE}}$ and Dn to $\overline{\text{PL}}$; see Figure 9	V _{CC} =2.0V	5	2	-	ns
			V _{CC} =4.5V	5	2	-	ns
			V _{CC} =6.0V	5	2	-	ns
		$\overline{\text{CE}}$ to CP and CP to $\overline{\text{CE}}$; see Figure 9	V _{CC} =2.0V	5	-17	-	ns
			V _{CC} =4.5V	5	-6	-	ns
			V _{CC} =6.0V	5	-5	-	ns
maximum frequency	f _{max}	CP input; see Figure 6	V _{CC} =2.0V	6	17	-	MHz
			V _{CC} =4.5V	30	51	-	MHz



			V _{CC} =5.0V;C _L =15pF	-	56	-	MHz
			V _{CC} =6.0V	35	61	-	MHz
power dissipation capacitance	C _{PD}	per package; V _I = GND to V _{CC}		-	35	-	pF
74HCT165							
propagation delay	t _{pd}	CP, $\overline{\text{CE}}$ to Q7, $\overline{\text{Q7}}$; see Figure 6	V _{CC} =4.5V	-	17	34	ns
			V _{CC} =5.0V;C _L =15pF	-	14	-	ns
		$\overline{\text{PL}}$ to Q7, $\overline{\text{Q7}}$; see Figure 7	V _{CC} =4.5V	-	20	40	ns
			V _{CC} =5.0V;C _L =15pF	-	17	-	ns
		D7 to Q7, $\overline{\text{Q7}}$; see Figure 8	V _{CC} =4.5V	-	14	28	ns
			V _{CC} =5.0V;C _L =15pF	-	11	-	ns
transition time	t _t	Q7, $\overline{\text{Q7}}$ output; see Figure 6	V _{CC} =4.5V	-	7	15	ns
pulse width	t _w	CP input; see Figure 6	V _{CC} =4.5V	16	6	-	ns
		$\overline{\text{PL}}$ input; see Figure 7	V _{CC} =4.5V	20	9	-	ns
recovery time	t _{rec}	$\overline{\text{PL}}$ to CP, $\overline{\text{CE}}$; see Figure 7	V _{CC} =4.5V	20	8	-	ns
set-up time	t _{su}	DS to CP, $\overline{\text{CE}}$; see Figure 9	V _{CC} =4.5V	20	2	-	ns
		$\overline{\text{CE}}$ to CP and CP to $\overline{\text{CE}}$; see Figure 9	V _{CC} =4.5V	20	7	-	ns
		Dn to $\overline{\text{PL}}$; see Figure 10	V _{CC} =4.5V	20	10	-	ns
hold time	t _h	DS to CP, $\overline{\text{CE}}$ and Dn to $\overline{\text{PL}}$; see Figure 9	V _{CC} =4.5V	7	-1	-	ns
		$\overline{\text{CE}}$ to CP and CP to $\overline{\text{CE}}$; see Figure 9	V _{CC} =4.5V	0	-7	-	ns
maximum frequency	f _{max}	CP input; see Figure 6	V _{CC} =4.5V	26	44	-	MHz
			V _{CC} =5.0V;C _L =15pF	-	48	-	MHz
power dissipation capacitance	C _{PD}	per package; V _I = GND to V _{CC} -1.5V		-	35	-	pF

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL}.

[2] t_t is the same as t_{THL} and t_{TLH}.

[3] C_{PD} is used to determine the dynamic power dissipation (P_D in uW).

$P_D = (C_{PD} \times V_{CC}^2 \times f_i \times N) + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

f_i=input frequency in MHz;

f_o=output frequency in MHz;

C_L=output load capacitance in pF;

V_{CC}=supply voltage in V;

N=number of inputs switching;

$\sum (C_L \times V_{CC}^2 \times f_o)$ =sum of outputs.



3.3.4 、 AC Characteristics 2

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, GND=0V, $C_L=50\text{pf}$, unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
74HC165						
propagation delay	t_{pd}	CP, $\overline{\text{CE}}$ to Q7, $\overline{\text{Q7}}$; see Figure 6	$V_{CC}=2.0\text{V}$	-	-	205 ns
			$V_{CC}=4.5\text{V}$	-	-	41 ns
			$V_{CC}=6.0\text{V}$	-	-	35 ns
		$\overline{\text{PL}}$ to Q7, $\overline{\text{Q7}}$; see Figure 7	$V_{CC}=2.0\text{V}$	-	-	205 ns
			$V_{CC}=4.5\text{V}$	-	-	41 ns
			$V_{CC}=6.0\text{V}$	-	-	35 ns
		D7 to Q7, $\overline{\text{Q7}}$; see Figure 8	$V_{CC}=2.0\text{V}$	-	-	150 ns
			$V_{CC}=4.5\text{V}$	-	-	30 ns
			$V_{CC}=6.0\text{V}$	-	-	26 ns
transition time	t_t	Q7, $\overline{\text{Q7}}$ output; see Figure 6	$V_{CC}=2.0\text{V}$	-	-	95 ns
			$V_{CC}=4.5\text{V}$	-	-	19 ns
			$V_{CC}=6.0\text{V}$	-	-	16 ns
pulse width	t_w	CP input HIGH or LOW; see Figure 6	$V_{CC}=2.0\text{V}$	100	-	- ns
			$V_{CC}=4.5\text{V}$	20	-	- ns
			$V_{CC}=6.0\text{V}$	17	-	- ns
		$\overline{\text{PL}}$ input LOW; see Figure 7	$V_{CC}=2.0\text{V}$	100	-	- ns
			$V_{CC}=4.5\text{V}$	20	-	- ns
			$V_{CC}=6.0\text{V}$	17	-	- ns
recovery time	t_{rec}	$\overline{\text{PL}}$ to CP, $\overline{\text{CE}}$; see Figure 7	$V_{CC}=2.0\text{V}$	125	-	- ns
			$V_{CC}=4.5\text{V}$	25	-	- ns
			$V_{CC}=6.0\text{V}$	21	-	- ns
set-up time	t_{su}	DS to CP, $\overline{\text{CE}}$; see Figure 9	$V_{CC}=2.0\text{V}$	100	-	- ns
			$V_{CC}=4.5\text{V}$	20	-	- ns
			$V_{CC}=6.0\text{V}$	17	-	- ns
		$\overline{\text{CE}}$ to CP and CP to $\overline{\text{CE}}$; see Figure 9	$V_{CC}=2.0\text{V}$	100	-	- ns
			$V_{CC}=4.5\text{V}$	20	-	- ns
			$V_{CC}=6.0\text{V}$	17	-	- ns
		Dn to $\overline{\text{PL}}$; see Figure 10	$V_{CC}=2.0\text{V}$	100	-	- ns
			$V_{CC}=4.5\text{V}$	20	-	- ns
			$V_{CC}=6.0\text{V}$	17	-	- ns
hold time	t_h	DS to CP, $\overline{\text{CE}}$ and Dn to $\overline{\text{PL}}$; see Figure 9	$V_{CC}=2.0\text{V}$	5	-	- ns
			$V_{CC}=4.5\text{V}$	5	-	- ns
			$V_{CC}=6.0\text{V}$	5	-	- ns
		$\overline{\text{CE}}$ to CP and CP to $\overline{\text{CE}}$; see Figure 9	$V_{CC}=2.0\text{V}$	5	-	- ns
			$V_{CC}=4.5\text{V}$	5	-	- ns
			$V_{CC}=6.0\text{V}$	5	-	- ns



maximum frequency	f _{max}	CP input; see Figure 6	V _{CC} =2.0V	5	-	-	MHz
			V _{CC} =4.5V	24	-	-	MHz
			V _{CC} =6.0V	28	-	-	MHz
74HCT165							
propagation delay	t _{pd}	CP, $\overline{CE}$ to Q7, $\overline{Q7}$; see Figure 6	V _{CC} =4.5V	-	-	43	ns
		PL to Q7, $\overline{Q7}$; see Figure 7	V _{CC} =4.5V	-	-	50	ns
		D7 to Q7, $\overline{Q7}$; see Figure 8	V _{CC} =4.5V	-	-	35	ns
transition time	t _t	Q7, $\overline{Q7}$ output; see Figure 6	V _{CC} =4.5V	-	-	19	ns
pulse width	t _w	CP input; see Figure 6	V _{CC} =4.5V	20	-	-	ns
		PL input; see Figure 7	V _{CC} =4.5V	25	-	-	ns
recovery time	t _{rec}	$\overline{PL}$ to CP, $\overline{CE}$; see Figure 7	V _{CC} =4.5V	25	-	-	ns
set-up time	t _{su}	DS to CP, $\overline{CE}$; see Figure 9	V _{CC} =4.5V	25	-	-	ns
		$\overline{CE}$ to CP and CP to $\overline{CE}$; see Figure 9	V _{CC} =4.5V	25	-	-	ns
		Dn to $\overline{PL}$; see Figure 10	V _{CC} =4.5V	25	-	-	ns
hold time	t _h	DS to CP, $\overline{CE}$ and Dn to $\overline{PL}$; see Figure 9	V _{CC} =4.5V	9	-	-	ns
		$\overline{CE}$ to CP and CP to $\overline{CE}$; see Figure 9	V _{CC} =4.5V	0	-	-	ns
maximum frequency	f _{max}	CP input; see Figure 6	V _{CC} =4.5V	21	-	-	MHz

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

[2] t_t is the same as t_{THL} and t_{TLH} .

[3] C_{PD} is used to determine the dynamic power dissipation (P_D in uW).

$P_D=(C_{PD} \times V_{CC}^2 \times f_i \times N) + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

f_i =input frequency in MHz;

f_o =output frequency in MHz;

C_L =output load capacitance in pF;

V_{CC} =supply voltage in V;

N =number of inputs switching;

$\sum (C_L \times V_{CC}^2 \times f_o)$ =sum of outputs.



4、Testing Circuit

4.1 、AC Testing Circuit

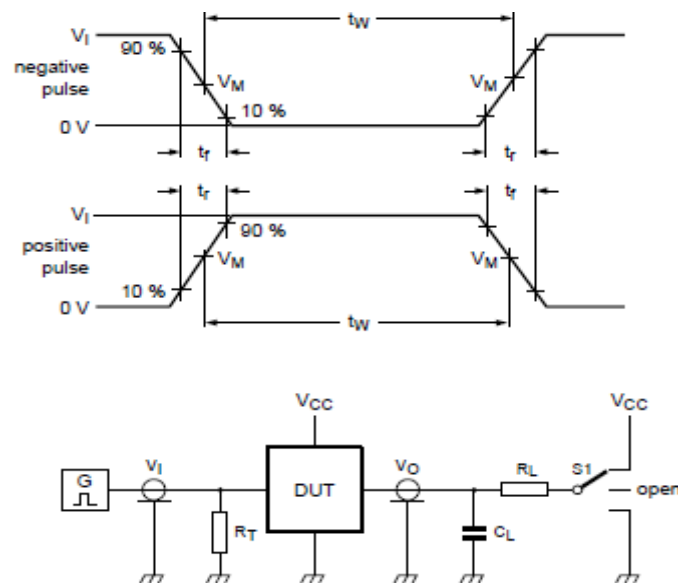


Figure 5. Test circuit for measuring switching times

Definitions for test circuit:

C_L =load capacitance including jig and probe capacitance.

R_T =termination resistance should be equal to the output impedance Z_o of the pulse generator.

R_L =Load resistance.

$S1$ =Test selection switch.

4.2 、AC Testing Waveforms

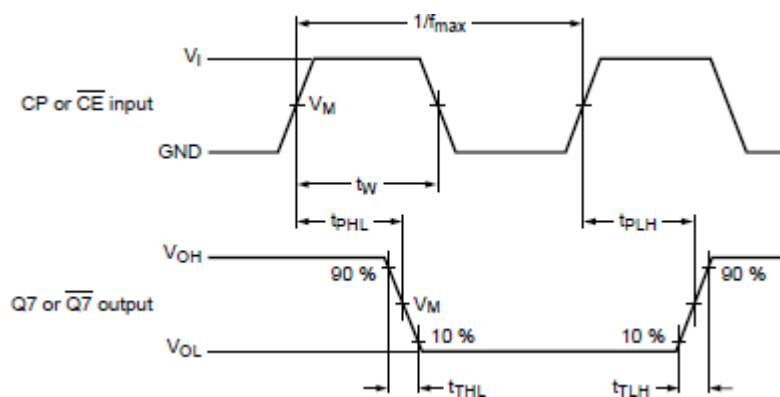


Figure 6. The clock (CP) or clock enable ($\overline{CE}$) to output ($Q7$ or $\overline{Q7}$) propagation delays, the clock pulse width, the maximum clock frequency and the output transition times

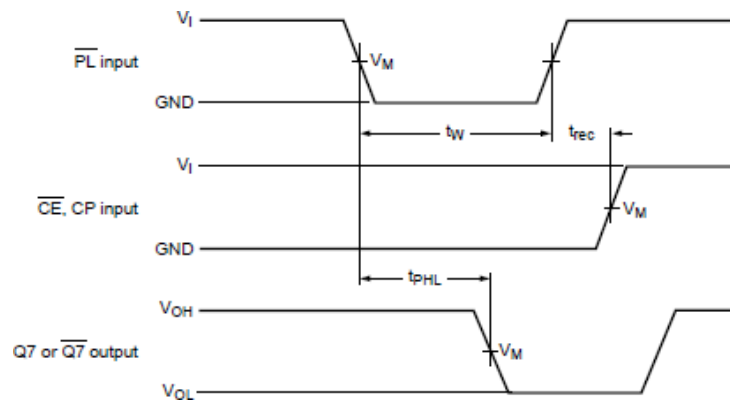


Figure 7. The parallel load ($\overline{\text{PL}}$) pulse width, the parallel load to output (Q7 or $\overline{\text{Q7}}$) propagation delays, the parallel load to clock (CP) and clock enable ($\overline{\text{CE}}$) recovery time

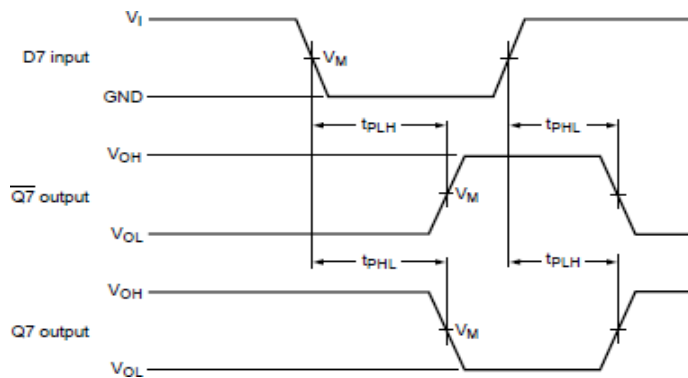


Figure 8. The data input (D7) to output (Q7 or $\overline{\text{Q7}}$) propagation delays when $\overline{\text{PL}}$ is LOW

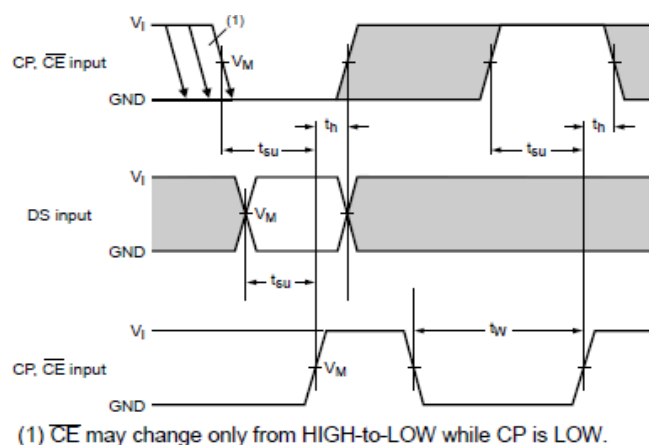


Figure 9. The set-up and hold times from the serial data input (DS) to the clock (CP) and clock enable ($\overline{\text{CE}}$) inputs, from the clock enable input ($\overline{\text{CE}}$) to the clock input (CP) and from the clock input (CP) to the clock enable input ($\overline{\text{CE}}$)

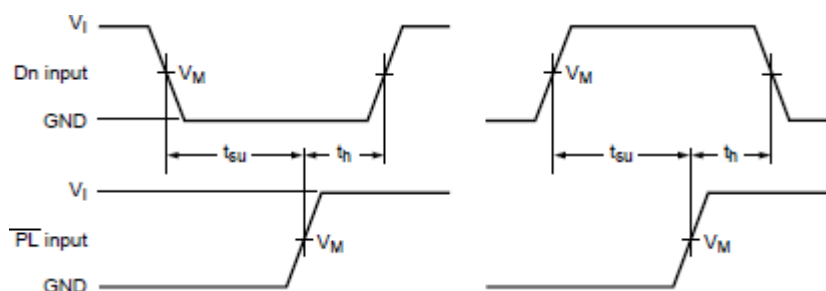


Figure 10. The set-up and hold times from the data inputs (Dn) to the parallel load input (PL)

4.3 、 Measurement Points

Type	Input		Output
	V_I	V_M	V_M
74HC165	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
74HCT165	3V	1.3V	1.3V


4.4 、 Test Data

Type	Input		Load		S1 position
	V_I	t_r, t_f	C_L	R_L	t_{PHL}, t_{PLH}
74HC165	V_{CC}	6.0ns	15pF, 50pF	1k Ω	open
74HCT165	3.0V	6.0ns	15pF, 50pF	1k Ω	open



5、Package Information


5.1、DIP16

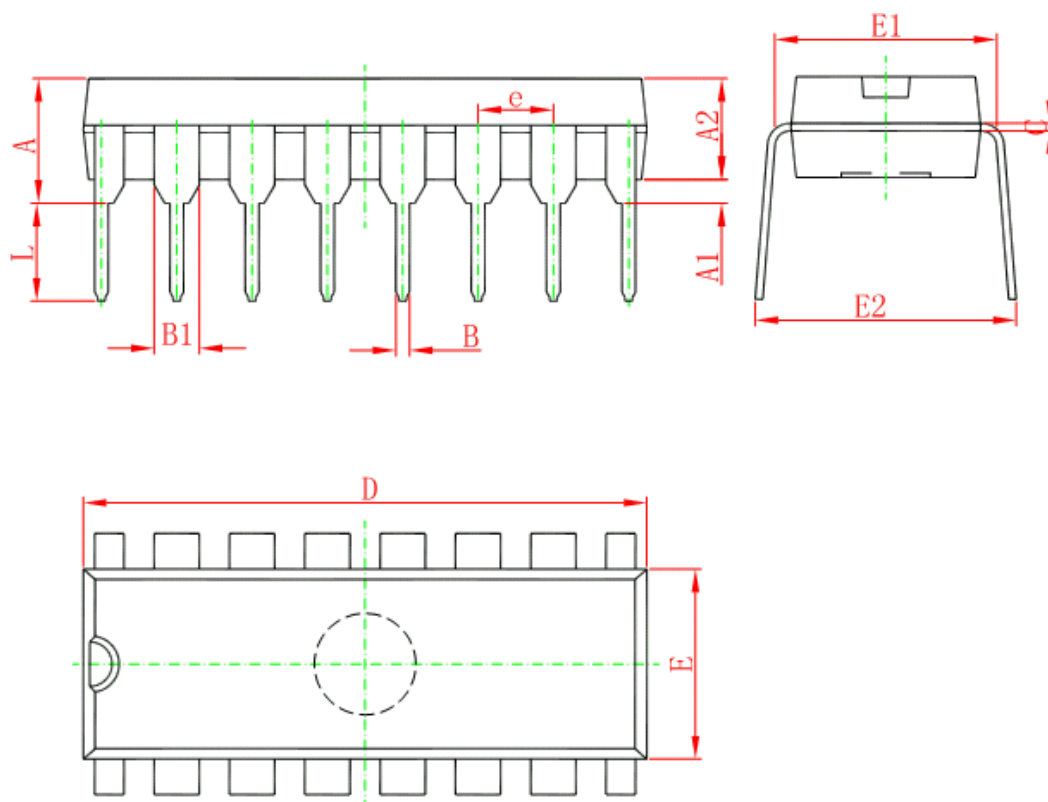

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.710	4.310	0.146	0.170
A1	0.510		0.020	
A2	3.200	3.600	0.126	0.142
B	0.380	0.570	0.015	0.022
B1	1.524 (BSC)		0.060 (BSC)	
C	0.204	0.360	0.008	0.014
D	18.800	19.200	0.740	0.756
E	6.200	6.600	0.244	0.260
E1	7.320	7.920	0.288	0.312
e	2.540 (BSC)		0.100 (BSC)	
L	3.000	3.600	0.118	0.142
E2	8.400	9.000	0.331	0.354





5.2、SOP16(SOIC-16)

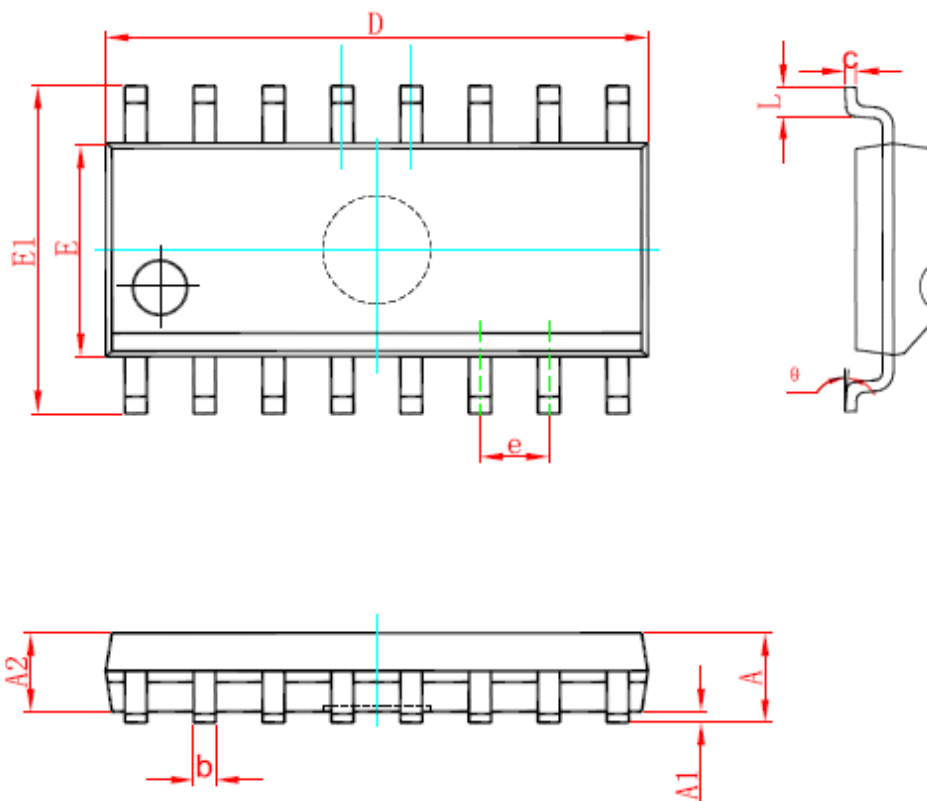

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	9.800	10.200	0.386	0.402
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°



5.3、TSSOP16

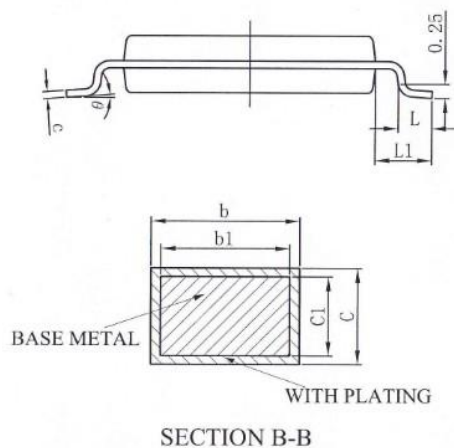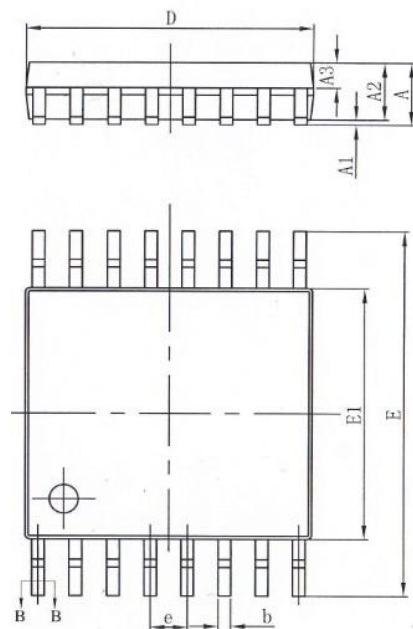

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.20
A1	0.05	—	0.15
A2	0.90	1.00	1.05
A3	0.39	0.44	0.49
b	0.20	—	0.28
b1	0.19	0.22	0.25
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	4.90	5.00	5.10
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	0.65BSC		
L	0.45	0.60	0.75
L1	1.00BSC		
θ	0	—	8°



6、Statements And Notes

6.1 、 The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.