521213-1 × OBSOLETE

Ultra-Pod | Ultra-Pod 250

TE Internal #: 521213-1

TE Internal Description: ULTRA-POD 250 ASSY REC 18-14 AWG BR ULTRA POD: Straight, Receptacle Assembly, Unplated, .250 inch

View on TE.com >



Terminals & Splices > Quick Disconnects > ULTRA POD: Straight, Receptacle Assembly, Unplated, .250 inch











Quick Disconnect Terminal Type: Receptacle

Wire Size: .82 – 2.08 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

All ULTRA POD: Straight, Receptacle Assembly, Unplated, .250 inch (11)

Features

Product Type Features

The data of the second of the			
Insertion Force	Low		
Configuration Features			
Connection Capacity	Single		
Compatible With Wire & Cable Type	Discrete Wire		
Electrical Characteristics			
Voltage Rating	600 V		
Body Features			
Insulation Material	Nylon		
Contact Features			
Quick Disconnect Terminal Type	Receptacle		
Mating Tab Width	6.35 mm[.25 in]		
Mating Tab Thickness	.81 mm[.032 in]		
Terminal Orientation	Straight		



Contact Base Material	Brass		
Terminal Plating Material	Unplated		
Crimp Type	F-Crimp		
Barrel Type	Open		
Termination Features			
Product Terminates To	Wire & Cable		
Mechanical Attachment			
Wire Insulation Support	With		
Dimensions			
Terminal Material Thickness	.41 mm[.016 in]		
Product Length	33.53 mm[1.32 in]		
Compatible Insulation Diameter Range	2.79 – 4.57 mm[.11 – .18 in]		
Wire Size	.82 – 2.08 mm ²		
Usage Conditions			
Insulation Option	Fully Insulated		
Operating Temperature Range	-40 - 150 °C[-40 - 302 °F]		
Industry Standards			
Compatible With Agency/Standards Products	CSA, UL		
UL Flammability Rating	UL 94V-2		
Packaging Features			
Packaging Quantity	2000		
Packaging Method	Strip/Reel		
Other			
Barrel Color	Natural		

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241)



Candidate List Declared Against: JUNE
2022 (224)

Does not contain REACH SVHC

Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in
	other sources.


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | Ultra-Pod 250

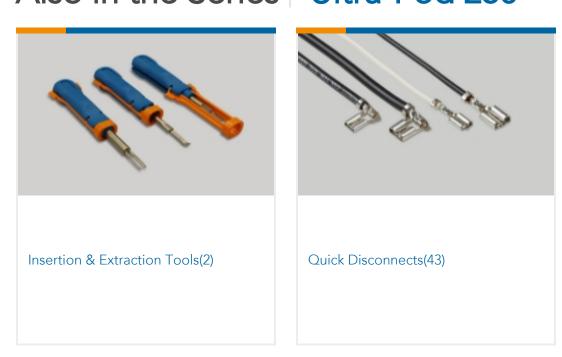

Customers Also Bought





















TE Part #520971-4 ULTRA-POD 250 ASY REC 18-14 AWG TPBR



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_521213-1_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_521213-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_521213-1_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Ultra-Fast and Ultra Fast Plus

English

Product Specifications

Application Specification

English

Application Specification

English

Agency Approvals

Agency Approval Document

English

