

What can we help you find?

Related Products

you're looking for?

Find Similar Products

View Part in Product Feature Selector

Check for Tooling

Not quite the product



Products Industries Resources About TE My Account Innovation Support Center


Home > Products > Relays > Product Feature Selector > Product Details

7022X11FC697 Product Details



Documents	Compliance		
Please Note: Use the Product Drawing for all	l design activity		
Mechanical Attachment		Configuration Features	
Mounting Options	Mounting Bracket	Contact - Arrangement	2 Form C, DPDT, 2 C/O
Electrical Characteristi	CS	Multiple Timing Ranges	Without
Input Voltage (VDC) Contact Rating	9 10A @ 240 VAC	Industry Standards	
_	10A @ 240 VAC	Approved Standards	CE Approved, CSA Certified, UL Listed
Termination Features Termination Type	Screw Terminal	RoHS/ELV Compliance	Not ELV/RoHS compliant
Dimensions	_	Lead Free Solder Processes ?	Not relevant for lead free process
Approx. Dimensions (L x W x H) (mm [in])	114.80 x 65.30 x 71.90 [4.523 x 2.572 x 2.832]	Conditions for Usage	
Contact Features		Temperature Range (°C)	-30 - +75
Delay Time	1 minute to 10 minutes	Operation/Application	
Type of Control	Knob	Mode of Operation	Off-Delay
Repeatability, Max.	± 10%	riode of Operation	OII-Delay
		Other	
		Series	7000 Electropneumatic Timing - Industrial
		Brand	Agastat

• Mounting Options = Mounting Bracket

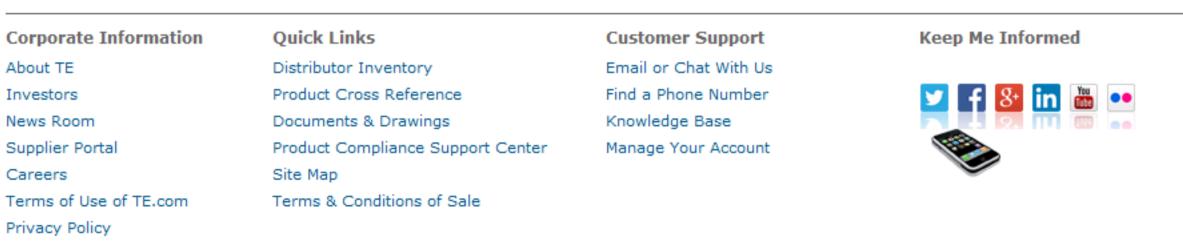

Global Accessibility Statement