

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



MCR analog frequency converter for converting standard analog signals into frequency signals or PWM signals, with spring-cage connection. Replacement part: 2902032 MINI MCR-2-UI-FRO-PT.

Your advantages

- Power supply possible via the foot element (TBUS)
- Error indication via diagnostic LED and analog signal
- Highly-compact analog-to-frequency transducer for electrical isolation, amplification, conversion, and filtering of standard signals to create frequencies or PWM signals
- Configurable interference filter
- 3-way isolation
- PWM output of 5 ... 95 %
- Input and output signals can be configured via DIP switches

Commercial data

Item number	2810243
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C403
Product key	CK1231
Catalog page	Page 110 (C-7-2015)
GTIN	4017918996062
Weight per piece (including packing)	110.9 g
Weight per piece (excluding packing)	108.3 g
Customs tariff number	85437090
Country of origin	DE

MINI MCR-SL-UI-F-SP - Frequency converter



2810243

<https://www.phoenixcontact.com/us/products/2810243>

Technical data

Product properties

Product type	Frequency value transformer
Product family	MINI Analog
No. of channels	1

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Rated insulation voltage	30 V AC
	50 V DC
Electrical isolation	Basic insulation in accordance with EN 61010
Electrical isolation between input and output	yes
Test voltage, input/output/supply	1.5 kV AC (50 Hz, 60 s)
Step response (0–99%)	< 15 ms (+ (1/f) smallest filter)
	< 1 s (+ (1/f) largest filter)
Maximum temperature coefficient	< 0.02 %/K
Temperature coefficient, typical	< 0.02 %/K
Maximum transmission error	≤ 0.1 % (> 7 kHz ≤ 0.2 %)

Supply

Nominal supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Max. current consumption	< 10 mA (at 24 V DC)
Power consumption	< 200 mW

Input data

Signal

Number of inputs	1
Configurable/programmable	Yes
Voltage input signal	0 V ... 5 V
	1 V ... 5 V
	0 V ... 10 V
	2 V ... 10 V
Max. voltage input signal	30 V DC
Current input signal	0 mA ... 20 mA
	4 mA ... 20 mA
	0 mA ... 10 mA
	2 mA ... 10 mA

MINI MCR-SL-UI-F-SP - Frequency converter



2810243

<https://www.phoenixcontact.com/us/products/2810243>

Max. current input signal	100 mA
Input resistance of voltage input	approx. 110 kΩ
Input resistance current input	approx. 50 Ω
Behavior in the event of an error	Alarm in the form of a red LED

Output data

Frequency:

Frequency output	0 Hz ... 10 kHz
	0 Hz ... 5 kHz
	0 Hz ... 2.5 kHz
	0 Hz ... 1 kHz
	0 Hz ... 500 Hz
	0 Hz ... 250 Hz
	0 Hz ... 100 Hz
	0 Hz ... 50 Hz
Load min.	$4 \text{ mA} \leq (U_L / R_L) \leq 20 \text{ mA}$
Output signal PWM	7.8 kHz (10 bit)
	3.9 kHz (10 bit)
	1.9 kHz (12 bit)
	977 Hz (12 bit)
	488 Hz (14 bit)
	244 Hz (14 bit)
	122 Hz (16 bit)
Load min.	61 Hz (16 bit)
	$12 \text{ mA} \leq (U_L / R_L) \leq 20 \text{ mA}$
Load current maximum	20 mA
Maximum switching voltage	30 V
Overrange/underrange	can be set (via DIP switch)
Protective circuit	Short-circuit protection, polarity reversal protection

Signal

Number of outputs	1
-------------------	---

Connection data

Connection method	Spring-cage connection
Stripping length	8 mm
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Dimensions


MINI MCR-SL-UI-F-SP - Frequency converter



2810243

<https://www.phoenixcontact.com/us/products/2810243>

Dimensional drawing



Width	6.2 mm
Height	93.1 mm
Depth	102.5 mm

Material specifications

Color	green (RAL 6021)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m
Permissible humidity (operation)	5 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	II 3 G Ex nA IIC T4 Gc X
----------------	--------------------------

UL, USA/Canada

Identification	UL 508 Recognized
	Class I, Div. 2, Groups A, B, C, D T4

Shipbuilding approval

Identification	BBBAA
Certificate	DNV GL TAA00000N1

EMC data

Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.

MINI MCR-SL-UI-F-SP - Frequency converter



2810243

<https://www.phoenixcontact.com/us/products/2810243>

Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Comments	Safety measures must be taken to prevent electrostatic discharge.
----------	---

Electromagnetic HF field

Designation	Electromagnetic RF field
Standards/regulations	EN 61000-4-3
Typical deviation from the measuring range final value	2 %

Fast transients (burst)

Designation	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Typical deviation from the measuring range final value	2 %

Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge current load (surge)

Comments	Criterion B
----------	-------------

Conducted interference

Designation	Conducted interferences
Standards/regulations	EN 61000-4-6
Typical deviation from the measuring range final value	2 %

Standards and regulations

Electrical isolation	Basic insulation in accordance with EN 61010
----------------------	--

Mounting

Mounting type	DIN rail mounting
Mounting position	any

MINI MCR-SL-UI-F-SP - Frequency converter


2810243

<https://www.phoenixcontact.com/us/products/2810243>




Drawings

Block diagram

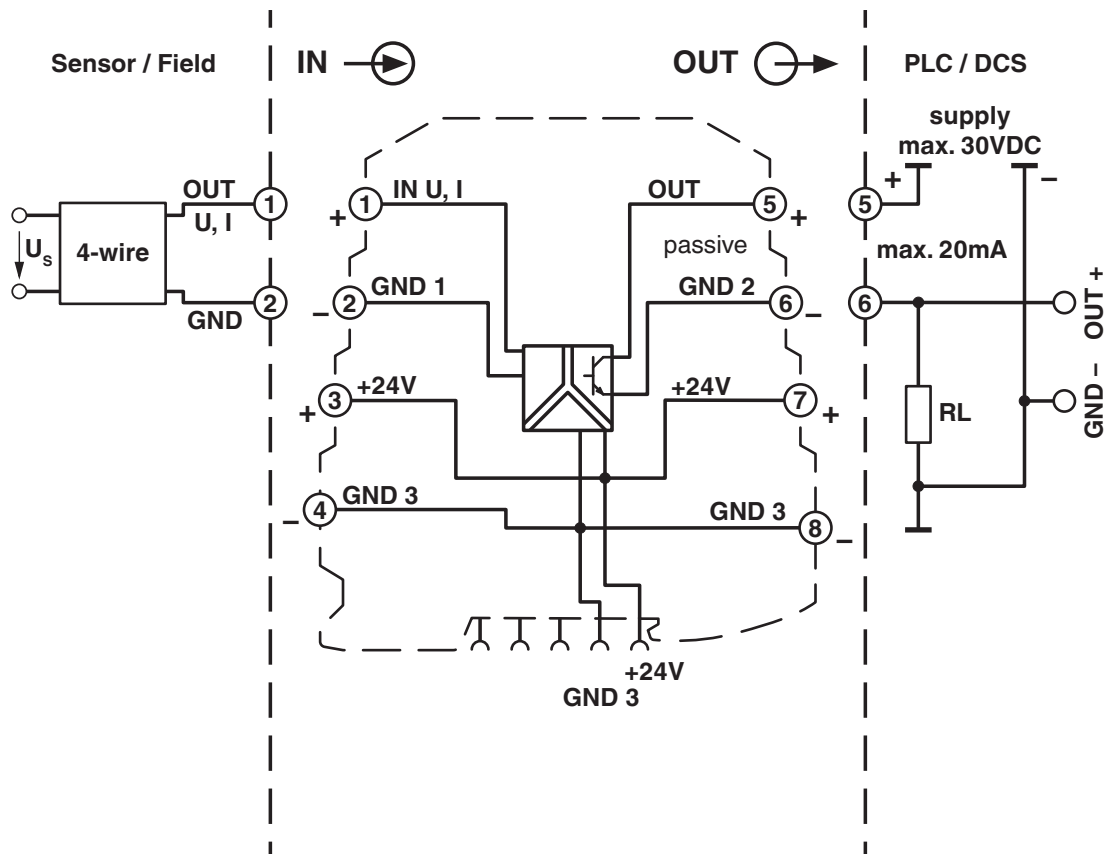


Diagram

Frequency output

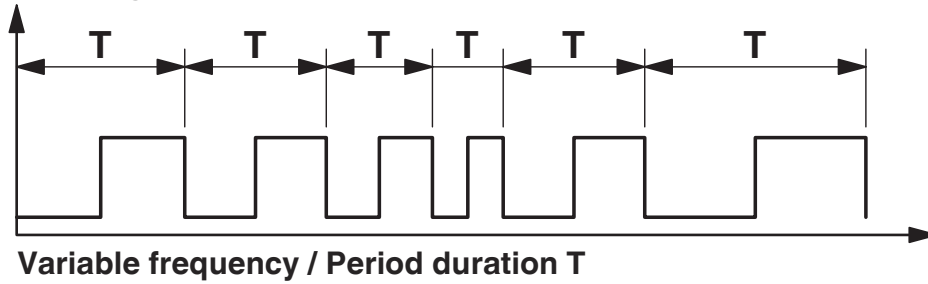

PWM output (pulse width modulation)

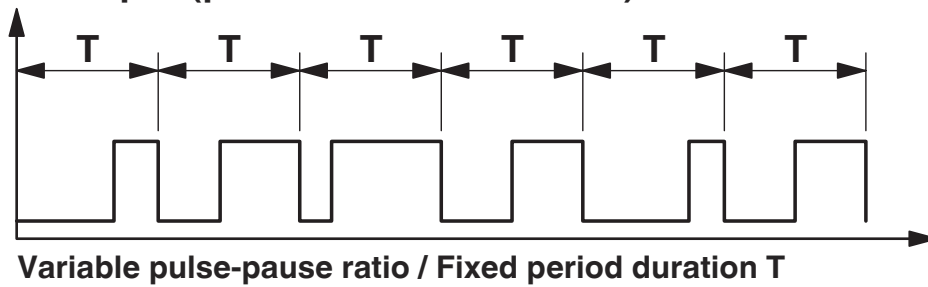


MINI MCR-SL-UI-F-SP - Frequency converter

2810243

<https://www.phoenixcontact.com/us/products/2810243>



Dimensional drawing

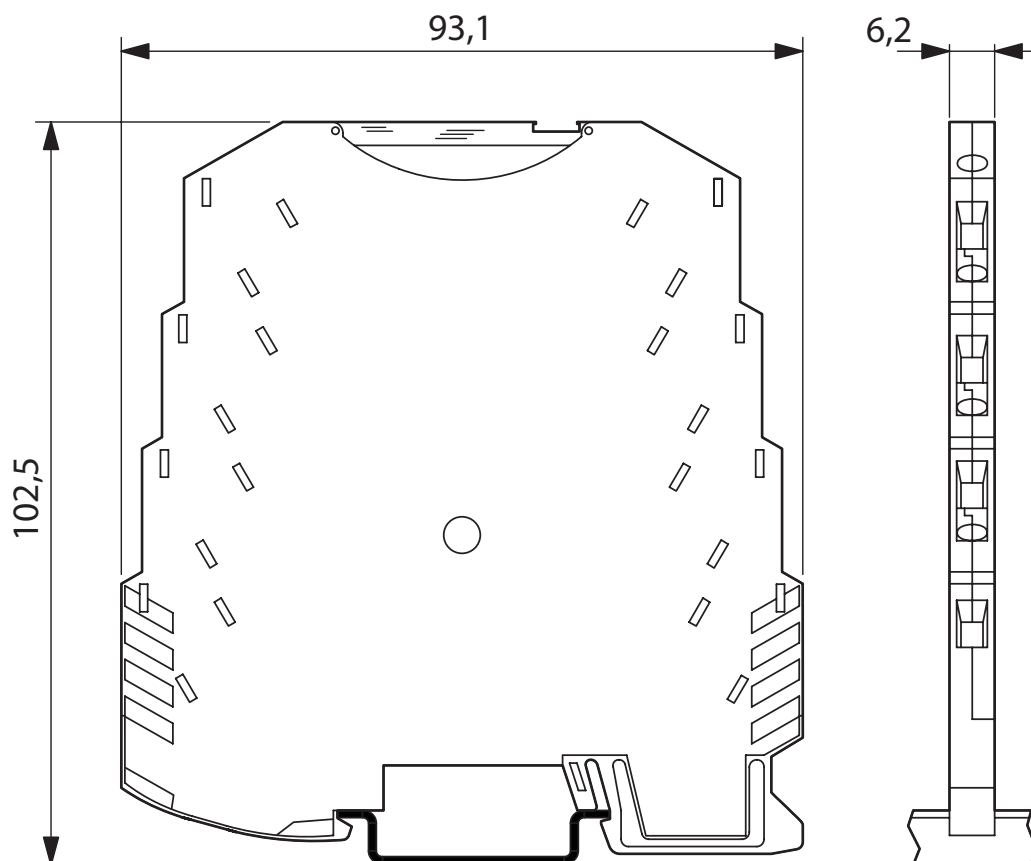

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-50 An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

MINI MCR-SL-UI-F-SP - Frequency converter



2810243

<https://www.phoenixcontact.com/us/products/2810243>


Accessories

ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - DIN rail bus connectors

2869728

<https://www.phoenixcontact.com/us/products/2869728>

DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.



MINI MCR-SL-PTB - Power terminal block

2864134

<https://www.phoenixcontact.com/us/products/2864134>

MCR power terminal block for supplying several MINI Analog modules via the DIN rail connector, with screw connection, maximum current consumption of up to 2 A



MINI MCR-SL-UI-F-SP - Frequency converter

2810243

<https://www.phoenixcontact.com/us/products/2810243>



MINI-SYS-PS-100-240AC/24DC/1.5 - Power supply unit

2866983

<https://www.phoenixcontact.com/us/products/2866983>



Please use the following item in new systems: 2904614

Primary-switched MINI POWER power supply for DIN rail mounting, input: 1-phase, output: 24 V DC/1.5 A

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com