M-Series
CIRCUIT BREAKER

The M-Series is a low cost, miniature, hydraulic-magnetic circuit breaker which features a compact, space saving design, front panel snap-in mounting and a vertically mounted parallel pole configuration. It features various styling options to maximize your design flexibility. Choices include rocker, illuminated rocker, paddle and baton style handle actuators, push-to-reset and push-pull pushbutton actuators, as well as Visi-Rocker two color actuators. Our exclusive Rockerguard bezel helps prevent inadvertent actuation and a wiping contact mechanism assures long-term reliability.

The M-Series circuit breakers are available with 1, 2 or parallel poles, 0.02 to 50 amp ratings, and 125 and 250VAC or 80VDC versions. With over 16 different time delays, 5 terminal styles, a variety of panel hardware, various colors, and legend imprinting, it assures suitability for most any application design.

Resources:

Configure a Complete Part

Download CAD & Sales Drawing >

Product Highlights:

- Parallel pole configuration fits in one rack unit
- MIL-PRF-55629
- MIL STD 202 compliant
- MIL-PRF-39019F ingress protection
- Sealed toggle actuator
- Compact design

Typical Applications:

- Telecom/Datacom
- Transportation
- Marine
- Generators
- Power Supplies
- Medical Equipment

Carling Technologies®
Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: 860.793.9281 **Fax:** 860.793.9231

www.carlingtech.com

Electrical

Maximum Voltage	125/250 VAC 50/60 Hz, 80 VDC (See Rating Tables.)
Current Ratings	Standard current coils: 0.100, 0.250, 0.500, 0.750, 1.00 thru 15.0 in 1 amp increments, 18.0, 20.0, 25.0, 30.0. Other ratings available - see Ordering Scheme.
Auxiliary Switch Rating	SPDT; 7A 250VAC, 7A (Res) 28VDC, 4A (Ind.) 28VDC, 0.25A 80VDC (Res) (silver contacts), 0.1A 125VAC (gold contacts).
Insulation Resistance	Minimum of 100 Megohms at 500 VDC.
Dielectric Strength	UL, CSA 1500V, 50/60 Hz for one minute between all electrically isolated terminals. M-Series Circuit Breakers comply with the 8mm spacing and 3750 V 50/60Hz dielectric requirements from hazardous voltage to operator accessible surfaces, per Publications IEC 380, 435, 950, EN 60950 and VDE 0805.
Resistance, Impedance	Values from Line to Load Terminal - based on Series Trip Circuit Breaker.

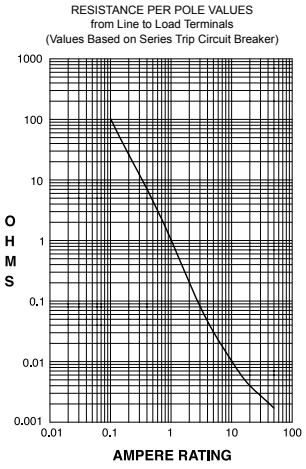

CURRENT (AMPS)	TOLERANCE (%)
0.10 - 20.0	± 25
20.1 - 50.0	± 35

Pulse Tolerance Curves





Mechanical

Endurance	10,000 ON-OFF operations @ 6 per minute with rated Current and Voltage.
Trip Free	All M-Series Circuit Breakers will trip on overload, even when actuator is forcibly held in the ON position.
Trip Indication	The actuator moves positively to the OFF position when an overload causes the circuit breaker to trip.

Physical

Number of Poles	1 or 2
Internal Circuit Configs.	Series with or without Auxiliary Switch. Switch Only with or without Auxiliary Switch.
Weight	Approximately 30 grams/pole (Approximately 1.07 ounces/pole)
Standard Colors	See Ordering Scheme

Environmental

Designed in accordance with requirements of specification MIL PRF-55629 & MIL-STD-202G as follows:

Shock	Withstands 100 Gs, 6ms, sawtooth while carrying rated current per Method 213, Cond. I. Instantaneous curves tested at 80% of rated current.
Vibration	Withstands 0.060" excursion from 10-55 Hz, and 10 Gs 55-500 Hz, at rated current per Method 204C, Test Condition A. Instantaneous curves tested at 80% of rated current.
Moisture Resistance	Method 106D, i.e., ten 24-hour cycles @ + 25°C to +65°C, 80-98% RH.
Salt Spray	Method 101, Condition A (90-95% RH @ 5% NaCl Solution, 96 hrs).
Thermal Shock	Method 107D, Condition A (Five cycles @ -55°C to +25°C to +85°C to +25°C).
Operating Temperature	-40° C to +85° C
Chemical Resistance	Only the outside surfaces of the case and the handles may be cleaned with detergents or alcohol. Organic (hydrocarbon based) solvents are not recommended because they attack plastics. Caution should be taken when solvents are used to clean and remove flux from terminals. Lubricants should not be introduced into the handle/bushing openings

*Manufacturer reserves the right to change product specification without prior notice.

Electrical Tables

Table A: Lists UL Recognized and CSA Accepted configurations & performance capabilities as a Component Supplementary Protector.

M-SERIES TABLE A: COMPONENT SUPPLEMENTARY PROTECTORS										
Circuit Configuration	Voltage			Current Rating		Poles Breaking	Short Circuit Capacity (Amps)		Application Codes	
							UL / CSA			
	Max Rating	Frequency	Phase	Full Load Amps	General Purpose Amps		With Backup Fuse	Without Backup Fuse	UL	CSA
Series	32	DC	---	0.02 - 15	---	1	---	1000	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 25	1	---	1000	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	50 [2]	DC	---	0.02 - 7.5	---	1	---	1000	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	65	DC	---	0.02 - 15	---	2	---	1000	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 25	2	---	1000	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	65 [1,2]	DC	---	0.02 - 15	---	1	---	1000	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 30	1	---	1000	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	65	DC	---	0.02 - 15	---	2	5000 [3]	---	TC1, 2, OL1, C1	TC1, 2, OL1, C1
				---	15.1 - 25	2	5000 [3]	---	TC1, 2, OL0, C1	TC1, 2, OL0, C1
	80 [1]	DC	---	0.02 - 15	---	1	---	600	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 30	1	---	600	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	125	50 / 60	1	0.02 - 15	---	1	---	1000	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 30	1	---	1000	TC1, 2, OL0, U1	TC1, 2, OL0, U1
				1 - 30	---	1	---	360	TC1, OL1, U2	TC3, OL1, U3
	250 [2]	50 / 60	1	0.02 - 12	---	1	---	1000	TC1, 2, OL1, U1	TC1, 2, OL1, U1
	250	50 / 60	1	---	12.1 - 18	1	1000 [4]	---	TC1, 2, OL0, C1	TC1, 2, OL0, C1
	250	50 / 60	1	0.02 - 15	---	2	---	1000	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 30	2	---	1000	TC1, 2, OL0, U1	TC1, 2, OL0, U1
				1 - 30	---	2	---	360	TC1, OL1, U2	TC3, OL1, U3

Notes:
1 Polarity Sensitive
2 Available only with Special Catalog Number. Consult Factory.
3 Requires Branch Circuit Backup with a UL Listed type K-5 or RK-5 fuse rated 30 Amps maximum
4 Requires Branch Circuit Backup with a UL Listed type K-5 or RK-5 fuse rated 60 Amps maximum

Table B: Lists UL Recognized,CSA Accepted and TUV and VDE Certified configurations and performance capabilities as a Component Supplementary Protector.

M-SERIES TABLE B: COMPONENT SUPPLEMENTARY PROTECTORS												
Circuit Configuration	Voltage			Current Rating		Poles Breaking	Short Circuit Capacity (Amps)				Application Codes	
							UL / CSA		VDE / TUV			
	Max Rating	Frequency	Phase	Full Load Amps	General Purpose Amps		With Backup Fuse	Without Backup Fuse	With Backup Fuse	Without Backup Fuse	UL	CSA
Series	32	DC	---	0.02 - 15	---	1	---	1000	3000	500	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 25	1	---	1000	3000	500	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	50 [2]	DC	---	0.02 - 7.5	---	1	---	1000	3000	500	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	65	DC	---	0.02 - 15	---	2	---	1000	3000	500	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 25	2	---	1000	3000	500	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	65 [3]	DC	---	0.02 - 15	---	2	5000	---	3000	500	TC1, 2, OL1, C1	TC1, 2, OL1, C1
				---	15.1 - 30	2	5000	---	3000	500	TC1, 2, OL0, C1	TC1, 2, OL0, C1
	80 [1]	DC	---	0.02 - 15	---	1	---	600 [4]	---	500	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				---	15.1 - 30	1	---	600 [4]	---	500	TC1, 2, OL0, U1	TC1, 2, OL0, U1
	125	50 / 60	1	0.02 - 15	---	1	---	1000	3000	500	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				1 - 15	---	1	---	360	3000	500	TC1, OL1, U2	TC3, OL1, U3
	250	50 / 60	1	0.02 - 12	---	1	---	1000	3000	500	TC1, 2, OL1, U1	TC1, 2, OL1, U1
				0.02 - 20	---	2	---	1000	3000	500	TC1, 2, OL0, U1	TC1, 2, OL0, U1
				1 - 12	---	1	---	360	3000	500	TC1, OL1, U2	TC3, OL1, U3

Notes:
1 Polarity Sensitive
2 Available only with Special Catalog Number. Consult Factory.
3 Requires Branch Circuit Backup with a UL Listed type K-5 or RK-5 fuse rated 30 Amps maximum
4 TUV only, not VDE
5 Requires backup protection with a thermal magnetic circuit breaker rated 32 amps and having a Type C trip characteristic per EN60898/DIN VDE 0641 (C32A) for ratings greater than 15amps, and a thermal magnetic circuit breaker rated 16 amps and having a Type C trip characteristic per EN60898/DIN VDE 0641 (C16A) for ratings 15 amps and less

Electrical Tables

Table C: Lists UL489A Listed and TUV Certified configurations and performance capabilities for use in Communications Equipment.

M-SERIES TABLE C: UL489A Listed (Communications Equipment - Polarity Sensitive)						
Circuit Configuration	Voltage		Current Rating General Purpose Amps	Poles Breaking	Interrupting Capacity (Amps)	
	Max Rating	Frequency			Without Backup Fuse	
					UL489A	TUV
Series	80	DC	0.02 - 30	1	600	---
	65 [1]	DC	0.02 - 30	1	1000	---
	80	DC	0.10 - 30	1	600	600

Notes:
1. Available only with Special Catalog Number

Table D: Lists UL489A Listed configurations and performance capabilities for use in Communications Equipment.

M-SERIES TABLE D: Parallel Pole Construction UL489A Listed (Communications Equipment - Polarity Sensitive)					
Circuit Configuration	Voltage		Current Rating General Purpose Amps	Poles Breaking	Interrupting Capacity (Amps)
	Max Rating	Frequency			Without Backup Fuse
					UL489A
Series	80	DC	31 - 50	2	600
	65 [1]	DC	31 - 50	2	1000

Notes:
1. Available only with Special Catalog Number

Agency Certifications

UL Recognized
UL Standard 1077
Component Recognition Program as Protectors, Supplementary (Guide CCN/QVNU2, File E75596)

UL Listed
UL Standard 489A
Communications Equipment (Guide CCN/DITT, File E189195)

CSA Accepted
Component Supplementary Protector (Class 3215 30, File 047848 0 000)
CSA Standard C22.2 No. 235

VDE Certified
EN60934, VDE 0642 under File 10537

TUV Certified
EN60934, under License No. R9671109

M	E	2	–	P	–	D2	–	650	–	5	–	A	1	2	–	B	–	T
1 Series	*2 Actuator*	*3 Poles*		*4 Circuit*		*5 Frequency & Delay*		*6 Current Rating*		*7 Terminal*		*8 Illumination*	*9 Actuator Color & Legend*	*10 Legend*		*11 Bezel Color*		*12 Agency Approval*

1 SERIES
M

2 ACTUATOR

Single Color		Two Color Visi		Single Color Translucent	
A	Angled	**D**	Indicate ON	**F**	Angled
B	Flat	**E**	Indicate OFF	**G**	Flat

STYLE	INDICATE - "ON" (CODE-D)	INDICATE - "OFF" (CODE-E)	FLAT (CODES-B & G)	ANGLED (CODES-A & F)
VERTICAL				
HORIZONTAL				

3 POLES
2 Two

4 CIRCUIT/AUXILIARY SWITCH [2]
P Series Trip Current (Parallel Pole)
with Auxiliary Switch, Silver Contacts
Q Series Trip Current (Parallel Pole) .110 x 0.20 Q.C
with Auxiliary Switch, Gold Contacts
R Series Trip Current (Parallel Pole) .110 x 0.20 Q.C

5 FREQUENCY & TIME DELAY
D2 DC Short
D4 DC Medium

6 CURRENT RATING (AMPERES)

CODE	*AMPERES*
631	31.000
635	35.000
640	40.000
645	45.000
650	50.000

7 TERMINAL
A Push in Stud
5 10-32 Screw (Bus Type)

8 ILLUMINATION
Non-Illuminated
A Non-Illuminated

9 ACTUATOR COLOR & LEGEND

	Actuator Visi [1]	**Legend**
1	White	Black
2	Black	White
3	Red	White
4	Green	White
5	Blue	White
6	Yellow	Black
7	Gray	Black
8	Orange	Black

10 LEGEND
2 ON - OFF Vertical
3 ON - OFF Horizontal
6 Dual Vertical
7 Dual Horizontal

11 BEZEL COLOR
A White without Rockerguard
B Black without Rockerguard
G Gray without Rockerguard
1 White with Rockerguard
2 Black with Rockerguard
7 Gray with Rockerguard

12 AGENCY APPROVAL
T UL 489A Listed

Notes:
1 Reminder of Rocker same color as Visi
2 Aux Switch only available with screw terminals

M	M	2	–	P	–	D2	–	650	–	5	–	1	B	B	–	B	–	T
1 Series	*2 Actuator*	*3 Poles*		*4 Circuit*		*5 Frequency & Delay*		*6 Current Rating*		*7 Terminal*		*8 Actuator Color*	*9 Front Panel Hardware*	*10 Legend Plate/ Marking*		*11 Brushing Color*		*12 Agency Approval*

1 SERIES
M

2 ACTUATOR
M Paddle
T Push-Pull

3 POLES
2 Two

4 CIRCUIT/AUXILIARY SWITCH [1]
P Series Trip Current (Parallel Pole)
with Auxiliary Switch, Silver Contacts
Q Series Trip Current (Parallel Pole) .110 x 0.20 Q.C
with Auxiliary Switch, Gold Contacts
R Series Trip Current (Parallel Pole) .110 x 0.20 Q.C

5 FREQUENCY & TIME DELAY
D2 DC Short
D4 DC Medium

6 CURRENT RATING (AMPERES)

CODE	*AMPERES*
631	31.000
635	35.000
640	40.000
645	45.000
650	50.000

7 TERMINAL
A Push in Stud
5 10-32 Screw (Bus Type)

8 ACTUATOR COLOR & LEGEND

Handle		**Push Button**	
1	White	A	White
2	Black	B	Black
3	Red	C	Red
4	Green	D	Green
5	Blue	E	Blue
6	Yellow	F	Yellow
7	Gray	G	Gray
8	Orange	H	Orange

9 FRONT PANEL HARDWARE
Handle
A No outer Panel Hardware
B Knurled Nut, Bright Nickel
C Knurled Nut, Bright Nickel with Locking Ring
D Knurled Nut, Black
E Knurled Nut, Black with Locking Ring
F Panel Dress, Bright Nickel
G Panel Dress, Bright Nickel with Locking Ring
H Panel Dress, Black
J Panel Dress, Black with Locking Ring
Push Button
1 No outer Panel Hardware
2 Knurled Nut, Bright Nickel

10 LEGEND PLATE / BUTTON MARKING
Handle Actuator Legend Plate
B ON - OFF Vertical
C ON - OFF Horizontal
Push-Pull Actuator Legend Plate
2 Rated Amps Horizontal
3 Rated Amps Line Side Down
4 Rated Amps Line Side Up

11 BUSHING COLOR
B Black

12 AGENCY APPROVAL
T UL 489A Listed

Notes:
1 Aux Switch only available with screw terminals

Dimensional Specifications: in. [mm]

PARALLEL POLE TERMINAL OPTIONS

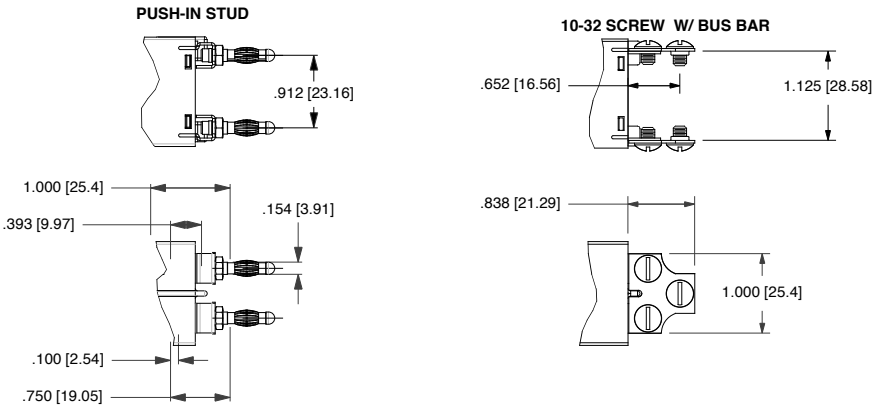

ROCKER ACTUATOR DETAIL

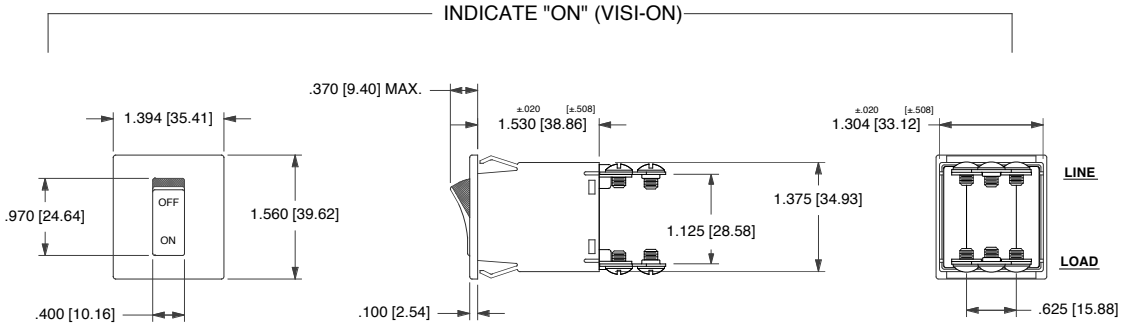

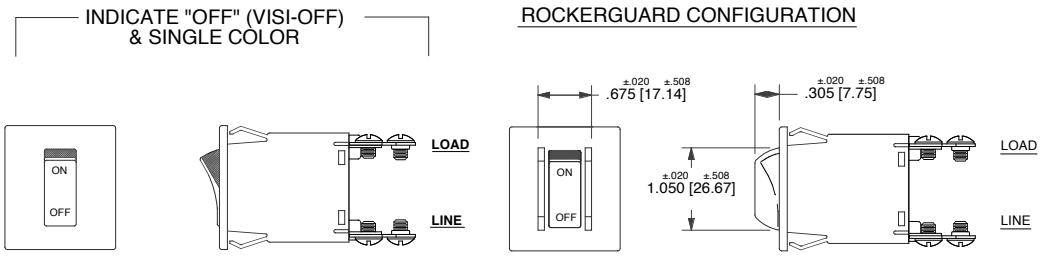

PANEL CUT - OUT DETAIL (ROCKER)

DOUBLE POLE



PANEL THICKNESS	DIM. A +.005/-.000 +.13/-.00
.062 [1.57]	1.385 [35.18]
.093 [2.36]	1.420 [36.07]
.125 [3.18]	1.460 [37.08]

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.010 [.25] unless otherwise specified.
3 Dimensions apply to both rocker styles.
4 I-o, on-off or dual legends available for vertical or horizontal mounting.
5 Notice that circuit breaker line and load terminal orientation on indicate “off” is opposite that of indicate “on”.

Dimensional Specifications: in. [mm]

PADDLE ACTUATOR STYLE

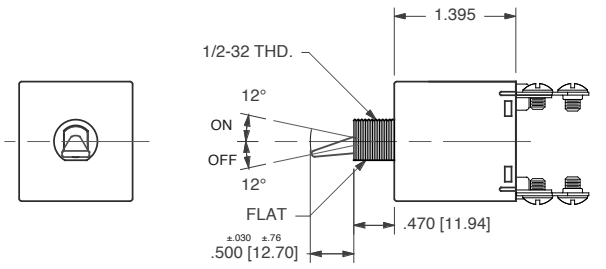

PUSH-PULL ACTUATOR STYLE

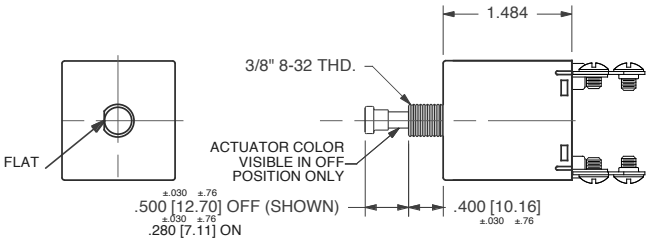

MOUNTING DETAILS

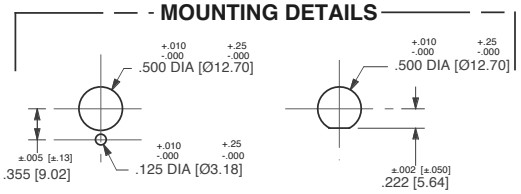

WITH LOCKING RING

WITHOUT LOCKING RING

MOUNTING DETAILS



PUSH-PULL, PUSH TO RESET



SNAP-IN BUSHING

PANEL HARDWARE



HEX NUT



PANEL DRESS NUT

LEGEND PLATES

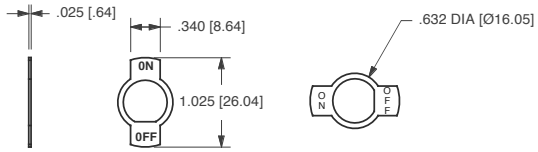

LEGEND CODE: B C

BUTTON MARKING ORIENTATION

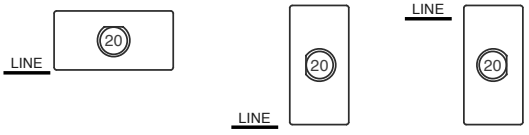

MARKING CODE: 2 3 4

PANEL HARDWARE



HEX NUT



PANEL DRESS NUT



KNURLED NUT

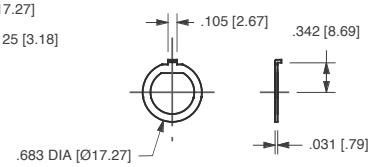

LOCKING RING

.110QC AUXILIARY SWITCH TERMINALS



Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.010 [.25] unless otherwise specified.
3 Dimensions apply to both rocker styles.
4 I-o, on-off or dual legends available for vertical or horizontal mounting.
5 Notice that circuit breaker line and load terminal orientation on indicate “off” is opposite that of indicate “on”.

M	G	2	–	B	–	34	–	620	–	1	–	H	C	6	–	7	–	C
1 Series	2 Actuator	3 Poles		4 Circuit		5 Frequency & Delay		6 Current Rating		7 Terminal		8 Illumination	9 Actuator Color	10 Legend		11 Bezel Color		12 Agency Approval

1 SERIES
M

2 ACTUATOR [1]
Non-Illuminated single color
A Angled
B Flat

Two Color Visi-Rocker
D Indicate ON
E Indicate OFF

illuminated single color
F Angled
G Flat



3 POLES
1 One **2** Two

4 CIRCUIT [2]
without Auxiliary Switch

A	Switch Only (no coil), Maintained Contacts	
B	Series Trip (Current)	
with Auxiliary Switch, Silver Contacts		**Terminal Type:**
M	Series Trip (Current) Aux Switch	.110 QC x .020 QC
P [3]	Switch Only, Maintained Contacts	.060 Dia, Round Solder Turret
Q [3,4]	Switch Only, Maintained Contacts	.058 Dia, Round Q.C.
R [3,16]	Switch Only, Maintained Contacts	.080 Dia x .020 Flat Q.C.
S [3]	Series Trip (Current)	.060 Dia, Round Solder Turret
T [3,4]	Series Trip (Current)	.058 Dia, Round Q.C.
U [3,16]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
with Auxiliary Switch, Gold Contacts		
2 [3,4]	Switch Only, Maintained Contacts	.058 Dia, Round Q.C.
3 [3,16]	Switch Only, Maintained Contacts	.080 Dia x .020 Flat Q.C.
4 [3,4]	Series Trip (Current)	.058 Dia, Round Q.C.
5 [3,16]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
9	Series Trip (Current) Aux Switch	.110 QC x .020 QC

5 FREQUENCY & DELAY

03	DC 50/60Hz, Switch Only	**32**	DC, 50/60Hz Short
10	DC Instantaneous	**34**	DC, 50/60Hz Medium
12	DC Short	**62**	50/60Hz Short, High-inrush
14	DC Medium	**64**	50/60Hz Medium, High-inrush
20	50/60Hz Instantaneous	**72**	DC, Short, High-inrush
22	50/60Hz Short	**74**	DC,Medium, High-inrush
24	50/60Hz Medium	**92**	DC, 50/60Hz Short, High-inrush
30	DC, 50/60Hz Instantaneous	**94**	DC, 50/60Hz Medium, High-inrush

VOLTAGE			FULL LOAD AMP RATING		GENERAL PURPOSE AMP RATING		TUNGSTEN LAMP RATING		
MAX. RATING	FREQUENCY	PHASE	MAX. AMPS	CHOOSE CURRENT COIL RATING CODE:	MAX. AMPS	CHOOSE CURRENT COIL RATING CODE:	MAX. AMPS	CHOOSE CURRENT COIL RATING CODE:	POLES BREAKING
32	DC	-	15	615	25	625	-	-	1
50	DC	-	-	-	7.5	Consult Factory	-	-	1
65	DC	-	15	615	25	625	-	-	2
125	50/60HZ	1	15	615	25	625	15	615	1
250	50/60HZ	1	12	612	-		-	-	1
250	50/60HZ	1	15	615	25	625	-	-	2

Notes:
1 One actuator is located in the center of each multi-pole breaker.
2 For Switch Only circuits, select Current Coil Rating from the above chart:
3 One Auxiliary Switch is supplied per breaker. On two-pole breakers, standard Auxiliary Switch mounting is in pole one. Auxiliary Switch option limited to Series Trip & Switch Only circuits, & is not available in single pole illuminated breakers, or Back Connected Screw or Push-in Stud terminals.
4 Mates with AMP .058" diameter pin receptacles: 60983-1 (gold plated) & 60983-2 (tin plated).
5 For neon bulb applications at 120VAC @ 47K, 1/4 WATT and for 250VAC applications @ 150K, 1/4 WATT, external resistors must be supplied by customer.
6 On Visi-Rocker breakers, Visi portion of rocker cannot be the same color as the bezel.
7 For LED (DC or rectified AC) applications, LED is mounted in the center of the rocker actuator with electrical characteristics: 100 millicandela at 20mA; Maximum power dissipation = 75mW at 25°C; Maximum forward current = 25mA; Typical forward voltage = 2.1V at 20mA; Typical reverse current = 100uA at 3V. Customer supplies the proper external resistor limiting current to these values.
8 Rocker color for LED's and green neon lamp must be clear, smoke gray, white translucent or match color of LED or neon lamp.
9 Other colors available. Consult factory.
10 TUV 20A, VDE 15A. UL Recognized and CSA Accepted to 30 amps. Screw Terminals or Push-in Stud recommended above 20 amps.
11 TUV or VDE Certified must have I-O or Dual Legends. Legend required on Visi-Rocker breakers.
12 30 amp rating not available with delay's 30, 32, 34, 92 or 94.
13 Screw Terminals are VDE certified only with use of ring terminal attached to wire.
14 Terminal code A available with circuit codes A & B only.
15 Printed circuit board available with UL recognized approval only.
16 Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

6 CURRENT RATING (AMPERES)

CODE	AMPERES	CODE	AMPERES	CODE	AMPERES	CODE	AMPERES
020	0.020	**225**	0.250	**420**	2.000	**710**	10.500
025	0.025	**230**	0.300	**522**	2.250	**611**	11.000
030	0.030	**235**	0.350	**425**	2.500	**711**	11.500
035	0.035	**240**	0.400	**527**	2.750	**612**	12.000
040	0.040	**245**	0.450	**430**	3.000	**712**	12.500
045	0.045	**250**	0.500	**435**	3.500	**613**	13.000
050	0.050	**255**	0.550	**440**	4.000	**614**	14.000
055	0.055	**260**	0.600	**445**	4.500	**615**	15.000
060	0.060	**265**	0.650	**450**	5.000	**616**	16.000
065	0.065	**270**	0.700	**455**	5.500	**617**	17.000
070	0.070	**275**	0.750	**460**	6.000	**618**	18.000
075	0.075	**280**	0.800	**465**	6.500	**620**	20.000
080	0.080	**285**	0.850	**470**	7.000	**622**	22.000
085	0.085	**290**	0.900	**475**	7.500	**624**	24.000
090	0.090	**295**	0.950	**480**	8.000	**625**	25.000
090	0.095	**410**	1.000	**485**	8.500	**630** [12]	30.000
210	0.100	**512**	1.250	**490**	9.000		
215	0.150	**415**	1.500	**495**	9.500		
220	0.200	**517**	1.750	**610**	10.000		

7 TERMINAL

1	Push-On 0.250 Tab (Q.C.)	**A** [14]	Push-In Stud
2 [10]	Screw 8-32 with Upturned Lugs	**P** [15]	Printed Circuit Board
3 [10]	Screw 8-32 (Bus Type)		

8 ROCKER ILLUMINATION

Non-illuminated	**A**		
Neon [5]	Neon	Green Glow [8]	
without resistor, 120VAC/250VAC	**B**	**C**	
LED [7, 8]	Red	Green	Amber
without resistor	**D**	**G**	**K**
with resistor, 4-8 VDC	**E**	**H**	**L**
with resistor, 9-16 VDC	**F**	**J**	**M**

9 ACTUATOR & LEGEND COLOR

Solid Color	Actuator	Legend
1	White	Black
2	Black	White
3	Red	White
4	Green	White
5	Blue	White
6	Yellow	Black
7	Gray	Black
8	Orange	Black
Visi-Rocker [6]	Visi & Legend (remainder of rocker same color as bezel)	
1	White	
2	Black	
3	Red	
4	Green	
5	Blue	
6	Yellow	
7	Gray	
8	Orange	
Illuminated [8]	Actuator	Legend
A	Clear	White
B	Red Transparent	White
C	Green Transparent	White
D	Amber Transparent	White
E	Smoke Gray Transparent	White
F	White Translucent	Black

10 LEGEND [11]

1	No Legend	**4**	I - O Vertical
2	ON - OFF Vertical	**5**	I - O Horizontal
3	ON - OFF Horizontal	**6**	Dual Vertical
		7	Dual Horizontal

11 BEZEL COLOR / STYLE [9]

Color	without Rockerguard	with Rockerguard
White	**A**	**1**
Black	**B**	**2**
Gray	**G**	**7**

12 AGENCY APPROVAL [10]

C	UL Recognized & CSA Accepted
D	VDE Certified, UL Recognized & CSA Accepted
E	TUV Certified, UL Recognized & CSA Accepted

M	A	1	–	B	–	14	–	620	–	1	–	A	1	6	–	2	–	J
1 Series	*2 Actuator*	*3 Poles*		*4 Circuit*		*5 Frequency & Delay*		*6 Current Rating*		*7 Terminal*		*8 Illumination*	*9 Actuator Color*	*10 Legend*		*11 Bezel Color*		*12 Agency Approval*

1 SERIES
M

2 ACTUATOR [1]
Non-Illuminated single color
A Angled
B Flat

Two Color Visi-Rocker
D Indicate ON
E Indicate OFF

illuminated single color
F Angled
G Flat



3 POLES
1 One

4 CIRCUIT [2]
without Auxiliary Switch
B Series Trip (Current)

with Auxiliary Switch, Silver Contacts		**Terminal Type:**
M	Series Trip (Current) Aux Switch	.110 QC x .020 QC
S [3]	Series Trip (Current)	.060 Dia, Round Solder Turret
T [3,4]	Series Trip (Current)	.058 Dia, Round Q.C.
U [3,16]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
with Auxiliary Switch, Gold Contacts		
4 [3,4]	Series Trip (Current)	.058 Dia, Round Q.C.
5 [3,16]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
9	Series Trip (Current) Aux Switch	.110 QC x .020 QC

5 FREQUENCY & DELAY

10	DC Instantaneous	**14**	DC Medium
12	DC Short	**72**	DC, Short, High-inrush
		74	DC,Medium, High-inrush

6 CURRENT RATING (AMPERES)

CODE	*AMPERES*						
020	0.020	**225**	0.250	**420**	2.000	**710**	10.500
025	0.025	**230**	0.300	**522**	2.250	**611**	11.000
030	0.030	**235**	0.350	**425**	2.500	**711**	11.500
035	0.035	**240**	0.400	**527**	2.750	**612**	12.000
040	0.040	**245**	0.450	**430**	3.000	**712**	12.500
045	0.045	**250**	0.500	**435**	3.500	**613**	13.000
050	0.050	**255**	0.550	**440**	4.000	**614**	14.000
055	0.055	**260**	0.600	**445**	4.500	**615**	15.000
060	0.060	**265**	0.650	**450**	5.000	**616**	16.000
065	0.065	**270**	0.700	**455**	5.500	**617**	17.000
070	0.070	**275**	0.750	**460**	6.000	**618**	18.000
075	0.075	**280**	0.800	**465**	6.500	**620**	20.000
080	0.080	**285**	0.850	**470**	7.000	**622**	22.000
085	0.085	**290**	0.900	**475**	7.500	**624**	24.000
090	0.090	**295**	0.950	**480**	8.000	**625**	25.000
090	0.095	**410**	1.000	**485**	8.500	**630**	30.000
210	0.100	**512**	1.250	**490**	9.000		
215	0.150	**415**	1.500	**495**	9.500		
220	0.200	**517**	1.750	**610**	10.000		

Notes:
1 One actuator is located in the center of each multi-pole breaker.
2 One Auxiliary Switch is supplied per breaker. Auxiliary Switch option limited to Series Trip & Switch Only circuits, and is not available in single pole illuminated breakers, or with Back Connected Screw or Push-in Stud terminals.
3 Mates with AMP .058" diameter pin receptacles: 60983-1 (gold plated) & 60983-1 (tin plated).
4 For neon bulb applications at 120VAC @ 47K, 1/4 WATT and for 250VAC applications @ 150K, 1/4 WATT, external resistors must be supplied by customer.
5 For LED (DC or rectified AC) applications, LED is mounted in the center of the rocker actuator with electrical characteristics as follows: 100 millicandela at 20mA; Maximum power dissipation = 75mW at 25°C; Maximum forward current = 25mA; Typical forward voltage = 2.1V at 20mA; Typical reverse current = 100uA at 3V. Customer supplies the proper external resistor limiting current to these values.
6 On Visi-Rocker breakers, Visi portion of rocker cannot be the same color as the bezel.
7 Rocker color for LED's and green neon lamp must be clear, smoke gray, white translucent or match color of LED or neon lamp.
8 Other colors available. Consult factory.
9 UL Recognized, CSA Accepted, UL489A Listed, and TUV Certified to 30 amps. Screw Terminals recommended above 20 amps.
10 UL489A Listed must have ON-OFF or Dual legends. TUV Certified approvals must have I - O or Dual legends.
11 Terminal code A available with circuit codes A & B only.
12 Printed circuit board available with UL recognized approval only.
13 Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

7 TERMINAL

1	Push-On 0.250 Tab (Q.C.)	**A** [11]	Push-In Stud
2	Screw 8-32 with Upturned Lugs	**P** [12]	Printed Circuit Board
3	Screw 8-32 (Bus Type)		

8 ROCKER ILLUMINATION

Non-illuminated	**A**		
Neon [4]	Neon	Green Glow [8]	
without resistor, 120VAC/250VAC	**B**	**C**	
LED [7, 8]	Red	Green	Amber
without resistor	**D**	**G**	**K**
with resistor, 4-8 VDC	**E**	**H**	**L**
with resistor, 9-16 VDC	**F**	**J**	**M**

9 ACTUATOR & LEGEND COLOR

Solid Color	Actuator	Legend
1	White	Black
2	Black	White
3	Red	White
4	Green	White
5	Blue	White
6	Yellow	Black
7	Gray	Black
8	Orange	Black
Visi-Rocker [6]	Visi & Legend (remainder of rocker same color as bezel)	
1	White	
2	Black	
3	Red	
4	Green	
5	Blue	
6	Yellow	
7	Gray	
8	Orange	
Illuminated [7]	Actuator	Legend
A	Clear	White
B	Red Transparent	White
C	Green Transparent	White
D	Amber Transparent	White
E	Smoke Gray Transparent	White
F	White Translucent	Black

10 LEGEND [10]
1 No Legend (Single Color or Illuminated Rocker Options Only)
2 ON - OFF Vertical
3 ON - OFF Horizontal
4 I - O Vertical
5 I - O Horizontal
6 Dual Vertical
7 Dual Horizontal

11 BEZEL COLOR / STYLE [8]

Color	without Rockerguard	with Rockerguard
White	**A**	**1**
Black	**B**	**2**
Gray	**G**	**7**

12 AGENCY APPROVAL [9]
J UL489A Listed & TUV Certified
M UL Recognized & CSA Accepted
N TUV Certified, UL Recognized & CSA Accepted
T UL489A Listed

Circuit & Terminal Diagrams: in. [mm]

SERIES TRIP



SERIES TRIP W/ ILLUMINATED ROCKER



SWITCH ONLY



SWITCH ONLY W/ ILLUMINATED ROCKER

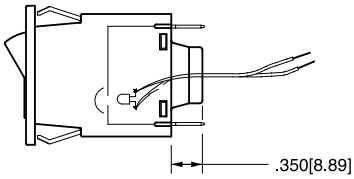

SERIES TRIP W/ AUXILIARY SWITCH

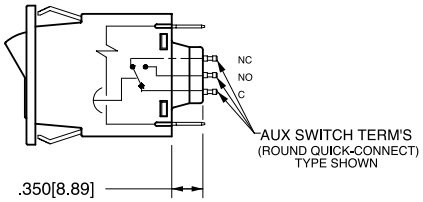



PUSH-IN STUD
MATING HOLE

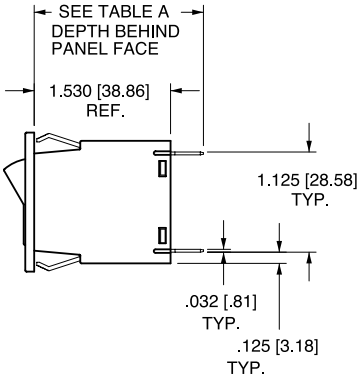

TABLE - A		
TERMINAL DESCRIPTION		DEPTH BEHIND PANEL FACE
MAIN	TAB (Q.C.)	1.900 [48.26]
	SCREW (#8-32)**	1.940 [49.28]
	PUSH-IN STUD	2.530 [64.26]
*AUX. SWITCH	DOUBLE SOLDER TURRET TYPE	2.045 [51.94]
	ROUND Q.C. TYPE	2.035 [51.69]
	FLAT QUICK CONNECT	2.139 [54.33]
	FLAT SOLDER LUG	2.022 [51.36]

* AUX. SWITCH IS NOT AVAILABLE ON SINGLE POLE ILLUMINATED UNITS. WHEN CALLED FOR ON MULTI-POLE UNITS, ONLY ONE AUX. SWITCH IS NORMALLY SUPPLIED, MOUNTED AS SHOWN ON CLA-8003.

**RECOMMENDED TIGHTENING TORQUE 12-15 IN LBS [1.4-2.7 NM]

TERMINAL DIMENSIONAL DETAIL

TAB (Q.C.) TERMINAL



SCREW TERMINAL #8-32 WITH UPTURNED LUGS



SCREW TERMINAL #8-32 BUS



PUSH-IN STUD TERMINAL

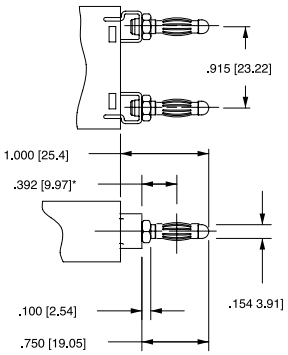

*CENTERLINE OF PUSH-IN STUD CONTACT AREA

AUXILIARY SWITCH TERMINALS

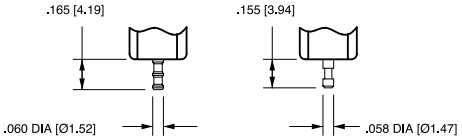

DOUBLE SOLDER TURRET TYPE



.080 [2.03] X .020 [.51] FLAT QUICK-CONNECT TYPE

ROUND QUICK-CONNECT TYPE



FLAT SOLDER LUG TYPE

.110 QC



*AVAILABLE THROUGH SPECAIL CATALOG PART NUMBER

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.020 [.51] unless otherwise specified.
3 Schematic shown represents current trip circuit.

Dimensional Specifications: in. [mm]

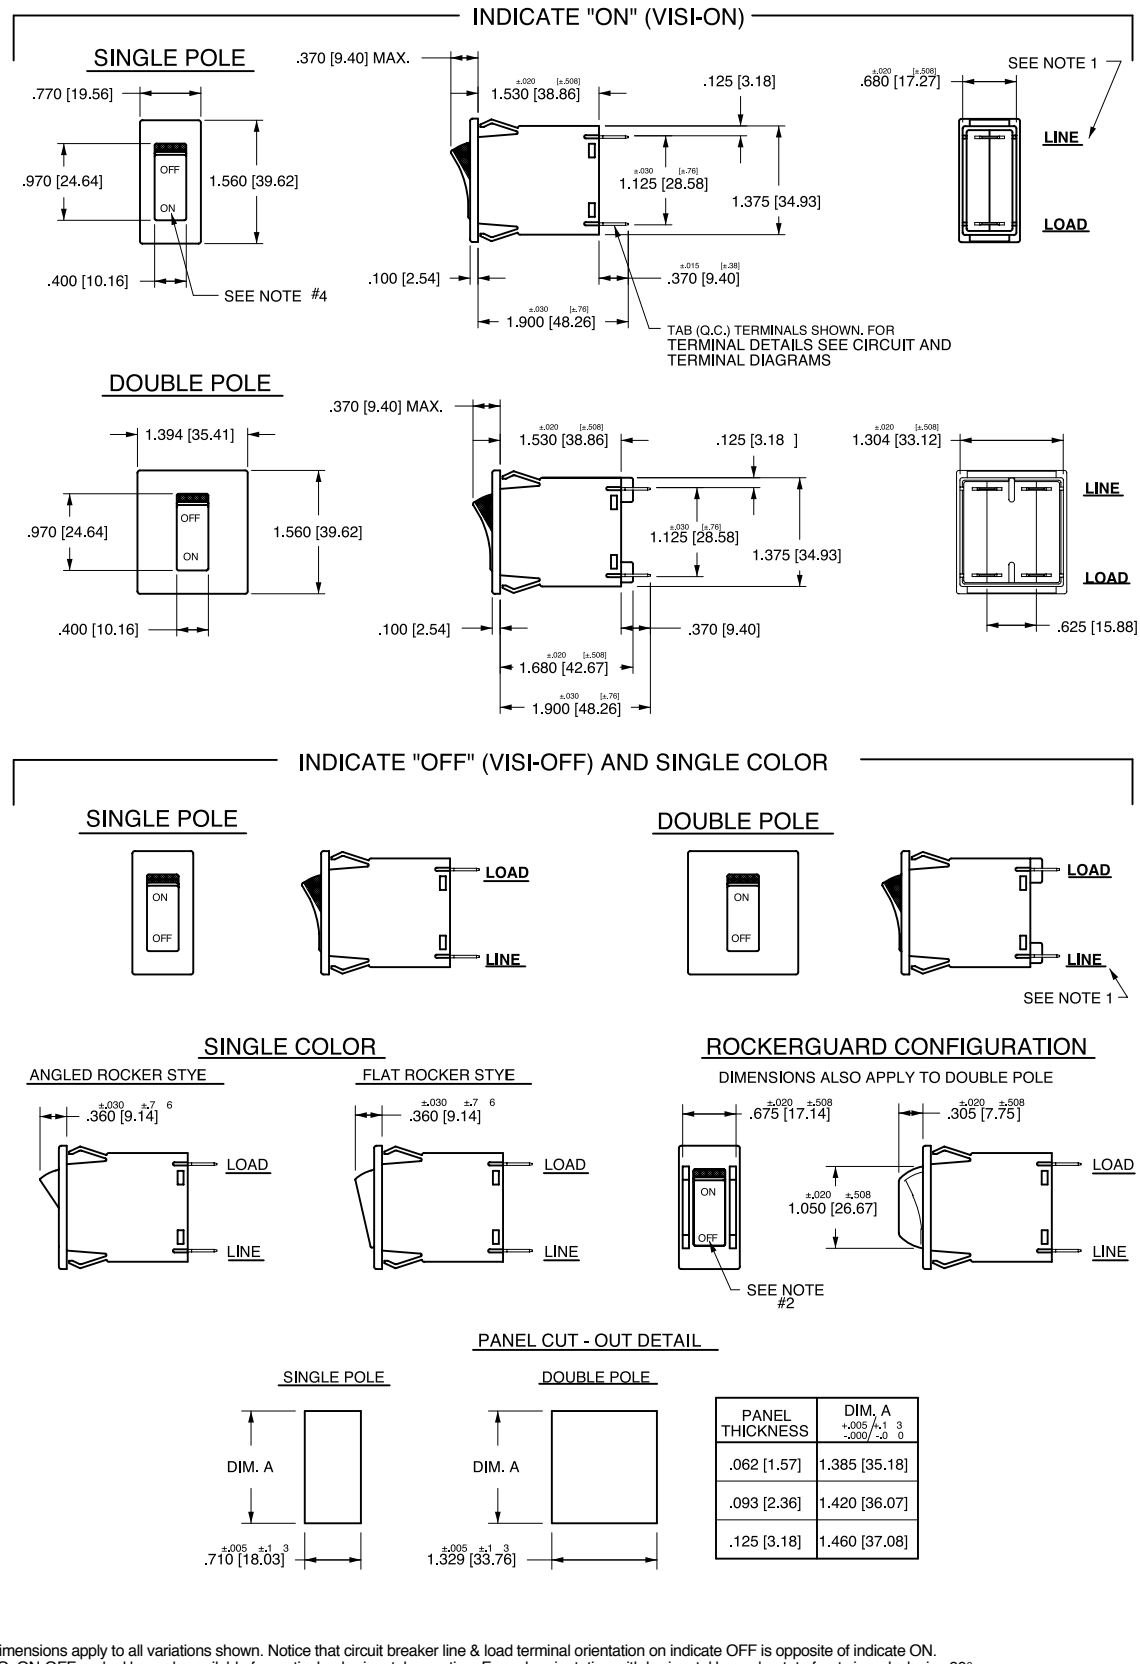

PANEL THICKNESS	DIM. A +.005 -.000 / +.1 -.0 3 0
.062 [1.57]	1.385 [35.18]
.093 [2.36]	1.420 [36.07]
.125 [3.18]	1.460 [37.08]

Notes:
1 Dimensions apply to all variations shown. Notice that circuit breaker line & load terminal orientation on indicate OFF is opposite of indicate ON.
2 I-O, ON-OFF or dual legends available for vertical or horizontal mounting. For pole orientation with horizontal legend, rotate front view clockwise 90°.
3 All dimensions are in inches [millimeters].
4 Tolerance ± 0.20 [.51] unless otherwise specified.

ONE POLE

SINGLE POLE / ROCKER BREAKERS SHOWN WITH DOUBLE SOLDER TURRET AND ROUND QC AUX.SWITCH TERMINALS

ROCKER AND AUXILIARY SWITCH OPTIONS

VISI-OFF AND SINGLE COLOR (NON-ILLUMINATED) ROCKER OPTIONS WITH AUXILIARY SWITCH



VISI-ON ROCKER WITH AUXILIARY SWITCH



ALL-ROCKER OPTIONS WITHOUT AUXILIARY SWITCH



ILLUMINATED ROCKERS WITHOUT AUXILIARY SWITCH



SINGLE POLE / ROCKER BREAKERS SHOWN WITH FLAT QC AND FLAT SOLDER LUG AUX.SWITCH TERMINALS

ROCKER AND AUXILIARY SWITCH OPTIONS

VISI-OFF AND SINGLE COLOR (NON-ILLUMINATED) ROCKER OPTIONS WITH AUXILIARY SWITCH



VISI-ON ROCKER WITH AUXILIARY SWITCH



.110 QC



TWO POLE

DOUBLE POLE / ROCKER BREAKERS SHOWN WITH DOUBLE SOLDER TURRET AND ROUND QC AUX.SWITCH TERMINALS

ROCKER AND AUXILIARY SWITCH OPTIONS

SINGLE COLOR AND VISI-OFF (ILLUMINATED AND NON-ILLUMINATED) ROCKER OPTIONS WITH AUXILIARY SWITCH



VISI-ON ROCKER WITH AUXILIARY SWITCH



ALL-ROCKER OPTIONS WITHOUT AUXILIARY SWITCH

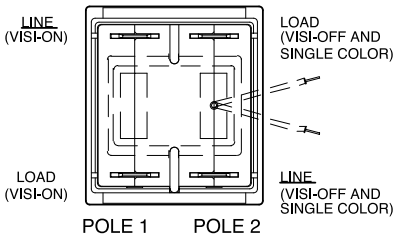

DOUBLE POLE / ROCKER BREAKERS SHOWN WITH FLAT QC AND FLAT SOLDER LUG AUX.SWITCH TERMINALS

ROCKER AND AUXILIARY SWITCH OPTIONS

SINGLE COLOR AND VISI-OFF (ILLUMINATED AND NON-ILLUMINATED) ROCKER OPTIONS WITH AUXILIARY SWITCH



VISI-ON ROCKER WITH AUXILIARY SWITCH



POLE DESIGNATIONS FOR HORIZONTAL MOUNTING/LEGEND- ALL ROCKER STYLES



M	M	1	–	B	–	34	–	260	–	1	–	1	B	B	–	C	–	B
1 Series	2 Actuator	3 Poles		4 Circuit		5 Frequency & Delay		6 Current Rating		7 Terminal		8 Actuator Color	9 Front Panel Hardware	10 Legend Plate		11 Bushing Color		12 Agency Approval

1 SERIES
M

2 ACTUATOR [1]

Handle
M Paddle

Push Button
T Push-Pull 

Push Button with Snap-In Mounting
V Push-Pull

N Baton

U Push To Reset

W Push To Reset

3 POLES
1 One **2** Two

4 CIRCUIT [2]

without Auxiliary Switch
A Switch Only (no coil), Maintained Contacts
B Series Trip (Current)

with Auxiliary Switch, Silver Contacts		**Terminal Type:**
M	Series Trip (Current) Aux Switch	.110 QC x .020 QC
P [3]	Switch Only, Maintained Contacts	.060 Dia, Round Solder Turret
Q [3,4]	Switch Only, Maintained Contacts	.058 Dia, Round Q.C.
R [3,13]	Switch Only, Maintained Contacts	.080 Dia x .020 Flat Q.C.
S [3]	Series Trip (Current)	.060 Dia, Round Solder Turret
T [3,4]	Series Trip (Current)	.058 Dia, Round Q.C.
U [3,13]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
with Auxiliary Switch, Gold Contacts		
2 [3,4]	Switch Only, Maintained Contacts	.058 Dia, Round Q.C.
3 [3,13]	Switch Only, Maintained Contacts	.080 Dia x .020 Flat Q.C.
4 [3,4]	Series Trip (Current)	.058 Dia, Round Q.C.
5 [3,13]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
9	Series Trip (Current) Aux Switch	.110 QC x .020 QC

5 FREQUENCY & DELAY

03	DC 50/60Hz, Switch Only	**32**	DC, 50/60Hz Short
10	DC Instantaneous	**34**	DC, 50/60Hz Medium
12	DC Short	**62**	50/60Hz Short, High-inrush
14	DC Medium	**64**	50/60Hz Medium, High-inrush
20	50/60Hz Instantaneous	**72**	DC, Short,High-inrush
22	50/60Hz Short	**74**	DC,Medium, High-inrush
24	50/60Hz Medium	**92**	DC, 50/60Hz Short, High-inrush
30	DC, 50/60Hz Instantaneous	**94**	DC, 50/60Hz Medium, High-inrush

Voltage			Full Load Amp Rating		General Purpose Amps		Tungsten Lamp Rating		Poles Breaking
Max Rating	Frequency	Phase	Max Amps	Choose Current Coil Rating Code	Max Amps	Choose Current Coil Rating Code	Max Amps	Choose Current Coil Rating Code	
32	DC	-	15	615	25	625	-	-	1
50	DC	-	-	-	7.5	Consult Factory	-	-	1
65	DC	1	15	615	25	625	-	-	2
125	50/60Hz	1	15	615	25	625	15	615	1
250	50/60Hz	1	12	612	-		-	-	1
250	50/60Hz	1	15	615	25	625	-	-	2

Notes:
1 One actuator is located in the center of each multi-pole breaker. Actuator codes V & W limited to single pole breakers only.
2 Switch Only circuits are not available with Push-To-Reset actuators. For Switch Only circuits, select Current Coil Rating from the above chart:
3 One Auxiliary Switch is supplied per breaker. On two-pole breakers, standard Auxiliary Switch mounting is in pole one. Auxiliary Switch option limited to Series Trip and Switch Only circuits. Not available with back connect screw or push-in stud terminals.
4 Mates with AMP .058" diameter pin receptacles including 60983-1 (gold plated) and 60983-2 (tin plated).
5 Actuator color is only visible in the OFF position on Push-Pull actuators.
6 All units except snap-in mounting have one hex nut installed on bushing for use behind the panel.
7 Other colors available. Consult factory.
8 TUV 20A, VDE 15A. UL Recognized and CSA Accepted to 30 amps. Screw Terminals or Push-in Stud recommended above 20 amps.
9 30 amp rating not available with delay's 30, 32, 34, 92 or 94.
10 Screw Terminals are VDE certified only with use of ring terminal attached to wire.
11 Terminal code A available with circuit codes A & B only.
12 Printed circuit board available with UL recognized approval only.
13 Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

6 CURRENT RATING (AMPERES)

CODE	AMPERES	CODE	AMPERES	CODE	AMPERES	CODE	AMPERES
020	0.020	**225**	0.250	**420**	2.000	**710**	10.500
025	0.025	**230**	0.300	**522**	2.250	**611**	11.000
030	0.030	**235**	0.350	**425**	2.500	**711**	11.500
035	0.035	**240**	0.400	**527**	2.750	**612**	12.000
040	0.040	**245**	0.450	**430**	3.000	**712**	12.500
045	0.045	**250**	0.500	**435**	3.500	**613**	13.000
050	0.050	**255**	0.550	**440**	4.000	**614**	14.000
055	0.055	**260**	0.600	**445**	4.500	**615**	15.000
060	0.060	**265**	0.650	**450**	5.000	**616**	16.000
065	0.065	**270**	0.700	**455**	5.500	**617**	17.000
070	0.070	**275**	0.750	**460**	6.000	**618**	18.000
075	0.075	**280**	0.800	**465**	6.500	**620**	20.000
080	0.080	**285**	0.850	**470**	7.000	**622**	22.000
085	0.085	**290**	0.900	**475**	7.500	**624**	24.000
090	0.090	**295**	0.950	**480**	8.000	**625**	25.000
090	0.095	**410**	1.000	**485**	8.500	**630**	30.000 [9]
210	0.100	**512**	1.250	**490**	9.000		
215	0.150	**415**	1.500	**495**	9.500		
220	0.200	**517**	1.750	**610**	10.000		

7 TERMINAL
1 Push-On 0.250 Tab (Q.C.)
2 [10] Screw 8-32 with Upturned Lugs
3 [10] Screw 8-32 (Bus Type)
A [11] Push-In Stud
P [12] Printed Circuit Board

8 ACTUATOR COLOR & LEGEND [5]

Gloss Handle	Push-Button	Actuator Color
1	**A**	White
2	**B**	Black
3	**C**	Red
4	**D**	Green
5	**E**	Blue
6	**F**	Yellow
8	**H**	Orange

9 FRONT PANEL HARDWARE [6]

	Handle	Push-Button
No outer Panel Hardware	**A**	**1**
Knurled Nut		
Bright nickel	**B**	**2**
Bright nickel with locking ring	**C**	
Black	**D**	
Black with locking ring	**E**	
Panel Dress Nut		
Bright nickel	**F**	
Bright nickel with locking ring	**G**	
Black	**H**	
Black with locking ring	**J**	

10 LEGEND PLATE / BUTTON MARKING

Handle Actuator Legend Plate (Actuator Styles M & N)
A No Legend Plate
B ON - OFF Vertical
C ON - OFF Horizontal
D I - O Vertical
E I - O Horizontal

Push-Pull Actuator Button Cap (Actuator Styles T & V)
1 No Marking
2 Rated Amps Horizontal
3 Rated Amps Line Side Down
4 Rated Amps Line Side Up

Push-to-Reset Actuator Button (Actuator Styles U & W)
1 No Marking

11 BUSHING COLOR [7]
B Black

12 AGENCY APPROVAL [8]
C UL Recognized & CSA Accepted
D VDE Certified, UL Recognized & CSA Accepted
E TUV Certified, UL Recognized & CSA Accepted

M	M	1	–	B	–	14	–	620	–	1	–	1	B	B	–	B	–	J
1 Series	2 Actuator	3 Poles		4 Circuit		5 Frequency & Delay		6 Current Rating		7 Terminal		8 Actuator Color	9 Front Panel Hardware	10 Legend Plate		11 Bushing Color		12 Agency Approval

1 SERIES
M

2 ACTUATOR [1]

Handle
M Paddle

Push Button
T Push-Pull



Push Button with Snap-In Mounting
V Push-Pull

N Baton

U [8] Push To Reset

W [8] Push To Reset

3 POLES
1 One

4 CIRCUIT

without Auxiliary Switch

B	Series Trip (Current)	
with Auxiliary Switch, Silver Contacts		**Terminal Type:**
M	Series Trip (Current) Aux Switch	.110 QC x .020 QC
S [3]	Series Trip (Current)	.060 Dia, Round Solder Turret
T [3,4]	Series Trip (Current)	.058 Dia, Round Q.C.
U [3,13]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
with Auxiliary Switch, Gold Contacts		
4 [2,3]	Series Trip (Current)	.058 Dia, Round Q.C.
5 [3,12]	Series Trip, Maintained Contacts	.080 Dia x .020 Flat Q.C.
9	Series Trip (Current) Aux Switch	.110 QC x .020 QC

5 FREQUENCY & DELAY

10	DC Instantaneous	**72**	DC, Short,High-inrush
12	DC Short	**74**	DC,Medium, High-inrush
14	DC Medium		

6 CURRENT RATING (AMPERES)

CODE	AMPERES	CODE	AMPERES	CODE	AMPERES	CODE	AMPERES
020	0.020	**225**	0.250	**420**	2.000	**710**	10.500
025	0.025	**230**	0.300	**522**	2.250	**611**	11.000
030	0.030	**235**	0.350	**425**	2.500	**711**	11.500
035	0.035	**240**	0.400	**527**	2.750	**612**	12.000
040	0.040	**245**	0.450	**430**	3.000	**712**	12.500
045	0.045	**250**	0.500	**435**	3.500	**613**	13.000
050	0.050	**255**	0.550	**440**	4.000	**614**	14.000
055	0.055	**260**	0.600	**445**	4.500	**615**	15.000
060	0.060	**265**	0.650	**450**	5.000	**616**	16.000
065	0.065	**270**	0.700	**455**	5.500	**617**	17.000
070	0.070	**275**	0.750	**460**	6.000	**618**	18.000
075	0.075	**280**	0.800	**465**	6.500	**620**	20.000
080	0.080	**285**	0.850	**470**	7.000	**622**	22.000
085	0.085	**290**	0.900	**475**	7.500	**624**	24.000
090	0.090	**295**	0.950	**480**	8.000	**625**	25.000
090	0.095	**410**	1.000	**485**	8.500	**630**	30.000
210	0.100	**512**	1.250	**490**	9.000		
215	0.150	**415**	1.500	**495**	9.500		
220	0.200	**517**	1.750	**610**	10.000		

7 TERMINAL [4]

1	Push-On 0.250 Tab (Q.C.)	**A** [10]	Push-In Stud
2	Screw 8-32 with Upturned Lugs	**P** [11]	Printed Circuit Board
3	Screw 8-32 (Bus Type)		

8 ACTUATOR COLOR & LEGEND [5]

Gloss Handle	Push-Button	Actuator Color
1	**A**	White
2	**B**	Black
3	**C**	Red
4	**D**	Green
5	**E**	Blue
6	**F**	Yellow
8	**H**	Orange

9 FRONT PANEL HARDWARE [6]

	Handle	Push-Button
No outer Panel Hardware	**A**	**1**
Knurled Nut		
Bright nickel	**B**	**2**
Bright nickel with locking ring	**C**	
Black	**D**	
Black with locking ring	**E**	
Panel Dress Nut		
Bright nickel	**F**	
Bright nickel with locking ring	**G**	
Black	**H**	
Black with locking ring	**J**	

10 LEGEND PLATE / BUTTON MARKING

Handle Actuator Legend Plate (Actuator Styles M & N)

A	No Legend Plate
B	ON - OFF Vertical
C	ON - OFF Horizontal
D	I - O Vertical
E	I - O Horizontal

Push-Pull Actuator Button Cap (Actuator Styles T & V)

1 [8]	No Marking
2	Rated Amps Horizontal
3	Rated Amps Line Side Down
4	Rated Amps Line Side Up

Push-to-Reset Actuator Button (Actuator Styles U & W)

1 [8]	No Marking

11 BUSHING COLOR [7]
B Black

12 AGENCY APPROVAL [9]

J	UL489A Listed, TUV Certified
M	UL Recognized, CSA Accepted
N	UL Recognized, TUV Certified
T	UL489A Listed

1 One actuator is located in the center of each multi-pole breaker. Actuator codes V & W limited to single pole breakers only.
2 One Auxiliary Switch is supplied per breaker. On two-pole breakers, standard Auxiliary Switch mounting is in pole one. Auxiliary Switch option limited to Series Trip and Switch Only circuits. Not available with Back Connected Screw or Push-in Stud terminals.
3 Mates with AMP .058" diameter pin receptacles including 60983-1 (gold plated) and 60983-3 (tin plated).
4 Screw terminals or Push-in Stud recommended above 20 amps.
5 Actuator color is only visible in the OFF position on Push-Pull actuators.
6 All units have one hex nut installed on bushing for use behind the panel.
7 Other colors available. Consult factory.
8 Not available with UL489A Listed breakers.
9 UL Recognized, CSA Accepted and UL Listed to 30 amps.
10 Terminal code A available with circuit codes A & B only.
11 Printed circuit board available with UL recognized approval only.
12 Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

Circuit & Terminal Diagrams: in. [mm]

SERIES TRIP

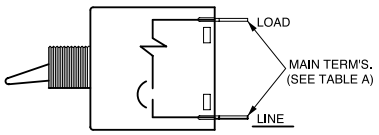

SWITCH ONLY



SERIES TRIP W/ AUXILIARY SWITCH

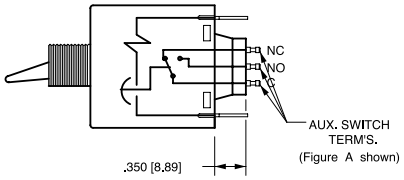

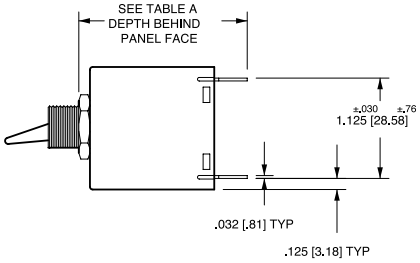

TABLE A		
TERMINAL DESCRIPTION		DEPTH BEHIND PANEL FACE *
MAIN	TAB (Q.C)	1.890 [48.00]
	SCREW (#8-32)	1.930 [49.03]
	PUSH-IN STUD	2.520 [64.00]
AUX. ** SWITCH	DOUBLE SOLDER TURRET TYPE	2.035 [51.69]
	ROUND Q.C TYPE	2.025 [51.44]
	FLAT QUICK-CONNECT	2.129 [54.08]
	FLAT SOLDER LUG	2.012 [51.10]

*DEPTH INCLUDES BEHIND PANEL HEX NUT AS SUPPLIED ON ALL UNITS.

**WHEN CALLED FOR ON MULTI-POLE UNITS, ONLY ONE AUX. SWITCH IS NORMALLY SUPPLIED, MOUNTED AS SHOWN IN FIG. A

MULTI-POLE IDENTIFICATION SCHEME

SOLDER TURRET AND ROUND QC AUX SWITCH TERMINALS



FIG. A

FLAT QC AND SOLDER LUG AUX SWITCHTERMINALS



FIG. B

TERMINAL DIMENSIONAL DETAIL

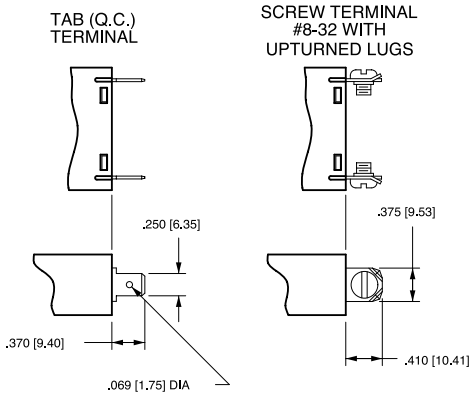

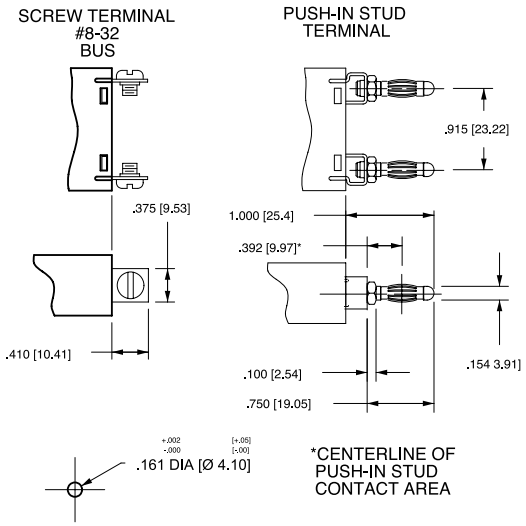

AUXILIARY SWITCH TERMINALS

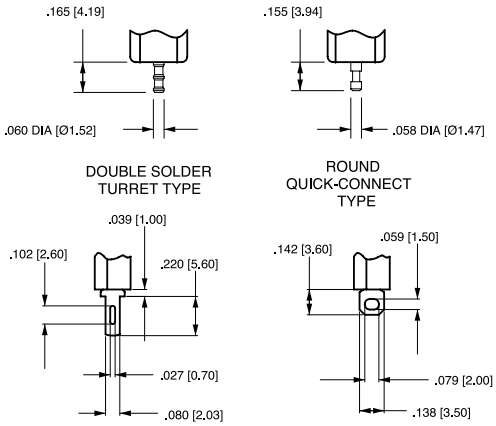

.080 [2.03] X .020 [.51] FLAT QUICK-CONNECT TYPE

FLAT SOLDER LUG TYPE

*AVAILABLE THROUGH SPECAIL CATALOG PART NUMBER

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.020 [.51] unless otherwise specified.

PC Terminal Diagrams: in. [mm]

HANDLE TYPE SHOWN WITHOUT AUX. SWITCH

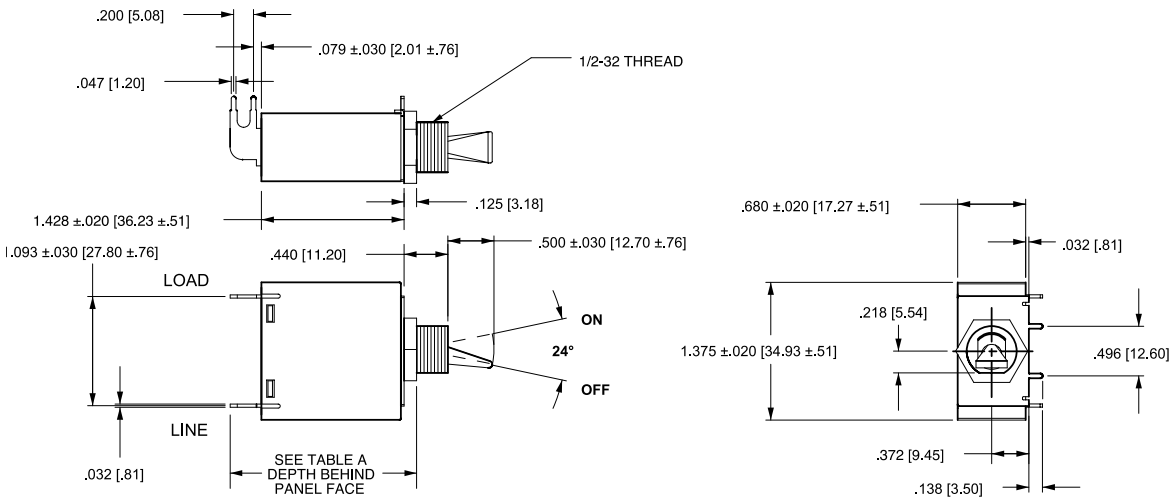

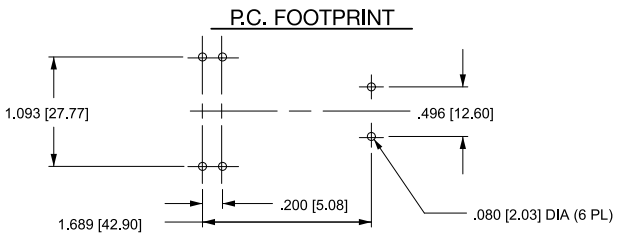

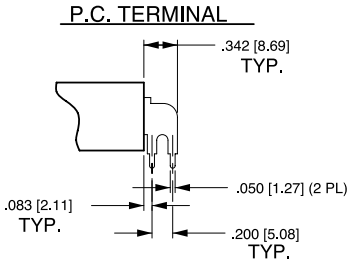

HANDLE TYPE SHOWN WITH AUX. SWITCH



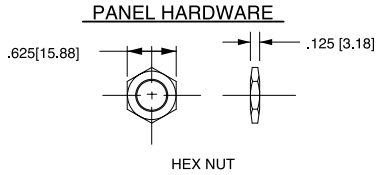

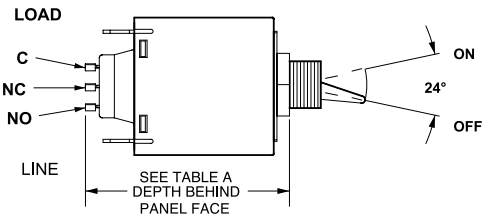



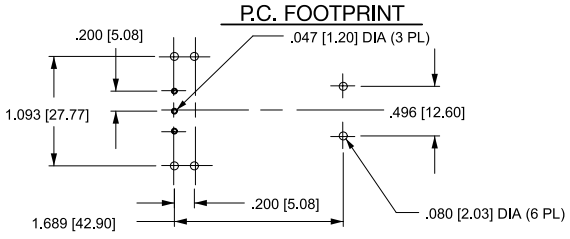

TABLE A		
TERMINAL DESCRIPTION		DEPTH BEHIND PANEL FACE *
MAIN	PRINTED CIRCUIT BOARD	1.957 [49.71]
AUX. SWITCH	PRINTED CIRCUIT BOARD	2.449 [62.20]

*DEPTH INCLUDES BEHIND PANEL HEX NUT AS SUPPLIED ON ALL UNITS

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.020 [.51] unless otherwise specified.

Dimensional Specifications: in. [mm]

PADDLE ACTUATOR STYLE

SINGLE POLE

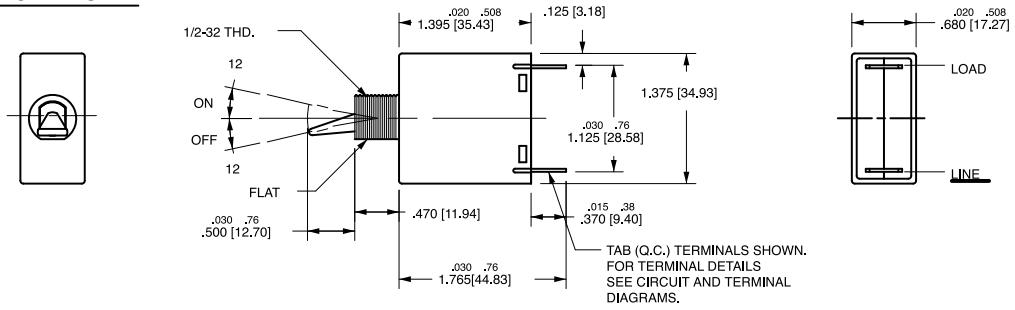

DOUBLE POLE

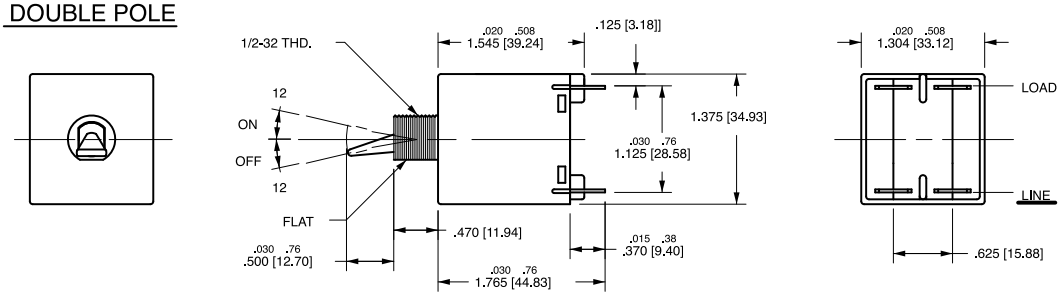

BATON ACTUATOR STYLE

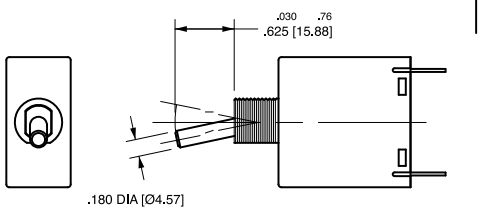

MOUNTING DETAILS

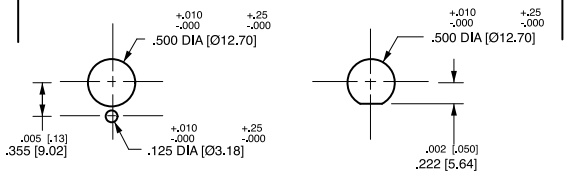

LEGEND PLATES

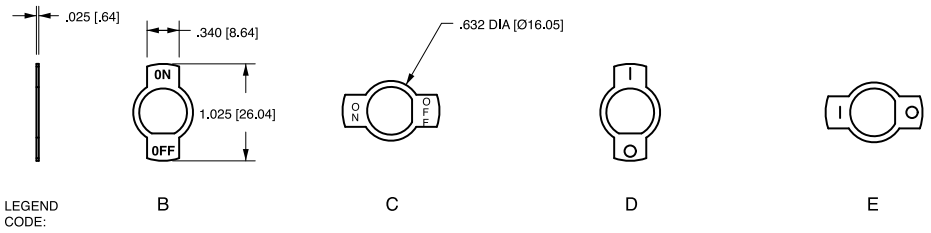

PANEL HARDWARE

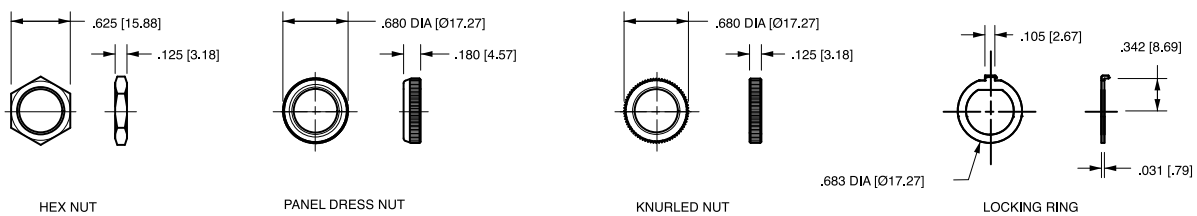

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.020 [.51] unless otherwise specified.

Circuit & Terminal Diagrams: in. [mm]

SERIES TRIP

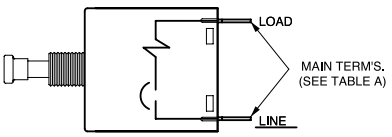

SWITCH ONLY



SERIES TRIP W/ AUXILIARY SWITCH

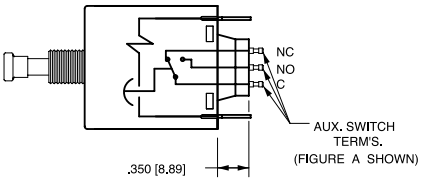

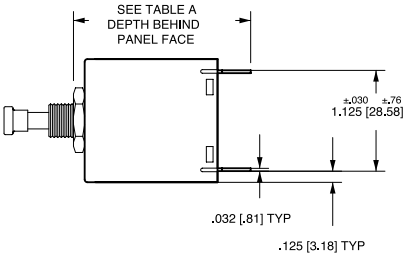

TABLE A		
TERMINAL DESCRIPTION		DEPTH BEHIND PANEL FACE *
MAIN	TAB (Q.C)	1.952 [49.57]
	SCREW (#8-32)	1.992 [50.60]
	PUSH-IN STUD	2.582 [65.58]
AUX. ** SWITCH	DOUBLE SOLDER TURRET TYPE	2.097 [53.26]
	ROUND Q.C TYPE	2.087 [53.01]
	FLAT QUICK-CONNECT	2.191 [55.65]
	FLAT SOLDER LUG	2.074 [52.68]

*DEPTH INCLUDES BEHIND PANEL HEX NUT AS SUPPLIED ON ALL UNITS.

** WHEN CALLED FOR ON MULTI-POLE UNITS, ONLY ONE AUX. SWITCH IS NORMALLY SUPPLIED, MOUNTED AS SHOWN IN FIG. A

MULTI-POLE IDENTIFICATION SCHEME

SOLDER TURRET AND ROUND QC AUX SWITCH TERMINALS



FIG. A

FLAT QC AND SOLDER LUG AUX SWITCHTERMINALS



FIG. B

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.020 [.51] unless otherwise specified.

TERMINAL DIMENSIONAL DETAIL

TAB (Q.C.) TERMINAL



SCREW TERMINAL #8-32 WITH UPTURNED LUGS



SCREW TERMINAL #8-32 BUS



PUSH-IN STUD TERMINAL

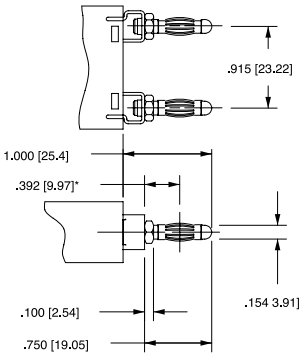



PUSH-IN STUD MATING HOLE

*CENTERLINE OF PUSH-IN STUD CONTACT AREA

AUXILIARY SWITCH TERMINALS

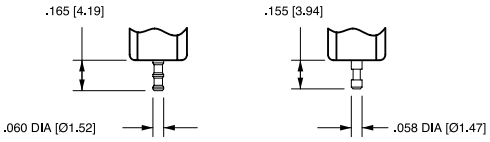

DOUBLE SOLDER TURRET TYPE



.080 [2.03] X .020 [.51] FLAT QUICK-CONNECT TYPE

ROUND QUICK-CONNECT TYPE



FLAT SOLDER LUG TYPE

*AVAILABLE THROUGH SPECAIL CATALOG PART NUMBER

.110 QC



Dimensional Specifications: in. [mm]

PUSH-PULL ACTUATOR STYLE

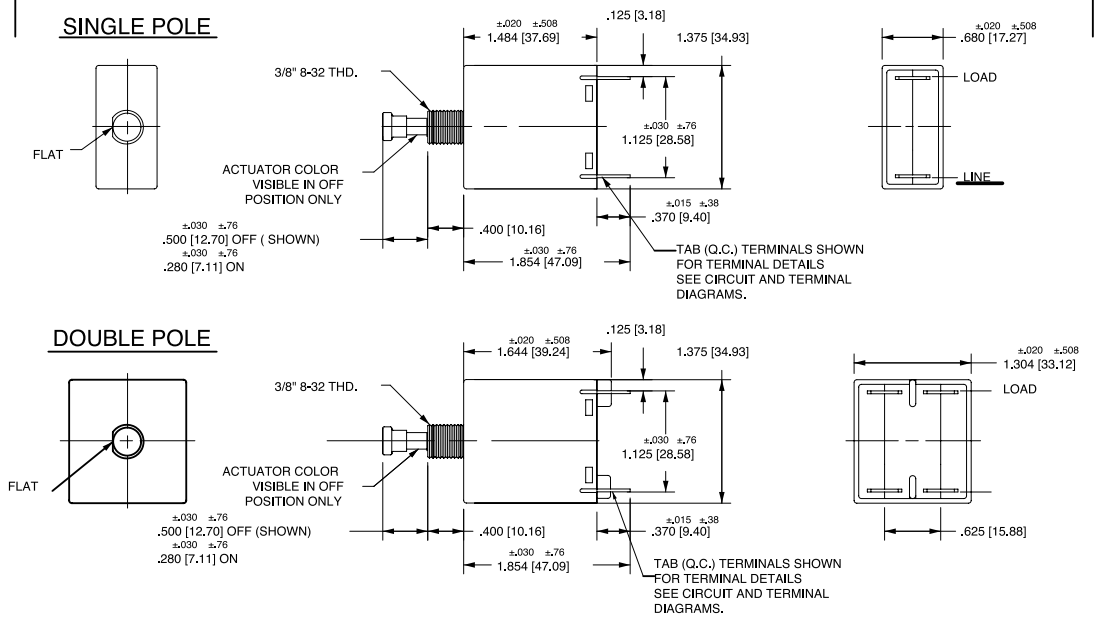

PUSH-TO-RESET ACTUATOR STYLE

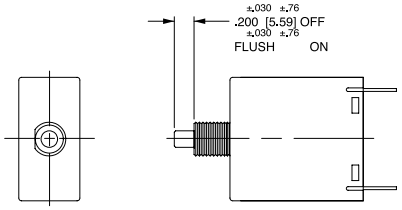

SNAP-IN BUSHING ACTUATOR STYLE

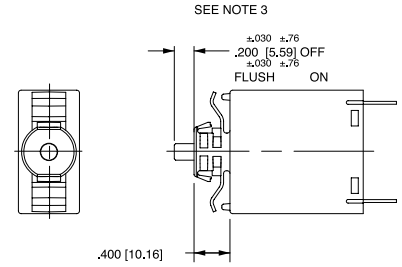

BUTTON MARKING ORIENTATION (PUSH-PULL ONLY)

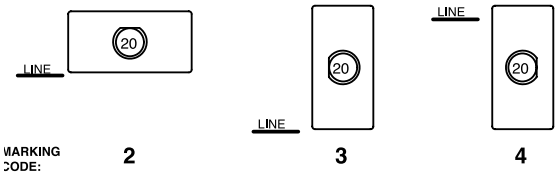

MOUNTING DETAILS



PUSH-PULL, PUSH TO RESET



SNAP-IN BUSHING

PANEL HARDWARE



HEX NUT

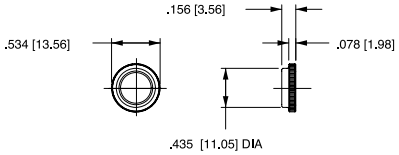

PANEL DRESS NUT

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ± 0.20 [.51] unless otherwise specified.
3 Available with Push-Pull or Push-to-Reset Actuators

PC Terminal Diagrams: in. [mm]

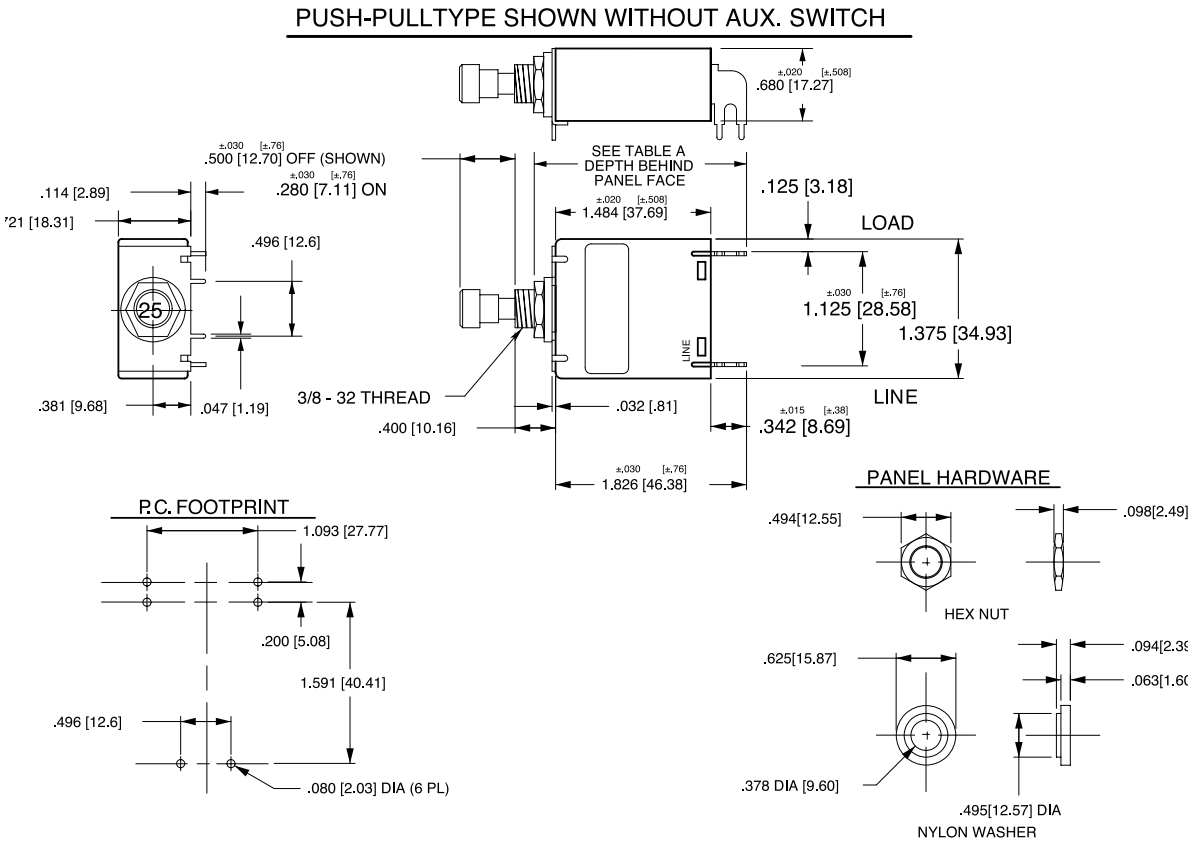

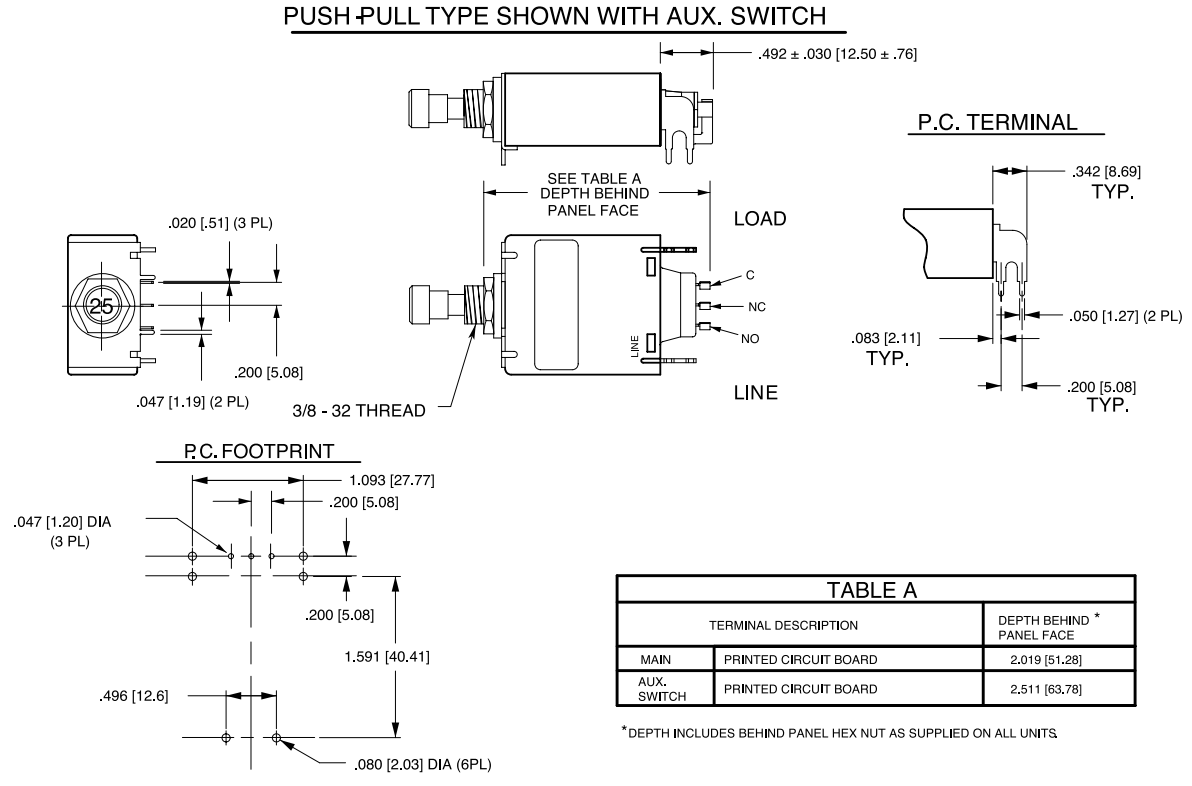

TABLE A		
TERMINAL DESCRIPTION		DEPTH BEHIND * PANEL FACE
MAIN	PRINTED CIRCUIT BOARD	2.019 [51.28]
AUX. SWITCH	PRINTED CIRCUIT BOARD	2.511 [63.78]

*DEPTH INCLUDES BEHIND PANEL HEX NUT AS SUPPLIED ON ALL UNITS.

Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance ±.020 [.51] unless otherwise specified.

M, MS-SERIES TIME DELAY VALUES										
	PERCENT OF RATED CURRENT									
	Delay	100%	135%	150%	200%	400%	600%	800%	1000%	1200%
TRIP	10, 20, 30	No Trip	May Trip	.100 Max	.100 Max	.100 Max	.100 Max	.100 Max	.100 Max	.100 Max
TIME	12, 22, 32, 62, 72, 92	No Trip	.300 - 7.00	.200 - 5.00	.100 - 2.00	.030 - .500	.008 - .300	.006 - .150	.005 - .100	.005 - .100
SECONDS	14, 24, 34, 64, 74, 94	No Trip	3.00 - 70.0	2.00 - 40.0	1.00 - 15.0	.100 - 4.00	.008 - 2.00	.006 - .800	.005 - .350	.005 - .160

Notes:
1 Delay Curves 12,14, 22, 24, 32, 34, 62, 64, 72, 74, 92, 94: Breakers to hold 100% and must trip at 135% of rated current and greater within the time limit shown in this curve.
2 Delay Curves 10, 20, 30: Breakers to hold 100% and must trip at 150% of rated current and greater within the time limit shown in this curve.
3 All Curves: Curve data shown represents breaker response at ambient temperature of 77°F (25°C) with no preloading. Breakers are mounted in standard wall-mount position.
4 The minimum inrush pulse tolerance handling capability is 12 times the rated current on standard delays and 18 times the rated current on high inrush delays. These values are based on a 60 Hz 1/2 cycle, 8.33 ms pulse. High inrush delays should be specified for applications with high initial surge currents of short duration, such as switching power supplies, highly capacitive loads and transformer loads.

Dual Rated AC/DC

Instantaneous

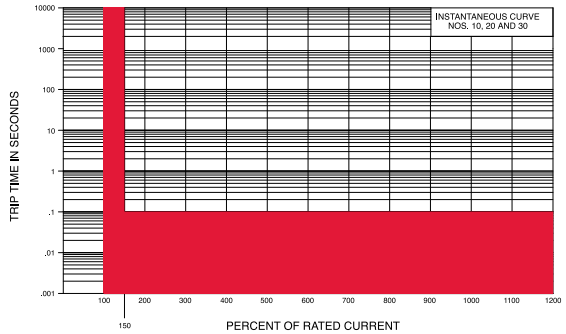

Short

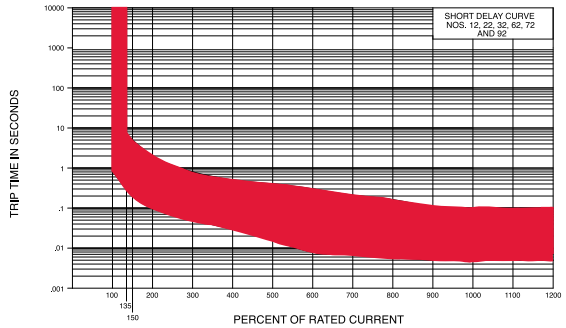

Short D2

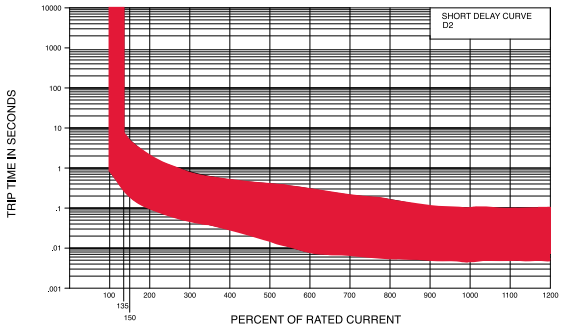

Medium

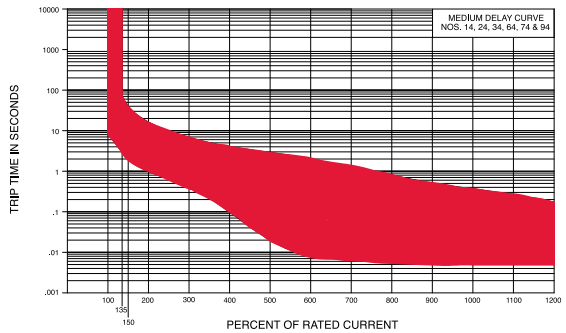

Medium D4

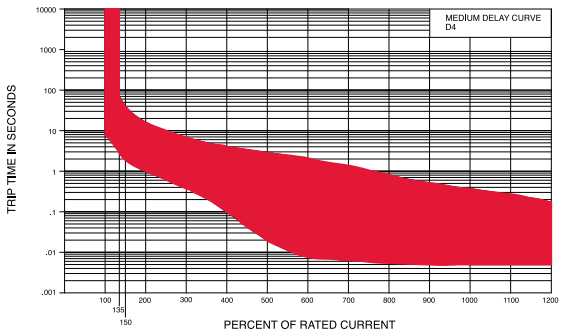

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit ***www.carlingtech.com/findarep***.

About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit **www.carlingtech.com/company-profile.**

To view all of Carling's environmental, quality, health & safety certifications please visit **www.carlingtech.com/environmental-certifications**

Worldwide Headquarters

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Phone: 860.793.9281 **Fax:** 860.793.9231
Email: sales@carlingtech.com

Northern Region Sales Office: nrsm@carlingtech.com
Southeast Region Sales Office: sersm@carlingtech.com
Midwest Region Sales Office: mrsm@carlingtech.com
West Region Sales Office: wrsm@carlingtech.com
Latin America Sales Office: larsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd.,
Suite 1607, 16/F Tower 2, The Gateway,
Harbour City, 25 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Phone: Int + 852-2737-2277 **Fax:** Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China: shenzhen@carlingtech.com
Shanghai, China: shanghai@carlingtech.com
Pune, India: india@carlingtech.com
Kaohsiung, Taiwan: taiwan@carlingtech.com
Yokohama, Japan: japan@carlingtech.com

Europe | Middle East | Africa Headquarters

Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Phone: Int + 44 1392.364422 **Fax:** Int + 44 1392.364477
Email: ltd.sales@carlingtech.com

Germany: gmbh@carlingtech.com
France: sas@carlingtech.com

Carling Technologies®
Innovative Designs. Powerful Solutions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Carling Technologies:

MA1-B-34-430-1-A162-C MA1-B-34-615-2A26-2-C MD1-B-34-615-1-A36-B-C MB1-B-34-450-1-A27-B-C MA1-B-34-450-1-A26-B-C MB1-B-34-450-1-A26-B-C MB2-B-34-610-1-A24-B-C MB2-B-34-615-1-A24-B-C MB2-B-34-625-1-A27-B-C MB2-B-34-610-1-A27-B-C MB2-B-34-615-1-A27-B-C MB2-B-34-620-1-A27-B-C MA1-B-34-475-1-A12-B-C MA1-B-34-450-1-A12-B-C MD2-B-34-610-1-A36-B-C MD2-B-34-615-1-A36-B-C MB2-B-34-420-1-A24-B-C MB2-B-34-470-1-A24-B-C MF1-B-34-610-1-DB7-B-C MF1-B-34-620-1-DB7-B-C MF1-B-34-615-1-DB7-B-C MA1-B-34-625-1-A26-B-C MB1-B-34-615-1-A27-B-C MA1-B-34-610-1-A26-B-C MA1-B-34-615-1-A26-B-C MB1-B-34-610-1-A27-B-C MB1-B-34-615-1-A26-B-C MB1-B-34-610-1-A26-B-C MB1-B-34-625-1-A27-B-C MB1-B-34-620-1-A26-B-C MA1-B-34-620-1-A26-B-C MB1-B-34-620-1-A27-B-C MB1-B-34-625-1-A26-B-C MA1-B-34-625-1-A32-B-C MA1-B-34-625-1-A12-B-C MA1-B-34-615-1-A12-B-C MA1-B-34-610-1-A12-B-C MA1-B-34-620-1-A12-B-C MA1-B-94-450-1-A86-B-C MA2-4-34-615-2-A22-7-C MA2-4-34-625-2-A22-7-C MA2-4-34-625-2-A32-7-C MA2-4-34-625-2-A36-7-C MA2-A-03-615-1-A16-2-C MA2-A-03-615-1-A22-2-C MA2-A-03-615-1-A24-2-C MA2-A-03-625-1-A12-2-C MA2-A-03-625-1-A12-B-C MA2-A-03-625-1-A14-2-C MA2-A-03-625-1-A16-2-C MA2-A-03-625-1-A21-2-C MA2-A-03-625-1-A21-B-C MA2-A-03-625-1-A22-B-C MA2-A-03-625-1-A24-2-C MA2-A-03-625-1-A24-B-C MA2-A-03-625-1-A84-2-C MA2-A-03-625-2-A21-2-C MA2-A-03-625-2-A35-B-C MA2-A-03-625-3-A24-2-C MA2-B-14-620-1-A26-2-C MA2-B-20-420-1-A26-2-D MA2-B-20-610-1-A22-B-E MA2-B-22-420-1-A24-B-D MA2-B-22-420-1-A26-2-D MA2-B-22-430-1-A14-B-D MA2-B-22-450-1-A14-B-D MA2-B-22-450-1-A24-2-D MA2-B-22-475-1-A14-B-D MA2-B-22-475-1-A34-B-E MA2-B-22-610-1-A25-B-C MA2-B-22-610-1-A25-B-D MA2-B-22-610-1-A26-B-D MA2-B-22-612-1-A24-2-D MA2-B-22-614-1-A24-2-D MA2-B-22-615-1-A14-B-D MA2-B-22-615-1-A16-B-D MA2-B-22-615-1-A26-B-D MA2-B-22-615-1-A32-2-D MA2-B-22-615-1-A36-1-D MA2-B-22-615-1-A36-B-D MA2-B-22-620-1-A24-B-C MA2-B-24-410-1-A24-B-D MA2-B-24-420-1-A14-B-D MA2-B-24-420-1-A24-B-D MA2-B-24-420-1-A26-B-D MA2-B-24-425-1-A24-B-D MA2-B-24-430-1-A14-B-D MA2-B-24-430-1-A24-B-D MA2-B-24-440-1-A14-2-D MA2-B-24-440-1-A14-B-D MA2-B-24-440-1-A15-B-D MA2-B-24-440-1-A16-B-D MA2-B-24-440-1-A24-B-D MA2-B-24-440-3-A15-B-E MA2-B-24-450-1-A14-1-D MA2-B-24-450-1-A14-B-D MA2-B-24-450-1-A16-2-D MA2-B-24-450-1-A24-B-D MA2-B-24-450-1-A34-2-D MA2-B-24-460-1-A14-2-D