

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	BFS520
▶ Overseas	Part Number	BFS520
▶ Equivalent	Part Number	BFS520

EV is the abbreviation of name EVVO

描述

BFS520 是生产的超高频低噪声晶体管，采用平面 NPN 硅外延双极型工艺，具有高功率增益、低噪声特性。采用超小型的 SOT-323 封装，适用于高密度表面贴片安装，主要用于 VHF，UHF，CATV 等高频低噪声放大器。

主要特性

高增益: $|S_{21e}|^2$ 典型值为 12.5dB

低噪声: NF 典型值为 1.5dB

增益带宽乘积: f_T 典型值为 8GHz

@ $V_{CE}=6V$, $I_C=20mA$, $f=0.9GHz$

@ $V_{CE}=6V$, $I_C=5mA$, $f=1GHz$

@ $V_{CE}=6V$, $I_C=20mA$, $f=1GHz$

订购信息

产品号	标准包装
BFS520	3K/盘

极限工作条件范围 ($T_A=25^{\circ}C$)

参数	符号	极值	单位
集电极基极击穿电压	V_{CBO}	20	V
集电极发射极击穿电压	V_{CEO}	12	V
发射极基极击穿电压	V_{EBO}	2	V
集电极电流	I_C	100	mA
功耗	P_C	150	mW
结温度	T_j	150	$^{\circ}C$
存储温度	T_{stg}	-65 ~ +150	$^{\circ}C$

HFE 档位

分档	B	C	D
标号	N2		
HFE	90-140	120-180	170-250



电学特性 (TA=25°C)

参数	符号	最小	典型	最大	单位	测试条件
集电极基极击穿电压	V _{CB0}	20			V	I _c =1.0μA
集电极基极漏电流	I _{CBO}			0.1	μA	V _{CB} =10V
发射极基极漏电流	I _{EBO}			0.1	μA	V _{EB} =1V
直流增益	h _{FE}	90	150	250		V _{CE} =6V, I _c =20mA
特征频率	f _T		8		GHz	V _{CE} =6V, I _c =20mA, f=1GHz
输出反馈电容	C _{re}		0.4	0.7	pF	V _{CB} =6V, I _E =0mA, f=1MHz
功率增益	S _{21e} ²		12.5		dB	V _{CE} =6V, I _c =20mA, f=1GHz
噪声系数	NF		1.5	2.0	dB	V _{CE} =6V, I _c =5mA, f=1GHz







封装形式



SOT-323

管脚定义：1：基极（Base） 2：发射极（Emitter） 3：集电极（Collector）

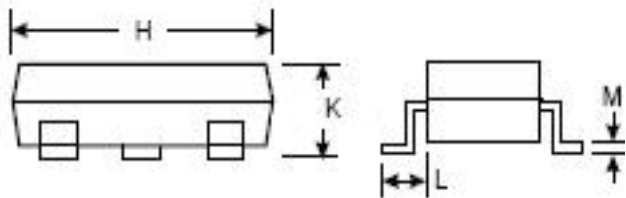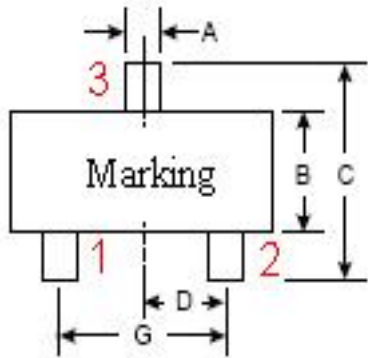


符号	最小值 (mm)	最大值 (mm)
A	0.200	0.400
B	1.150	1.350
C	2.150	2.450
D	0.650	
G	1.200	1.400
H	2.000	2.200
K	0.900	1.100
L	0.525	
M	0.080	0.150

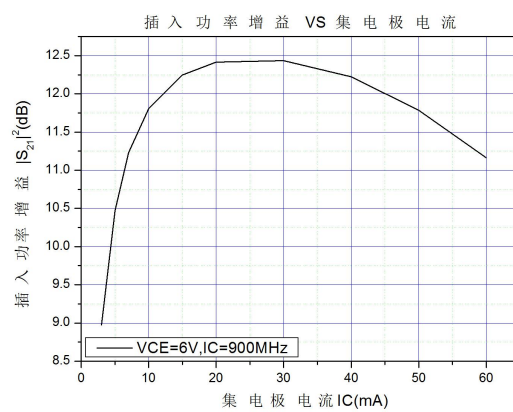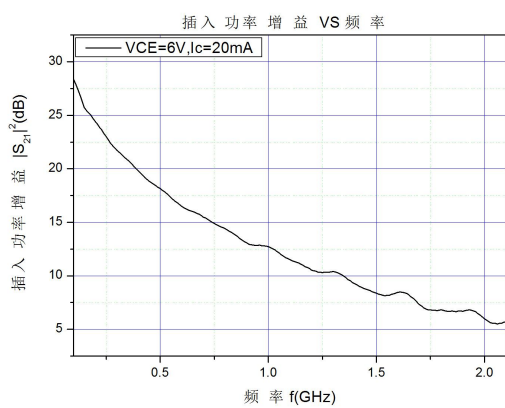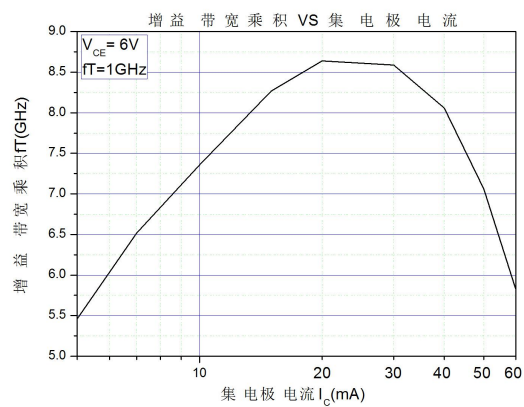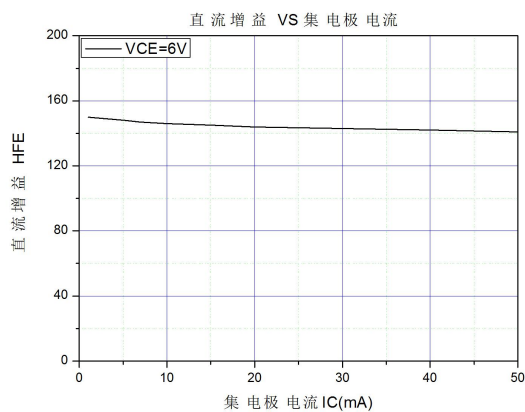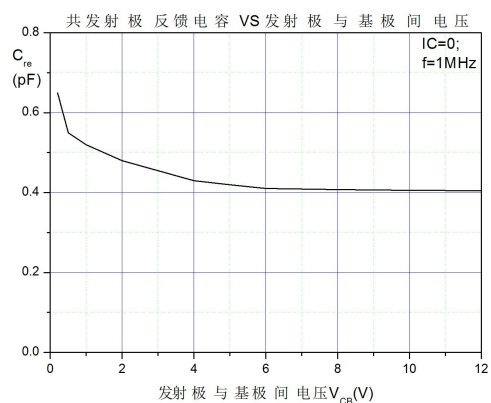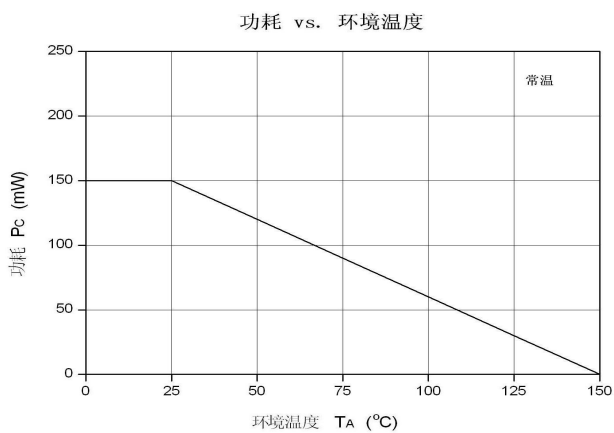典型特性曲线 ($T_A = 25^\circ\text{C}$)

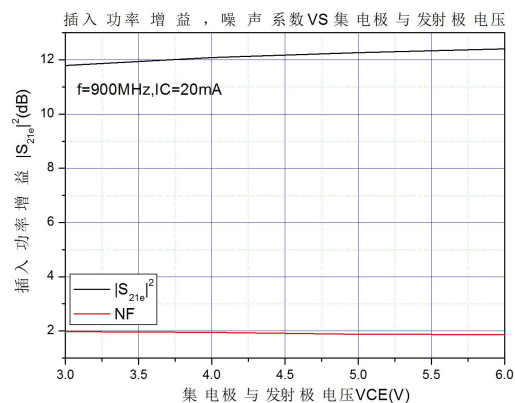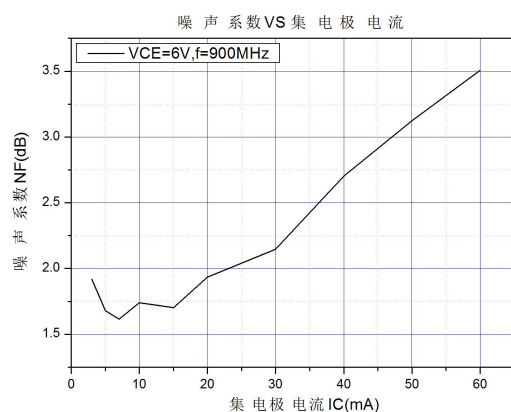


SMITH 图


测试条件: VCE=6V, IC=20mA
 S_{21e} -FREQUENCY

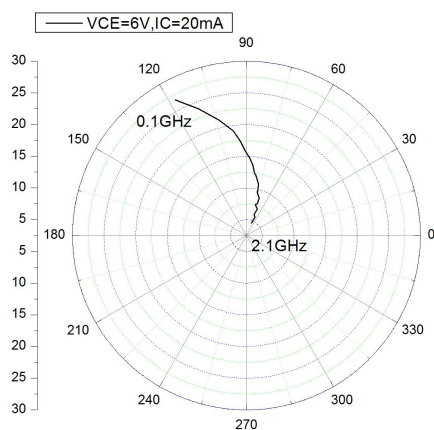


S_{12e} -FREQUENCY

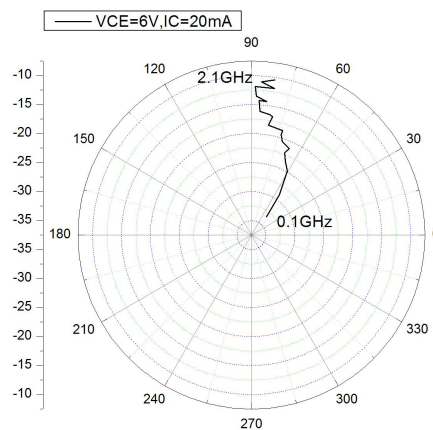

S_{11e} -FREQUENCY

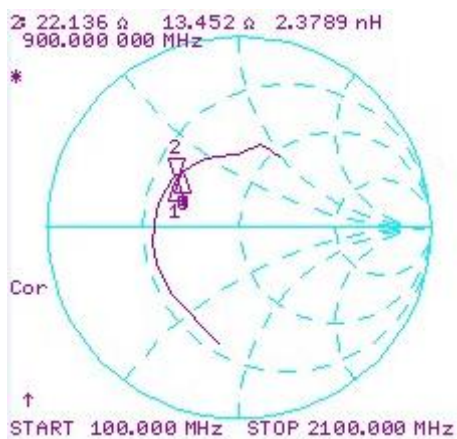

S_{22e} -FREQUENCY

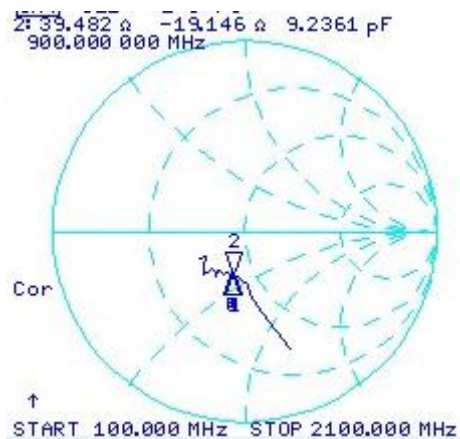

散射参数 (S-PARAMETER)

 测试条件: $V_{CE}=6V$, $I_C=20mA$, $Z_0=50\Omega$

测试频率	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
GHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.1	-3.968	-100.19	26.697	117.75	-33.407	50.515	-3.4933	-70.359
0.2	-6.0174	-134.08	23.879	110.76	-28.98	55.092	-7.1947	-78.18
0.3	-6.6333	-156.09	21.2	103.43	-26.485	58.917	-9.6217	-84.694
0.4	-6.8898	-169.55	19.125	97.1	-24.833	60.883	-10.85	-87.512
0.5	-7.0566	178.6	17.47	93.748	-23.524	65.087	-11.788	-92.589
0.6	-7.2003	168.28	15.845	90.718	-22.174	68.075	-12.169	-96.618
0.7	-7.253	159.99	14.807	87.639	-21.273	66.418	-12.41	-99.684
0.8	-7.3099	151.63	13.648	84.548	-20.476	71.739	-12.635	-103.63
0.9	-7.508	143.8	12.417	82.532	-19.41	73.519	-12.439	-106.85
1	-7.5639	136.62	12.028	80.88	-18.72	73.217	-12.479	-109.04
1.1	-7.7841	128.65	10.862	76.867	-18.316	81.252	-12.393	-114.53
1.2	-7.9778	122.16	9.9387	75.906	-16.756	79.78	-12.073	-116.47
1.3	-8.0504	114.61	9.5905	76.073	-16.512	81.227	-12.096	-119.06
1.4	-8.1647	107.65	8.7216	71.336	-16.096	86.038	-12.346	-123.51
1.5	-8.2313	104.46	7.7844	71.039	-14.239	86.81	-11.303	-123.27
1.6	-8.2685	95.335	7.5717	73.709	-14.324	83.437	-11.656	-125.35
1.7	-8.2623	89.382	7.0271	67.552	-13.53	87.9	-11.8	-132.21
1.8	-8.0808	88.48	6.1835	69.686	-11.9	88.576	-10.235	-133.42
1.9	-7.0628	75.506	5.9958	70.012	-11.933	81.004	-11.325	-139.96
2	-7.2531	67.538	5.6937	65.499	-11.008	86.331	-12.559	-147.55
2.1	-7.3646	60.937	4.6181	69.081	-10.451	81.436	-11.198	-148.59

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.