General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Other Ratings

Contact Resistance: 50 milliohms maximum for silver; 100 milliohms maximum for gold
Insulation Resistance: 200 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 1,000,000 operations minimum for momentary circuit
200,000 operations minimum for maintained circuit
Electrical Life: 100,000 operations minimum
Nominal Operating Force: Single pole: 1.5N
Double pole: 3.0N
Contact Timing: Nonshorting (break-before-make)
Travel: Pretravel .059" (1.5mm); Overtravel .059" (1.5mm); Total Travel .118" (3.0mm)

Materials & Finishes

Bezel: Black: Glass fiber reinforced polyamide (UL94V-0);
Chrome plated: Chrome plating over ABS resin (UL94V-2)
Housing: Glass fiber reinforced polyamide (UL94V-0)
Base: Glass fiber reinforced polyamide (UL94V-0)
Movable Contactor: Phosphor bronze with silver or gold plating
Movable Contacts: Silver alloy or copper with gold plating
Stationary Contacts: Silver alloy or copper with gold plating
Switch Terminals: Phosphor bronze with tin plating
Lamp Terminals: Phosphor bronze with tin plating

Environmental Data

Operating Temperature Range: –25°C through +50°C (–13°F through +122°F) for Illuminated
–25°C through +70°C (–13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s^2) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)
Sealing: IP65 of IEC60529 standard

Installation

Mounting Torque: 0.785Nm (6.95 lb•in) maximum
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 housing, base & black bezel
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
Add "/CUL" before first dash in part number to order cULus marking on switch.
All solder lug models recognized at 3A @ 125/250V AC or 0.4VA @ 28V AC/DC maximum.

Distinctive Characteristics

24mm square and 25mm diameter pushbuttons with the shortest above-panel dimension (1.8mm) in the industry for splashproof design.

Meets IP65 of IEC60529 standards (similar to NEMA 4 and 13), providing dust tight and splashproof panel seal protection.

Tamper resistant 18mm square and 19mm diameter actuators.

Short body of .965″ (24.5mm) conserves behind-panel space.

Distinctive long stroke and light touch actuation for clear indication of circuit status.

Choice of cap colors includes clear, brushed chrome, red, green, or yellow, for enhanced panel appearance. Metallic silver cap option has bright ring illumination (round only). Unbrushed chrome has the look of stainless steel when non-illuminated, and LED color or legends when illuminated.

Brilliant illumination with multiple LED colors.

Bezel color options in black or brushed chrome.

Brushed chrome option is lighter weight than actual metal switches due to metal plating on resin.

Available in momentary and alternate action with latchdown.

Crisp actuation and clear circuit status provided by snap-action contact mechanism. Arc barrier protects against crossover.

Combination solder lug and .110″ quick connect terminals. Terminals are epoxy sealed to lock out flux, dust, solvents, and other contaminants, as well as to secure terminals and improve contact stability.

Custom legends on actuator or inserts.

Actual Size (Round)

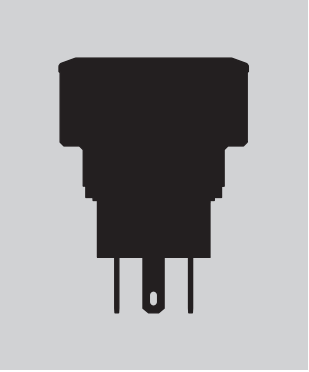

TYPICAL SWITCH

YB2 | 1 | 5 | C | W | C | K | W | 01

Poles

1	SPDT
2	DPDT

Contact Point

C	Normally Open and Normally Closed

Shape

C	Round
S	Square

Terminals

01	Solder Lug/.110" (2.8mm) Quick Connect

Circuits

5	ON	(ON)
( ) = Momentary		
6	ON	ON
Alternate Action with Latchdown		

Panel Seal

W	With Panel Seal

Bezel

K	Black
P	Brushed Chrome

Contact Materials & Ratings

W	Silver Rated 3A @ 125V AC
G	Gold Rated 0.4VA maximum @ 28V AC/DC maximum

IMPORTANT:

Switches are supplied without cULus marking unless specified. **cULus recognized only when ordered with marking on the switch.** Specific models, ratings, and ordering instructions are noted on General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

YB215CWCKW01-6B-JB

ORDERING EXAMPLE

— 6 B — JB —

LEDS

Bright LED

LED Colors		Resistor	
5C	Red	No Code	No Resistor (not for Green)
5D	Amber	05	5-volt
5F	Green	12	12-volt
		24	24-volt

Super Bright LED

6B	White
6F	Green
6G	Blue

Nonilluminated

N	No Lamp

Cap Types & Colors

Lens/Diffuser Colors

JB	Clear/White
JS	Metallic Silver Cap/Clear Ring (Round only)
CB	Red/White
EB	Yellow/White
FB	Green/White
HB	Unbrushed Chrome/White

LED and cap need to be the same color. Yellow cap pairs with amber LED to achieve amber illumination. Codes JB and JS (Round only) may be combined with all LED colors.

Lens/Diffuser Cap Colors

JB	Clear/White
JS	Metallic Silver Cap/Clear Ring (Round only)
HB	Unbrushed Chrome/White

Cap Color

JB	Clear/White
CB	Red/White
EB	Yellow/White
FB	Green/White
HB	Unbrushed Chrome/White
P	Brushed Chrome

— [ ]

Round or Square Cap with Legend

001	⏻
002	START
003	STANDBY
004	STOP
005	⏻

Contact factory for custom options.

Round or Square Cap with Legend

001	⏻
002	START
003	STANDBY
004	STOP
005	⏻

Contact factory for custom options.

Part Numbers for Unbrushed Chrome Caps with Legends

Round Cap for Bright LED	Round Cap for Super Bright LED	Square Cap for Bright or Super Bright LED
AT3017HB-001	AT3018HB-001	AT3025HB-001
AT3017HB-002	AT3018HB-002	AT3025HB-002
AT3017HB-003	AT3018HB-003	AT3025HB-003
AT3017HB-004	AT3018HB-004	AT3025HB-004
AT3017HB-005	AT3018HB-005	AT3025HB-005

Refer to Ordering Table for legend that corresponds with last 3 digits of part number.

POLES & CIRCUITS

Pole	Model	Plunger Position ( ) = Momentary: Normal	Plunger Position ( ) = Momentary: Down	Connected Terminals: Normal	Connected Terminals: Down	Throw & Switch/Lamp Schematics
SP	**YB215** **YB216**	ON ON	(ON) ON	1-3	1-2	SPDT
DP	**YB225** **YB226**	ON ON	(ON) ON	1-3 4-6	1-2 4-5	DPDT

Notes: Switch is marked with NC, NO, COM, L+, L–. Lamp circuit is isolated and requires an external power source.

CONTACT POINT

C **Normally Open and Normally Closed**

Contact points are both Normally Open and Normally Closed.

PANEL SEAL

W **Panel Seal (Round and Square)**

Two o-rings provide panel seal protection meeting IP65 of IEC60529 standards.



SHAPE

C **Round**



S **Square**



BEZEL

K **Black**

P **Brushed Chrome**

For Round or Square





CONTACT MATERIALS & RATINGS

W **Silver Contacts**

Power Level: 3A @ 125/250V AC

Switch base is black

G **Gold Contacts**

Logic Level: 0.4VA max. @ 28V AC/DC max.

Switch base is ivory

TERMINALS

01 **Solder Lug/ .110" (2.8mm) Quick Connect**



BRIGHT & SUPER BRIGHT LEDS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. Base of AT634 and AT636 is Black for 5V, Light Blue for 12V and Gray for 24V.

Electrical Specifications for Bright LED without Resistor

Bright AT628

T-1 Bi-pin



Colors Available: 5C Red, 5D Amber		No Code No Resistor		Unit
	LED Colors	Red	Amber	
Maximum Forward Current	I_{FM}	40	40	mA
Typical Forward Current	I_F	26	26	mA
Forward Voltage	V_F	1.9	2.0	V
Maximum Reverse Voltage	V_{RM}	4	4	V
Current Reduction Rate Above 25°C	ΔI_F	0.50		mA/°C
Ambient Temperature Range		−25 ~ +50		°C

Electrical Specifications for Bright Red & Amber LED with Resistor

Bright AT634

T-1¼ Bi-pin

Colors Available: 5C Red, 5D Amber		05	12	24	Unit
Maximum Forward Current	I_{FM}	—	—	—	mA
Typical Forward Current	I_F	25	20	10	mA
Forward Voltage	V_F	5	12	24	V
Maximum Reverse Voltage	V_{RM}	4	8	16	V
Current Reduction Rate Above 25°C	ΔI_F	—	—	—	mA/°C
Ambient Temperature Range		−25 ~ +50			°C

AT634 5-volt, 2-element with Resistor



AT634 12-volt, 4-element with Resistor



AT634 24-volt, 4-element with Resistor



Electrical Specifications for Bright Green LED with Resistor

Bright AT636

T-1¼ Bi-pin



5V



12V & 24V

Colors Available: ATTENTION ELECTROSTATIC SENSITIVE DEVICES 5F Green		05	12	24	Unit
Maximum Forward Current	I_{FM}	—	—	—	mA
Typical Forward Current	I_F	11	9.5	8.7	mA
Forward Voltage	V_F	5	12	24	V
Maximum Reverse Voltage	V_{RM}	5	5	5	V
Current Reduction Rate Above 25°C	ΔI_F	—	—	—	mA/°C
Ambient Temperature Range		−25 ~ +50			°C

Electrical Specifications for Super Bright LED

Super Bright AT625G Blue AT631B White AT632F Green

T-1 Bi-pin

ATTENTION ELECTROSTATIC SENSITIVE DEVICES Colors:		6B White	6F Green	6G Blue	Unit
Maximum Forward Current	I_{FM}	30	30	30	mA
Typical Forward Current	I_F	20	20	20	mA
Forward Voltage	V_F	3.3	3.3	3.3	V
Maximum Reverse Voltage	V_{RM}	7	7	7	V
Current Reduction Rate Above 25°C	ΔI_F	0.40	0.40	0.40	mA/°C
Ambient Temperature Range		−25 ~ +50			°C

BALLAST RESISTOR CALCULATION FOR LEDS

If the source voltage is greater than the rated voltage of a lamp or LED, a ballast resistor must be connected in series with the lamp. This circuit diagram and formula will assist in calculating the value of the required ballast resistor.



$$R = \frac{E - V_F}{I_F}$$

Where: R = Resistor Value (Ohms)
E = Source Voltage (V)
V_F = Forward Voltage (V)
I_F = Forward Current (A)

CAPS & CAP COLORS

AT3017 Cap for Bright LED or Nonilluminataed

Lens/Diffuser Colors Available:

- **JB** Clear/White
- **CB** Red/White
- **EB** *Yellow/White
- **FB** Green/White
- **HB** Unbrushed Chrome/ White



AT3018 Cap for Super Bright LED

Lens/Diffuser Colors Available:

- **JB** Clear/White
- **HB** Unbrushed Chrome/ White



Material for Lens & Diffuser:
Polycarbonate
HB Lens: ABS Resin & Unbrushed Chrome Plating

AT3019 Cap for Nonilluminated

Cap Color Available:

- **P** Brushed Chrome



Material for Lens:
ABS Resin & Brushed Chrome Plating

AT3020 Cap with Illumination Ring for Bright or Super Bright LED

Cap Color Available:

- **JS** Metallic Silver with Clear Ring



Materials
Lens: Polycarbonate
Insert: Polyester

*Yellow cap pairs with amber LED to achieve amber illumination.

AT3025 Cap for Illuminated or Nonilluminated

Lens/Diffuser Colors Available:

- **JB** Clear/White For Bright & Super Bright LEDs
- **CB** Red/White For Bright LED only
- **EB** *Yellow/White For Bright LED only
- **FB** Green/White For Bright LED only
- **HB** Unbrushed Chrome/White For Bright & Super Bright LEDs



Material for Lens & Diffuser:
Polycarbonate

*Yellow cap pairs with amber LED to achieve amber illumination.

AT3027 Cap for Nonilluminated

Cap Color Available:

- **P** Brushed Chrome



Material for Lens:
ABS Resin & Brushed Chrome Plating

Standard Legends for Unbrushed Chrome Caps

001

Round or Square Cap
Bright or Super Bright LED

002

Round or Square Cap
Bright or Super Bright LED

003

Round or Square Cap
Bright or Super Bright LED

004

Round or Square Cap
Bright or Super Bright LED

005

Round or Square Cap
Bright or Super Bright LED

Images appear the color of the LED when lit.
Contact factory for other legends options.

Legend illustrations are approximate representations of the actual images on the caps.

Unbrushed Chrome/White Cap with Lens/Diffuser

Without Illumination

With Illumination

Depending on the design and the color of ink used, the legend may be visible when it is not illuminated.
It is recommended that the legend be clear and without ink in order to achieve the maximum visibility when the cap is illuminated.

TYPICAL SWITCH DIMENSIONS

Single Pole Double Pole

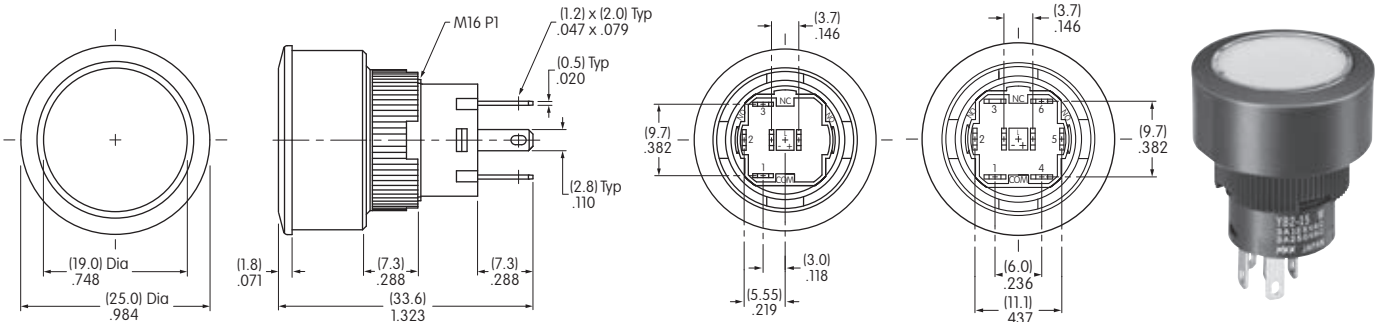

YB215CWCKW01-6B-JB

Single Pole Double Pole

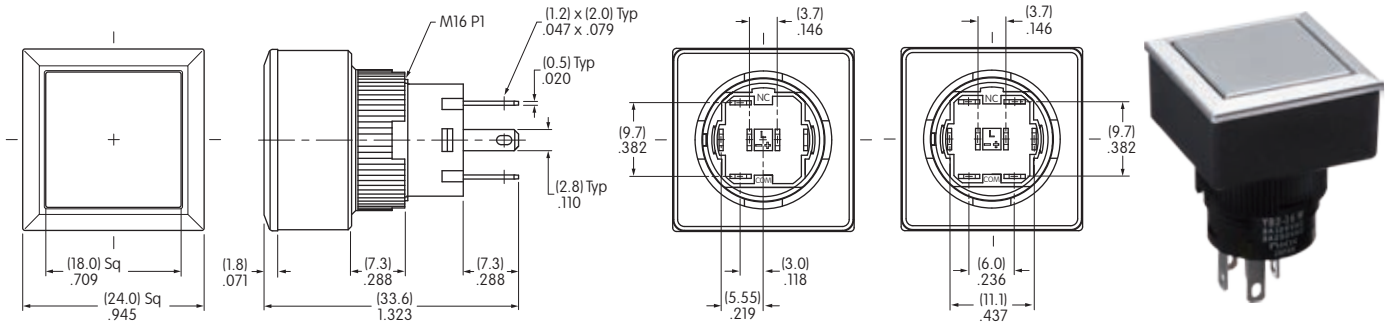

YB216CWSPW01-N-P

PANEL THICKNESS & CUTOUT

Recommended
Panel Thickness
.020" ~ .197"
(0.5mm ~ 5.0mm)



Side-by-side Mounting

Recommended
Panel Thickness
.020" ~ .197"
(0.5mm ~ 5.0mm)



Side-by-side Mounting

OPTIONAL ACCESSORIES

Adaptors

AT716
Single Pole
Solder Lug/
Quick Connect
Terminals

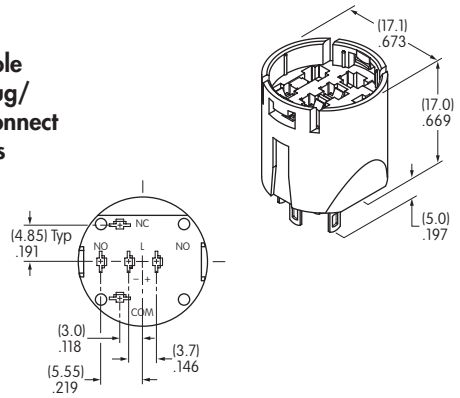

AT717
Double Pole
Solder Lug/
Quick Connect
Terminals

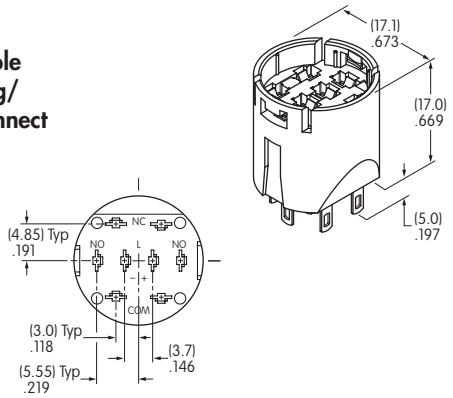

AT718
Single Pole
Straight PC
Terminals

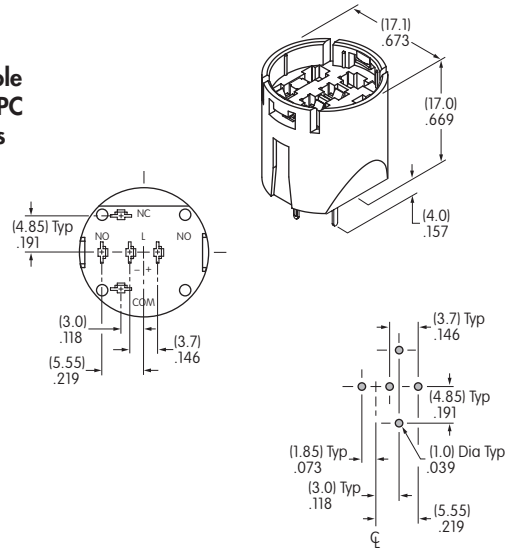

AT719
Double Pole
Straight PC
Terminals

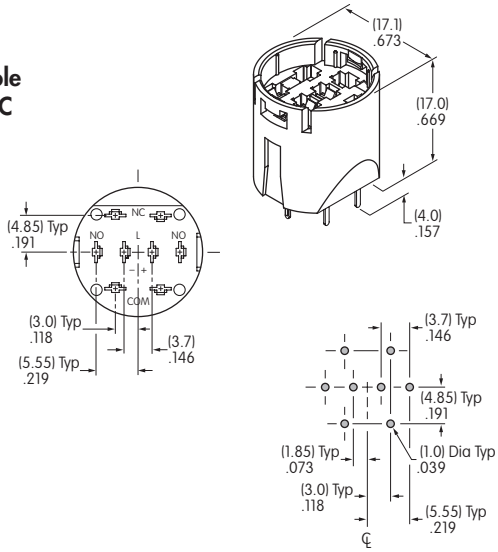

Material: Glass fiber reinforced polyamide Note: Order adaptors separately

---

Round & Square Switch Dimensions Shown with Adaptor AT716

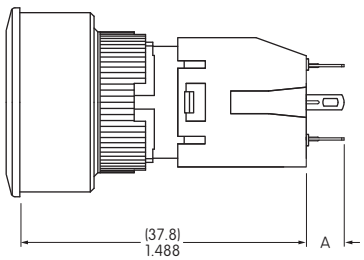

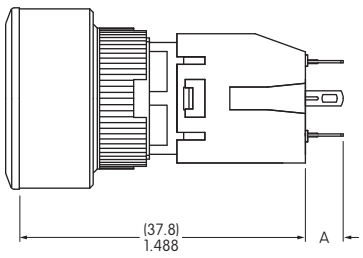

Dimension A:
Solder Lug .197″ (5.0mm); Straight PC .157″ (4.0mm)

Panel thickness for YB2 Round:
.020″ ~ .161″ (0.5mm ~ 4.1mm)

Panel thickness for YB2 Square:
.020″ ~ .126″ (0.5mm ~ 3.2mm)

ASSEMBLY INSTRUCTIONS FOR ROUND

1. Remove knurled mounting nut.



2. Remove bezel and red o-ring from housing. There are two o-rings in this assembly: one is red, one is orange.

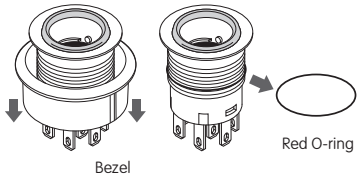

3. Install LED.



LEDs
AT634 & AT636



ATTENTION
ELECTROSTATIC
SENSITIVE DEVICES

Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.

LED AT628



Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.

ATTENTION
ELECTROSTATIC
SENSITIVE DEVICES

LEDs AT625G,
AT631B,
AT632F



The larger metal part within the LED represents the cathode (–). Align LED for appropriate polarity and insert LED into base.



4. Align tabs (B) on both sides of actuator with the projections (A) inside of the housing and push actuator firmly down to snap in.



5. Install the red o-ring which was removed in step 2 at the inside bottom of the bezel.



6. Align tab inside of the bezel with keyway on housing and bring bezel back into its original position.

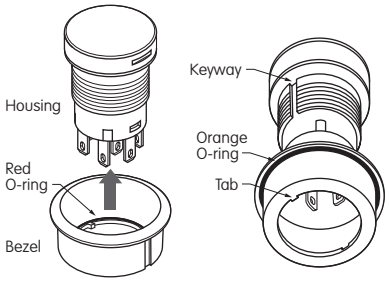

7. Before installing into panel, make sure that the orange o-ring is present at the back of the bezel. Align keyway on bezel with tab in panel and push switch all the way into the panel.



8. Attach mounting nut behind panel and tighten. Make sure that bezel and actuator fit properly and that there is no space between bezel and panel. Do not overtighten.

Mounting torque: 0.785Nm (6.95 lb•in) maximum. Optional socket wrench AT106 available.

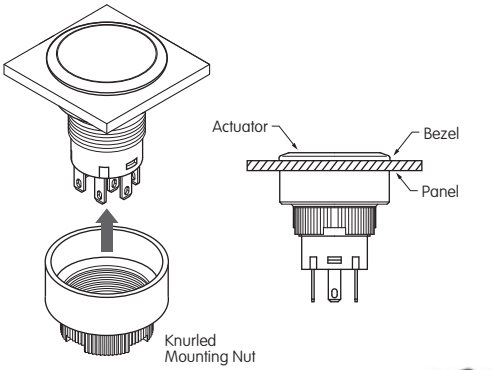

AT106 Socket Wrench

ASSEMBLY INSTRUCTIONS FOR SQUARE

1. Remove knurled mounting nut.

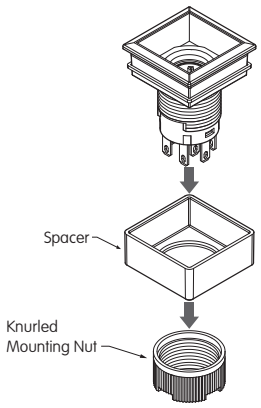

2. Remove bezel and blue o-ring from housing.

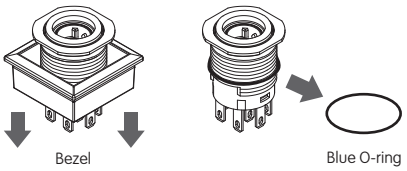

3. Install LED.



LEDs
AT634 & AT636



ATTENTION
ELECTROSTATIC
SENSITIVE DEVICES

Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.

LED AT628



Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.

ATTENTION
ELECTROSTATIC
SENSITIVE DEVICES

LEDs AT625G,
AT631B,
AT632F



The larger metal part within the LED represents the cathode (–). Align LED for appropriate polarity and insert LED into base.



4. Align tabs (B) on both sides of actuator with the projections (A) inside of the housing and push actuator firmly down to snap in.



5. Install the blue o-ring which was removed in step 2 at the inside bottom of the bezel.



6. Align tab inside of the bezel with keyway on housing and bring bezel back into its original position.

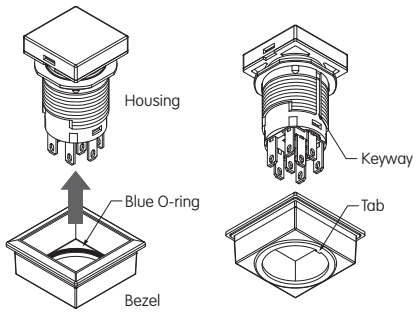

7. Before installing into panel, make sure that the square gasket is present at the back of the bezel. Align keyway on bezel with tab in panel and push switch all the way into the panel.



8. Attach mounting nut behind panel and tighten. Make sure that bezel and actuator fit properly and that there is no space between bezel and panel. Do not overtighten.

   Mounting torque: 0.785Nm (6.95 lb•in) maximum. Optional socket wrench AT106 available.

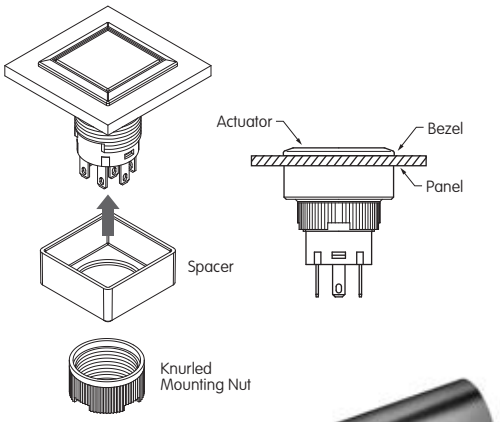

AT106 Socket Wrench

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for YB2 Caps

Recommended Methods: Laser Etch on clear cap, Screen Print or Pad Print on cap.
Epoxy based ink is recommended.

For Caps
AT3017, AT3018, and AT3019



For Cap
AT3020 (with clear ring for illumination)



For Caps
AT3025 and AT3027



Shaded areas are printable areas.

Suggested Printable Area for Film Inserts





Recommended Method:
Screen Print; Epoxy based ink is recommended

Film Material and Thickness:
Clear Polyester, 4 mil max.

Shaded areas are printable areas.

HANDLING & PRECAUTIONS

ATTENTION
ELECTROSTATIC
SENSITIVE DEVICES

LEDs are electrostatic sensitive devices. When installing and handling LEDs, use an electrostatic protected work station to prevent LED damage.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NKK Switches:

YB26WRKW01-12-GB YB25NKW01-12-EB YB26WSKW03-6B-JB YB26WSKG01-12-FB YB26WRKW01-2CF05-JB YB26RKW01-5C12-JB YB26WSKW01-5C12-JC-RO YB26WSKW01-28-JB YB215CWCKG01-5D24-EB YB215CWCKG01/CUL-5D24-EB YB216CWCKW01/CUL-5F05-FB YB226CWCKW01-5C-CB YB215CWCSW01-5F12-JB YB215CWCKW01/CUL-6G-JB YB25CKW01-5D24-JB YB25WSKW01-5D-JB-RO YB215CWCKW01/CUL-N-CB YB215CWCKW01-5C12-CB YB215CWCSG01 YB215CWCSG01/CUL-N-S YB215CWCSG01-N-FB YB215CWCSW01-N-JB YB225CWCKW01-5C12-CB YB225CWCSW01-N-JB YB215CWSKW01/CUL-5C24-CB YB215CWSKW01/CUL-5F24-FB YB216CWSKW01/CUL-5D24-EB YB225CWSKW01/CUL-5C24-CB YB226CWSKW01/CUL-5F24-FB YB215CWCKG01-5C-CB YB225CWCKG01-N-CB YB226CWCKW01-N-CB YB225CWCKW01-N-CB YB216CWCKW01-5D24-EB YB226CWCKW01/CUL-N-FB YB225CWCKG01-N-JB YB226CWCKW01-5C24-CB YB216CWCKW01-6F-JB YB215CWCSW01-5F24-FB YB216CWCKW01-5C24-CB YB25WSKW01-5F-JF-RO YB25WCKW01-5D-JD-RO YB25WCKW01-5C-JC-RO YB25CKW01-12-BB YB26CKG01-5C-JB YB26WCKG01-5C12-JB YB215CWCKW01/CUL-5D-JB YB226CWCKW01/CUL-5C-JB YB216CWCKW01/CUL-5C-CB YB225CWCKW01/CUL-5D-JB YB215CWCKW01/CUL-5D-EB YB215CWCKW01/CUL-5C-CB YB215CWCKW01/CUL-5C-JB YB226CWCKW01/CUL-5C-CB YB216CWCKW01/CUL-5D-JB YB226CWCKW01/CUL-5D-JB YB216CWCKW01/CUL-5D-EB YB225CWCKW01/CUL-5C-CB YB225CWCKW01/CUL-5C-JB YB226CWCKW01/CUL-5D-EB YB216CWCKW01/CUL-5C-JB YB225CWCKW01/CUL-5D-EB YB226CWCKW01-5F24-FB YB226CWCKW01/CUL-5F24-FB YB226CWCKW01-6F-JB YB226CWCKW01/CUL-6F-JB YB215CWCSG01-6F-JB YB215CWCSW01-6G-JB YB25WSKW01-1CF02-JB YB215CWCKW01-6B-JB YB215CWCSW01-6B-JS YB215CWCKW01/CUL-5F12-FB YB215CWCSW01-6F-JS YB215CWCKG01-5C12-CB YB215CWCKG01-5D12-EB YB215CWCKG01-5F12-FB YB215CWCKW01-5C12-JB YB215CWCKW01-5C24-CB YB215CWCKW01-5D-JB YB215CWCKW01-5D12-EB YB215CWCKW01-5F12-FB YB215CWCKW01-5F24-FB YB215CWCKW01/CUL-6B-JB YB216CWCKW01-5C12-CB YB216CWCKW01-5F12-FB YB216CWCSW01-5F05-FB YB225CWCKW01/CUL-5F12-JB YB225CWCSW01-5D-JB YB215CWCKW01/CUL-5C-JS YB215CWCKW01/CUL-5D-JS YB215CWCKW01/CUL5F24FB YB216CWCKW01/CUL-5C-JS YB216CWCKW01/CUL-5D-JS YB225CWCKW01/CUL-5C-JS YB225CWCKW01/CUL-5D-JS YB225CWCKW01/CUL5F24FB YB215CWCKW01/CUL5C24CB YB215CWCKW01CUL5D24EB YB225CWCKW01/CUL5C24CB YB225CWCKW01CUL5D24EB