


GENERAL PURPOSE APPLICATION.
DPAK FOR SURFACE MOUNT APPLICATIONS.
FEATURES


- Low Collector Saturation Voltage : $V_{CE(sat)} = -1.0V$ (Max.) at $I_C = -2A$, $I_B = -0.2A$.
- Straight Lead (IPAK, "L" Suffix)
- Complementary to KTC2020D/L.

MAXIMUM RATING (Ta=25)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-60	V
Collector-Emitter Voltage	V_{CEO}	-60	V
Emitter-Base Voltage	V_{EBO}	-7	V
Collector Current	I_C	-3	A
Base Current	I_B	-0.5	A
Collector Power Dissipation	P_C Tc=25	1.0 20	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

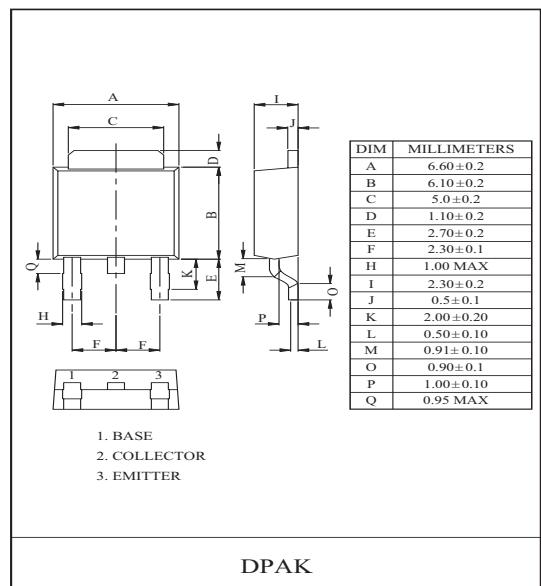

DPAK

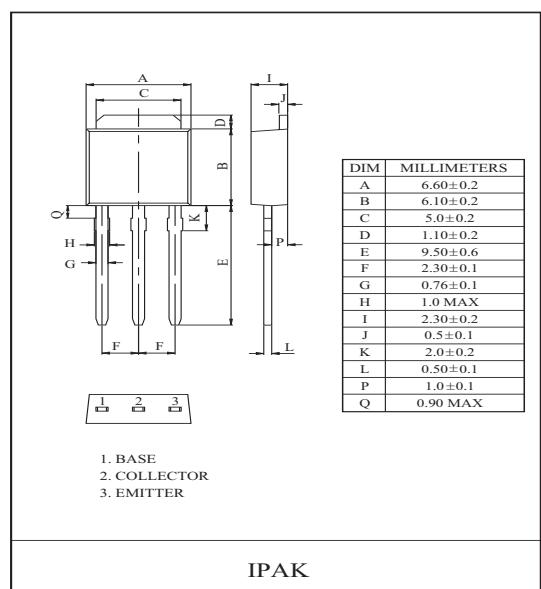

IPAK

ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = -60V$, $I_E = 0$	-	-	-1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -7V$, $I_C = 0$	-	-	-1	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -50mA$, $I_B = 0$	-60	-	-	V
DC Current Gain	$h_{FE}(1)$ (Note)	$V_{CE} = -5V$, $I_C = -0.5A$	100	-	300	
	$h_{FE}(2)$	$V_{CE} = -5V$, $I_C = -3A$	20	-	-	
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -2A$, $I_B = -0.2A$	-	-0.25	-1.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = -5V$, $I_C = -0.5A$	-	-0.7	-1.0	V
Transition Frequency	f_T	$V_{CE} = -5V$, $I_C = -0.5A$	-	30	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V$, $I_E = 0$, $f = 1MHz$	-	45	-	pF
Switching Time	Turn-on Time	t_{on}	<p>The graph shows current I_B versus time. The turn-on time t_{on} is the time from 0 to the point where I_B reaches I_{B2}. The fall time t_f is the time from I_{B1} back to I_{B2}. The storage time t_{stg} is the time from I_{B1} to the start of fall time t_f. The graph also shows the input current pulse and the output voltage $V_{CC} = -30V$.</p>	-	0.4	-
	Storage Time	t_{stg}		-	1.7	-
	Fall Time	t_f		-	0.5	-

Note : $h_{FE}(1)$ Classification Y:100~200, GR:150~300.

KTA1040D/L

