

LTCC 低通滤波器 (Low Pass Filter)

HT-LFCN-5850+

Features

- Low insertion loss.
- Good rejection.
- LTCC Construction.
- temperature stable.
- Small size.


Applications

- Harmonic rejection.
- VHF/UHF transmitters/receivers.
- Lab use.


Pad Connections

RF IN	1
RF OUT	3
GROUND	2,4

Outline Drawing

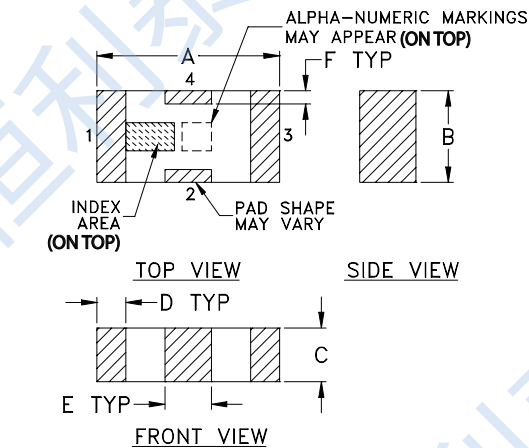

PCB Land Pattern

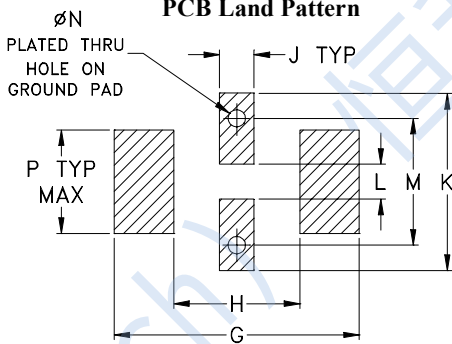



Suggested Layout,
Tolerance to be within ± 0.002

Outline Dimensions : inch mm

A	B	C	D	E	F	G
.126	.063	.037	.020	.032	.009	.169
3.20	1.60	0.94	0.51	0.81	0.23	4.29

H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Functional Schematic

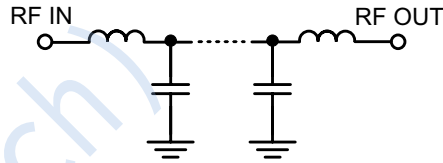



50 Ω
DC to 5850MHz

Electrical Specifications(1) at 25°C

Parameter		Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-5850	-	-	2.0	dB
	Freq. Cut-Off	6680	-	3.0	-	dB
	VSWR	DC-5850	-	1.5	-	:1
Stop Band	Rejection Loss	7600	20	-	-	dB
		7100-9900	-	30	-	dB
		9900-12500	-	20	-	dB
	VSWR	7600-12500	-	17	-	:1

1.In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


Typical Performance Data at 25°C

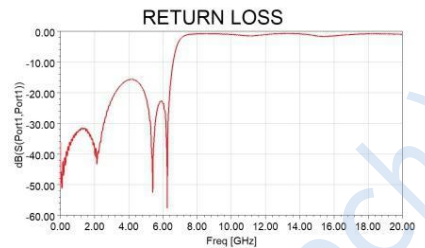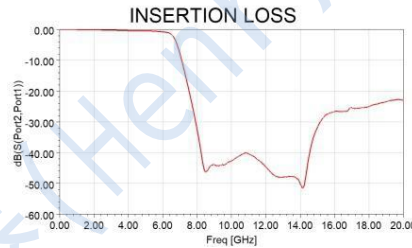

Notes

- The specifications are tested at 25°C $\pm$ 5°C, relative humidity 55~75%.
- Other quality and characteristic not specify in this datasheet.

Suggested PCB Layout

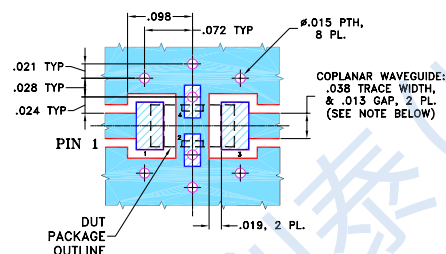

NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" $\pm$.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input*	8W max at 25°C

*Passband rating, derate linearly to 3W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.