

# MJF6388 (NPN), MJF6668 (PNP)

## Complementary Power Darlington

### For Isolated Package Applications

Designed for general-purpose amplifiers and switching applications, where the mounting surface of the device is required to be electrically isolated from the heatsink or chassis.

#### Features

- Isolated Overmold Package
- Electrically Similar to the Popular 2N6388, 2N6668, TIP102, and TIP107
- No Isolating Washers Required, Reduced System Cost
- High DC Current Gain
- High Isolation Voltage
- UL Recognized at 3500 VRMS: File #E69369
- These Devices are Pb-Free and are RoHS Compliant\*

#### MAXIMUM RATINGS

| Rating                                                                                                            | Symbol         | Value           | Unit                     |
|-------------------------------------------------------------------------------------------------------------------|----------------|-----------------|--------------------------|
| Collector-Emitter Voltage                                                                                         | $V_{CEO}$      | 100             | Vdc                      |
| Collector-Base Voltage                                                                                            | $V_{CB}$       | 100             | Vdc                      |
| Emitter-Base Voltage                                                                                              | $V_{EB}$       | 5.0             | Vdc                      |
| RMS Isolation Voltage (Note 1)<br>( $t = 0.3$ sec, R.H. $\leq 30\%$ , $T_A = 25^\circ\text{C}$ )<br>Per Figure 14 | $V_{ISOL}$     | 4500            | V                        |
| Collector Current – Continuous                                                                                    | $I_C$          | 10              | Adc                      |
| Collector Current – Peak (Note 2)                                                                                 | $I_{CM}$       | 15              | Adc                      |
| Base Current – Continuous                                                                                         | $I_B$          | 1.0             | Adc                      |
| Total Power Dissipation (Note 3)<br>@ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$                 | $P_D$          | 40<br>0.31      | W<br>W/ $^\circ\text{C}$ |
| Total Power Dissipation<br>@ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$                          | $P_D$          | 2.0<br>0.016    | W<br>W/ $^\circ\text{C}$ |
| Operating and Storage Temperature Range                                                                           | $T_J, T_{stg}$ | $-65$ to $+150$ | $^\circ\text{C}$         |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Proper strike and creepage distance must be provided.
2. Pulse Test: Pulse Width = 5.0 ms, Duty Cycle  $\leq 10\%$ .
3. Measurement made with thermocouple contacting the bottom insulated surface (in a location beneath the die), the devices mounted on a heatsink with thermal grease and a mounting torque of  $\geq 6$  in. lbs.

#### THERMAL CHARACTERISTICS

| Characteristic                                | Symbol          | Max  | Unit               |
|-----------------------------------------------|-----------------|------|--------------------|
| Thermal Resistance, Junction-to-Case (Note 4) | $R_{\theta JC}$ | 4.0  | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction-to-Ambient       | $R_{\theta JA}$ | 62.5 | $^\circ\text{C/W}$ |
| Lead Temperature for Soldering Purposes       | $T_L$           | 260  | $^\circ\text{C}$   |



4. Measurement made with thermocouple contacting the bottom insulated surface (in a location beneath the die), the devices mounted on a heatsink with thermal grease and a mounting torque of  $\geq 6$  in. lbs.



**ON Semiconductor®**


<http://onsemi.com>

### COMPLEMENTARY SILICON POWER DARLINGTONS 10 AMPERES 100 VOLTS, 40 WATTS

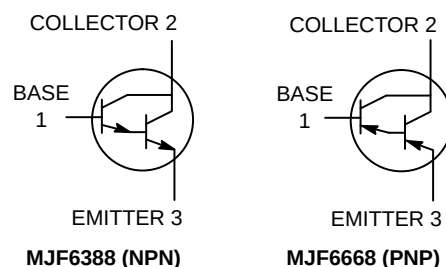

**TO-220 FULLPACK  
CASE 221D  
STYLE 2  
UL RECOGNIZED**

#### MARKING DIAGRAM



MJF6xy8 = Specific Device  
Code

x = 3 or 6

y = 6 or 8

G = Pb-Free Package

A = Assembly Location

Y = Year

WW = Work Week

#### ORDERING INFORMATION

| Device   | Package                      | Shipping      |
|----------|------------------------------|---------------|
| MJF6388G | TO-220 FULLPACK<br>(Pb-Free) | 50 Units/Rail |
| MJF6668G | TO-220 FULLPACK<br>(Pb-Free) | 50 Units/Rail |

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MJF6388 (NPN), MJF6668 (PNP)

## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                    | Symbol         | Min                        | Max                      | Unit                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------------|--------------------------|-------------------------|
| <b>OFF CHARACTERISTICS</b>                                                                                                                                                                                                                                        |                |                            |                          |                         |
| Collector-Emitter Sustaining Voltage (Note 5)<br>( $I_C = 30\text{ mAdc}$ , $I_B = 0$ )                                                                                                                                                                           | $V_{CEO(sus)}$ | 100                        | –                        | Vdc                     |
| Collector Cutoff Current<br>( $V_{CE} = 80\text{ Vdc}$ , $I_B = 0$ )                                                                                                                                                                                              | $I_{CEO}$      | –                          | 10                       | $\mu\text{Adc}$         |
| Collector Cutoff Current<br>( $V_{CE} = 100\text{ Vdc}$ , $V_{EB(off)} = 1.5\text{ Vdc}$ )<br>( $V_{CE} = 100\text{ Vdc}$ , $V_{EB(off)} = 1.5\text{ Vdc}$ , $T_C = 125^\circ\text{C}$ )                                                                          | $I_{CEX}$      | –<br>–                     | 10<br>3.0                | $\mu\text{Adc}$<br>mAdc |
| Collector Cutoff Current<br>( $V_{CB} = 100\text{ Vdc}$ , $I_E = 0$ )                                                                                                                                                                                             | $I_{CBO}$      | –                          | 10                       | $\mu\text{Adc}$         |
| Emitter Cutoff Current<br>( $V_{BE} = 5.0\text{ Vdc}$ , $I_C = 0$ )                                                                                                                                                                                               | $I_{EBO}$      | –                          | 2.0                      | mAdc                    |
| <b>ON CHARACTERISTICS (Note 5)</b>                                                                                                                                                                                                                                |                |                            |                          |                         |
| DC Current Gain<br>( $I_C = 3.0\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )<br>( $I_C = 5.0\text{ Adc}$ , $V_{CE} = 3.0\text{ Vdc}$ )<br>( $I_C = 8.0\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )<br>( $I_C = 10\text{ Adc}$ , $V_{CE} = 3.0\text{ Vdc}$ )            | $h_{FE}$       | 3000<br>1000<br>200<br>100 | 15000<br>–<br>–<br>–     | –                       |
| Collector-Emitter Saturation Voltage<br>( $I_C = 3.0\text{ Adc}$ , $I_B = 6.0\text{ mAdc}$ )<br>( $I_C = 5.0\text{ Adc}$ , $I_B = 0.01\text{ Adc}$ )<br>( $I_C = 8.0\text{ Adc}$ , $I_B = 80\text{ mAdc}$ )<br>( $I_C = 10\text{ Adc}$ , $I_B = 0.1\text{ Adc}$ ) | $V_{CE(sat)}$  | –<br>–<br>–<br>–           | 2.0<br>2.0<br>2.5<br>3.0 | Vdc                     |
| Base-Emitter Saturation Voltage<br>( $I_C = 5.0\text{ Adc}$ , $I_B = 0.01\text{ Adc}$ )<br>( $I_C = 10\text{ Adc}$ , $I_B = 0.1\text{ Adc}$ )                                                                                                                     | $V_{BE(sat)}$  | –<br>–                     | 2.8<br>4.5               | Vdc                     |
| Base-Emitter On Voltage<br>( $I_C = 8.0\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )                                                                                                                                                                                 | $V_{BE(on)}$   | –                          | 2.5                      | Vdc                     |
| <b>DYNAMIC CHARACTERISTICS</b>                                                                                                                                                                                                                                    |                |                            |                          |                         |
| Small-Signal Current Gain<br>( $I_C = 1.0\text{ Adc}$ , $V_{CE} = 5.0\text{ Vdc}$ , $f_{test} = 1.0\text{ MHz}$ )                                                                                                                                                 | $ h_{fe} $     | 20                         | –                        | –                       |
| Output Capacitance<br>( $V_{CB} = 10\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ )<br>MJF6388<br>MJF6668                                                                                                                                                       | $C_{ob}$       | –<br>–                     | 200<br>300               | pF                      |
| Insulation Capacitance<br>(Collector-to-External Heatsink)                                                                                                                                                                                                        | $C_{c-hs}$     | –                          | 3.0 Typ                  | pF                      |
| Small-Signal Current Gain<br>( $I_C = 1.0\text{ Adc}$ , $V_{CE} = 5.0\text{ Vdc}$ , $f = 1.0\text{ kHz}$ )                                                                                                                                                        | $h_{fe}$       | 1000                       | –                        | –                       |

5. Pulse Test: Pulse Width  $\leq 300\text{ }\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

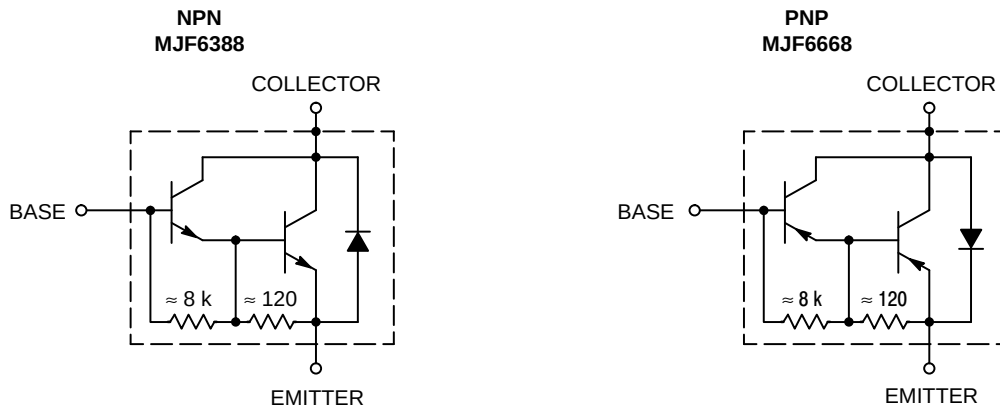


Figure 1. Darlington Schematic

## MJF6388 (NPN), MJF6668 (PNP)

$R_B$  &  $R_C$  VARIED TO OBTAIN DESIRED CURRENT LEVELS

$D_1$ , MUST BE FAST RECOVERY TYPES, e.g.,

MUR110 USED ABOVE  $I_B \approx 100$  mA

MSD6100 USED BELOW  $I_B \approx 100$  mA

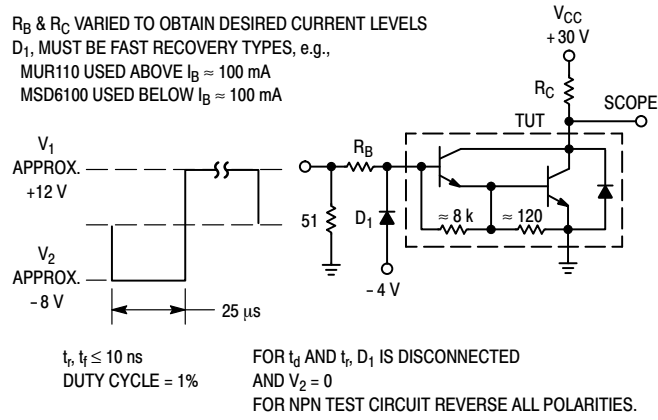


Figure 2. Switching Times Test Circuit

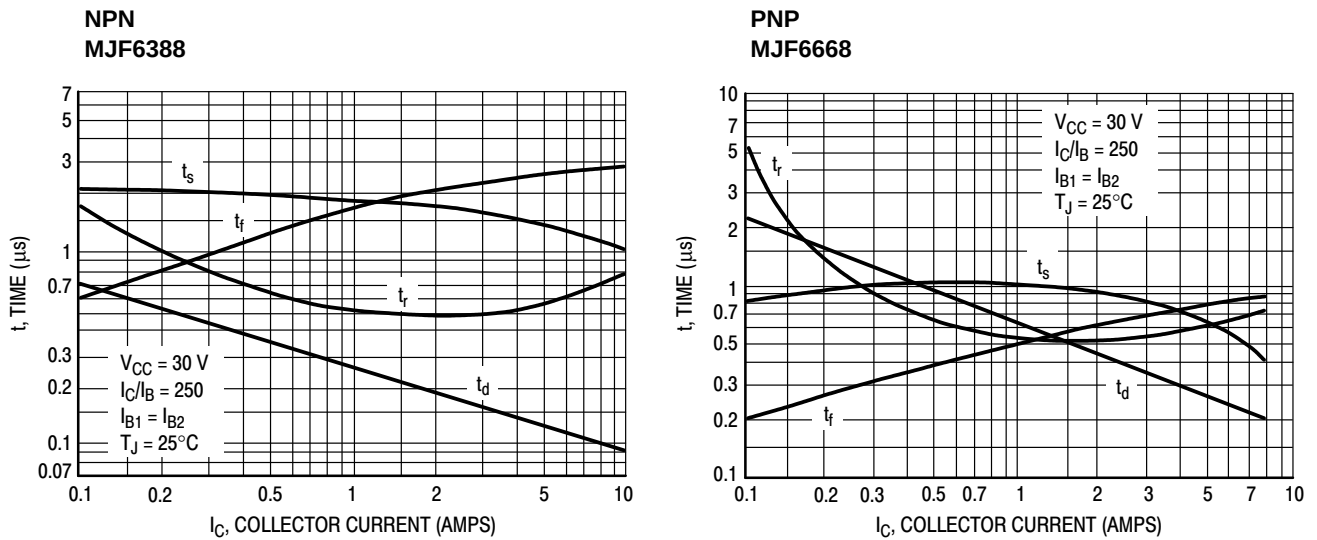


Figure 3. Typical Switching Times

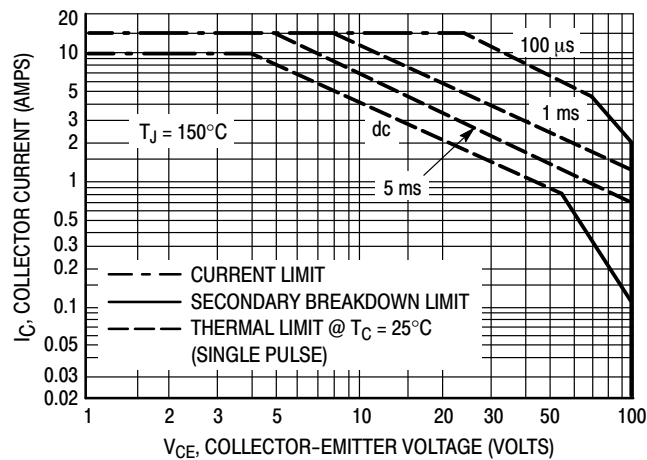


Figure 4. Maximum Forward Bias Safe Operating Area

## MJF6388 (NPN), MJF6668 (PNP)

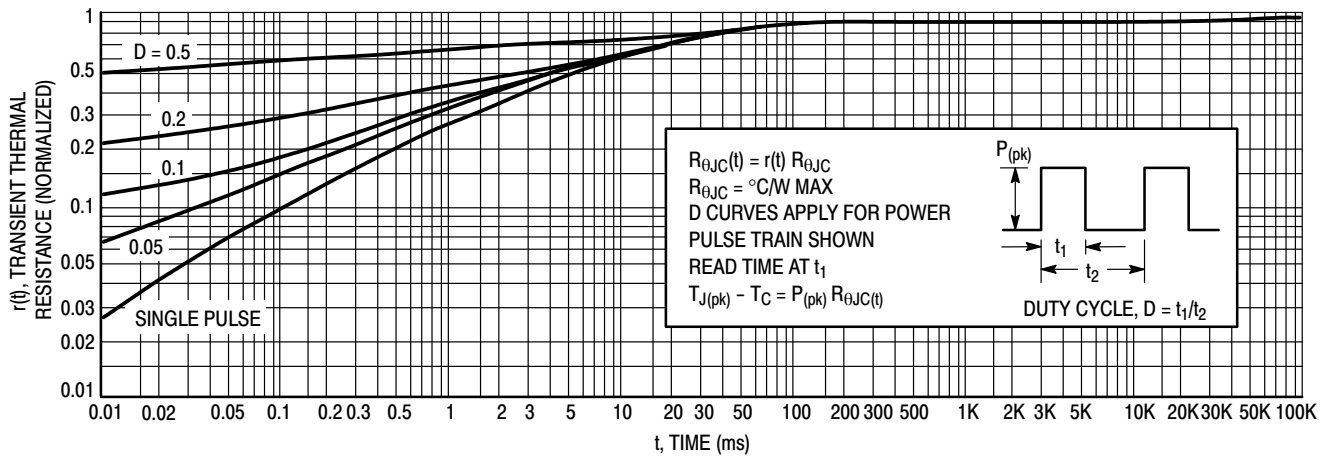


Figure 5. Thermal Response

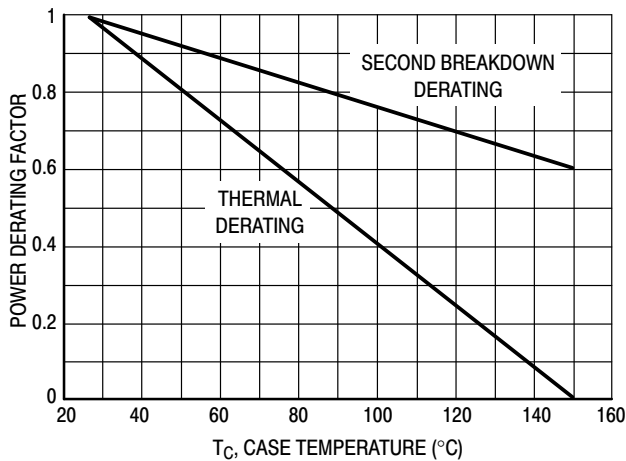


Figure 6. Maximum Power Derating

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 4 is based on  $T_{J(pk)} = 150^\circ\text{C}$ ;  $T_C$  is variable depending on conditions. Secondary breakdown pulse limits are valid for duty cycles to 10% provided  $T_{J(pk)} < 150^\circ\text{C}$ .  $T_{J(pk)}$  may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

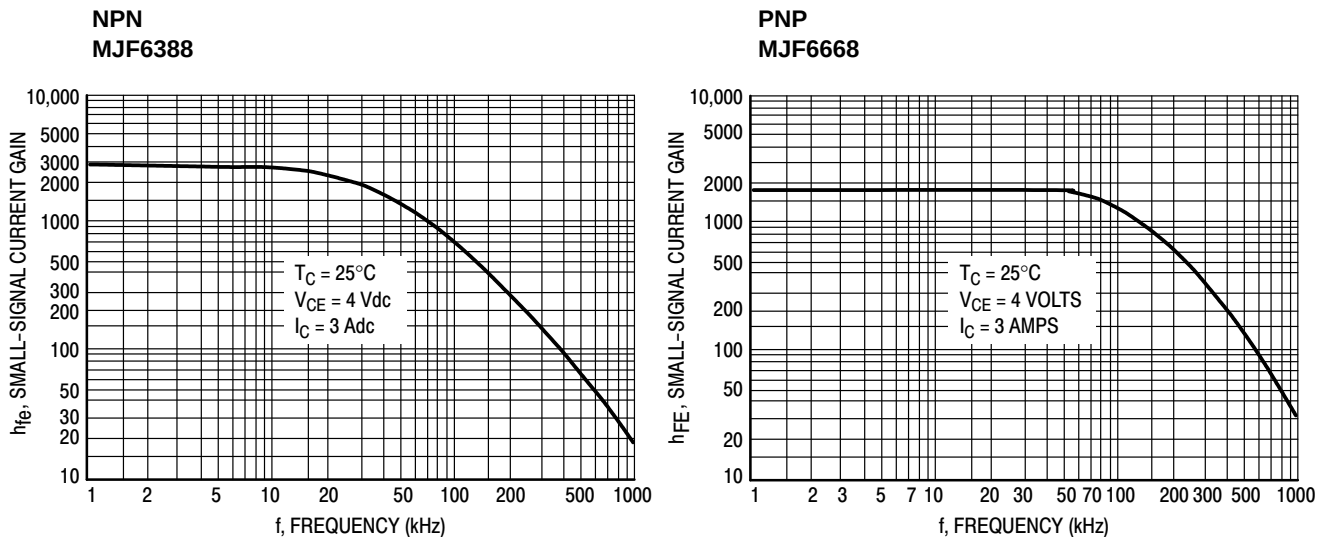


Figure 7. Typical Small-Signal Current Gain

# MJF6388 (NPN), MJF6668 (PNP)

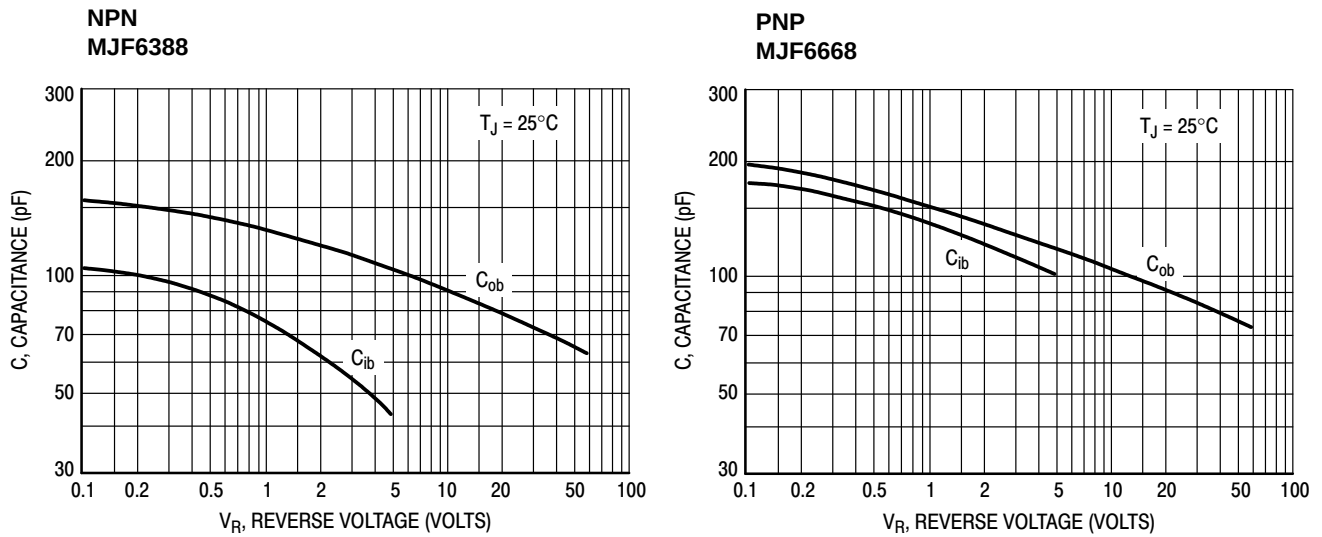


Figure 8. Typical Capacitance

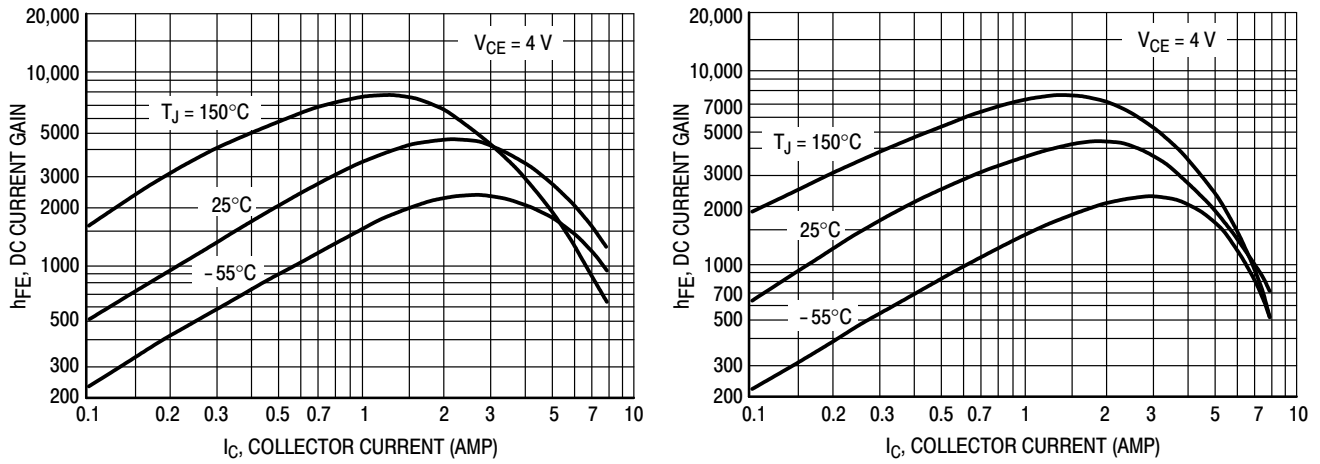


Figure 9. Typical DC Current Gain

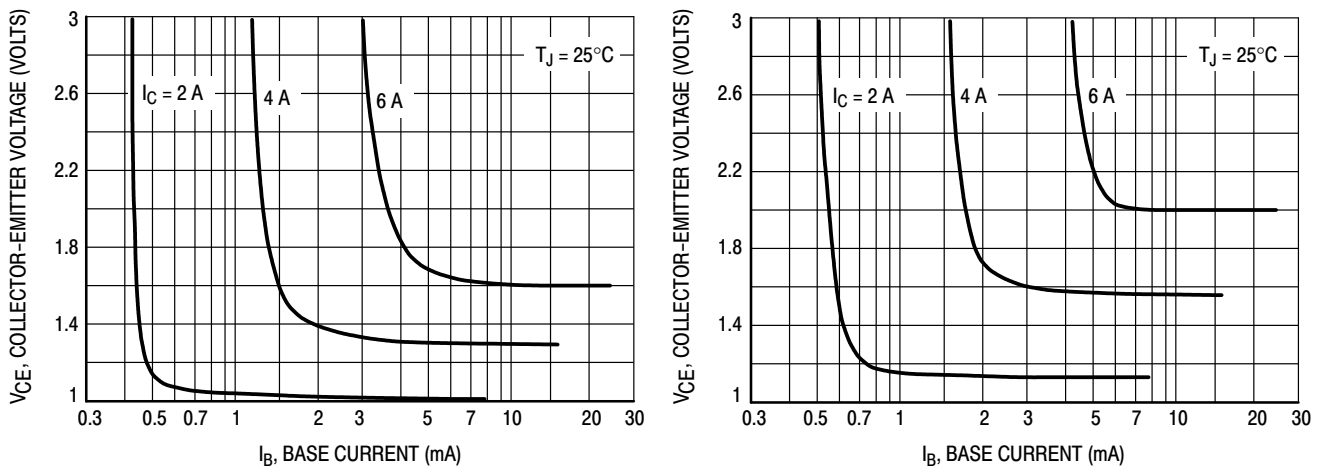


Figure 10. Typical Collector Saturation Region

# MJF6388 (NPN), MJF6668 (PNP)

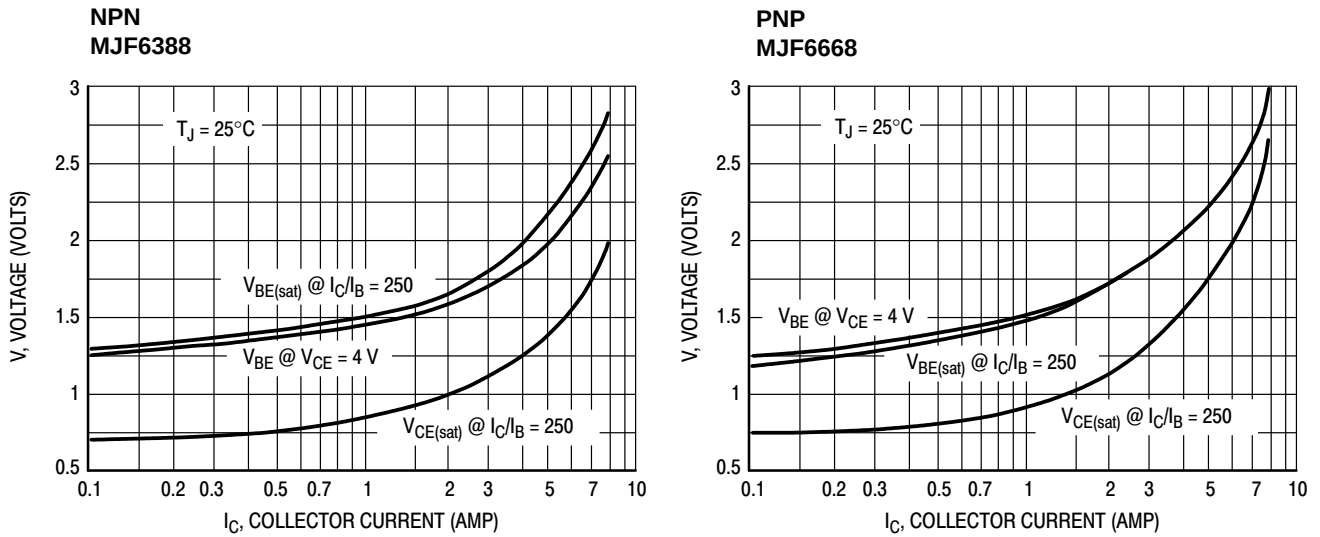


Figure 11. Typical “On” Voltages

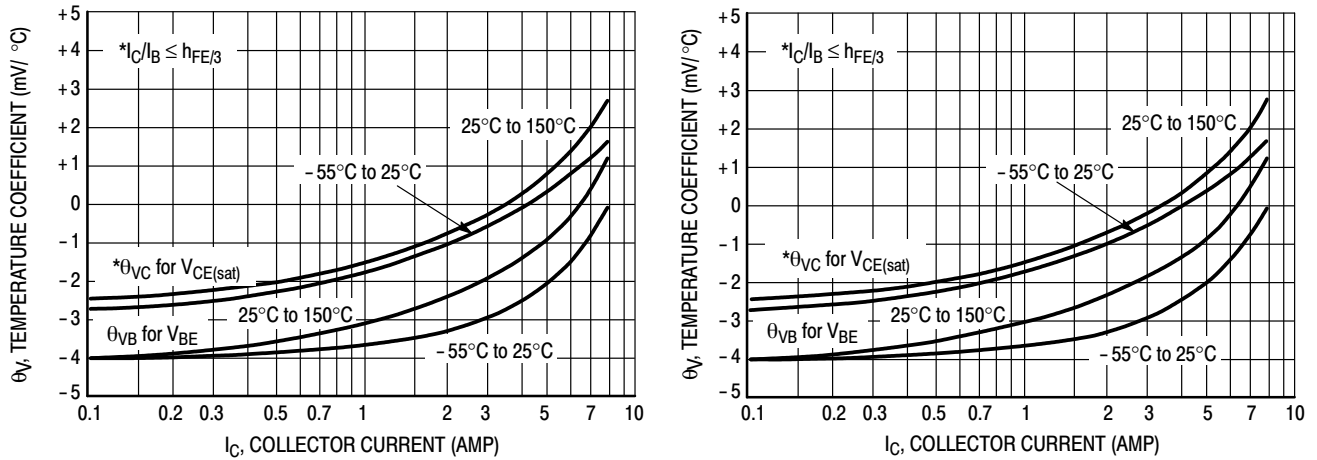


Figure 12. Typical Temperature Coefficients


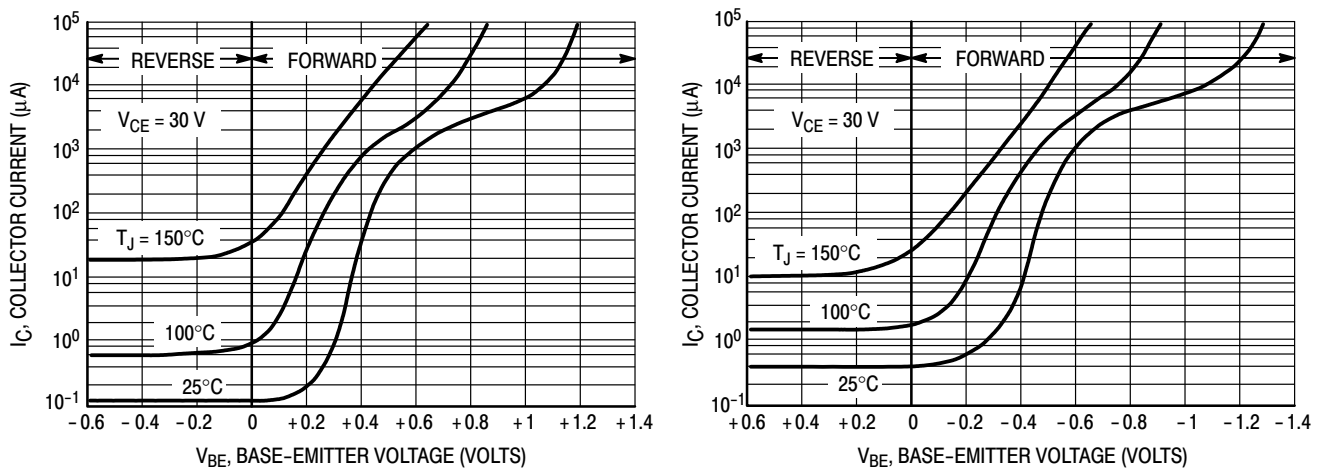


Figure 13. Typical Collector Cut-Off Region

## MJF6388 (NPN), MJF6668 (PNP)


### TEST CONDITION FOR ISOLATION TEST\*

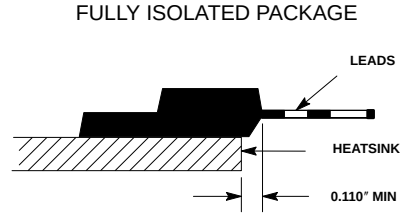

**Figure 14. Mounting Position**

\*Measurement made between leads and heatsink with all leads shorted together.

### MOUNTING INFORMATION

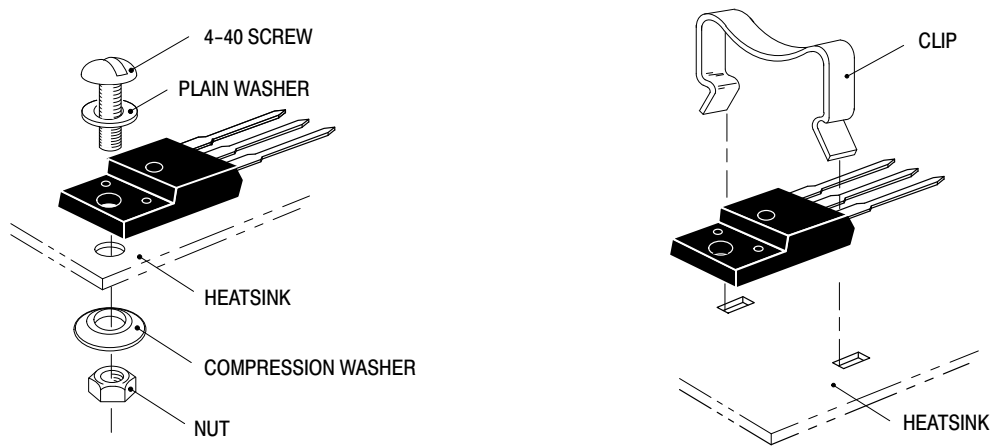


**Figure 15. Typical Mounting Techniques\***

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4-40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4-40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, ON Semiconductor does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.


\*\* For more information about mounting power semiconductors see [Application Note AN1040](http://onsemi.com/AN1040).



SCALE 1:1

TO-220 FULLPAK  
CASE 221D-03  
ISSUE K

DATE 27 FEB 2009

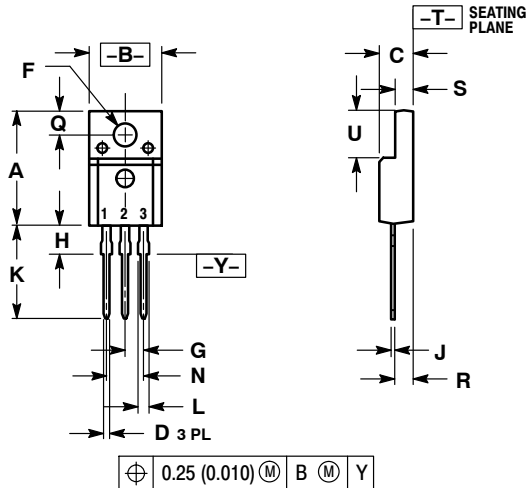

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH
  3. 221D-01 THRU 221D-02 OBSOLETE, NEW STANDARD 221D-03.


| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.617     | 0.635 | 15.67       | 16.12 |
| B   | 0.392     | 0.419 | 9.96        | 10.63 |
| C   | 0.177     | 0.193 | 4.50        | 4.90  |
| D   | 0.024     | 0.039 | 0.60        | 1.00  |
| F   | 0.116     | 0.129 | 2.95        | 3.28  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.118     | 0.135 | 3.00        | 3.43  |
| J   | 0.018     | 0.025 | 0.45        | 0.63  |
| K   | 0.503     | 0.541 | 12.78       | 13.73 |
| L   | 0.048     | 0.058 | 1.23        | 1.47  |
| N   | 0.200 BSC |       | 5.08 BSC    |       |
| Q   | 0.122     | 0.138 | 3.10        | 3.50  |
| R   | 0.099     | 0.117 | 2.51        | 2.96  |
| S   | 0.092     | 0.113 | 2.34        | 2.87  |
| U   | 0.239     | 0.271 | 6.06        | 6.88  |

MARKING  
DIAGRAMS

- STYLE 1:  
PIN 1. GATE  
2. DRAIN  
3. SOURCE
- STYLE 2:  
PIN 1. BASE  
2. COLLECTOR  
3. EMITTER
- STYLE 3:  
PIN 1. ANODE  
2. CATHODE  
3. ANODE
- STYLE 4:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE
- STYLE 5:  
PIN 1. CATHODE  
2. ANODE  
3. GATE
- STYLE 6:  
PIN 1. MT 1  
2. MT 2  
3. GATE



Bipolar



Rectifier

xxxxxx = Specific Device Code  
G = Pb-Free Package  
A = Assembly Location  
Y = Year  
WW = Work Week

A = Assembly Location  
Y = Year  
WW = Work Week  
xxxxxx = Device Code  
G = Pb-Free Package  
AKA = Polarity Designator

|                  |                |                                                                                                                                                                                     |
|------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42514B    | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | TO-220 FULLPAK | PAGE 1 OF 1                                                                                                                                                                         |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)