



0.187" (4.75mm) Quick Disconnect Terminals

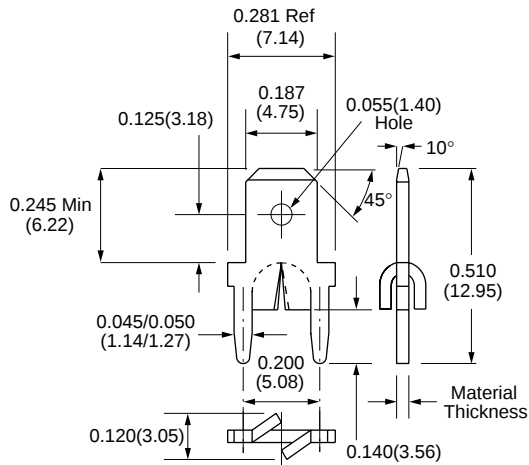

Loose Part No.	1027	1024
Reeled Part No.	6027-6	6024-6
Mounting Type	Stable-Lok™ Splay Outward or Inward	Stable-Lok™ Splay Outward or Inward
Material Thickness/ Type	0.020" (0.51mm) Brass	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Matt Tin over Copper Reeled: 95/5 Matt Tin/Lead over Copper	
Mounting Hole Diameter	0.050" ± 0.003 " (1.27mm ± 0.076 mm)	0.058" ± 0.003 " (1.47mm ± 0.076 mm)
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9718	

U.S. Patent No. 4,688,866

For exact finish specifications and available special finishes, see Finish Table (page 91).

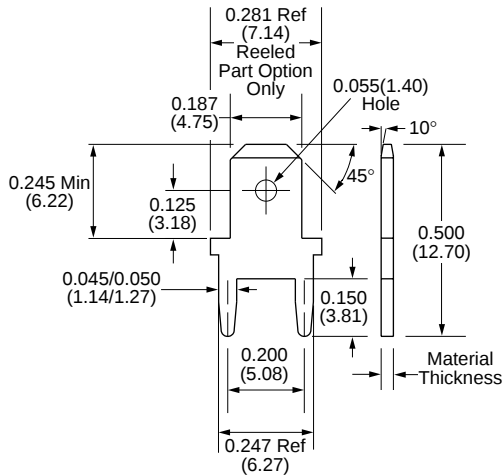

Loose Part No.	895	894
Reeled Part No.	6895-6	6894-6
Mounting Type	Outward or Inward Splay	Outward or Inward Splay
Material Thickness/ Type	0.020" (0.51mm) Brass	0.032" (0.81mm) Brass
Standard Finish	100% Matt Tin over Copper	
Mounting Hole Diameter	0.050" ± 0.003 " (1.27mm ± 0.076 mm)	0.058" ± 0.003 " (1.47mm ± 0.076 mm)
Applicator System	Loose: ZPT81-A, 9700, 9718	

For exact finish specifications and available special finishes, see Finish Table (page 91).