

A

B

C

D

E

F

G

1

2

3

4

5

6

7

8

9

10

MAPX

MODIFICATION

DATE

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: copper alloy,t=0.15mm

1.3 Shell: copper alloy,t=0.30mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kg Max.

2.6 Total unmating force: 1.0 Kg Min.

2.7 Temperature range: -30°C~80°C

A

B







C

D


E

F


G

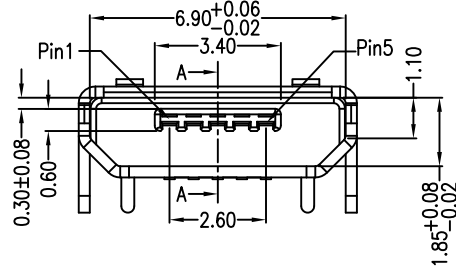

不锈钢双铆合

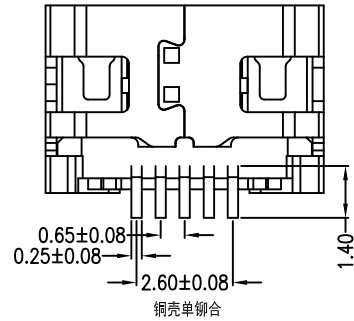

铜壳单铆合

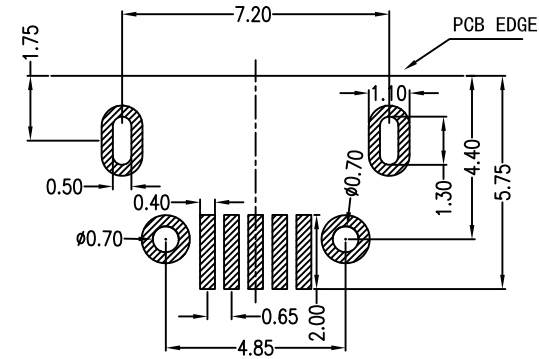

PCB图仅做参考

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	920-E62A2021S10101
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	MICRO 5P-F B型7.2 4.85四牛角型无卷边 无柱SMT端子加长0.75黑胶
日期 DATE	2021-04-16	核准 APPD	黄国荣	角法 VIEW	版本 VER
					AO