

- Low-loss 2140 MHz SAW Filter
- · Designed for 50 ohm Source/Load
- Complies with Directive 2002/95/EC (RoHS)




Absolute Maximum Ratings

Rating	Value	Units
Input Power Level	+13	dBm
DC Voltage on any Non-ground Terminal	3	V
Operating Temperature Range	-30 to +85	°C
Storage Temperature Range in Tape and Reel	-40 to +90	°C
Maximum Soldering Profile, 5 cycles/10 seconds maximum	265	°C

SF2225E

2140 MHz **SAW Filter**



Electrical Characteristics

Characteristic	Sym	Notes	Min	Тур	Max	Units	
Center Frequency	f _C			2140		MHz	
Insertion Loss, 2110 to 2170 MHz				2.1	3.5	dB	
Amplitude Ripple, 2110 to 2170 MHz				0.6	2.0	dB _{P-P}	
Input/Output VSWR, 2110 to 2170 MHz				1.9	2.2		
Attenuation, Referenced to 0 dB:							
10 to 500 MHz			30	32			
500 to 1920 MHz			25	33			
1920 to 1980 MHz			33	40		dB	
1980 to 2025 MHz			40	45			
2025 to 2050 MHz			26	33			
2230 to 2260 MHz			40	55			
2490 to 2558 MHz			30	35			
Source Impedance	Z _S			50		Ω	
Load Impedance				50		Ω	
Case Style	SM3030-6 3.0 x 3.0 mm Nominal Footprint						
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	961, YWWS						
Standard Reel Quantity Reel Size 7 inch	500 Pieces/Reel						
Reel Size 13 inch			3000	Pieces/Reel			

Electrical Connections

Connection	Terminals
Input	2
Output	5
Case Ground	All others


CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

- Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50Ω and measured with 50Ω network analyzer. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes." The design manufacturing process and specifications of this filter are subject to change
- The design, manufacturing process, and specifications of this filter are subject to change.


 Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
- US and international patents may apply.

 Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.


Filter Passband Response, 1800 to 2500 MHz

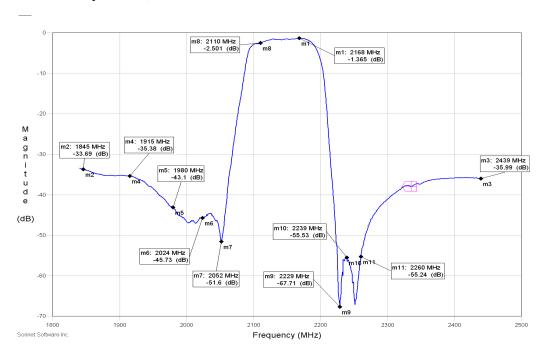


Filter Wideband Response, 10 to 5000 MHz

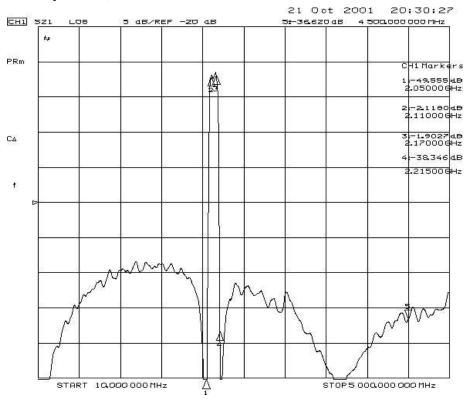



Filter Input Impedance

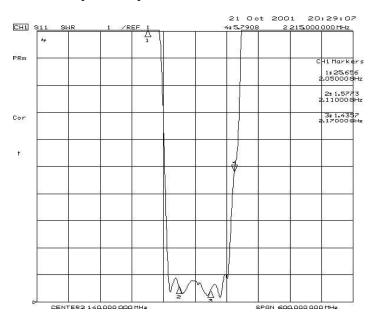

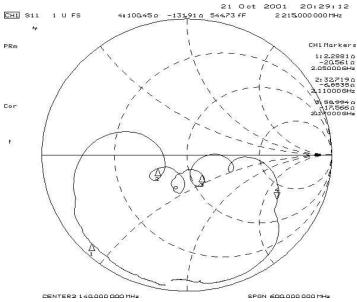

Filter Output Impedance

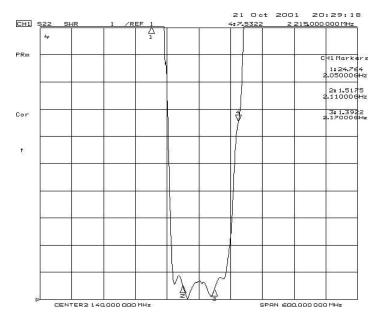


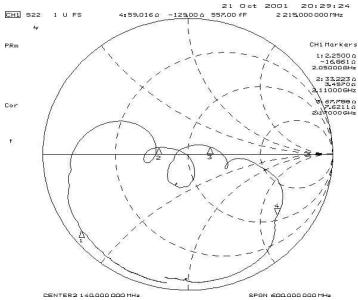


SM3030-6 Case

6-Terminal Ceramic Surface-Mount Case 3.0 X 3.0 mm Nominal Footprint

Case and PCB Footprint Dimensions






PCB Footprint Top View

Dimension	mm			Inches			
Dilliension	Min	Nom	Max	Min	Nom	Max	
Α	2.87	3.00	3.13	0.113	0.118	0.123	
В	2.87	3.00	3.13	0.113	0.118	0.123	
С	1.12	1.25	1.38	0.044	0.049	0.054	
D	0.77	0.90	1.03	0.030	0.035	0.040	
E	2.67	2.80	2.93	0.105	0.110	0.115	
F	1.47	1.60	1.73	0.058	0.063	0.068	
G	0.72	0.85	0.98	0.028	0.033	0.038	
Н	1.37	1.50	1.63	0.054	0.059	0.064	
I	0.47	0.60	0.73	0.019	0.024	0.029	
J	1.17	1.30	1.43	0.046	0.051	0.056	
K		3.20			0.126		
L		1.70			0.067		
М		1.05			0.041		
N		0.81			0.032		
0		0.38			0.015		


Case Materials

Materials				
Solder Pad Plating	0.3 to 1.0 μm Gold over 1.27 to 8.89 μm Nickel			
Lid Plating	2.0 to 3.0 µm Nickel			
Body	Al ₂ O ₃ Ceramic			
Pb Free				

Tape and Reel Specifications

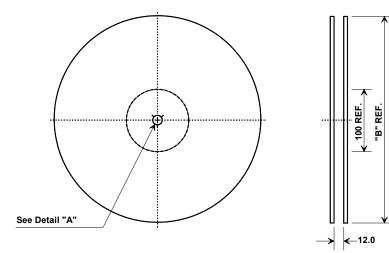

•	'B"	Quantity Por Pool		
Inches	millimeters	Quantity Per Reel		
7	178	500		
13	330	3000		



COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions				
Ao	3.35 mm			
Во	3.35 mm			
Ko	1.40 mm			
Pitch	8.0 mm			
W	12.0 mm			

