
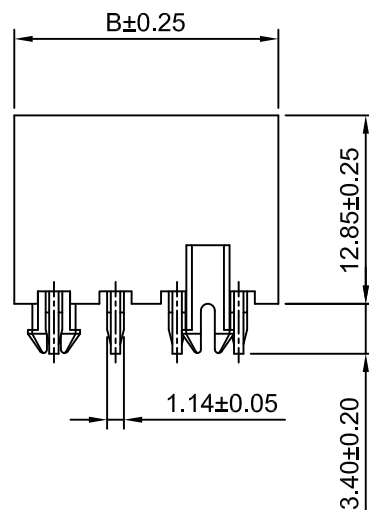
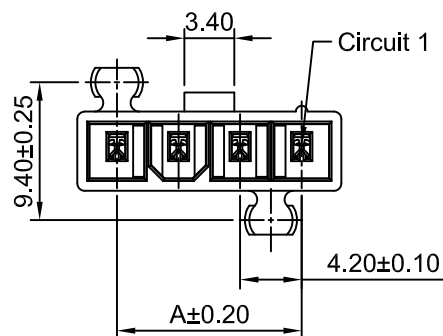


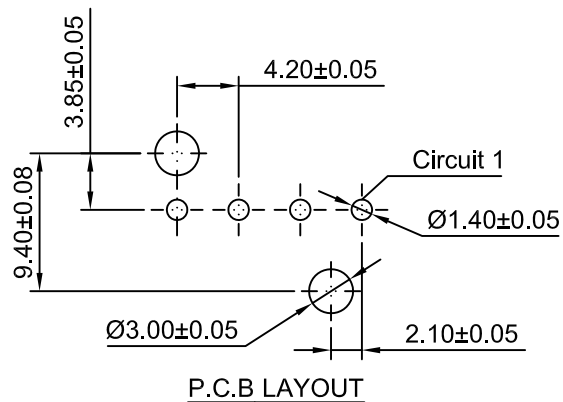

Ordering Information:
C4201WVA-F-XP - *** - ** - ***
1 2 3 4

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),IEC 60335-1,
5th Edition Glow Wire Capable.

46: Nylon 46,UL94V-0 (Beige)

9T: Nylon 9T,UL94V-0 (Beige)

LCP: LCP,UL94V-0 (Beige)

3.Color:

(blank): see section 2 Material

BK:Black RD:Red

YL:Yellow BL:Blue

GN:Green

4.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(Au:1u")

G3:Gold over Nickel(Au:3u",Mateing area)

G15:Gold over Nickel(Au:15u",Mateing area)

G30:Gold over Nickel(Au:30u",Mateing area)



SPECIFICATIONS:

Current Rating: 9A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL 94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	8P	29.40	34.80
3P	8.40	13.80	9P	33.60	39.00
4P	12.60	18.00	10P	37.80	43.20
5P	16.80	22.20	11P	42.00	47.40
6P	21.00	26.40	12P	46.20	51.60
7P	25.20	30.60			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	4.20mm PITCH	
DRWN	CHK'D	APPR	180° SINGLE ROW WAFER WITH	
Dengchun Yi	Djankui Wan	Jack Yin	FOOT - WITH DRAIN HOLES	
General Tolerances			DRAWING NO.	
x.xx±0.25			C4201WVA-F-XP	
x.xxx±0.20			REV	
x.xxxx±0.15			A1	
ANGLES ±1°				

A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE