

Features


- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

Ordering Information

- Shipping Qty:3000 /7inch Tape& Reel



Circuit Diagram

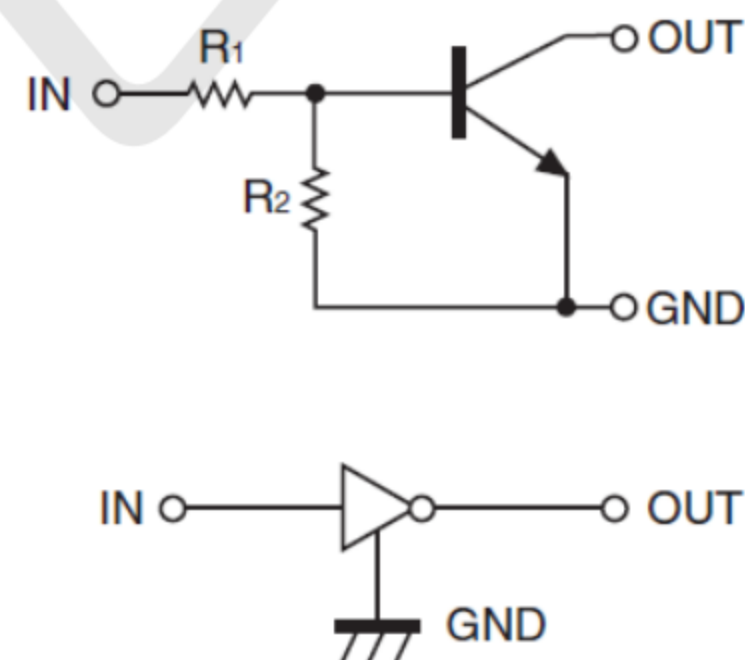



Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Symbol	Parameter	Value	Units
V_{CC}	Supply Voltage	50	V
V_{IN}	Input Voltage	+30 to -5	V
I_O	Output Current	100	mA
$I_C(\text{Max.})$	Output current ALL	100	mA
P_D	Power Dissipation	200	mW
T_j, T_{stg}	Operating and Storage and Temperature Range	-55 to +150	°C





Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	$V_{CC}=5V, I_O=100\mu A$	0.5			V
	$V_{I(on)}$	$V_O=0.3V, I_O=5mA$			1.3	V
Output voltage	$V_{O(on)}$	$I_O/I_I=5mA/0.25mA$		0.1	0.3	V
Input current	I_I	$V_I=5V$			1.8	mA
Output current	$I_{O(off)}$	$V_{CC}=50V, V_I=0$			0.5	μA
DC current gain	G_I	$V_O=5V, I_O=10mA$	80			
Input resistance	R_I		3.29	4.7	6.11	k Ω
Resistance ratio	R_2/R_1		8	10	12	
Transition frequency	f_T	$V_O=10V, I_O=5mA, f=100MHz$		250		MHz


Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

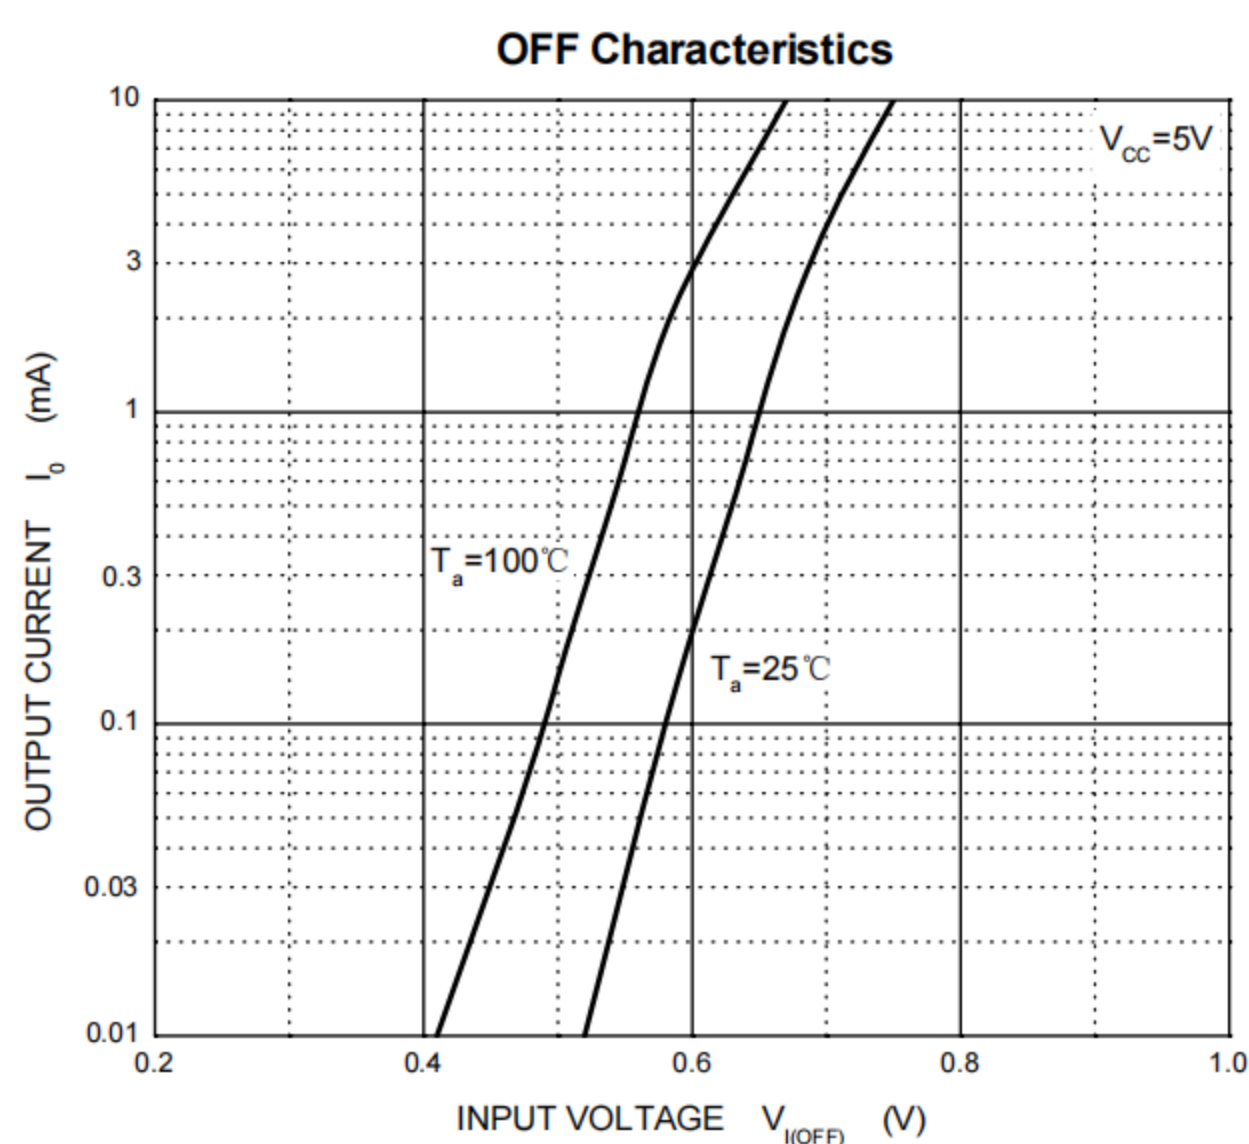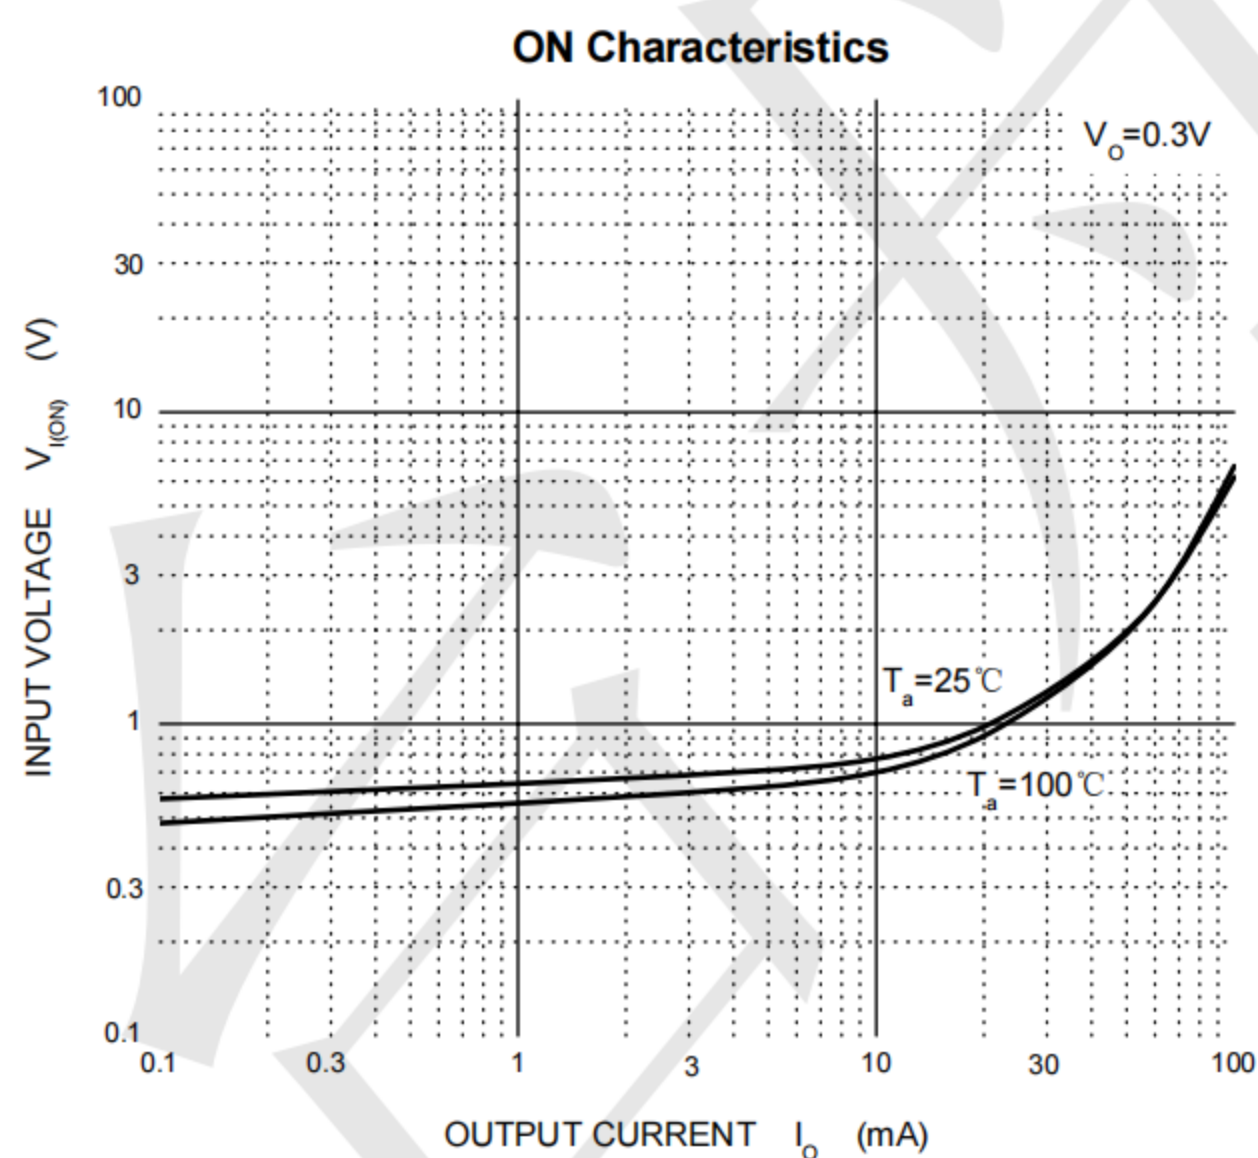

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

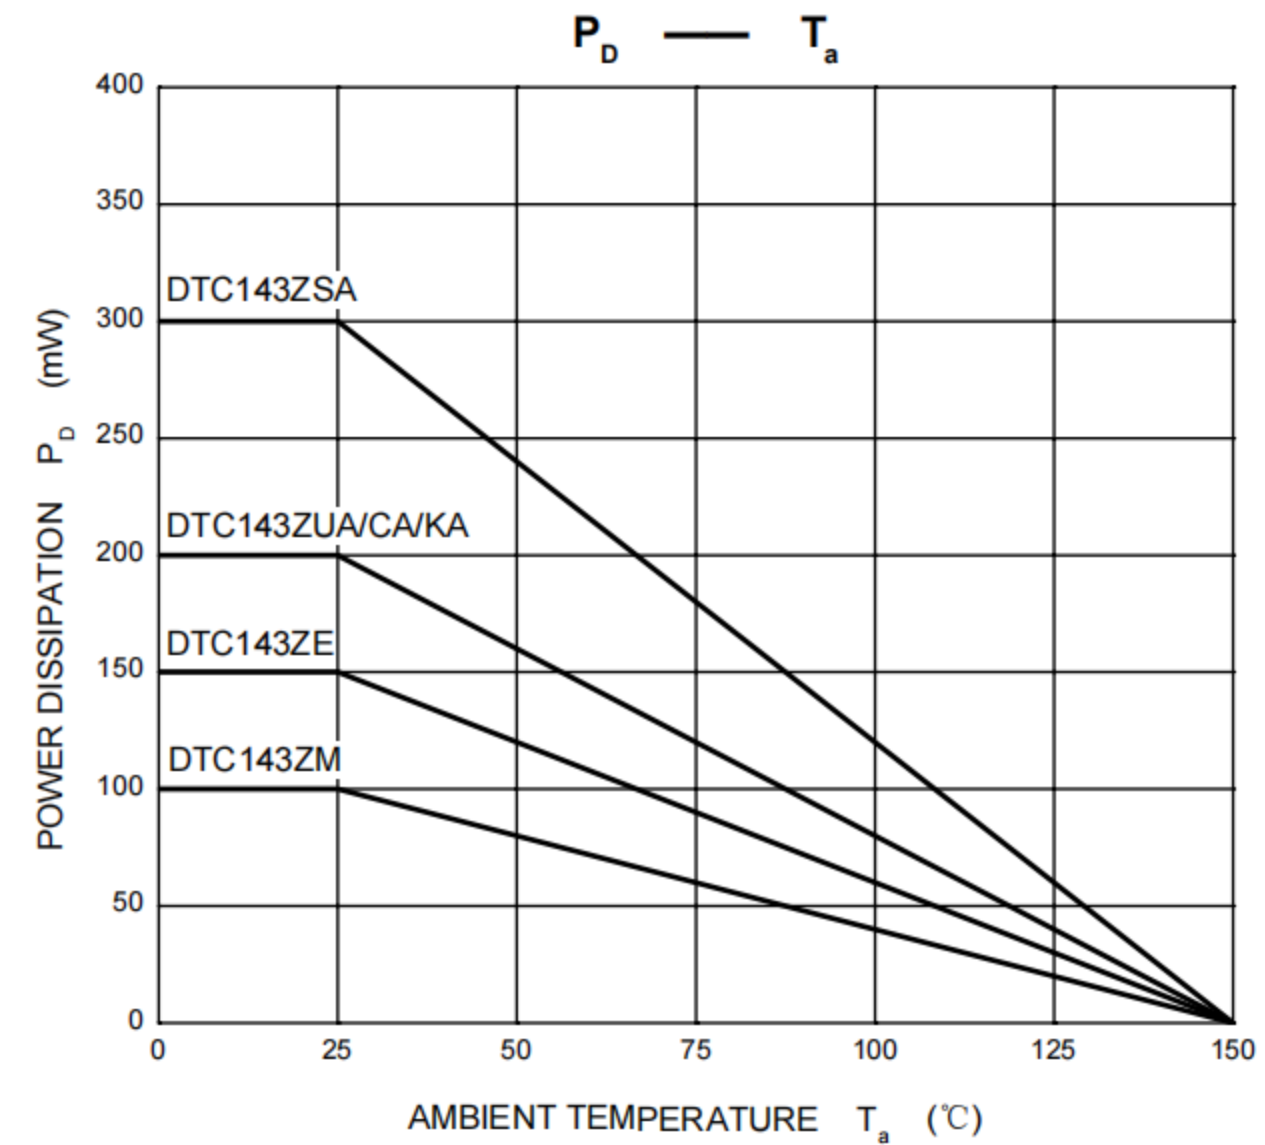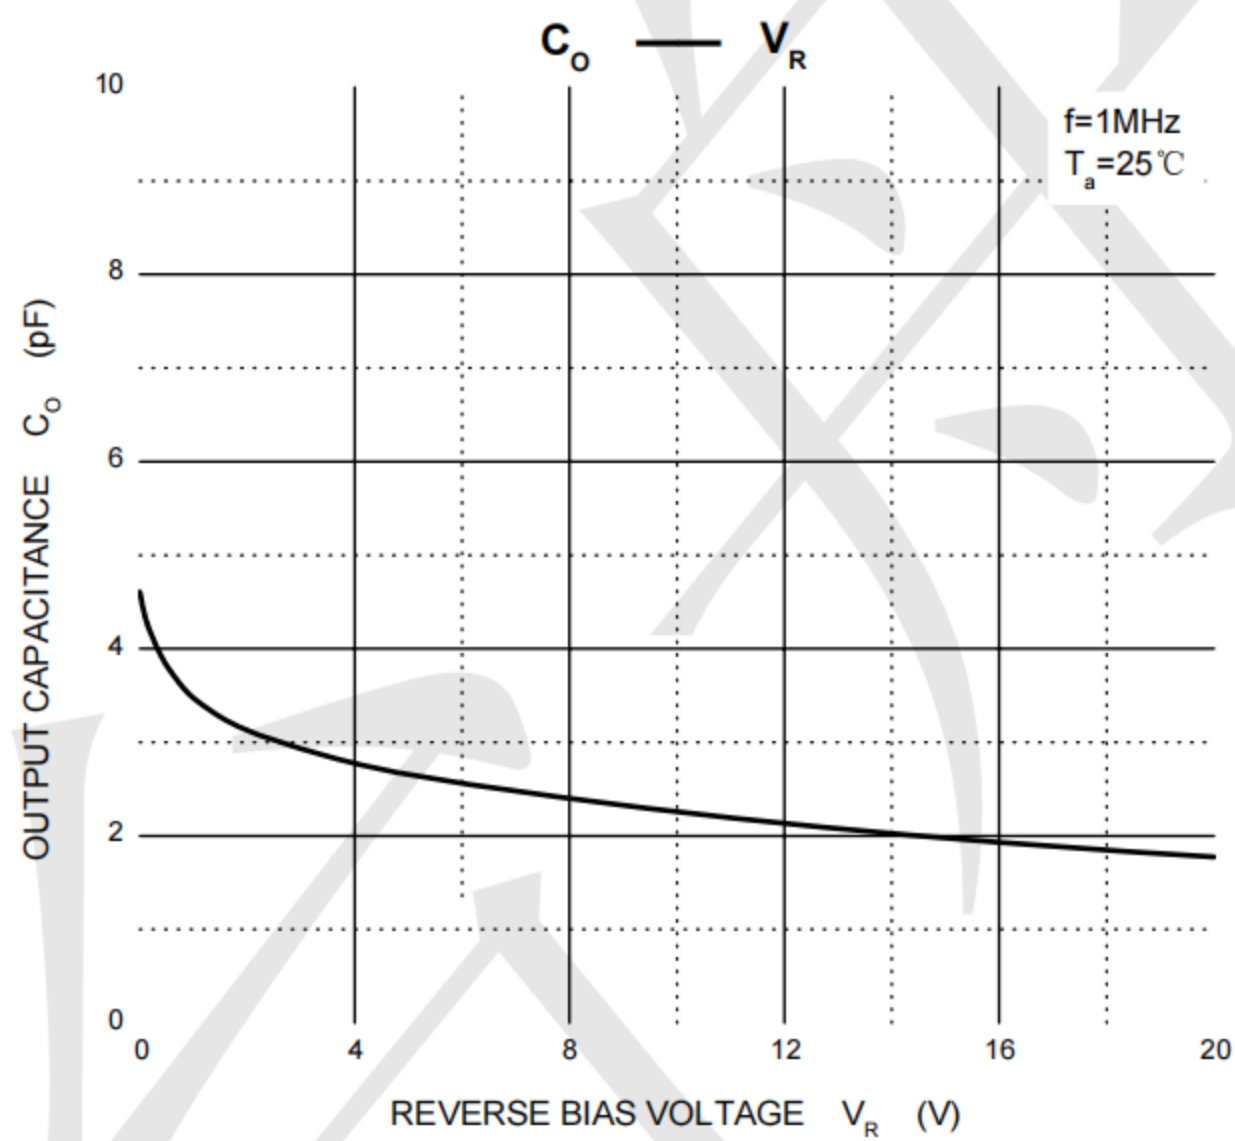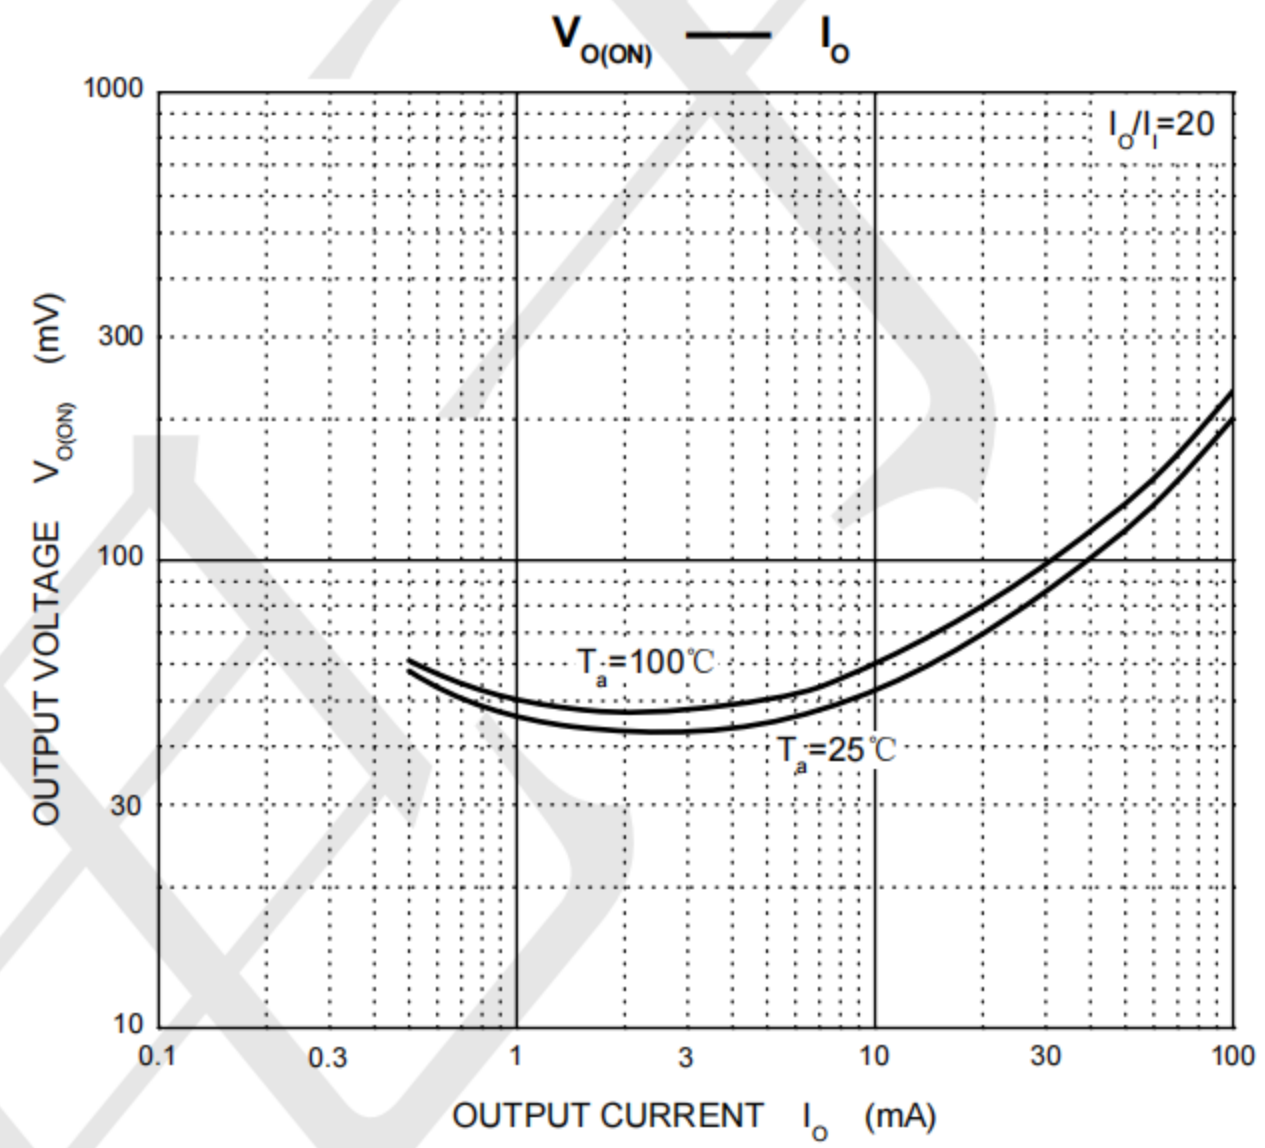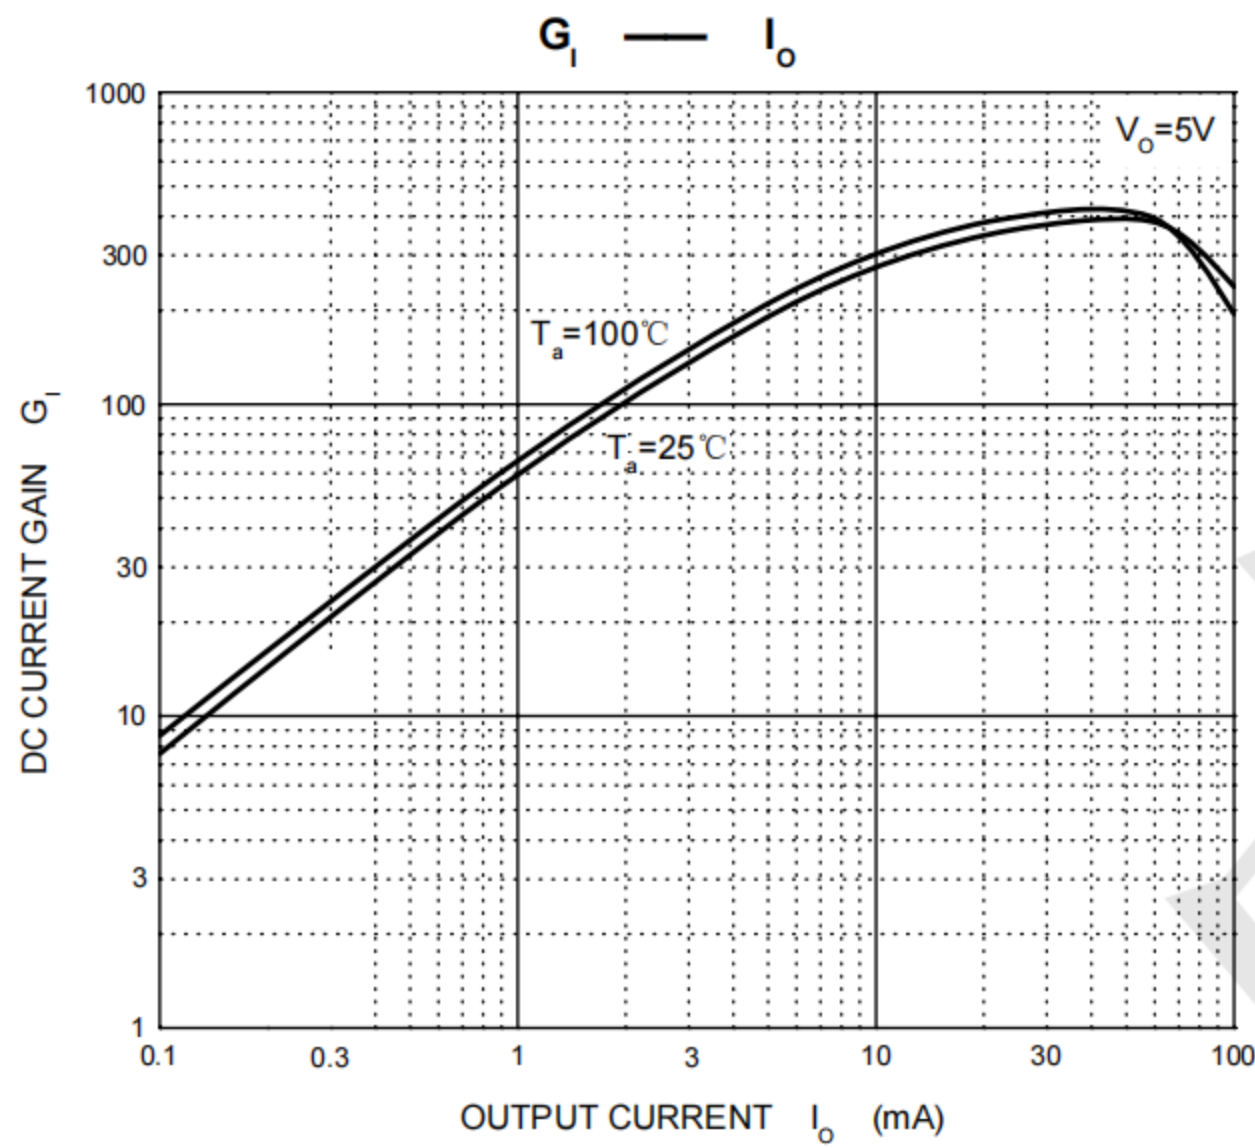

Outline Drawing - SOT323

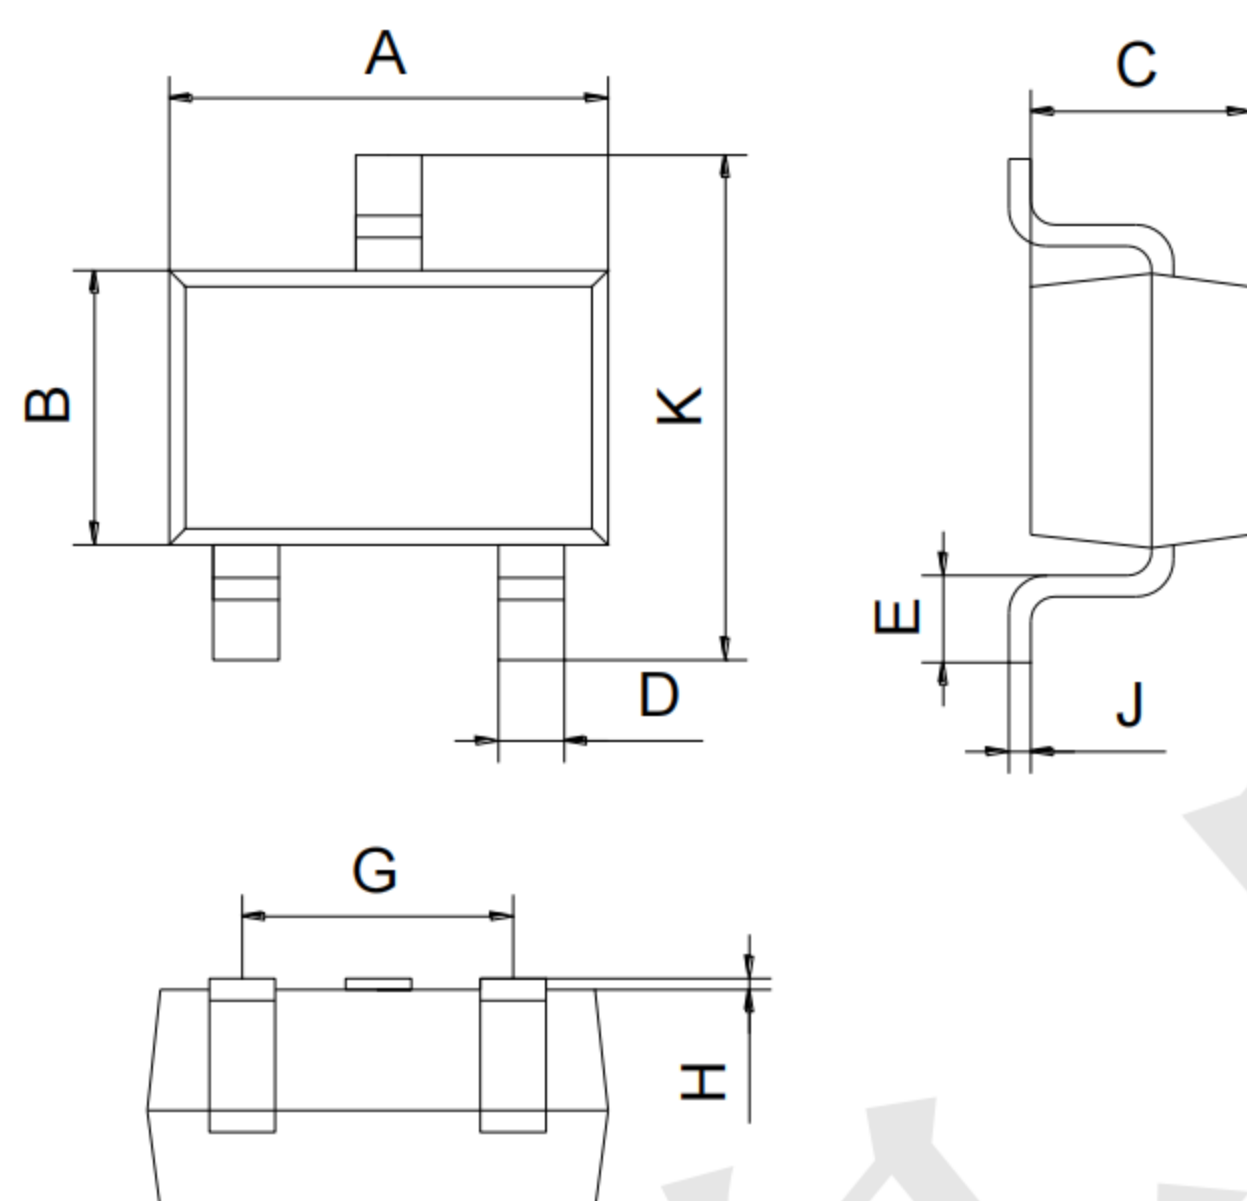

SOT-323		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40
All Dimensions in mm		

Land Pattern - SOT323

