




E-NETTR

100/1000 Base-T Quad Port Transformer Module

P/N: H8807D

- * Designed to meet IEEE802.3at requirement
- * Lead-Free & Designed to meet RoHS requirement
- * Designed to meet IR 255°C peak Requirement.
- * Primary inductance 350μH min with 8mADC Bias
- * Operating temperature range:-40°Cto+85°C
- * Storage temperature range: -40°Cto+85°C
- * POE applications with 700mA current capability







Electrical Specifications@25° C

Part Number	Turn Ratio (±3%)	OCL(μH Min) @ 100KHz/0.1V with 8mADC Bias	L.L (μH Max)	C _{w/w} (pF Max)	DCR (Ω Max)	Hi-Pot (Vrms MIN)
H8807D	1CT:1CT	350	0.5	56	1.2	AC 1500V 1mA 1S

Continue

Part Number	Insertion Loss 0.3~100MHZ (dB Max)	Return Loss (dB Min)					Cross Talk (dB Min)			DCMR (dB Min)		
		0.3-30MH	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz
H8807D	-1.0	-18	-16	-14.08	-12.5	-10	-40	-35	-30	-43	-37	-33

Mechanical

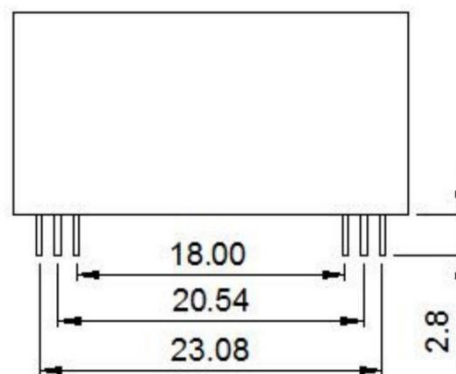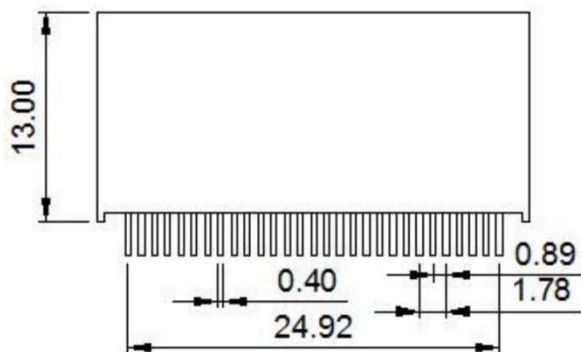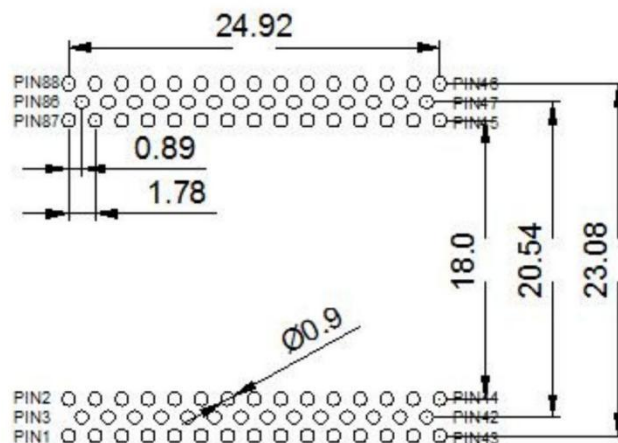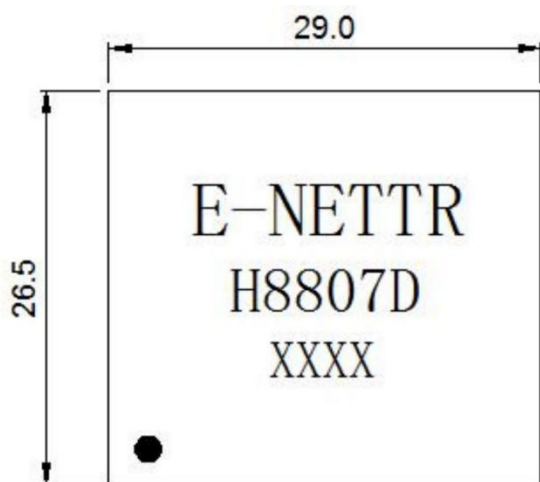

Dimensions: mm

Unless otherwise specified tolerances: xx.xo ± 0.25mm

o.xx ± 0.05mm

东莞市祥星电子有限公司

地址：东莞市石碣镇横滘科技中路第三工业区

Miss Xie: 13549396638

TEL:0769-86384669

FAX:0769-81813600

Http://www.e-nettr.com


xxing.guang@163.com



E-NETTR 100/1000 Base-T Quad Port Transformer Module

P/N: H8807D

Schematic

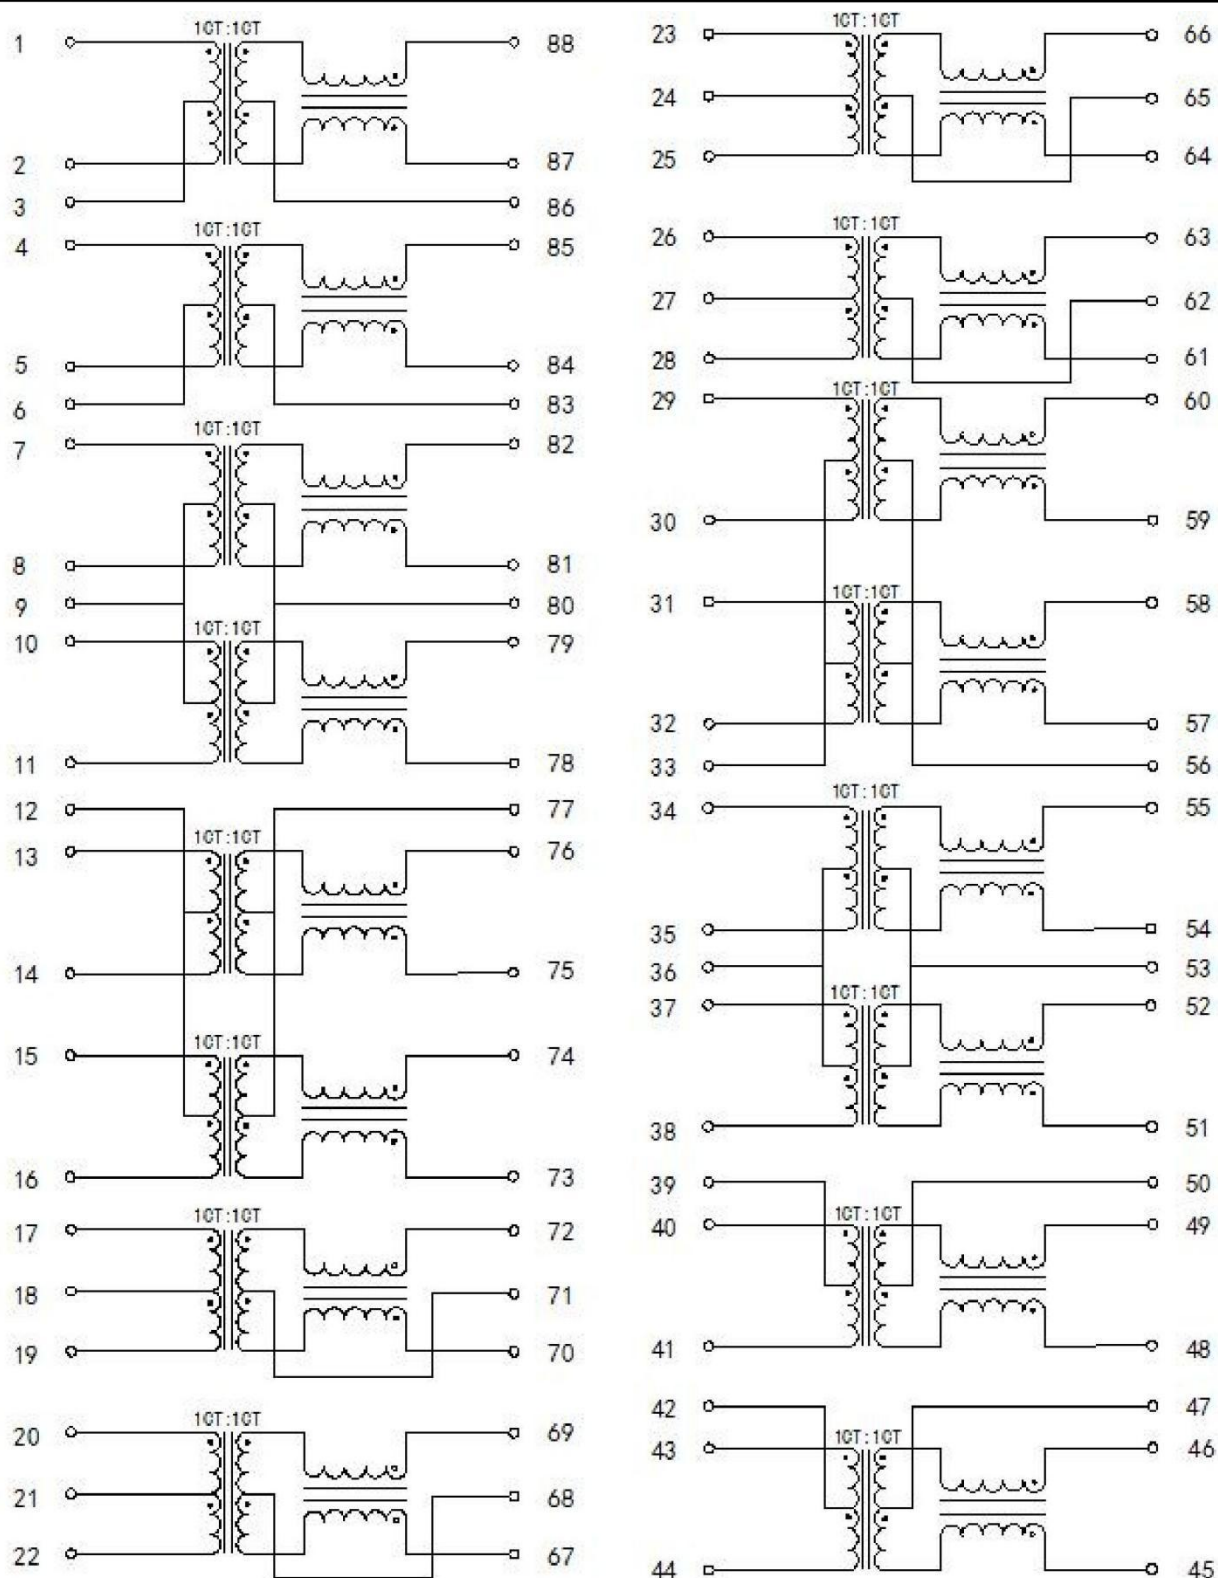

东莞市祥星电子有限公司

地址：东莞市石碣镇横滘科技中路第三工业区

TEL:0769-86384669

FAX:0769-81813600

Miss Xie: 13549396638

[Http://www.e-nettr.com](http://www.e-nettr.com)

xxing.guang@163.com