
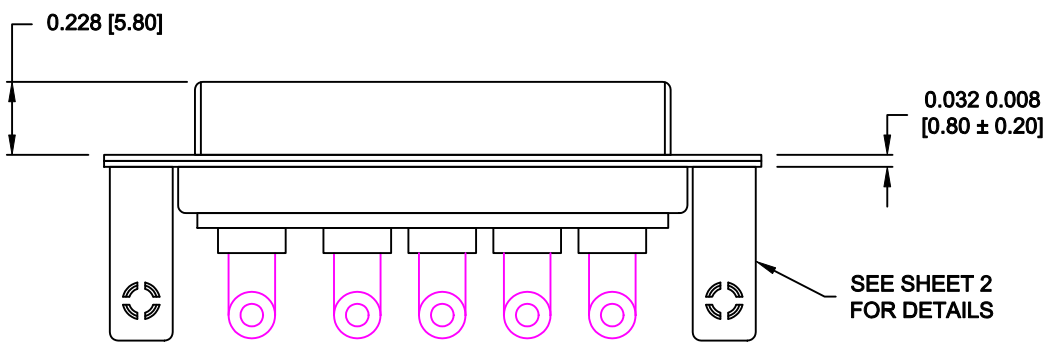


DESCRIPTION: POWER - RIGHT ANGLE - FEMALE - MACHINED

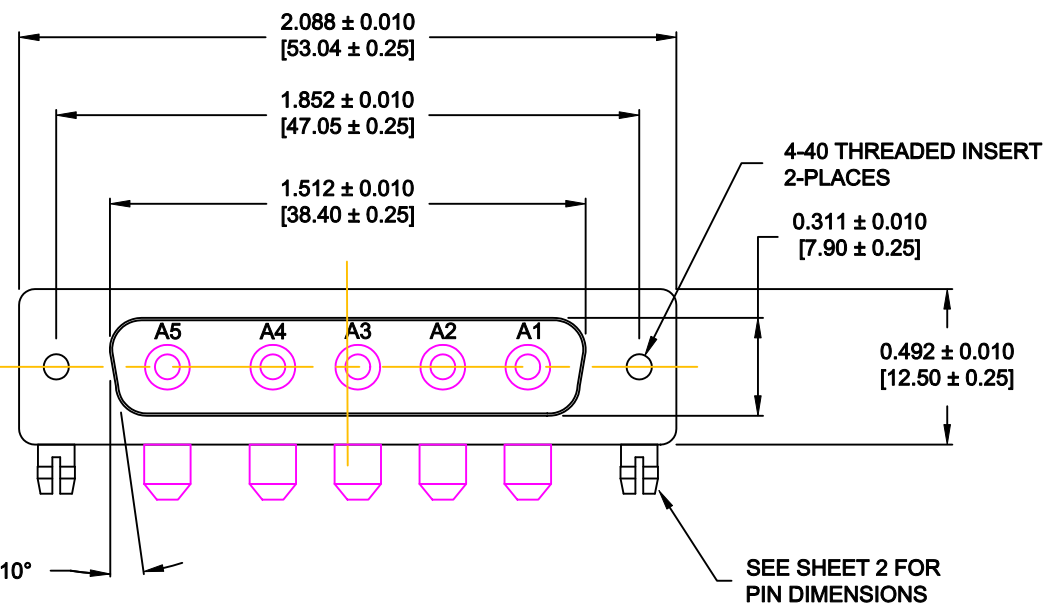


SPECIFICATIONS:

ELECTRICAL:	
INSULATOR RESISTANCE:	5 GOHMS Min.
DIELECTRIC WITHSTANDING:	1,000VAC r.m.s.
OPERATING TEMPERATURE:	-55° C ~ +125° C
CONTACT RESISTANCE:	1.0 MillioHMS Max.
POWER PINS:	40 AMPS
MECHANICAL:	
CONTACT INSERTION FORCE:	4.5 Kg Max.
CONTACT SEPARATOR FORCE:	0.3Kg Min.
MATERIALS:	
CONTACTS:	COPPER ALLOY
INSULATOR:	PBT UL94V-0 RATED, 230°C PROCESS TEMP.
SHELL:	STEEL
BOARD LOCK:	BRASS, NICKEL PLATED
CINCHNUT:	BRASS, NICKEL PLATED
BRACKET:	STEEL, NICKEL PLATED
FINISH:	
SHELL:	NICKEL
CONTACTS:	FULL GOLD FLASH



684M5W5203L461

46 = 4-40 INSERTS /
BOARD LOCKS


RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 12-06-13	
		CHECKED:		DATE:	
NorComp	SCALE: 1.5 = 1		SHEET 1		OF 2
	DWG NO. 684M5W5203L461		REV 0		

NOTE:
POWER CONTACTS COME
PRE-LOADED INTO INSULATORS

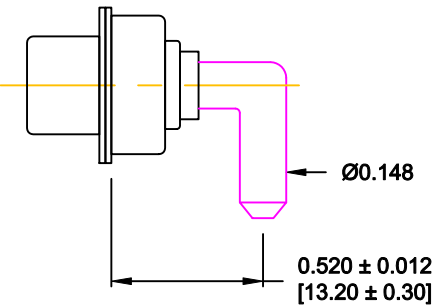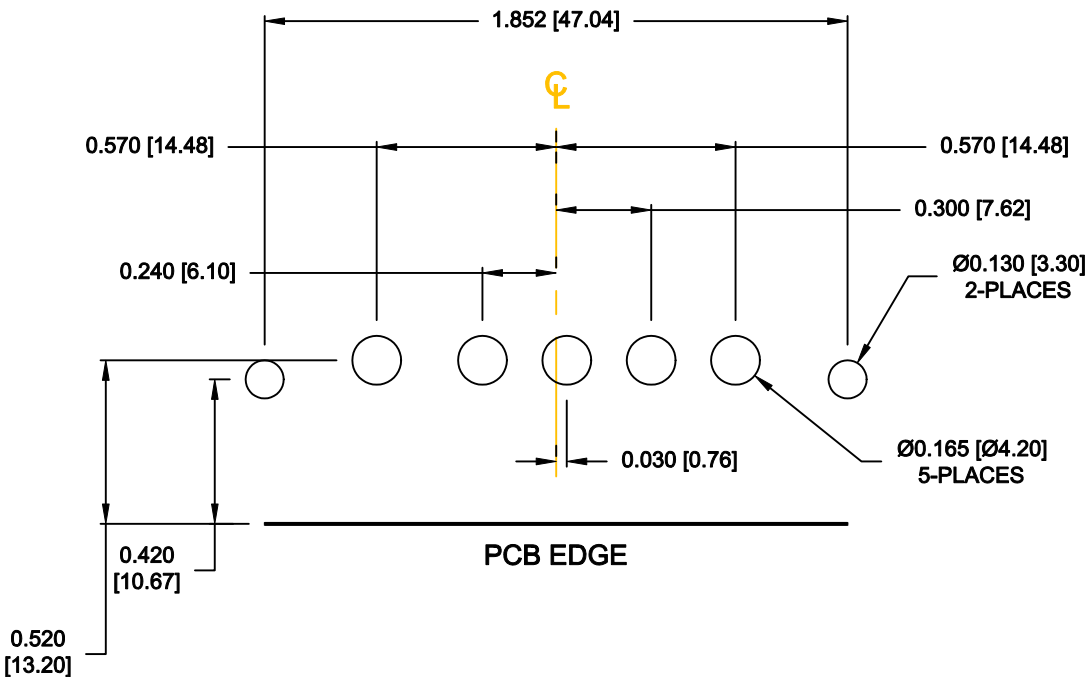


40 AMP POWER CONTACT

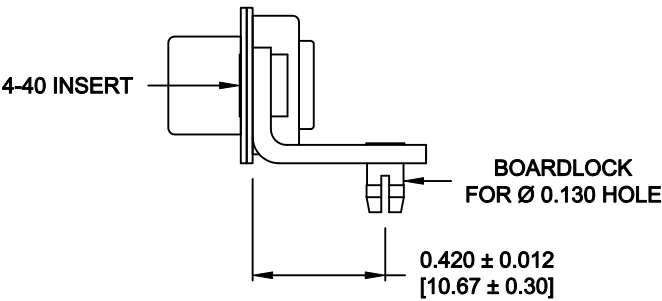

MOUNTING HARDWARE

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 12-06-13		
		CHECKED:		DATE:		
NorComp			SCALE: 1.5 = 1	SHEET 2	OF 2	REV 0
			DWG NO. 684M5W5203L461			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[684M5W5203L461](#)